


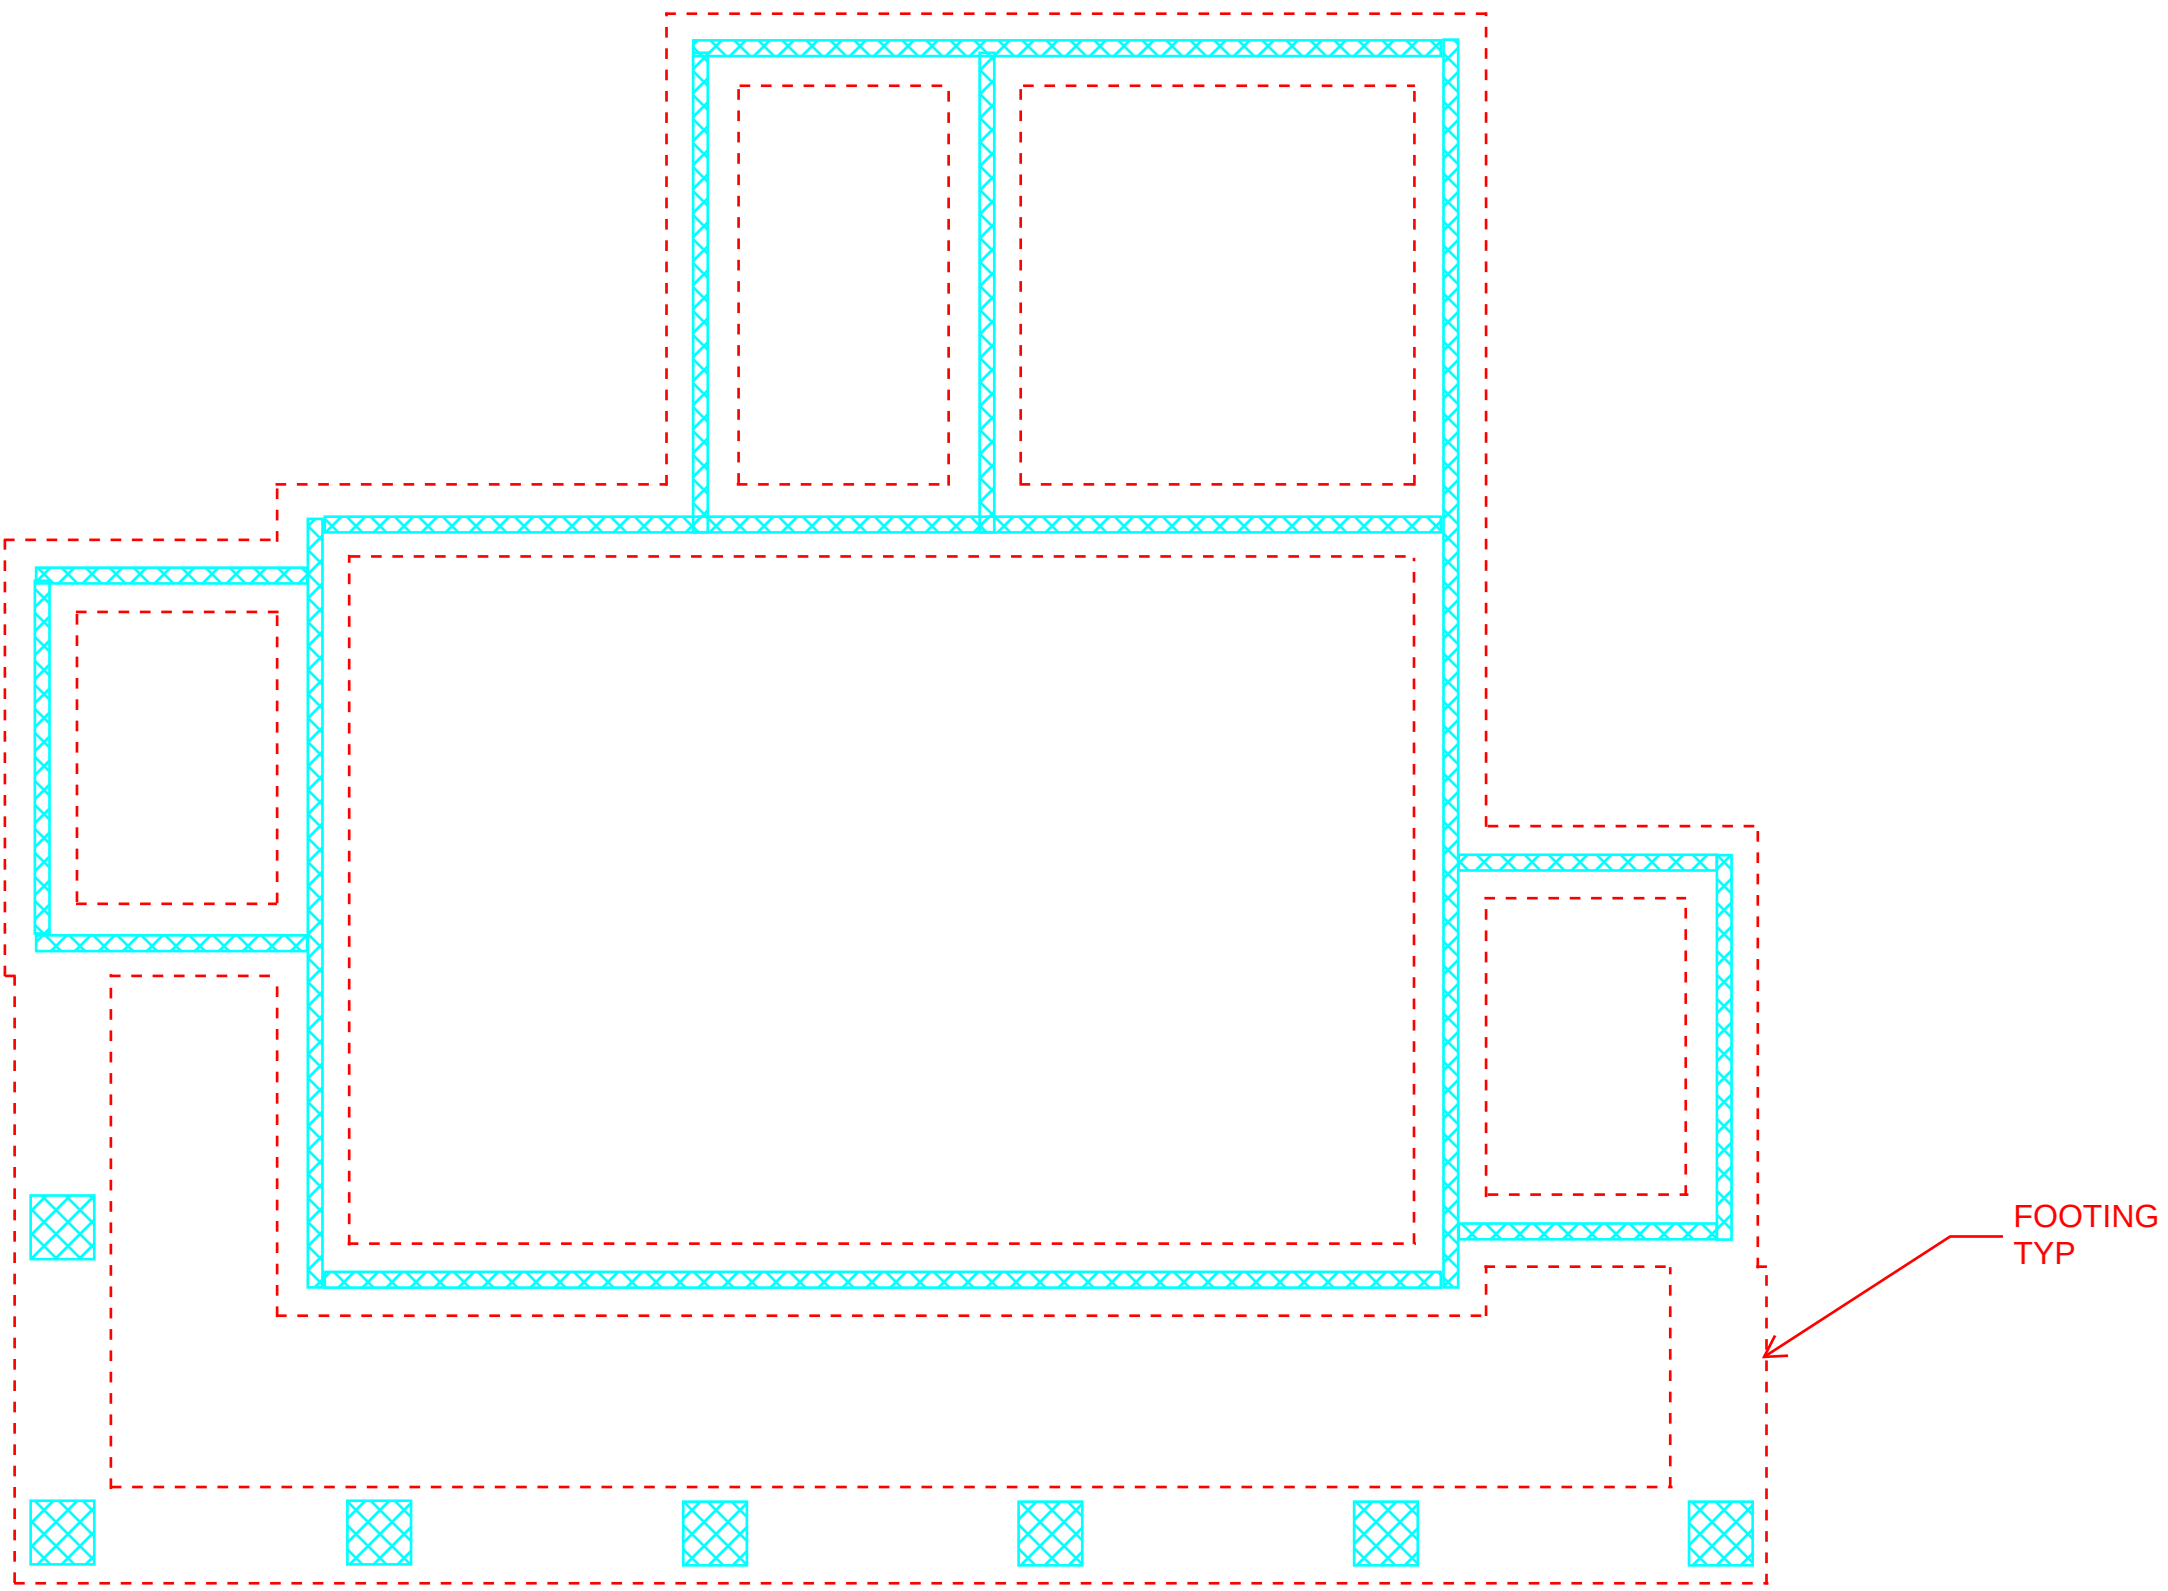

121

At = 2.8 ft
Ls (cmu) = ? ft
h = 2.7 ft
Ld = 20.7 ft

Vi = 198 plf(2.8 ft) = 201 lbs
V' = 826 lbs + 201 lbs = 1027 lbs

122

At = 14.8 ft
Ls (cmu) = ? ft
h = 2.7 ft
Ld = 21.7 ft

Vi = 198 plf(14.8 ft) = 2931 lbs
V' = 7750 lbs + 2931 lbs = 10681 lbs

123

At = 14.8 ft
Ls (cmu) = ? ft
h = 2.7 ft
Ld = 31.7 ft

Vi = 198 plf(14.8 ft) = 2931 lbs
V' = 7750 lbs + 2931 lbs = 10681 lb

124

At = 2.8 ft
Ls (cmu) = ? ft
h = 2.7 ft
Ld = 14.7 ft

Vi = 198 plf(2.8 ft) = 201 lbs
V' = 826 lbs + 201 lbs = 1027 lbs

At = 5 ft
Ls (cmu) = ? ft
h = 2.7 ft
Ld = 16 ft

Vi = 198 plf(5 ft) = 990 lbs
V' = 1475 lbs + 990 lbs = 2465 lbs

At = 13 ft
Ls (cmu) = ? ft
h = 2.7 ft
Ld = 24 ft

Vi = 198 plf(13 ft) = 2574 lbs
V' = 6091 lbs + 2574 lbs = 8665 lbs

At = 10.9 ft
Ls (cmu) = ? ft
h = 2.7 ft
Ld = 35.3 ft

Vi = 198 plf(10.9 ft) = 2158 lbs
V' = 5472 lbs + 2158 lbs = 7630 lbs

At = 2.9 ft
Split Shear among 6 Piers
h = 2.7 ft
Ld = 35.3 ft

Vi = 198 plf(2.9 ft) = 574 lbs
V' = 574 lbs

wi = 198 plf
TYP THIS
LEVEL


CONCRETE
STAIRS

CMU WALL
TYP


CMU PIER
TYP

CONCRETE
STAIRS

1 FIRST FLOOR FRAMING PLAN
1/4" = 1'-0"

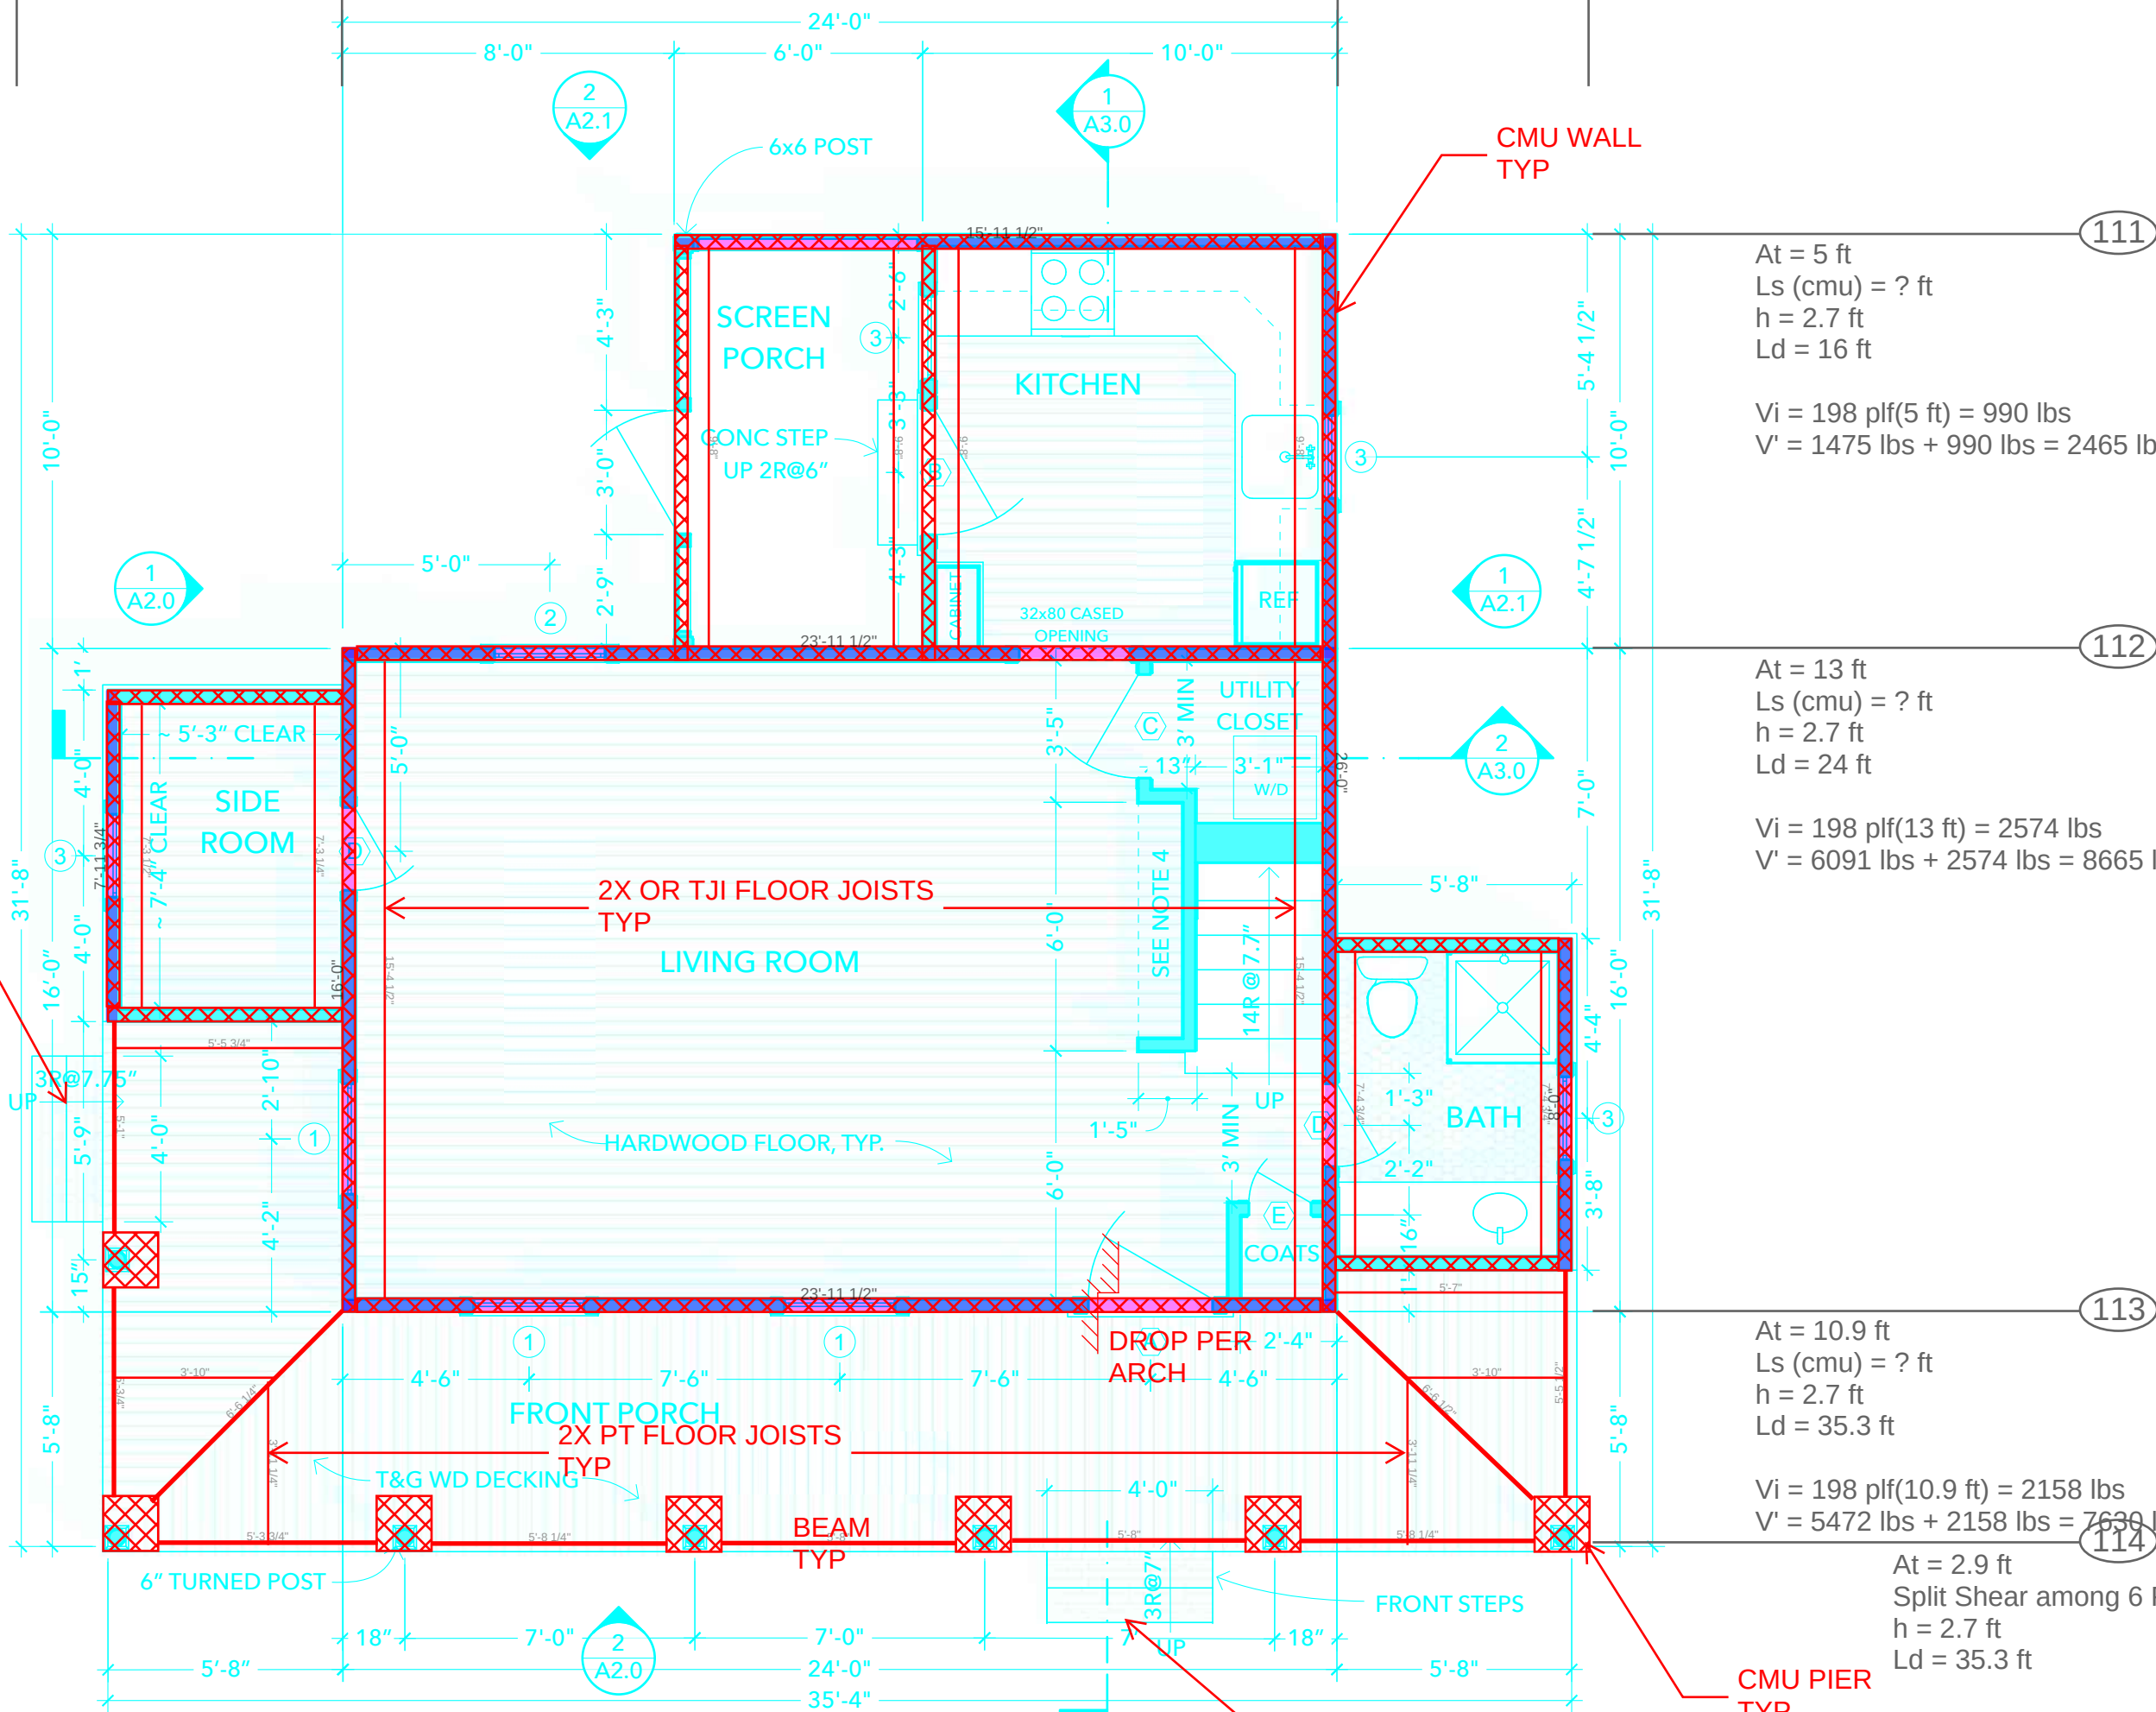

RATIOS	
9 ft/2 = 4.5 ft	—
9 ft/3.5 = 2.6 ft	—

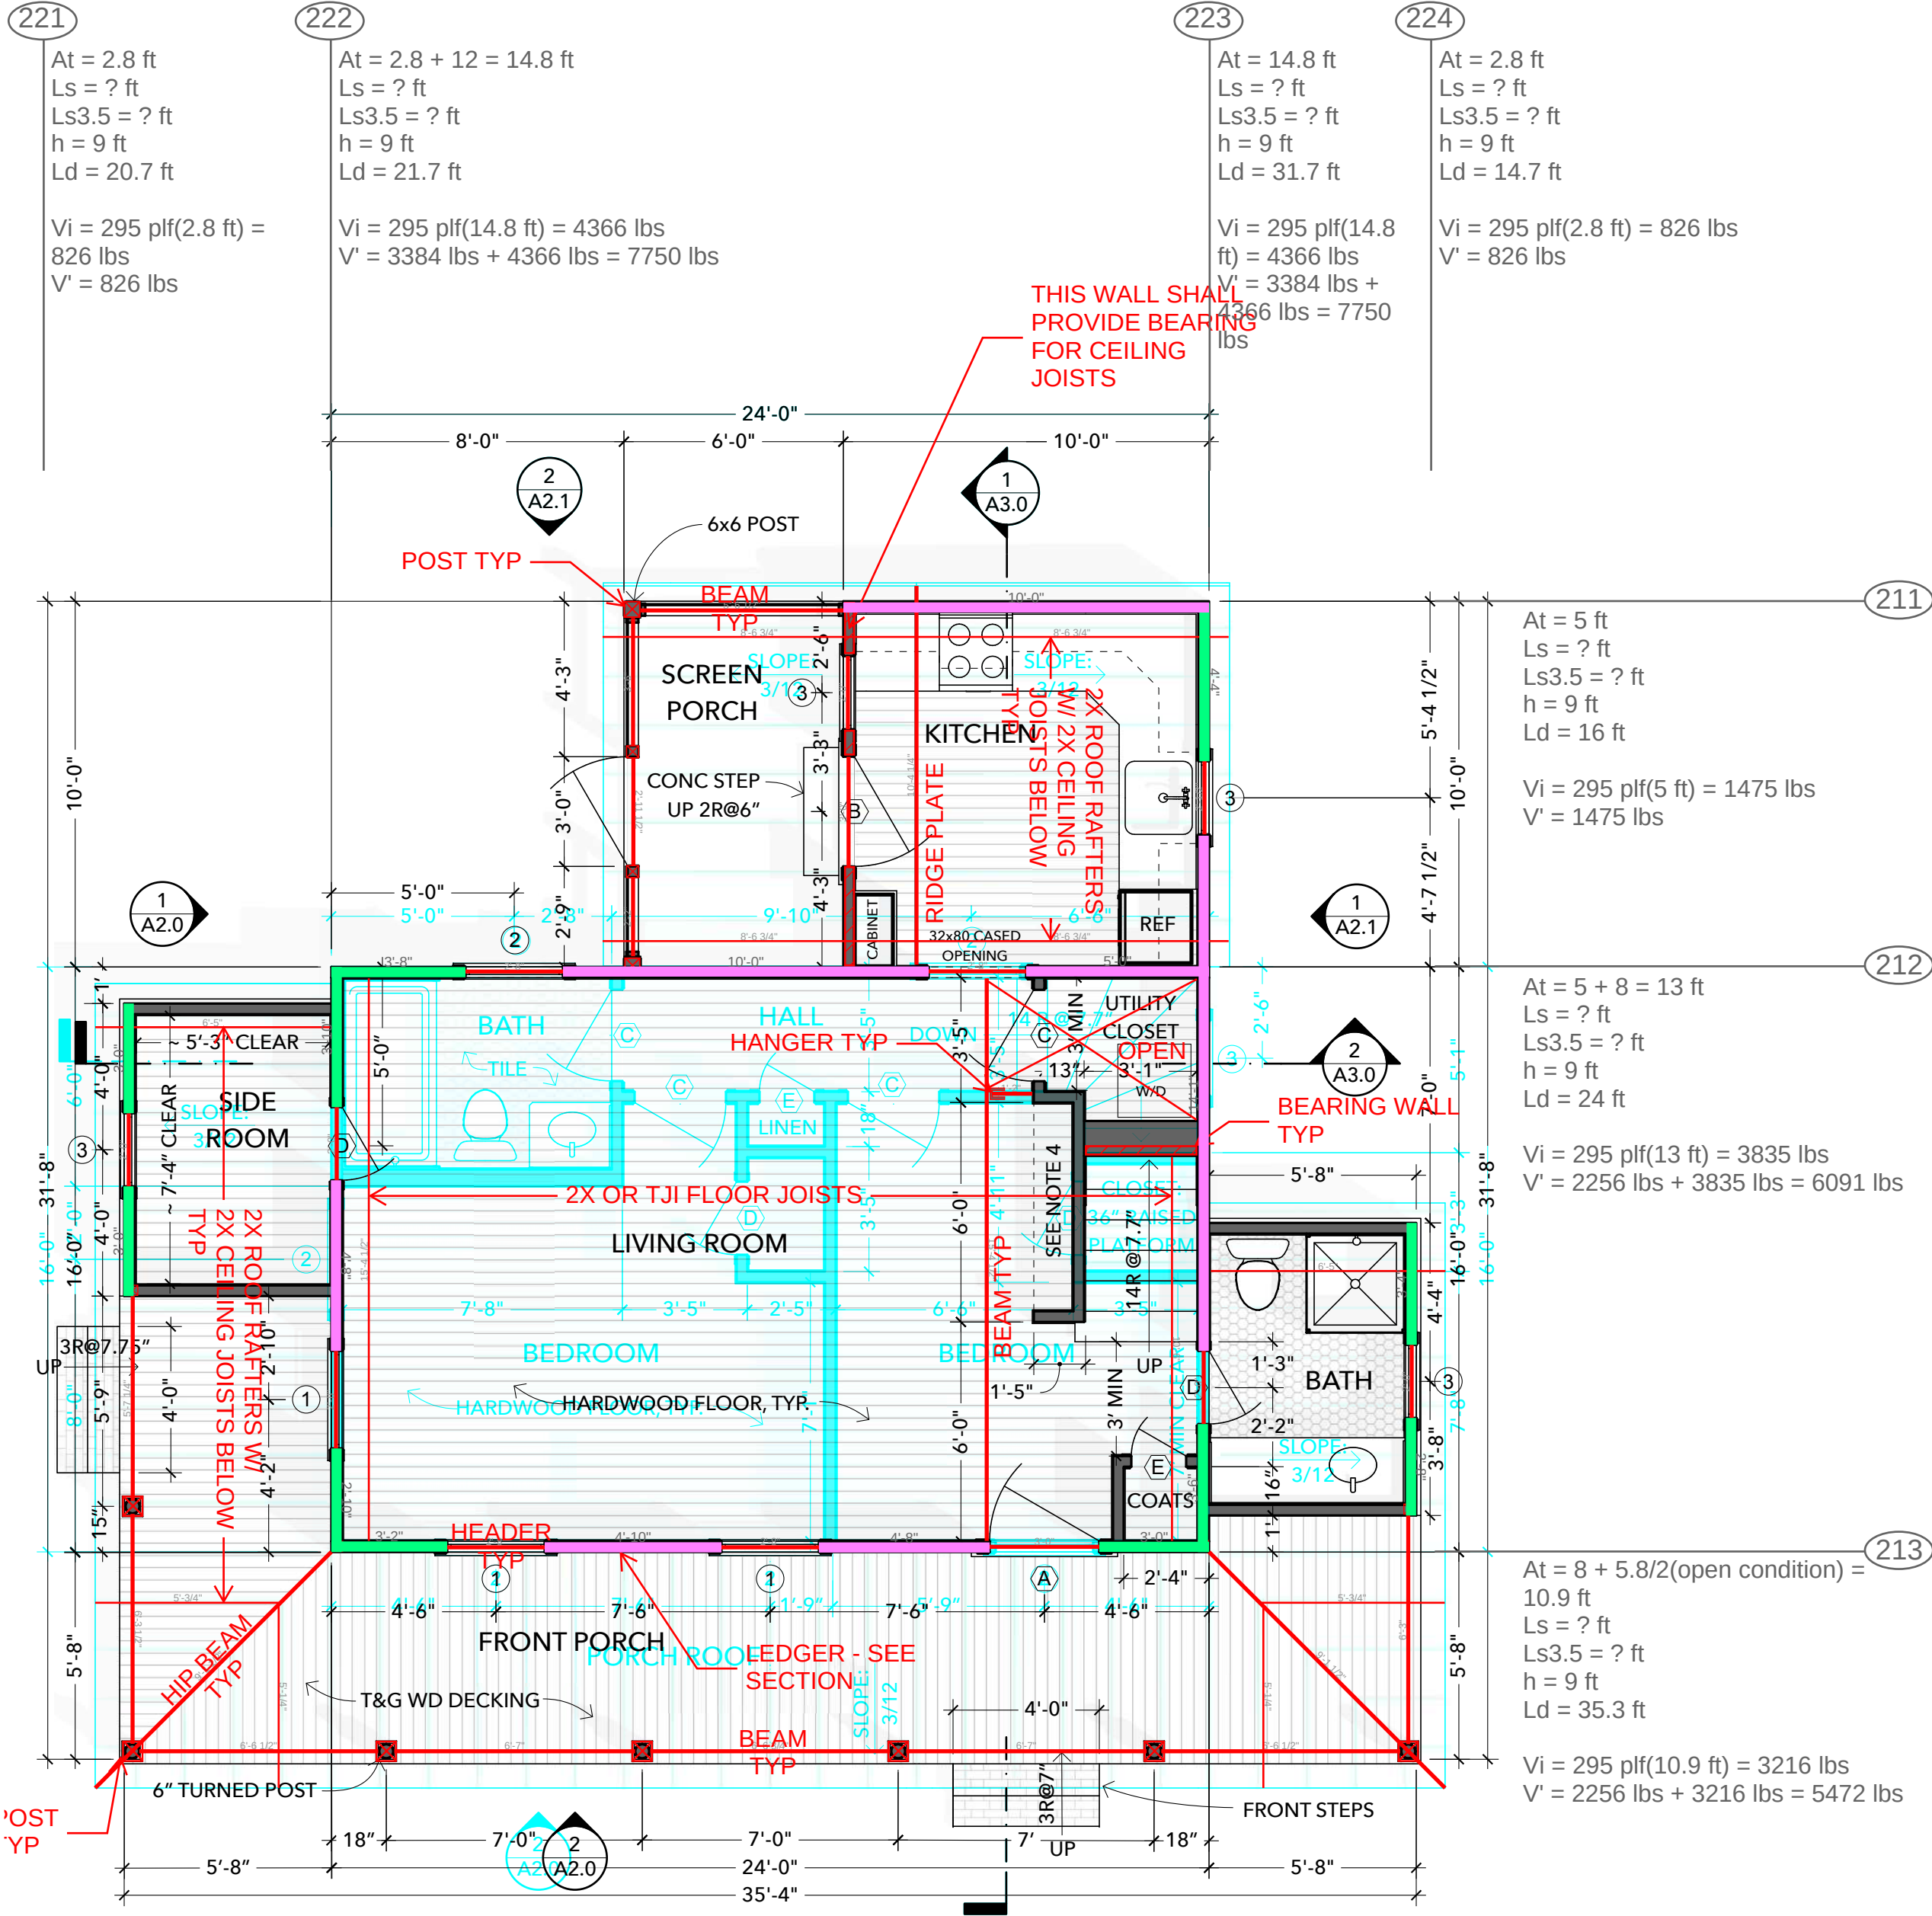

At = 14.8 ft
 Ls = ? ft
 Ls3.5 = ? ft
 h = 9 ft
 Ld = 31.7 ft

Vi = 295 plf(14.8 ft) = 4366 lbs
 V' = 3384 lbs + 4366 lbs = 7750 lbs

At = 2.8 ft
 Ls = ? ft
 Ls3.5 = ? ft
 h = 9 ft
 Ld = 14.7 ft

Vi = 295 plf(2.8 ft) = 826 lbs
 V' = 826 lbs

At = 5 ft
 Ls = ? ft
 Ls3.5 = ? ft
 h = 9 ft
 Ld = 16 ft

Vi = 295 plf(5 ft) = 1475 lbs
 V' = 1475 lbs

At = 5 + 8 = 13 ft
 Ls = ? ft
 Ls3.5 = ? ft
 h = 9 ft
 Ld = 24 ft

Vi = 295 plf(13 ft) = 3835 lbs
 V' = 2256 lbs + 3835 lbs = 6091 lbs

At = 8 + 5.8/2(open condition) = 10.9 ft
 Ls = ? ft
 Ls3.5 = ? ft
 h = 9 ft
 Ld = 35.3 ft

Vi = 295 plf(10.9 ft) = 3216 lbs
 V' = 2256 lbs + 3216 lbs = 5472 lbs

wi = 295 plf
 TYP THIS LEVEL

1 LOW ROOF/SECOND FLOOR FRAMING PLAN
 1/4" = 1'-0"

A diagram of a horizontal beam of length L . The beam is supported by a pin support at the left end and a roller support at the right end. A uniformly distributed load of intensity w is applied downwards along the entire length of the beam. The load is represented by a series of downward-pointing arrows of equal length, with the label w placed above the first arrow and L placed below the last arrow.

RATIOS

$$8.5 \text{ ft}/2 = 4.25 \text{ ft} \quad \text{---}$$

$$8.5 \text{ ft}/3.5 = 2.42 \text{ ft} \quad \text{---}$$



1 ROOF FRAMING PLAN

