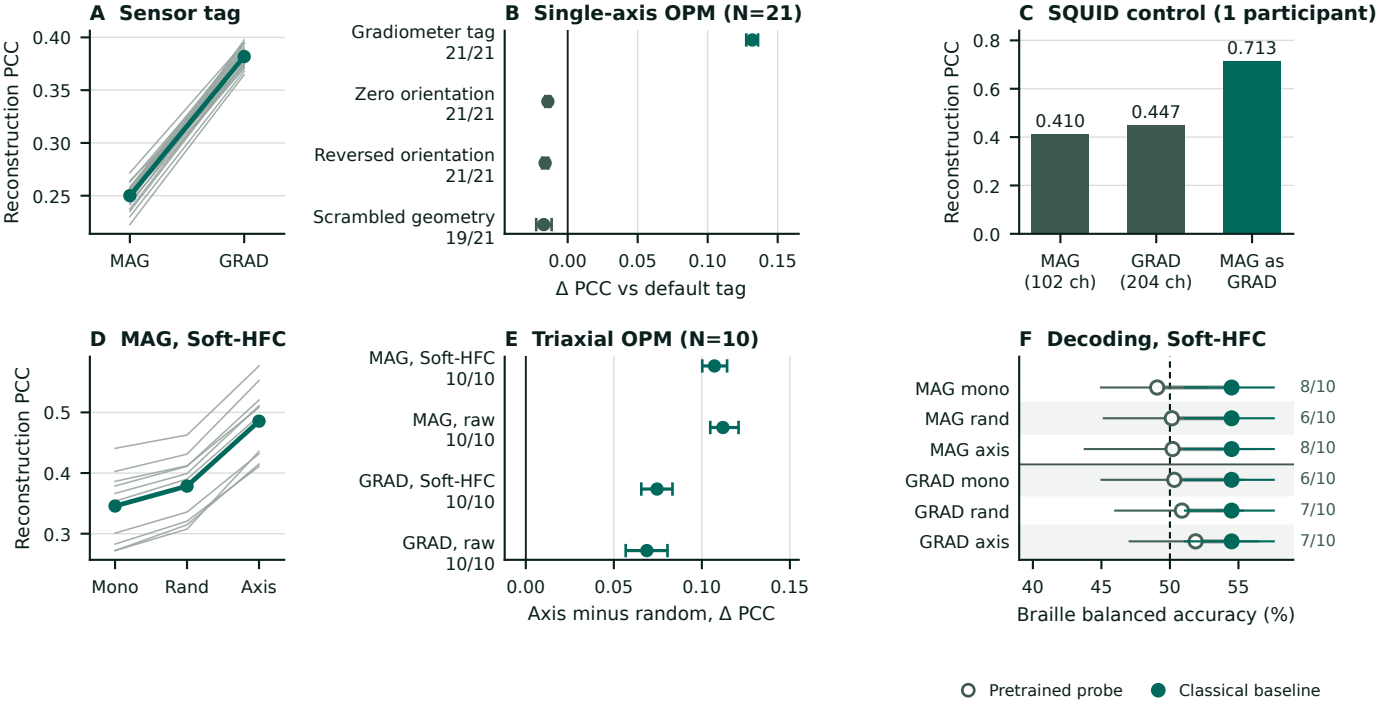
A Sensor tag
Reconstruction PCC
0.40
0.35
0.30
0.25
MAG
GRAD
B Single-axis OPM (N=21)
Gradiometer tag
21/21
Zero orientation
21/21
Reversed orientation
21/21
Scrambled geometry
19/21
0.00
0.05
0.10
0.15
Δ PCC vs default tag
C SQUID control (1 participant)
Reconstruction PCC
0.8
0.6
0.4
0.2
0.0
0.410
0.447
0.713
MAG
(102 ch)
GRAD
(204 ch)
MAG as
GRAD
D MAG, Soft-HFC
Reconstruction PCC
0.5
0.4
0.3
Mono
Rand
Axis
E Triaxial OPM (N=10)
MAG, Soft-HFC
10/10
MAG, raw
10/10
GRAD, Soft-HFC
10/10
GRAD, raw
10/10
0.00
0.05
0.10
0.15
Axis minus random, Δ PCC
F Decoding, Soft-HFC
MAG mono
MAG rand
MAG axis
GRAD mono
GRAD rand
GRAD axis
8/10
6/10
8/10
6/10
7/10
7/10
40
45
50
55
Braille balanced accuracy (%)
Pretrained probe
Classical baseline