



EASY RAPID PLUS

BRACCI EGRESSO PER INFISSI A SPORGERE, BATTENTE E VASISTAS



Cerniere egresso | Stay hinge for outside, casement and transom opening | Compases para proyectante exterior, batiente y abatible | Compas ouverture extérieure pour ouvertures projetant, frappe et à soufflet



Cerniere in acciaio inox AISI 304 con pattino di frizionamento rivestito in nylon autolubrificante, regolatore di posizionamento in zama.



Hinge in AISI 304 stainless steel with friction shoe covered in self-lubricating nylon, zamak position regulator.






Charnières en acier inox AISI 304 avec patin de friction revêtu en nylon autolubrifiant, régulateur de position en zamak.





Bisagras de acero inox AISI 304 con cojinete de fricción revestido en nylon autolubricante, regulador de posicionamiento de zamac.




ART.	1292.18
Imballo Package Conditionnement Embalaje	5 Cp
Finiture disponibili Available finishes Finitions disponibles Acabados disponibles	1 2 3 4



ART.	L		ALTEZZA ANTA SASH HEIGHT		LARGHEZZA ANTA SASH WIDTH		TIPO DI APERTURA OPENING	ANGOLI DI APERTURA OPENING ANGLE		PORTATA MAX LOAD
	A	B	Min Max	Min Max	Min Max	Min Max		Opening Angle	Opening Limitation	
1292.18	463mm 18 inch	110	500 1800	500 800	500 800	500 800	Battente Side Hung	α 30°	NO*	45
								α 50°	4 x A1250	
			500 1450	500 1450	500 1450	500 1450	Sporgere Top Hung	α 20°	vite screw + 1 x A1250	100
								α 30°	vite screw	60
			500 1450	500 1450	500 1450	500 1450	Vasistas Bottom Hung	α 30°	vite screw	100
								α 30°	vite screw	100

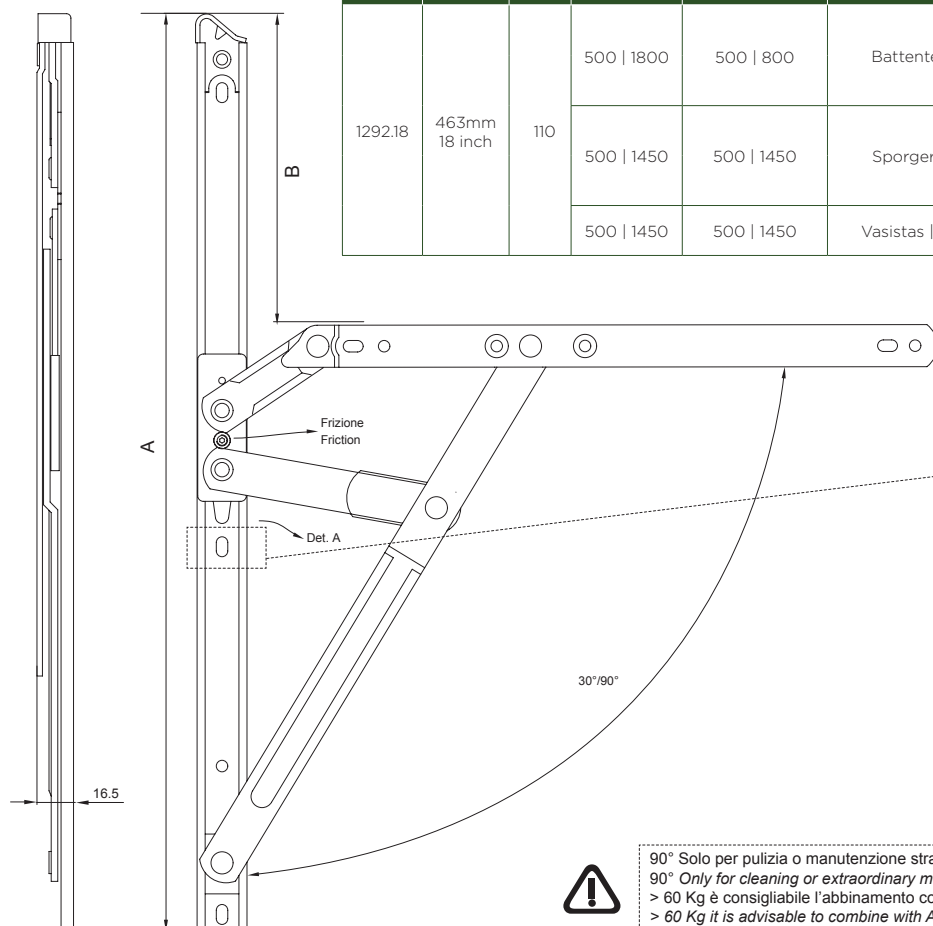

Nodo di riferimento
Cross section reference



90° Solo per pulizia o manutenzione straordinaria
90° Only for cleaning or extraordinary maintenance
> 60 Kg è consigliabile l'abbinamento con A1203A.XX
> 60 Kg it is advisable to combine with A1203.XX