



DEVIATORE

DEVIATORE ENTRATA MARTELLINA



Deviatore entrata per martellina | Handle positioning diverter |
Renvoi de fouillot pour béquille à poignée | Desviador entrada
maneta



Cassa e copricassa
in zama; Ruote in
acciaio tornito C40;
Perni in acciaio
zincato. Interasse
deviazione 12,5 mm.



Case and cover in
zamak; C40 turned
steel wheels; Pins in
galvanized steel.
Backset deviation
12.5 mm.







Boîtier et couvercle
de boîtier en zamak;
Jantes en acier
tournées C40 ;
Goupilles en acier
galvanisé. Déviation
d'entrée de 12,5 mm




Caja y tapa de
carcasa en zamak;
Ruedas de acero
torneadas C40;
Pasadores en acero
galvanizado.
Desviación de
entrada 12,5 mm



ART.	3632			
Imballo Package Conditionnement Embalaje	5 Pz			
Finiture disponibili Available finishes Finitions disponibles Acabados disponibles	1	2	3	4

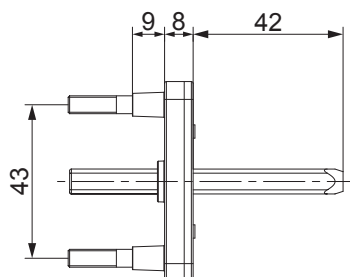


LAVORAZIONE ANTA / SASH MACHINING

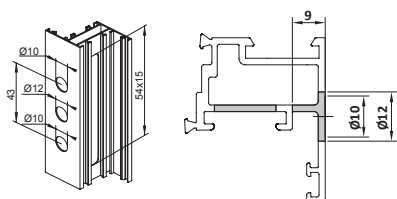


LAVORAZIONE CARTELLA DI CENTRAGGIO / CENTERING COVER MACHINING


3090.2X



3090.3X




3091.3X




3070.15






3072.15



3100.15



MONTAGGIO / ASSEMBLY

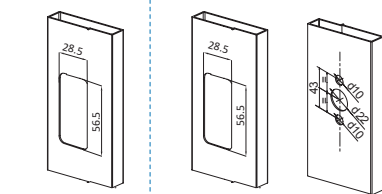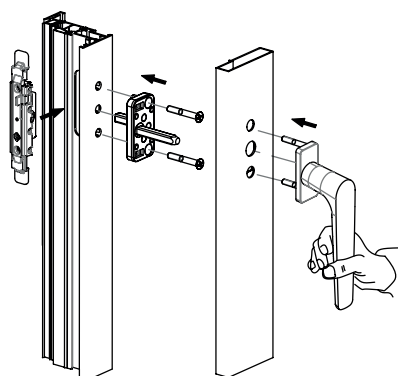

Rimuovere il perno della maniglia
Remove the pin from the handle
Tagliare le viti delle maniglie
Cut the screws supplied with handle

