



DIAGRAMMI DI CARICO


LOAD CHART

TABELLE DI CARICO PER CONFIGURAZIONI MONOANTA
LOAD CHARTS FOR ONE SASH CONFIGURATIONS

130 kg - 180°

⚠ Obbligatorio A3310.50 con soglie ribassate
Mandatory A3310.50 with low threshold


Consigliato A3310.50 per portate > 110 kg
Recommended A3310.50 with weight > 100kg





2500	50	42	35	30	26	23	21	19	17	16	15	14
2400	50	43	36	31	27	24	22	20	18	17	15	14
2300	50	45	38	32	28	25	23	21	19	17	15	15
2200	50	47	39	34	30	26	24	21	20	18	16	16
2100	50	50	41	35	31	28	25	23	21	19	17	17
2000	50	50	43	37	33	29	26	24	22	20	18	17
1900	50	50	46	39	34	30	27	25	23	21	19	18
1800	50	50	48	41	36	32	29	26	24	22	20	17
1700	50	50	50	44	38	34	31	28	25	24	20	18
1600	50	50	50	46	41	36	33	30	27	23	21	20
1500	50	50	50	50	43	39	35	32	29	24	21	21
1400	50	50	50	50	46	41	37	34	28	26	22	19
1300	50	50	50	50	50	44	40	33	30	28	24	17
1200	50	50	50	50	50	48	39	35	33	25	21	17
1100	50	50	50	50	50	47	43	39	30	22	19	13
1000	50	50	50	50	50	50	47	35	26	24	15	7
900	50	50	50	50	50	50	35	32	19	9	N.D.	N.D.
800	50	50	50	50	50	43	39	24	11	N.D.	N.D.	N.D.
700	50	50	50	50	50	50	15	N.D.	N.D.	N.D.	N.D.	N.D.
600	50	50	50	50	43	19	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
550	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
H / L	470	500	600	700	800	900	1000	1100	1200	1300	1400	1500

150 kg - 90°

⚠ Obbligatorio A3310.50
Mandatory A3310.50



	50	44	37	32	28	25	22	20	19	17	16	15	14	13
2700	50	46	38	33	29	26	23	21	19	18	16	15	14	14
2500	50	48	40	34	30	27	24	22	20	18	17	16	15	14
2400	50	50	42	36	31	28	25	23	21	19	18	17	16	15
2300	50	50	43	37	33	29	26	24	22	20	19	17	16	15
2200	50	50	45	39	34	30	27	25	23	21	19	18	17	16
2100	50	50	48	41	36	32	29	26	24	22	20	19	18	15
2000	50	50	50	43	38	33	30	27	25	23	21	20	19	16
1900	50	50	50	45	39	35	32	29	26	24	23	21	18	17
1800	50	50	50	48	42	37	33	30	28	26	24	20	19	18
1700	50	50	50	50	44	39	35	32	29	27	23	21	20	19
1600	50	50	50	50	47	42	38	34	31	26	24	23	21	17
1500	50	50	50	50	50	44	40	36	33	28	26	24	19	14
1400	50	50	50	50	50	48	43	39	32	30	28	21	16	15
1300	50	50	50	50	50	50	46	38	35	32	25	18	17	11
1200	50	50	50	50	50	50	45	41	38	23	21	20	13	6
1100	50	50	50	50	50	50	49	45	27	25	23	15	6	N.D.
1000	50	50	50	50	50	50	50	33	30	28	17	7	N.D.	N.D.
900	50	50	50	50	50	50	40	36	22	10	N.D.	N.D.	N.D.	N.D.
800	50	50	50	50	50	50	45	27	11	N.D.	N.D.	N.D.	N.D.	N.D.
700	50	50	50	50	50	50	17	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
600	50	50	50	50	50	19	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
550	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
H / L	470	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700

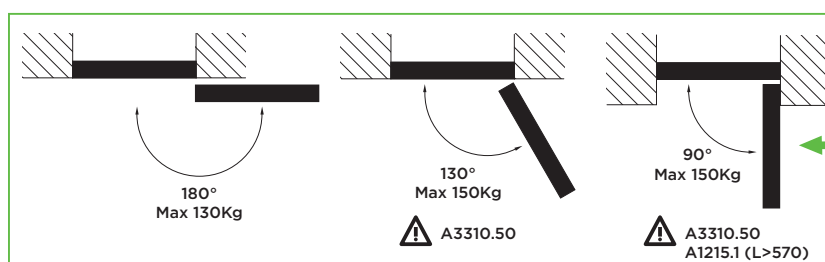

Per apertura
impedita a 180°
è obbligatorio
braccio limitatore
For windows
with 180°
restricted opening
mandatory use a
limiter arm

⚠ A1215.1 (L>570)

