




DIAGRAMMI DI CARICO

LOAD CHART

TABELLE DI CARICO PER CONFIGURAZIONI MONOANTA
LOAD CHARTS FOR ONE SASH CONFIGURATIONS

110 kg		spessore vetro max maximum thickness of the glass - s [mm]							
2700	37	33	27	23	20	18	16	15	14
2600	38	34	28	24	21	19	17	15	14
2500	40	35	29	25	22	20	18	16	15
2400	42	37	31	26	23	20	18	17	15
2300	43	38	32	27	24	21	19	17	16
2200	45	40	33	29	25	22	20	18	17
2100	48	42	35	30	26	23	21	19	17
2000	50	44	37	31	28	24	22	20	18
1900	50	46	39	33	29	26	23	21	19
1800	50	49	41	35	31	27	24	22	20
1700	50	50	43	37	32	29	26	24	22
1600	50	50	46	39	34	31	28	25	23
1500	50	50	49	42	37	33	29	27	24
1400	50	50	50	45	39	35	31	29	24
1300	50	50	50	48	42	38	34	28	25
1200	50	50	50	50	46	41	33	30	28
1100	50	50	50	50	50	40	36	33	20
1000	50	50	50	50	50	44	40	24	22
900	50	50	50	50	50	49	29	27	16
800	50	50	50	50	50	37	33	20	11
700	50	50	50	50	47	42	13	N.D.	N.D.
600	50	50	50	50	37	19	N.D.	N.D.	N.D.
550	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.
H \ L	440	500	600	700	800	900	1000	1100	1200

140 kg *		spessore vetro max maximum thickness of the glass - s [mm]							
2700	47	41	35	30	26	23	21	19	17
2600	49	43	36	31	27	24	22	20	18
2500	50	45	37	32	28	25	22	20	19
2400	50	47	39	33	29	26	23	21	19
2300	50	49	41	35	30	27	24	22	20
2200	50	50	42	36	32	28	25	23	21
2100	50	50	44	38	33	30	27	24	22
2000	50	50	47	40	35	31	28	25	23
1900	50	50	49	42	37	33	29	27	25
1800	50	50	50	44	39	35	31	28	26
1700	50	50	50	47	41	37	33	30	27
1600	50	50	50	50	44	39	35	32	29
1500	50	50	50	50	47	41	37	34	31
1400	50	50	50	50	50	44	40	36	30
1300	50	50	50	50	50	48	43	35	32
1200	50	50	50	50	50	50	42	38	35
1100	50	50	50	50	50	50	46	42	32
1000	50	50	50	50	50	50	50	38	28
900	50	50	50	50	50	50	37	34	21
800	50	50	50	50	50	47	42	25	11
700	50	50	50	50	50	50	16	N.D.	N.D.
600	50	50	50	50	47	19	N.D.	N.D.	N.D.
550	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.
H \ L	440	500	600	700	800	900	1000	1100	1200

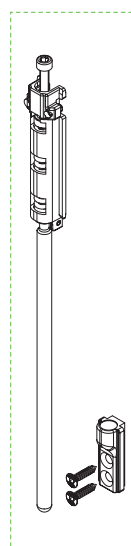

* realizzabile solo con il sostegno 3310.50 | only with sash support 3310.50