







SLIM RAPID 806X

H	3000	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
	2900	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	81%
	2800	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	75%
	2700	100%	100%	100%	100%	100%	100%	100%	100%	100%	80%	69%
	2600	100%	100%	100%	100%	100%	100%	100%	100%	100%	73%	63%
	2500	100%	100%	100%	100%	100%	100%	100%	100%	79%	67%	56%
	2400	100%	100%	100%	100%	100%	100%	100%	85%	71%	60%	50%
	2300	100%	100%	100%	100%	100%	100%	100%	77%	64%	53%	50%
	2200	100%	100%	100%	100%	100%	100%	83%	69%	57%	50%	50%
	2100	100%	100%	100%	100%	100%	100%	75%	62%	50%	50%	50%
	2000	100%	100%	100%	100%	100%	82%	67%	54%	50%	50%	50%
	1900	100%	100%	100%	100%	100%	73%	58%	50%	50%	50%	N.D.
	1800	100%	100%	100%	100%	80%	64%	50%	50%	50%	N.D.	N.D.
	1700	100%	100%	100%	100%	70%	55%	50%	50%	50%	N.D.	N.D.
	1600	100%	100%	100%	78%	60%	50%	50%	50%	N.D.	N.D.	N.D.
		600	700	800	900	1000	1100	1200	1300	1400	1500	1600
	L											

Indipendentemente dal peso della porta, per porte sottoposte ad un intenso utilizzo come nel caso di edifici aperti al pubblico, porte con chiudiporta o porte ad azionamento motorizzato il limite di impiego è limitato a H 2400 e L 1000 con l'utilizzo della terza o quarta cerniera (cerniera blu) come da diagramma.

Whatever the door weight, doors subject to heavy duty, such as public building, doors with closers or automatic doors have a limited range of application limited to H 3000 and L 1400 and must be fitted with an addition hinge (blue hinge) as in the diagram.

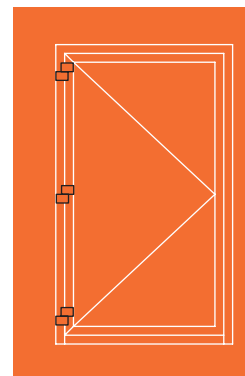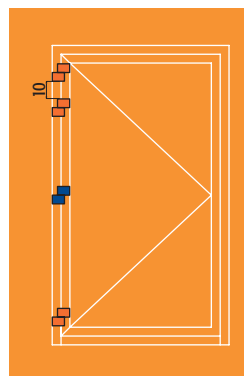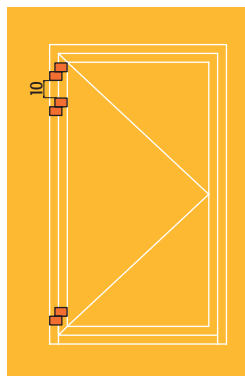

Esempio

1. Dim. LxH (WxH) 1200x3000 = 100% Portata 2 cerniere (Load Capacity 2 hinges)
2. Dim. LxH (WxH) 1600x2200 = 50% Portata 3 cerniere (Load Capacity 3 hinges)
3. Dim. LxH (WxH) 1400x3000 = 100% Portata 4 cerniere (Load Capacity 4 hinges)

ART	PORTATA LOAD CAPACITY
8060 8063 8064	100% = 120kg
8061 8062	100% = 100kg
8060.6 8063.6 8064.6	100% = 160kg
8061.6 8062.6	100% = 140kg