


Network Topology

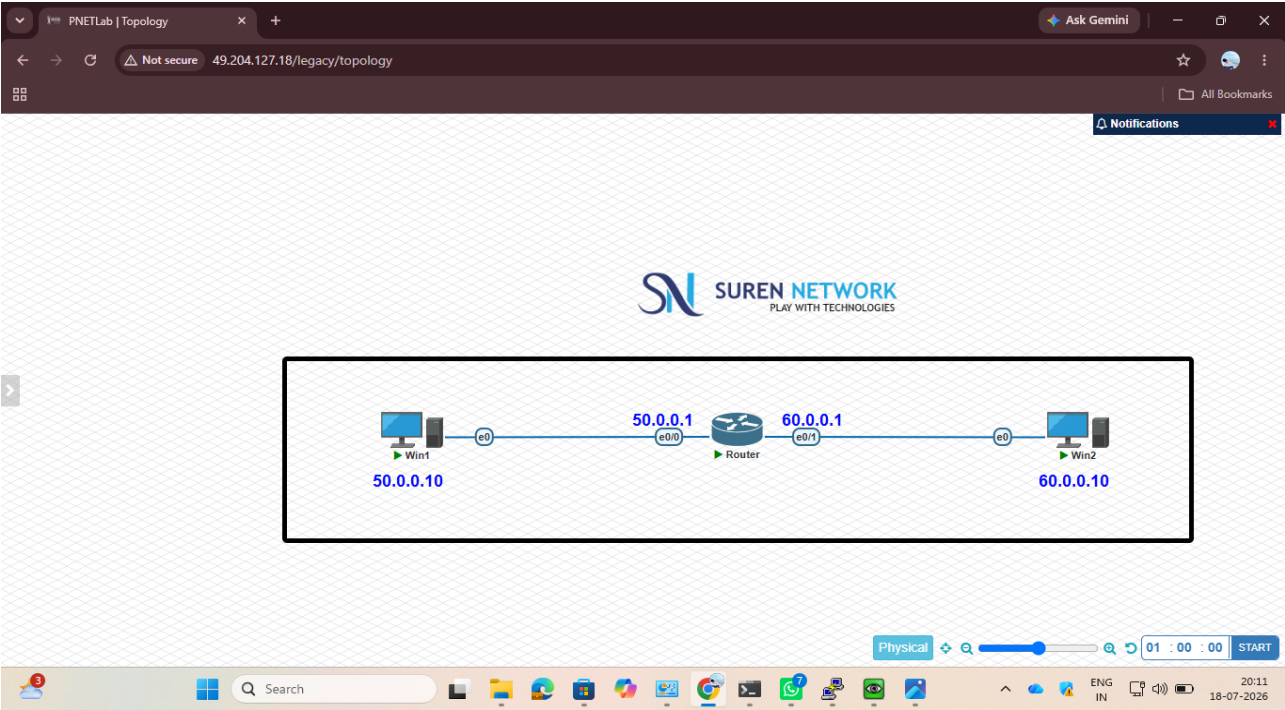


Router IP Address Configuration

```
Router#
Router#
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
*Jul 18 14:02:10.240: %LINK-3-UPDOWN: Interface Ethernet0/2, changed state to do
wn
*Jul 18 14:02:10.245: %LINK-3-UPDOWN: Interface Ethernet0/3, changed state to do
wn
*Jul 18 14:02:11.240: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to down
*Jul 18 14:02:11.245: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
3, changed state to down
Router(config)#int e0/0
Router(config-if)#ip add 50.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#int e0/1
Router(config-if)#ip add 60.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#exit
Router(config)#exi
Router(config)#exi
% Invalid input detected at '^' marker.


Router(config)#exit
Router#sh ip
*Jul 18 14:03:24.383: %SYS-5-CONFIG_I: Configured from console by console
Router#sh ip int bri
Interface                IP-Address      OK? Method Status      Prot
ocol
Ethernet0/0              50.0.0.1        YES manual up          up
Ethernet0/1              60.0.0.1        YES manual up          up
Ethernet0/2              unassigned      YES TFTP  down        down
Ethernet0/3              unassigned      YES TFTP  down        down

Router#
```


PC1 IP Address and Default Gateway Configuration

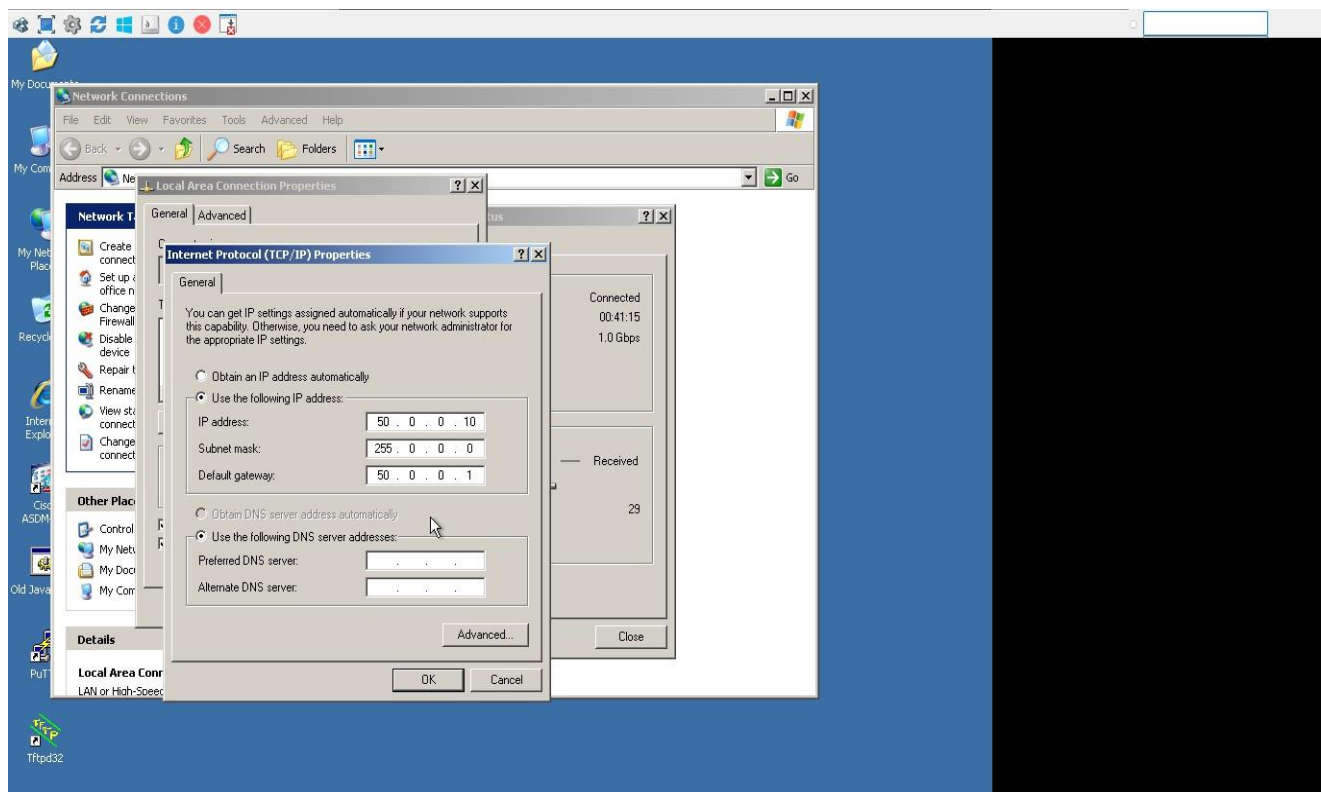

PC2 IP Address and Default Gateway Configuration

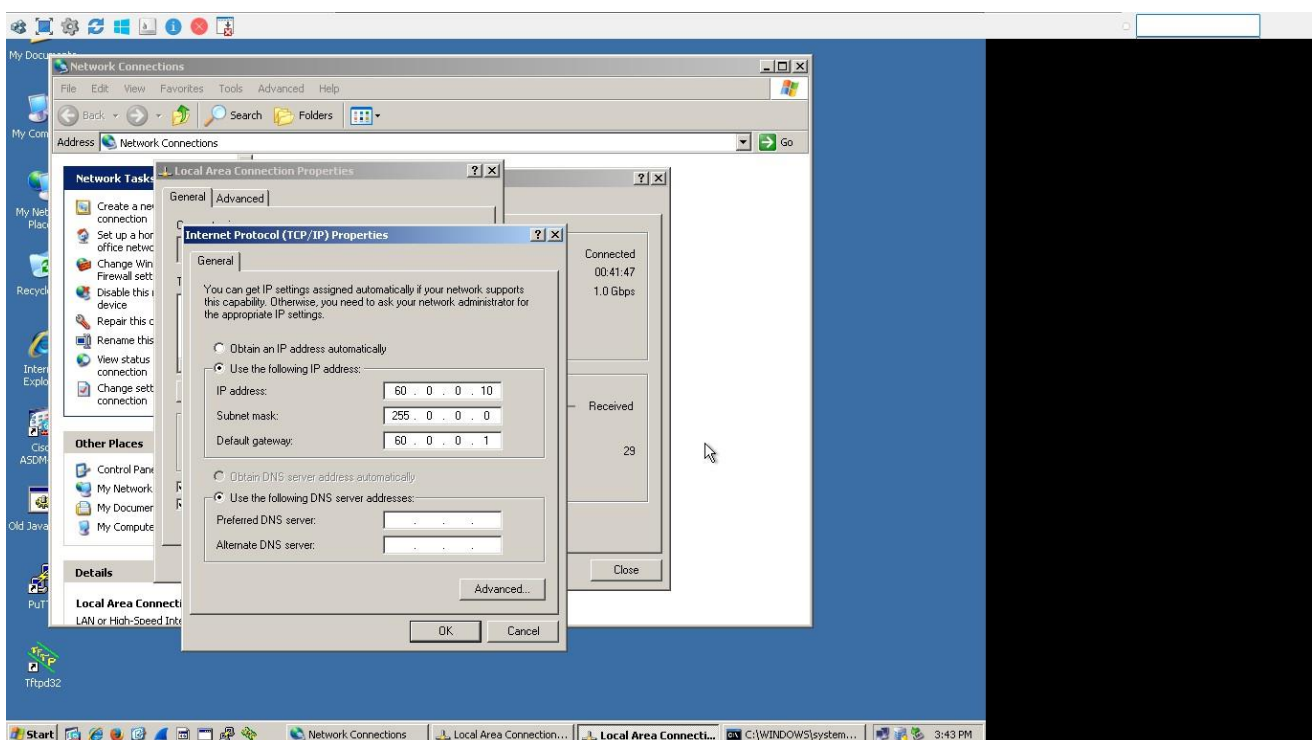

Ping Test from PC1 to PC2

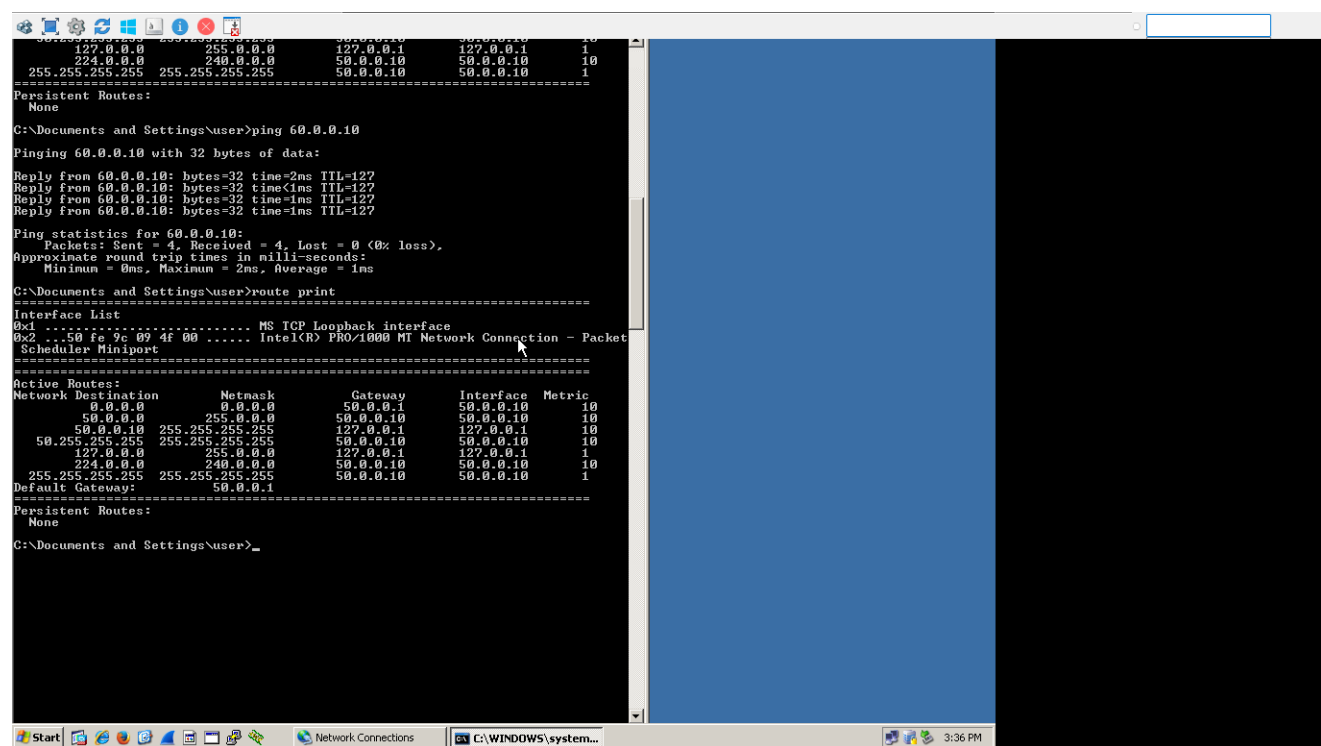

Ping Test from PC2 to PC1

