


Network Topology

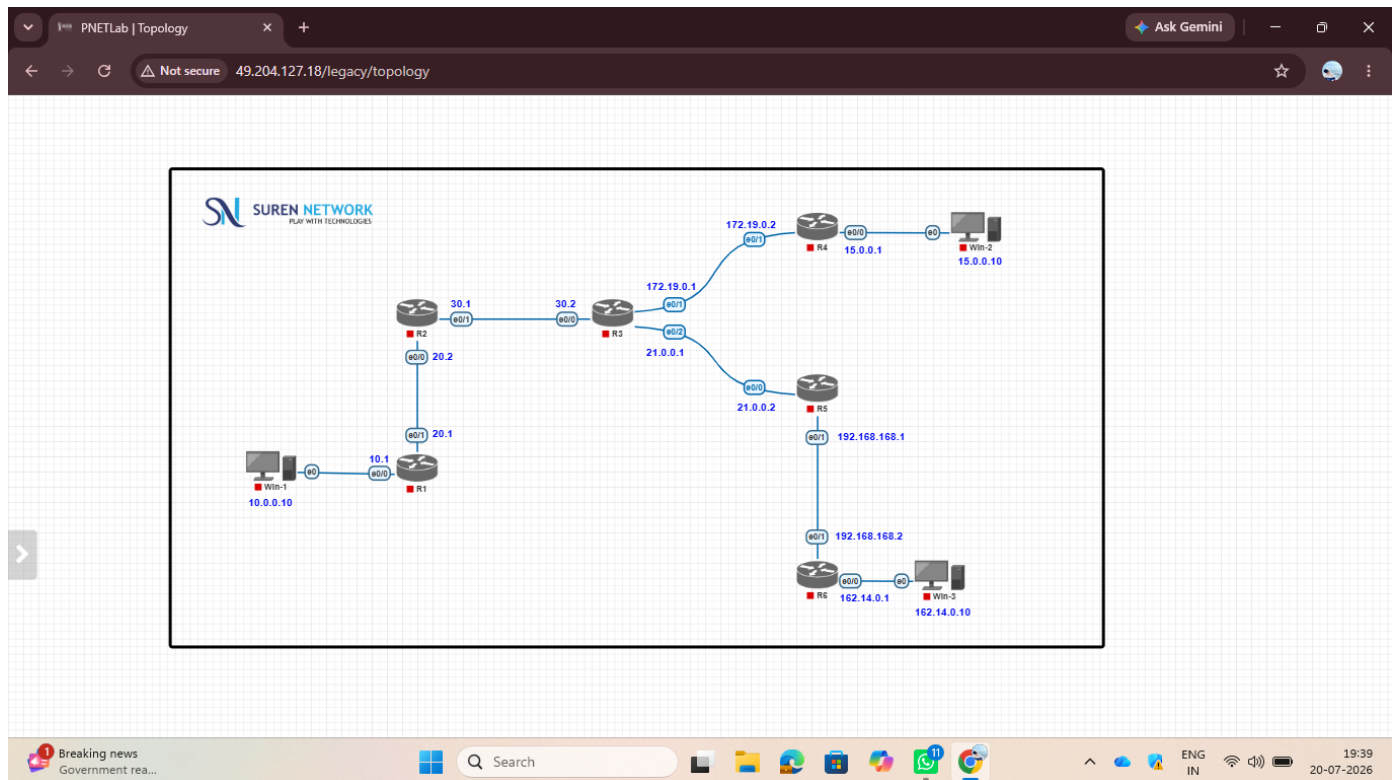

Router 1 - IP Address Assignment

```
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#int e0/0
R1(config-if)#ip add 10.0.0.1 255.0.0.0
R1(config-if)#int e0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#exit
R1#sh
*Jul 20 15:36:24.854: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip int bri
Interface                IP-Address      OK? Method Status      Prot
Ethernet0/0              10.0.0.1        YES manual up          up
Ethernet0/1              20.0.0.1        YES manual up          up
Ethernet0/2              unassigned      YES TFTP  down        down
Ethernet0/3              unassigned      YES TFTP  down        down

R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#ip ro
*Jul 20 15:36:43.765: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config)#ip route 15.0.0.0 255.0.0.0 20.0.0.2
R1(config)#ip route 21.0.0.0 255.0.0.0 20.0.0.2
R1(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2
R1(config)#ip route 162.14.0.0 255.255.0.0 20.0.0.2
R1(config)#ip route 172.14.0.0 255.255.0.0 20.0.0.2
R1(config)#ip route 192.168.168.0 255.255.255.0 20.0.0.2
R1(config)#
R1(config)#
R1(config)#exit
R1#sh
*Jul 20 15:40:11.334: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
```

Router 1 - Static Route Configuration

```
R1
C 10.0.0.0/8 is directly connected, Ethernet0/0
L 10.0.0.1/32 is directly connected, Ethernet0/0
S 15.0.0.0/8 [1/0] via 20.0.0.2
  20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/1
L 20.0.0.1/32 is directly connected, Ethernet0/1
S 21.0.0.0/8 [1/0] via 20.0.0.2
S 30.0.0.0/8 [1/0] via 20.0.0.2
S 162.14.0.0/16 [1/0] via 20.0.0.2
S 192.168.168.0/24 [1/0] via 20.0.0.2
R1#
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#ip route 172.19.0.0 255.255.0.0 20.0.0.2
R1(config)#exit
R1#sh
*Jul 20 15:47:42.465: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    10.0.0.0/8 is directly connected, Ethernet0/0
L    10.0.0.1/32 is directly connected, Ethernet0/0
S    15.0.0.0/8 [1/0] via 20.0.0.2
  20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/1
L    20.0.0.1/32 is directly connected, Ethernet0/1
S    21.0.0.0/8 [1/0] via 20.0.0.2
S    30.0.0.0/8 [1/0] via 20.0.0.2
S    162.14.0.0/16 [1/0] via 20.0.0.2
S    172.19.0.0/16 [1/0] via 20.0.0.2
S    192.168.168.0/24 [1/0] via 20.0.0.2
R1#
```

Router 2 - IP Address Assignment

```
R2
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#
R2(config)#
R2(config)#
R2(config)#int e0/0
R2(config-if)#
R2(config-if)#
R2(config-if)#ip add 20.0.0.2
*Jul 20 15:41:14.141: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config-if)#ip add 20.0.0.2 255.0.0.0
R2(config-if)#no sh
R2(config-if)#int e0/1
R2(config-if)#ip add 30.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#
R2(config)#
R2(config)#exit
R2#
*Jul 20 15:42:18.359: %SYS-5-CONFIG_I: Configured from console by console
R2#
R2#
R2#sh ip int bri
Interface      IP-Address      OK? Method Status      Prot
-----
Ethernet0/0    20.0.0.2        YES manual up          up
Ethernet0/1    30.0.0.1        YES manual up          up
Ethernet0/2    unassigned      YES TFTP  down        down
Ethernet0/3    unassigned      YES TFTP  down        down

R2#
R2#
R2#
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#
R2(config)#
```

Router 2 - Static Route Configuration

```
R2
R2(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
R2(config)#ip route 15.0.0.0 255.0.0.0 30.0.0.2
R2(config)#ip route 21.0.0.0 255.0.0.0 30.0.0.2
R2(config)#ip route 162.14.0.0 255.255.0.0 30.0.0.2
R2(config)#ip route 172.19.0.0 255.255.0.0 30.0.0.2
R2(config)#ip route 192.168.168.0 255.255.255.0 30.0.0.2
R2
% Invalid input detected at '^' marker.
R2(config)#ip route 192.168.168.0 255.255.255.0 30.0.0.2
R2(config)#
R2(config)#
R2(config)#exit
R2#
R2#
*Jul 20 15:49:40.417: %SYS-5-CONFIG_I: Configured from console by console
R2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
S    15.0.0.0/8 [1/0] via 30.0.0.2
C    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/0
L    20.0.0.2/32 is directly connected, Ethernet0/0
S    21.0.0.0/8 [1/0] via 30.0.0.2
C    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.1/32 is directly connected, Ethernet0/1
S    162.14.0.0/16 [1/0] via 30.0.0.2
S    172.19.0.0/16 [1/0] via 30.0.0.2
S    192.168.168.0/24 [1/0] via 30.0.0.2
R2#
R2#
R2#
```

Router 3 - IP Address Assignment

```
R3
%Invalid next hop address (it's this router)
R3(config)#no ip add 172.19.0.2 255.255.0.0
R3
% Invalid input detected at '^' marker.
R3(config)#
R3(config)#
R3(config)#exit
R3#
R3#
*Jul 20 16:04:21.841: %SYS-5-CONFIG_I: Configured from console by console
R3#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
Ethernet0/0    30.0.0.2        YES manual up          up
Ethernet0/1    172.19.0.2      YES manual up          up
Ethernet0/2    21.0.0.1        YES manual up          up
Ethernet0/3    unassigned      YES TFTP  down        down
R3#config term
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#
R3(config)#
R3(config)#interface ether
R3(config)#interface ethernet 0/1
R3(config-if)#no ip address
R3(config-if)#exit
R3(config)#
R3(config)#
R3(config)#
R3(config)#inter
R3(config)#interface ether
R3(config)#interface ethernet 0/1
R3(config-if)#ip address 172.19.0.1 255.255.0.0
R3(config-if)#no shutdown
R3(config-if)#exit
R3(config)#exit
R3#
R3#
*Jul 20 16:06:08.425: %SYS-5-CONFIG_I: Configured from console by console
R3#show ip inter
R3#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
Ethernet0/0    30.0.0.2        YES manual up          up
Ethernet0/1    172.19.0.1      YES manual up          up
Ethernet0/2    21.0.0.1        YES manual up          up
```

Router 3 - Static Route Configuration

```
R3
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#ip route 15.0.0.0 255.0.0.0 172.19.0.2
R3(config)#ip route 192.168.168.0 255.255.255.0 21.0.0.2
R3(config)#ip route 162.168.168.0 255.255.0.0 21.0.0.2
%Inconsistent address and mask
R3(config)#
R3(config)#
R3(config)#ip route 162.14.0.0 255.255.0.0 21.0.0.2
R3(config)#
R3(config)#
R3(config)#exit
R3#sh
*Jul 20 16:13:05.132: %SYS-5-CONFIG_I: Configured from console by console
R3#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    15.0.0.0/8 [1/0] via 172.19.0.2
S    20.0.0.0/8 [1/0] via 30.0.0.1
    21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    21.0.0.0/8 is directly connected, Ethernet0/2
L    21.0.0.1/32 is directly connected, Ethernet0/2
C    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/0
L    30.0.0.2/32 is directly connected, Ethernet0/0
S    162.14.0.0/16 [1/0] via 21.0.0.2
    172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    172.19.0.0/16 is directly connected, Ethernet0/1
L    172.19.0.1/32 is directly connected, Ethernet0/1
S    192.168.168.0/24 [1/0] via 21.0.0.2
R3#
R3#
R3#
```

Router 4 - IP Address Assignment & Routing

```
R4
Enter configuration commands, one per line. End with CNTL/Z.
R4(config)#int e0/0
R4(config-if)#ip add 15.0.0.1 255.0.0.0
R4(config-if)#int e0/1
R4(config-if)#ip add 172.19.0.2 255.255.0.0
R4(config-if)#no sh
R4(config-if)#
R4(config-if)#
R4(config-if)#exit
R4(config)#exit
R4#sh
*Jul 20 17:11:04.055: %SYS-5-CONFIG_I: Configured from console by console
R4#sh ip int bri
Interface                IP-Address      OK? Method Status      Prot
Ethernet0/0              15.0.0.1       YES manual up          up
Ethernet0/1              172.19.0.2     YES manual up          up
Ethernet0/2              unassigned     YES TFTP  down        down
Ethernet0/3              unassigned     YES TFTP  down        down

R4#
R4#
R4#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R4(config)#sh ip route
^
% Invalid input detected at '^' marker.

R4(config)#
R4(config)#
R4(config)#exit
R4#sh
*Jul 20 17:11:51.327: %SYS-5-CONFIG_I: Configured from console by console
R4#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
```

Router 4 - Routing Table

```
R4
Ethernet0/3          unassigned    YES TFTP   down      down

R4#
R4#
R4#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R4(config)#sh ip route

% Invalid input detected at '^' marker.

R4(config)#
R4(config)#
R4(config)#exit
R4#sh
*Jul 20 17:11:51.327: %SYS-5-CONFIG_I: Configured from console by console
R4#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 172.19.0.1
    15.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    15.0.0.0/8 is directly connected, Ethernet0/0
L    15.0.0.1/32 is directly connected, Ethernet0/0
S    20.0.0.0/8 [1/0] via 172.19.0.1
S    21.0.0.0/8 [1/0] via 172.19.0.1
S    30.0.0.0/8 [1/0] via 172.19.0.1
S    162.14.0.0/16 [1/0] via 172.19.0.1
    172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    172.19.0.0/16 is directly connected, Ethernet0/1
L    172.19.0.2/32 is directly connected, Ethernet0/1
S    192.168.168.0/24 [1/0] via 172.19.0.1
R4#
R4#
R4#
```

Router 5 - IP Address Assignment

```
R5
R5#
R5#
R5#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R5(config)#
R5(config)#
R5(config)#
R5(config)#int e0/0
R5(config-if)#ip add 21.0.0.2 255.0.0.0
R5(config-if)#
*Jul 20 16:22:11.712: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R5(config-if)#int e0/1
R5(config-if)#ip add 192.168.168.1 255.255.255.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#exit
R5#
R5#
R5#
R5#
*Jul 20 16:22:56.053: %SYS-5-CONFIG_I: Configured from console by console
R5#sh ip int bri
Interface                IP-Address      OK? Method Status      Prot
-----
Ethernet0/0              21.0.0.2        YES manual up          up
Ethernet0/1              192.168.168.1   YES manual up          up
Ethernet0/2              unassigned      YES TFTP   down        down
Ethernet0/3              unassigned      YES TFTP   down        down

R5#
R5#
R5#
R5#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R5(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
R5(config)#ip route 20.0.0.0 255.0.0.0 20.0.0.1
R5(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.1
R5(config)#ip route 15.0.0.0 255.0.0.0 20.0.0.1
```

Router 5 - Static Route Configuration

```
R5
R5#
R5#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R5(config)#ip route 10.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 20.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 30.0.0.0 255.0.0.0 21.0.0.1
R5(config)#
R5(config)#
R5(config)#exit
R5#ex
*Jul 20 16:34:53.994: %SYS-5-CONFIG_I: Configured from console by console
R5#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 21.0.0.1
      [1/0] via 20.0.0.1
S    15.0.0.0/8 [1/0] via 20.0.0.1
S    20.0.0.0/8 [1/0] via 21.0.0.1
S    21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    21.0.0.0/8 is directly connected, Ethernet0/0
L    21.0.0.2/32 is directly connected, Ethernet0/0
S    30.0.0.0/8 [1/0] via 21.0.0.1
      [1/0] via 20.0.0.1
S    162.14.0.0/16 [1/0] via 192.168.168.2
S    172.19.0.0/16 [1/0] via 21.0.0.1
C    192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
L    192.168.168.0/24 is directly connected, Ethernet0/1
L    192.168.168.1/32 is directly connected, Ethernet0/1
R5#
R5#
R5#
R5#
```

Router 6 - Routing Table

```
R6
*Jul 20 17:26:20.364: %SYS-5-CONFIG_I: Configured from console by console
R6#sh ip int bri
Interface                IP-Address      OK? Method Status      Prot
Ethernet0/0              162.14.0.1     YES manual up          up
Ethernet0/1              192.168.168.2  YES manual up          up
Ethernet0/2              unassigned     YES TFTP  down        down
Ethernet0/3              unassigned     YES TFTP  down        down
R6#
R6#
R6#
R6#
R6#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 192.168.168.1
S    15.0.0.0/8 [1/0] via 192.168.168.1
S    20.0.0.0/8 [1/0] via 192.168.168.1
S    21.0.0.0/8 [1/0] via 192.168.168.1
S    30.0.0.0/8 [1/0] via 192.168.168.1
C    162.14.0.0/16 is variably subnetted, 2 subnets, 2 masks
L    162.14.0.0/16 is directly connected, Ethernet0/0
L    162.14.0.1/32 is directly connected, Ethernet0/0
S    172.19.0.0/16 [1/0] via 192.168.168.1
C    192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
L    192.168.168.0/24 is directly connected, Ethernet0/1
L    192.168.168.2/32 is directly connected, Ethernet0/1
R6#
```

PC1 Ping to PC2

```
C:\WINDOWS\system32\cmd.exe
Pinging 10.0.0.10 with 32 bytes of data:
Reply from 10.0.0.10: bytes=32 time=7ms TTL=123
Reply from 10.0.0.10: bytes=32 time=3ms TTL=123
Reply from 10.0.0.10: bytes=32 time=3ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 7ms, Average = 3ms

C:\Documents and Settings\user>ping 15.0.0.10

Pinging 15.0.0.10 with 32 bytes of data:
Reply from 15.0.0.10: bytes=32 time=3ms TTL=124
Reply from 15.0.0.10: bytes=32 time=4ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=4ms TTL=124

Ping statistics for 15.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 4ms, Average = 3ms

C:\Documents and Settings\user>
```

PC1 Ping to PC3

```
C:\WINDOWS\system32\cmd.exe
Ping statistics for 162.14.0.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=5ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=3ms TTL=124

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 5ms, Average = 3ms

C:\Documents and Settings\user>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=3ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 162.14.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
```

PC2/PC3 Connectivity Test

```
C:\WINDOWS\system32\cmd.exe

Pinging 15.0.0.10 with 32 bytes of data:
Reply from 15.0.0.10: bytes=32 time=5ms TTL=124
Reply from 15.0.0.10: bytes=32 time=3ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 15.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 5ms, Average = 3ms

C:\Documents and Settings\user>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:
Reply from 162.14.0.10: bytes=32 time=6ms TTL=123
Reply from 162.14.0.10: bytes=32 time=3ms TTL=123
Reply from 162.14.0.10: bytes=32 time=3ms TTL=123
Reply from 162.14.0.10: bytes=32 time=2ms TTL=123

Ping statistics for 162.14.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms

C:\Documents and Settings\user>
```