




Step 1: Router IP Configuration

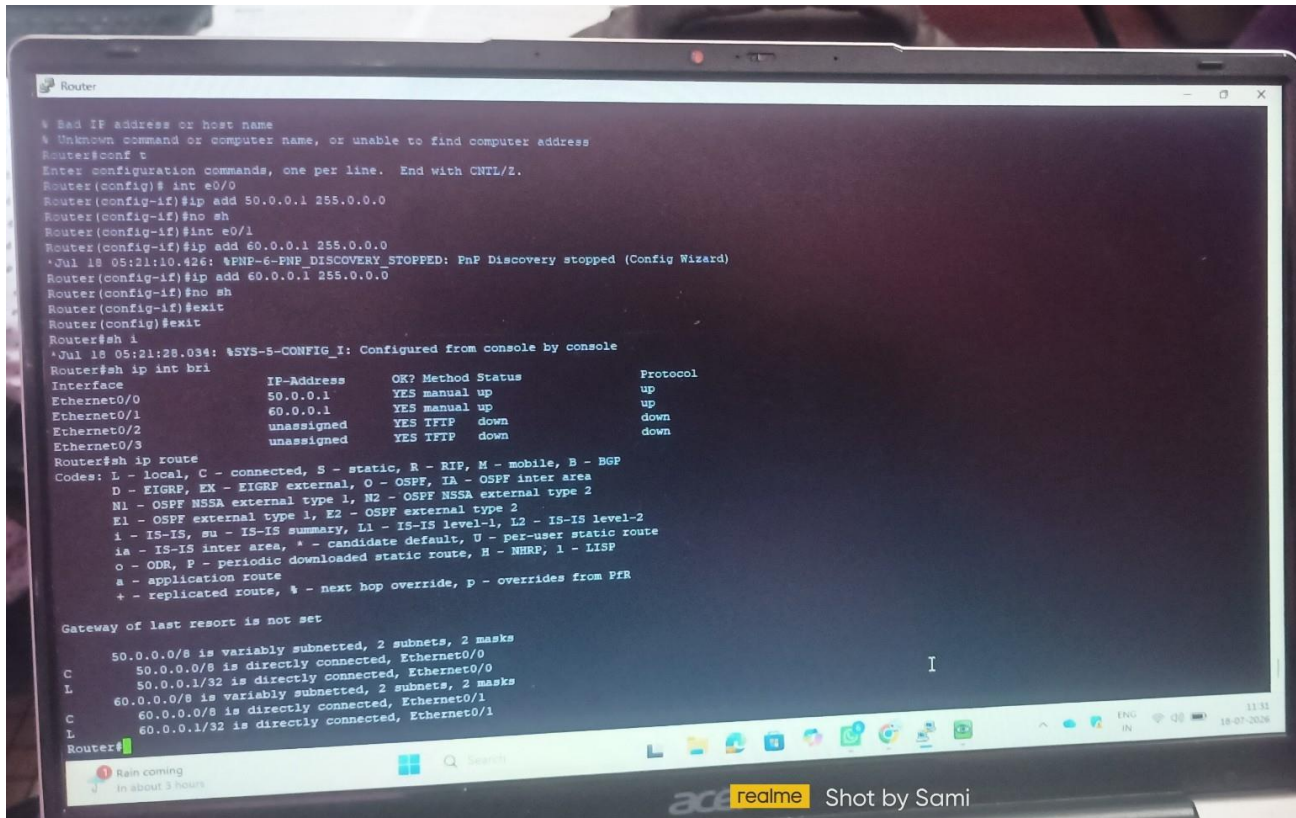


Step 2: PC-1 IP Address & Default Gateway

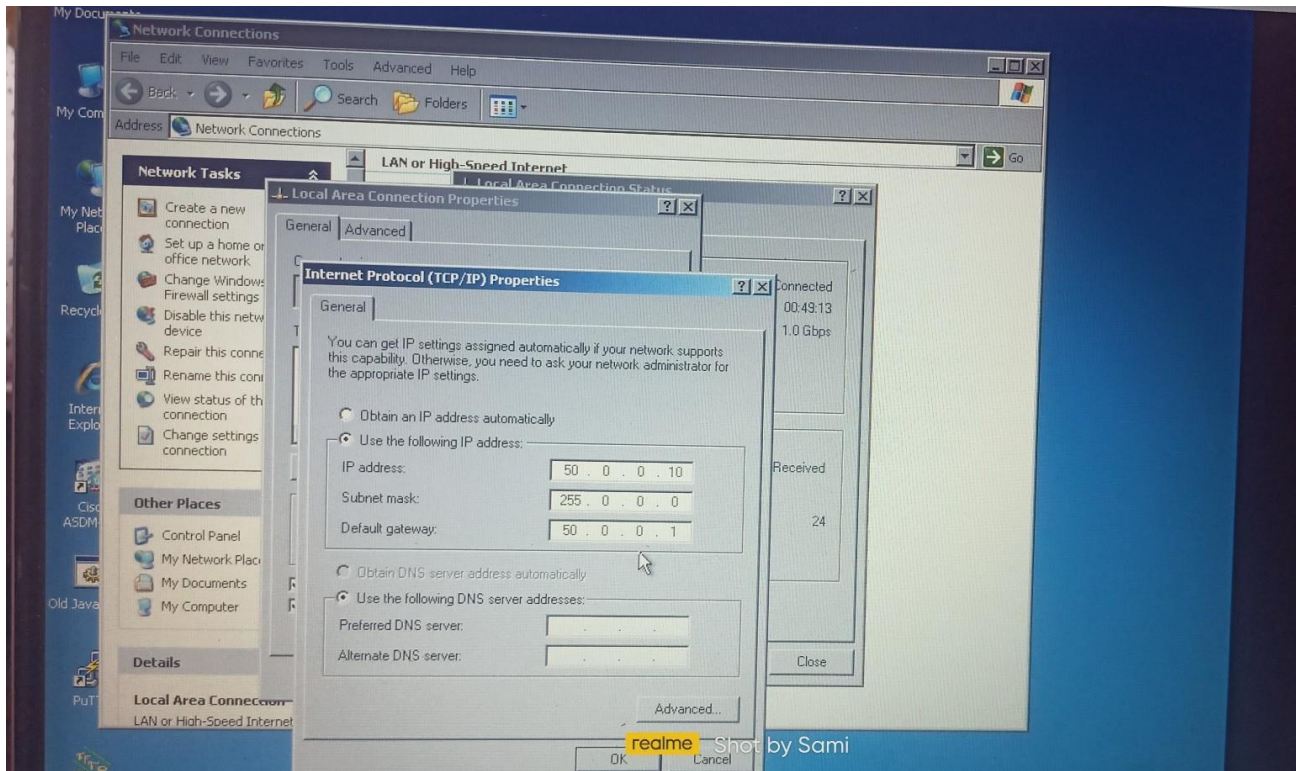


Step 3: PC-2 IP Address & Default Gateway

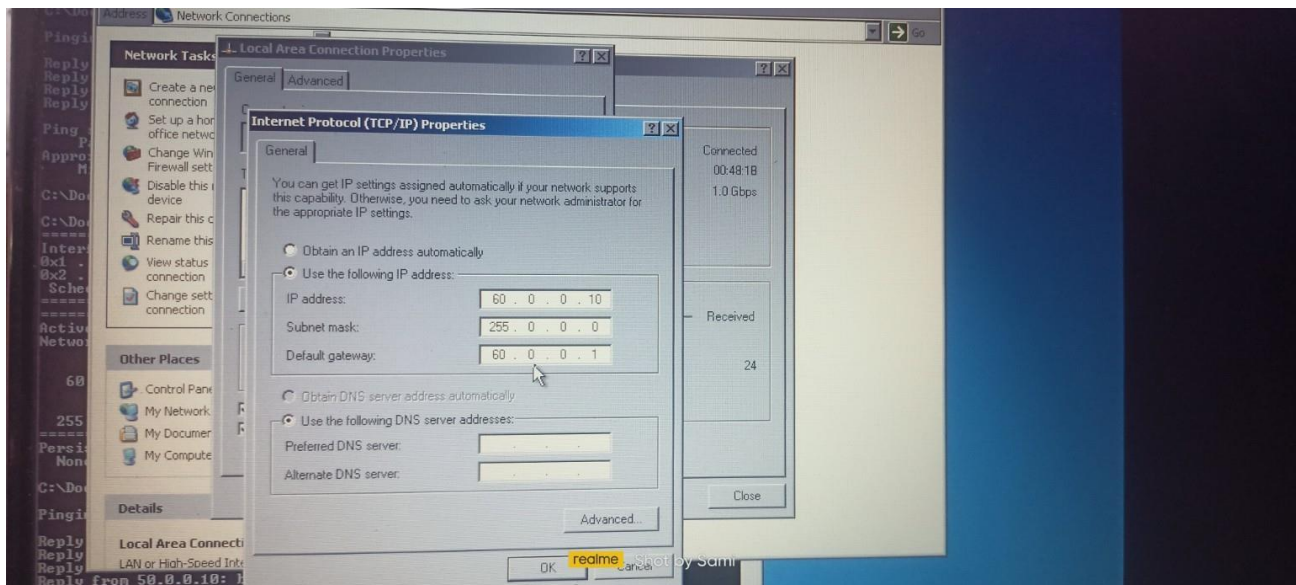

Step 4: Output - Ping from PC2 to PC1

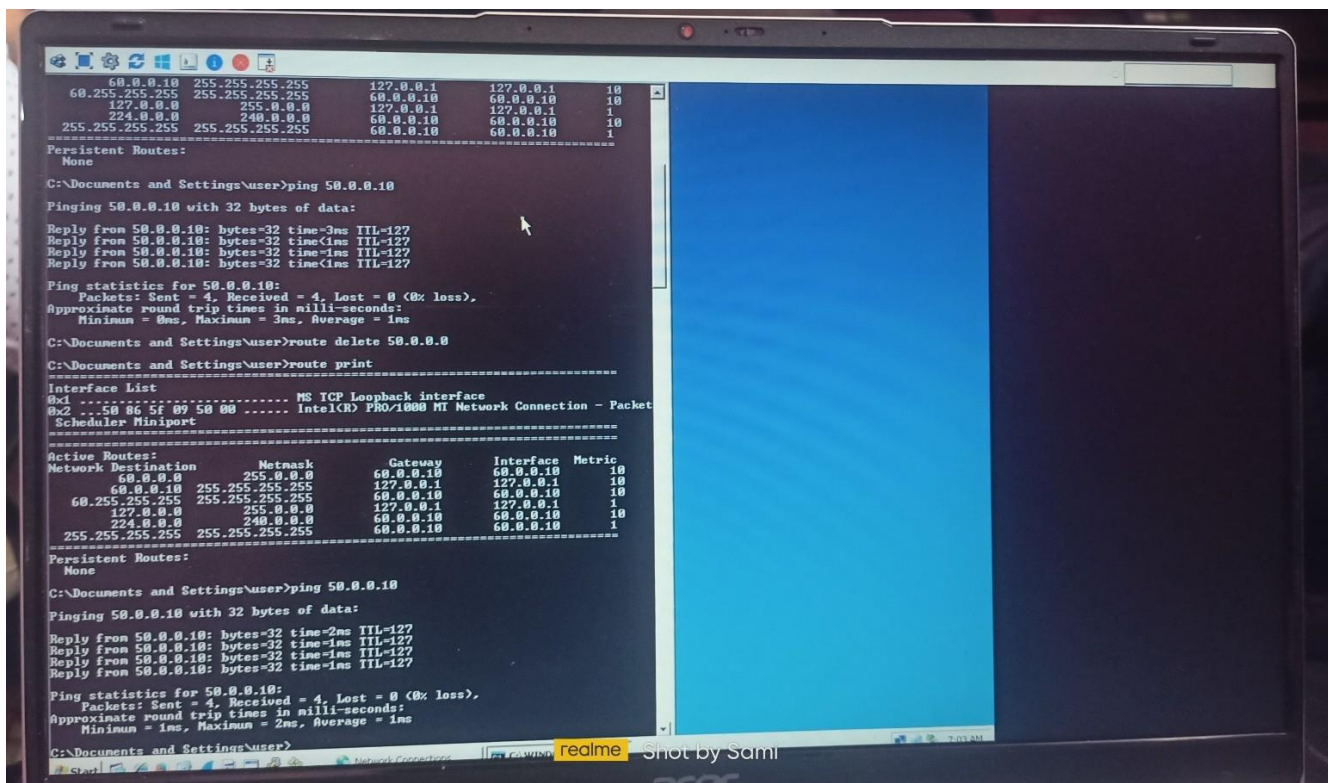

Step 5: Output - Ping from PC1 to pc2

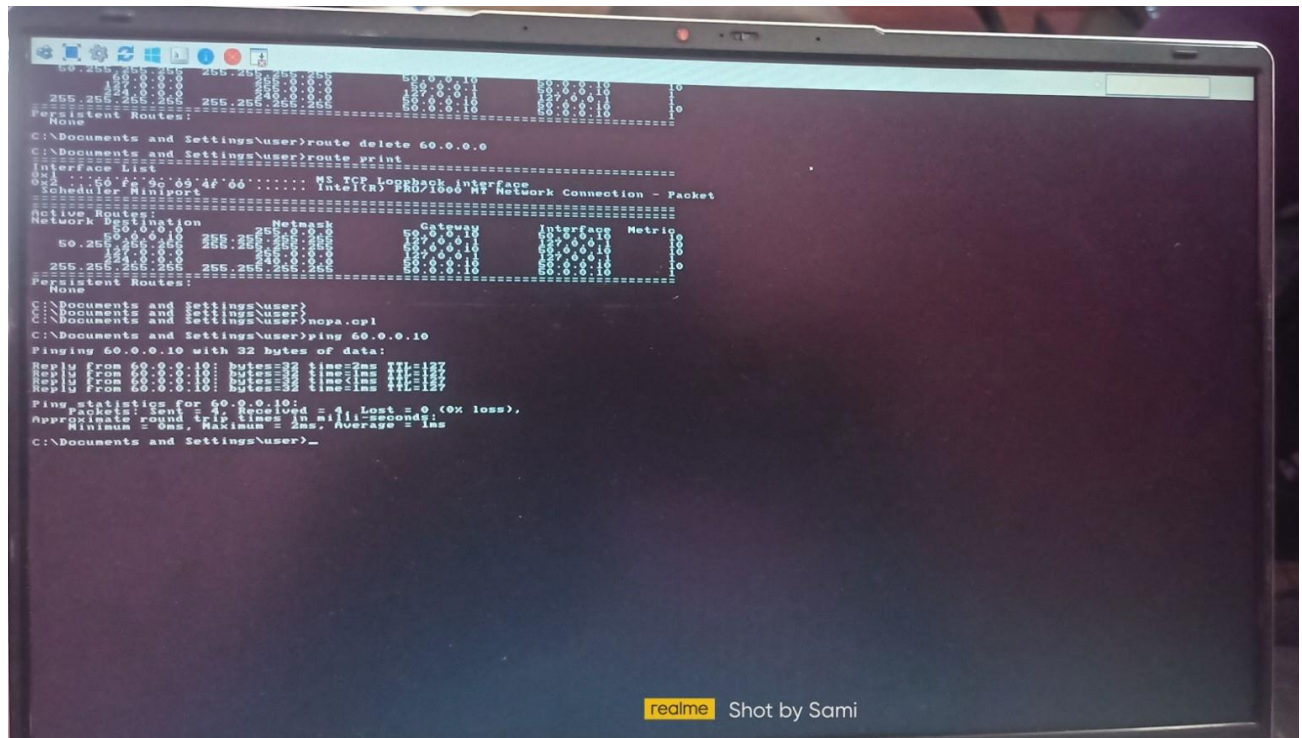

```
C:\Documents and Settings\user>route delete 60.0.0.0
C:\Documents and Settings\user>route print
Interface List
0x{...} {60 f... 9c 00 4f 00} ..... WS TCP Loopback Interface
Schedule Report
Active Routes:
=====================================================================
Network        Subnet        Netmask        Gateway        Interface        Metric
-----
50.255.255.255 50.255.255.255 255.255.255.255 50.0.0.10      {60 f... 9c 00 4f 00} 1
255.255.255.255 255.255.255.255 255.255.255.255 50.0.0.10      {60 f... 9c 00 4f 00} 1
Persistent Routes:
None
C:\Documents and Settings\user>
C:\Documents and Settings\user>nmap.cpl
C:\Documents and Settings\user>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time=2ms TTL=127
Reply from 60.0.0.10: bytes=32 time=2ms TTL=127
Reply from 60.0.0.10: bytes=32 time=2ms TTL=127
Reply from 60.0.0.10: bytes=32 time=2ms TTL=127

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>
```

