



F3 — The correction trajectory, thirteen states in methodology order

Methodology order: the two literature corrections (C1, C2) first, then the implementation defects found in the engine, then the closure fixes.  
Each state is the previous state plus exactly one correction, cherry-picked onto the unmodified baseline. The final state, +Closure fixes, is canonical.  
One axis per metric — the trajectory spans roughly 4,200 kWh to 4 kWh, so no two of these series may share a scale.


1 — Sensible heating

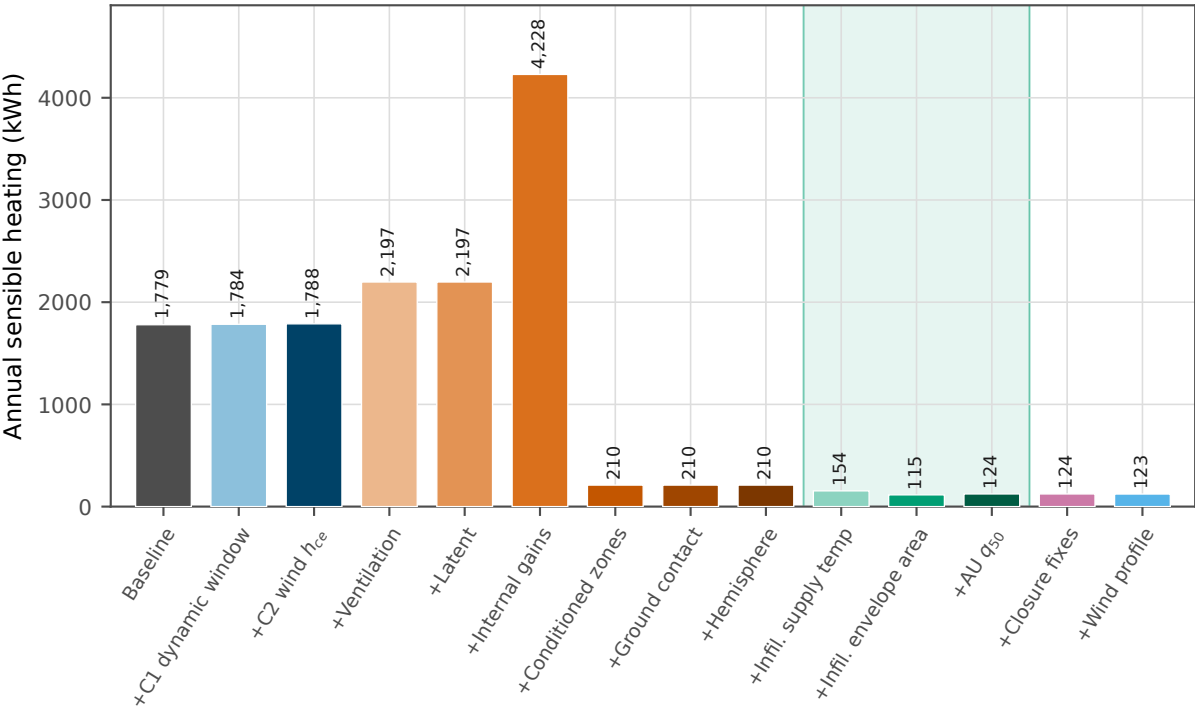


2 — Sensible cooling

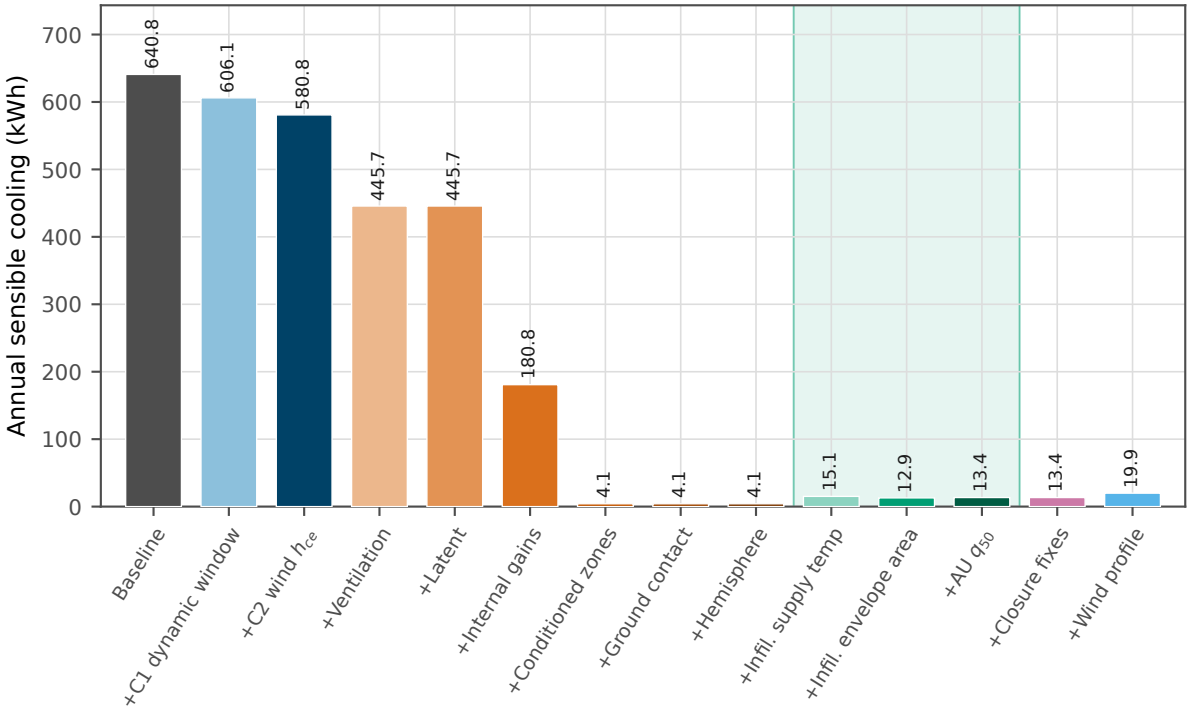


3 — Total energy need, paper metric ( $Q_{H,sens} + Q_{C,sens} + Q_{C,lat}$  gated)

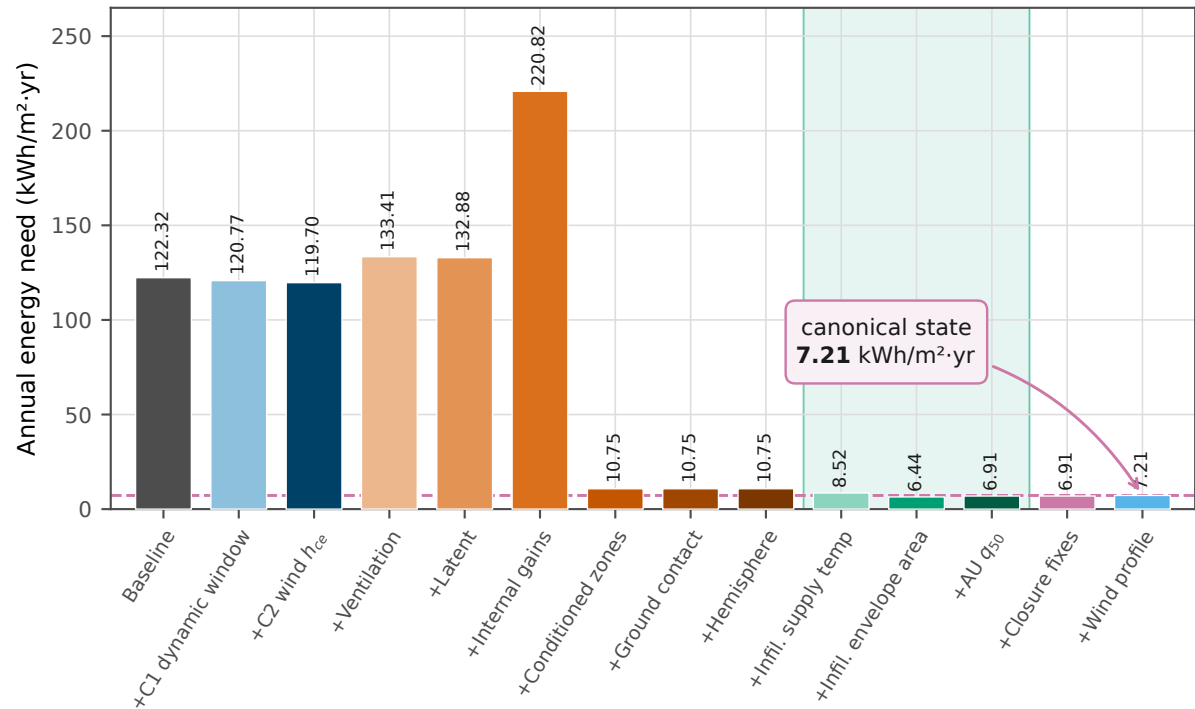


4 — Latent cooling: gated charge against the ungated moisture balance

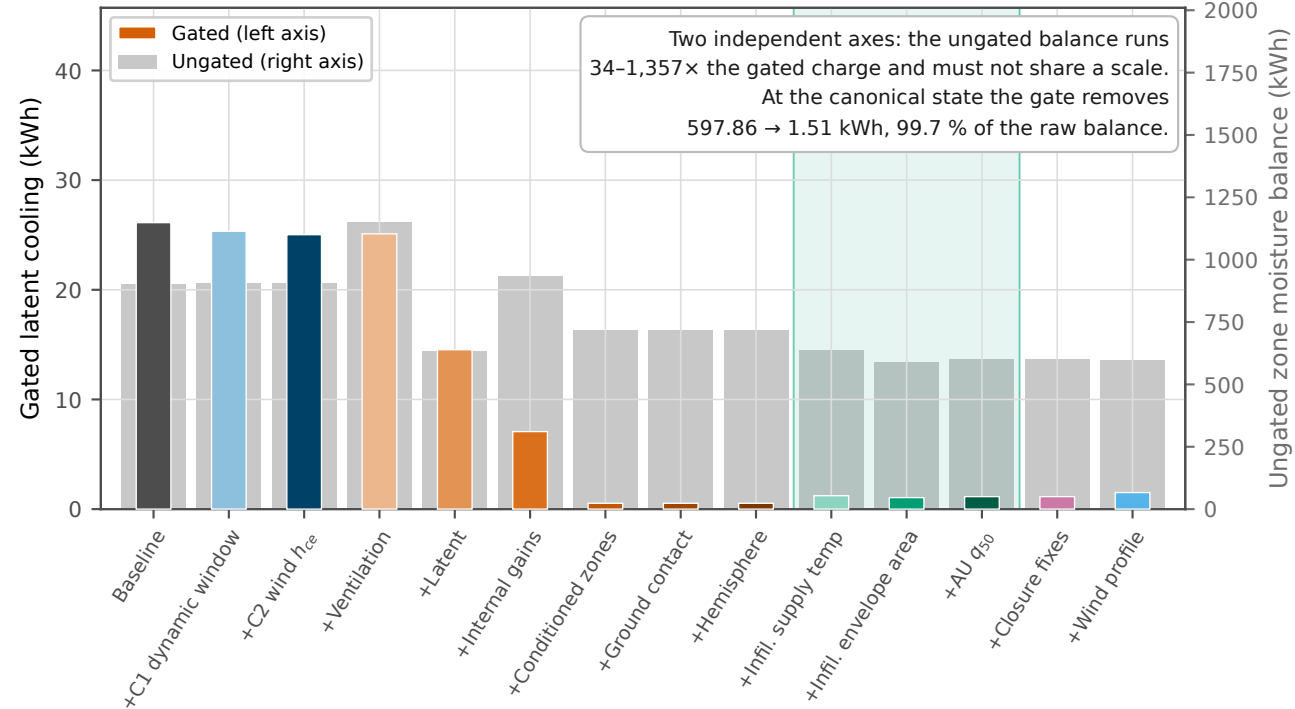

5 — Ventilation + infiltration loss

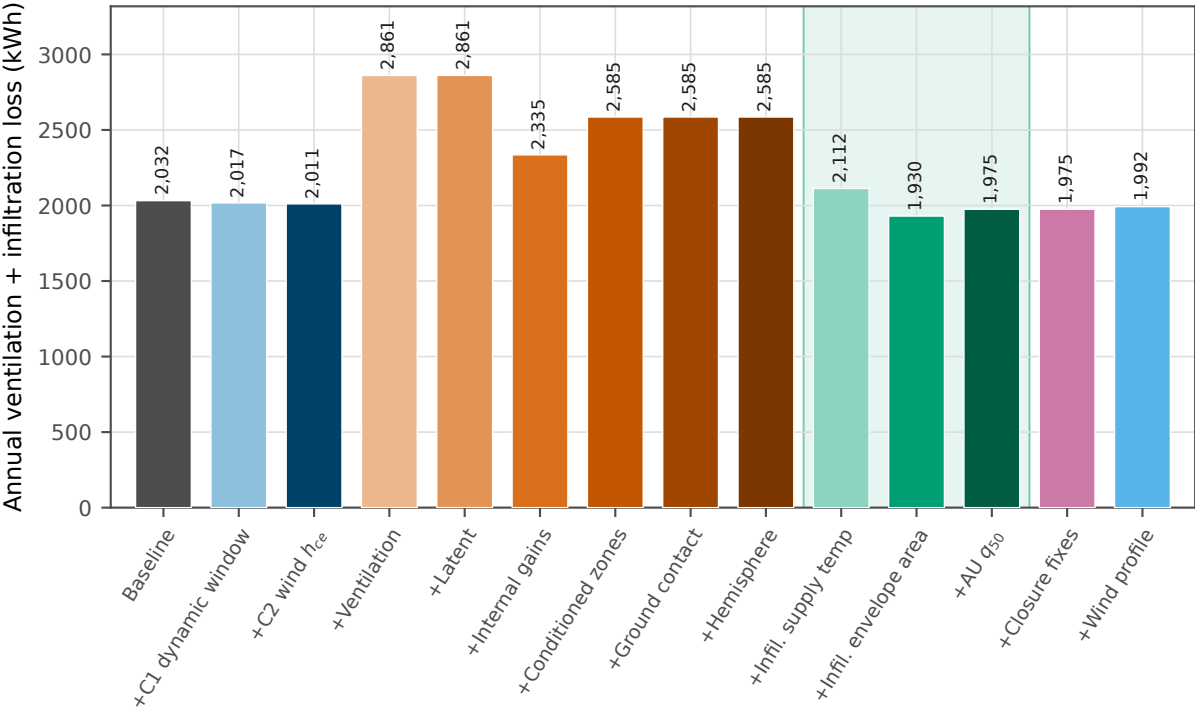

6 — V2 closure residual, with the  $\pm 5\%$  gate

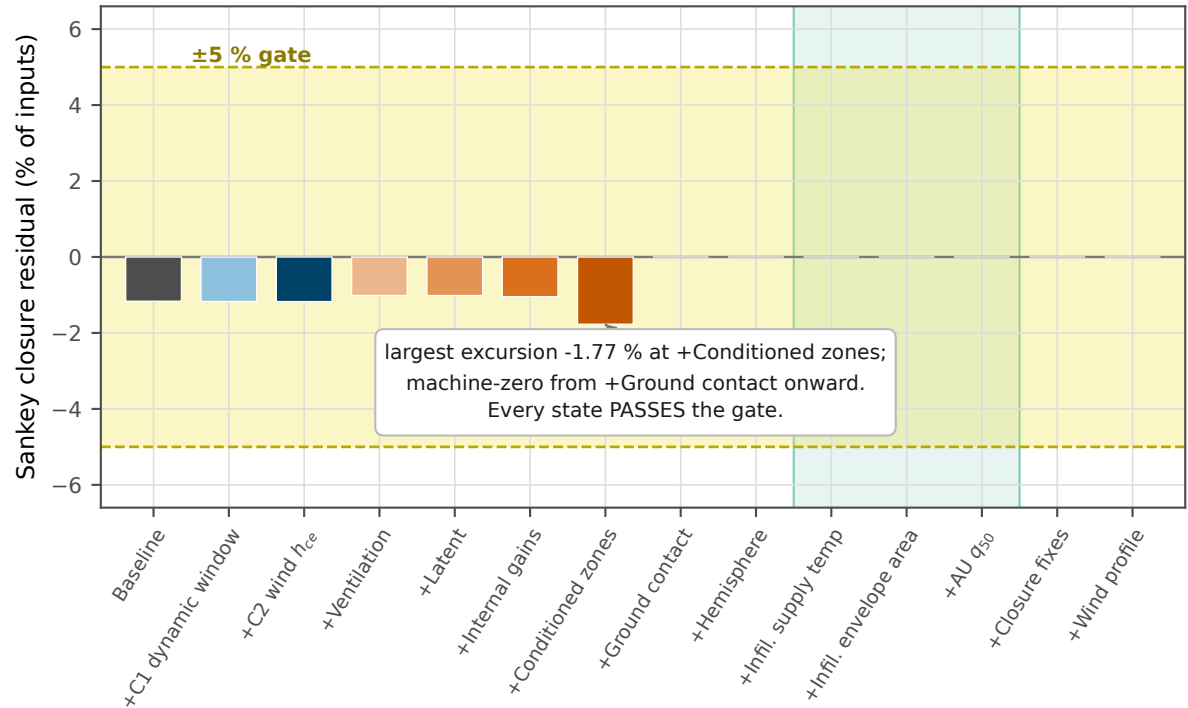

Baseline Literature corrections (C1, C2) Implementation defects Infiltration defects + AU recalibration (\$3.7.1) Closure fixes Wind profile (terrain + height) shaded band: the three infiltration states (Section 3.7.1)