



## Five interacting inputs: cold native semilinear PDE solve

- Relative field error
- Raw PDE residual RMS
- Largest corner error

More resolution improves accuracy

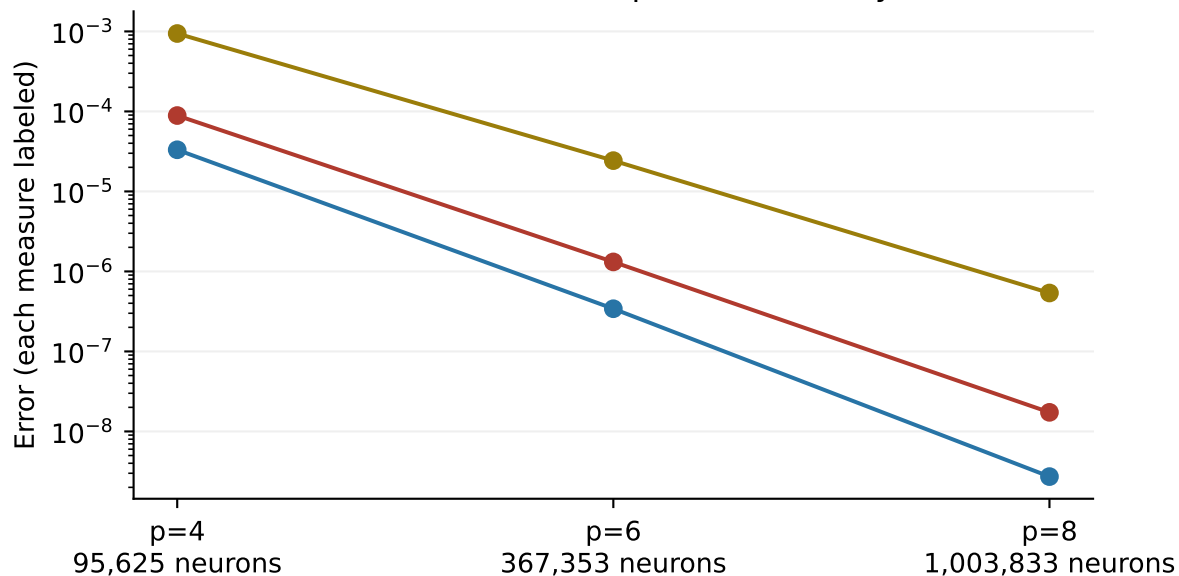

One million neurons: time becomes costly

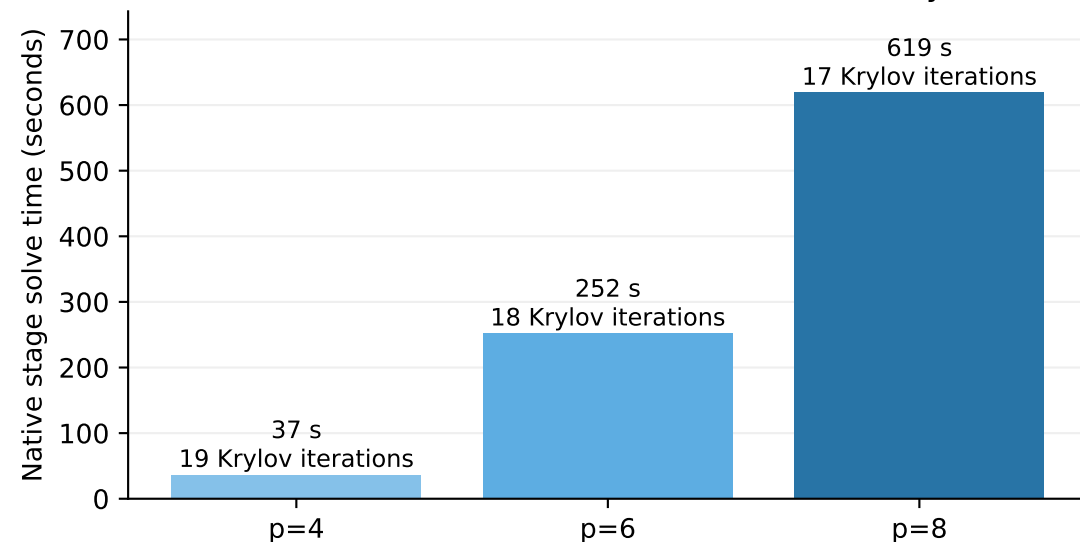

Smooth manufactured control; forcing + boundary values only. 917 s solve; 476 MB peak RSS.  
Independent ordinary-MLP audit: 257 interior values, 97 PDE points, 257 walls, all 32 corners.  
Soft time budget reached after p8 correction; accuracy goal not reached. No continuum certificate.