



Material-removal drift & robustness stress: LQG vs ESO-ADRC vs A-ESO-ADRC


D2 ramp -12% — frequency drift DURING the pass (ramp over 60 %, then hold)

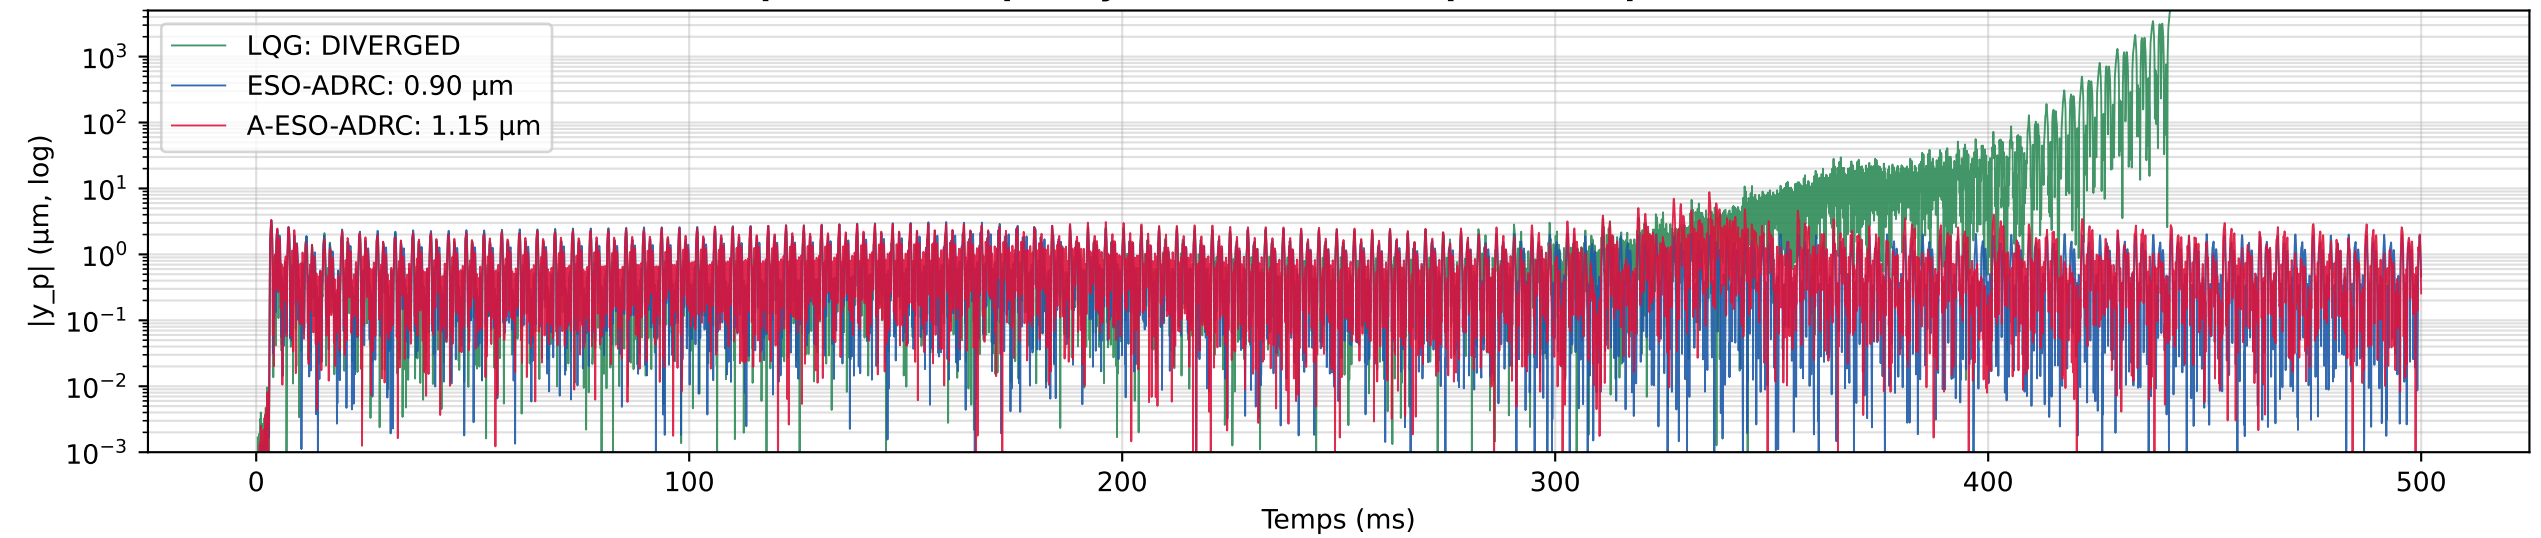

A-ESO-ADRC rung supervision under D2

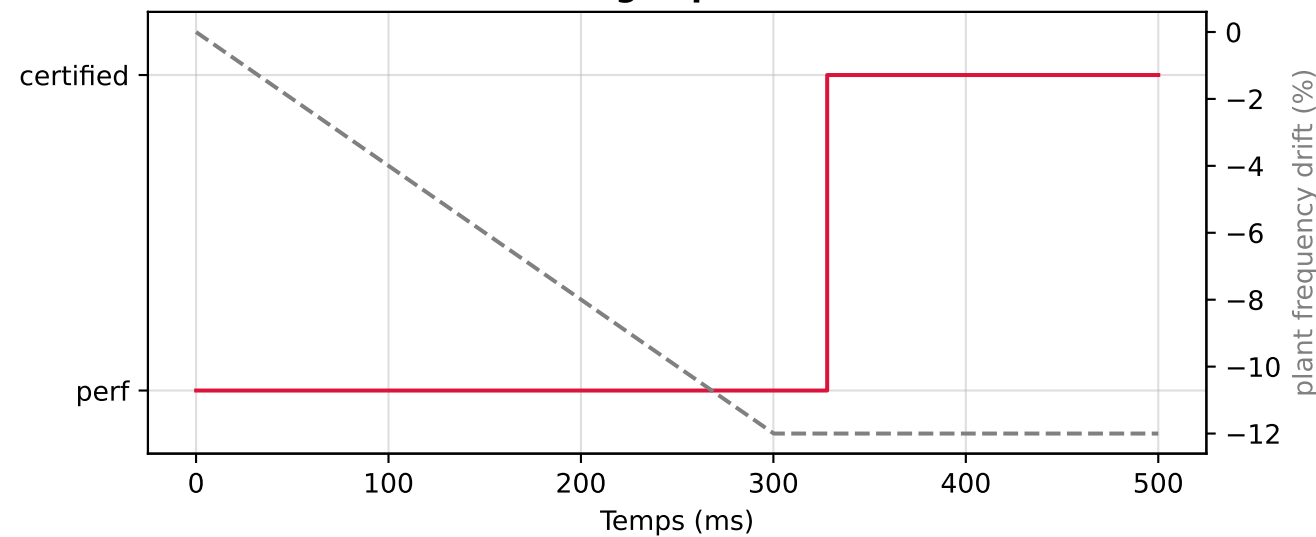

A-ESO-ADRC rung supervision under D1

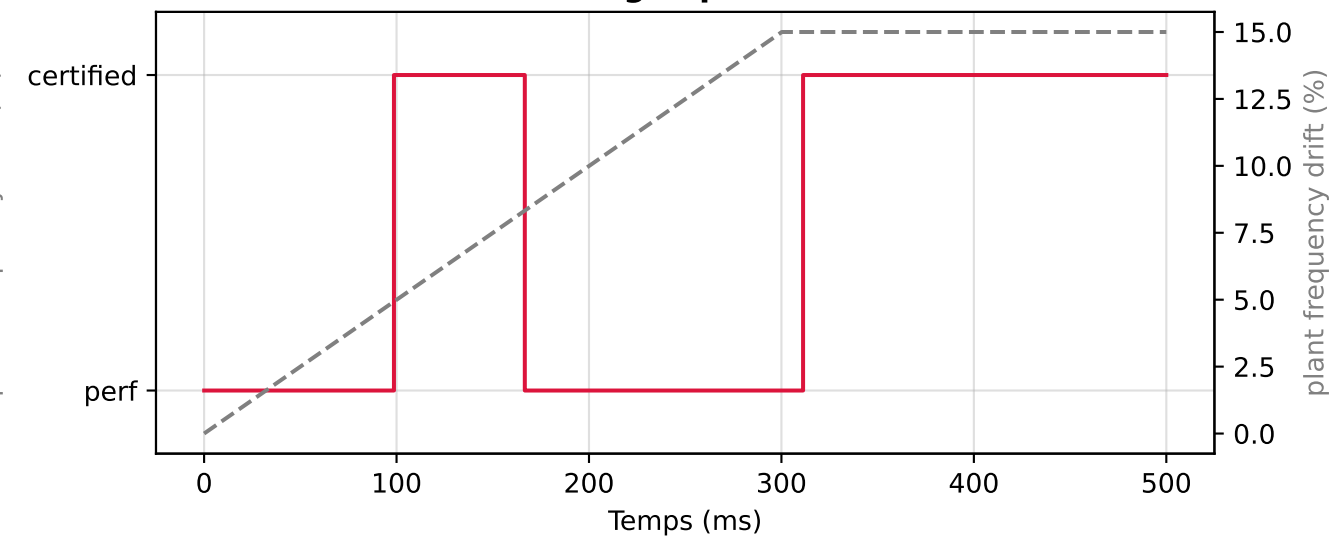

Drift / stress benchmark — fixed designs vs supervised adaptation

