


Real-time identification over an accurate material-removal finishing sequence

Active-probe real-time identification tracks the drifting modes
(passive ID would return the tooth harmonics — biased)



Fixed LQG loses control past its margin (RMS $\rightarrow$ ~ 10 μm); real-time ID keeps it on the oracle. ESO-ADRC is robust without ID.

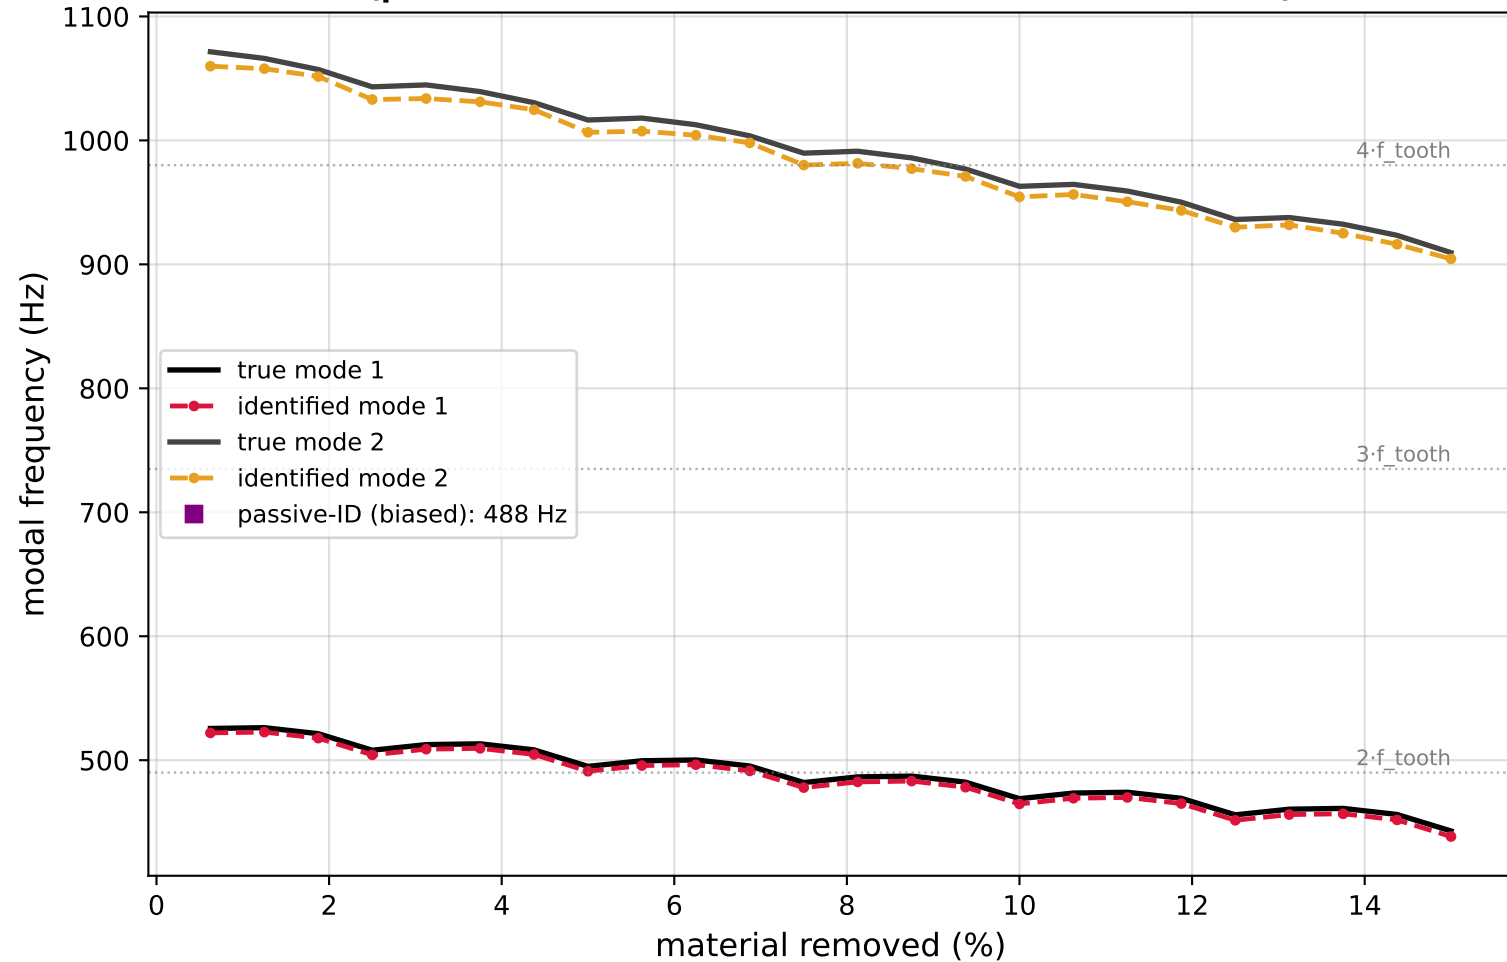