


(a) $x_T = 95$ mm, $a_p = 0.4$ mm, 4900 rpm: chatter suppression and disturbance rejection



(b) control voltage (the controller's response)

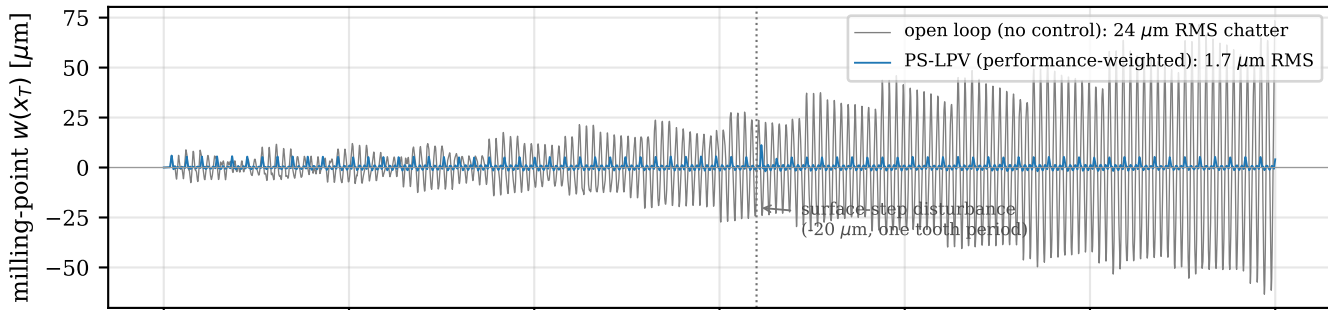