


## Data sheet PR202xxVBDN


Page 1/3

P/N  
PR202XXVBDN  
xx=number of poles  
2020/10/20  
Version: P

### Illustrations

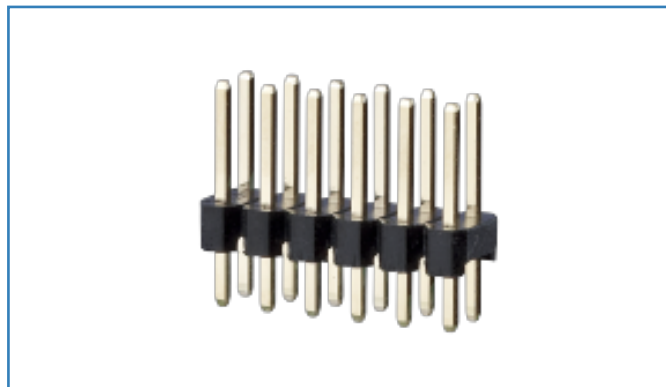

### Dimensional drawing

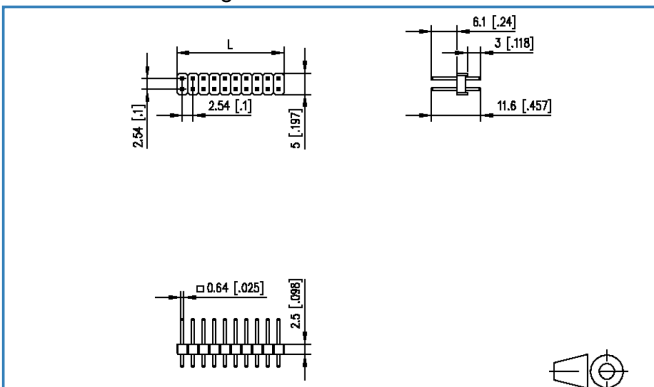

See enlarged drawings at the end of document

### Product specification

- pin header, THR solderable
- centerline 2.54 mm, direction of connection vertical 0°
- color black
- Tape & Reel packaging possible
- dual rows



## Technical Data

### General Data

Solder pin length	3 mm
Min. number of poles	2
Max. number of poles	40
Protection category	IP00
Rated current	3 A

### Material

Insulating material	PE-HT
Contact pin material	CuZn
Contact pin surface	Ni + Au Flash
Glow-Wire Flammability GWFI	-
Glow-Wire Flammability GWIT	-

### Climatic Data

Upper limit temperature	105 °C
Lower limit temperature	-40 °C


### general

Tolerance	ISO 2768 -mH
Solderability	Acc. to IPC/JEDEC J-STD-020D-MSL 1



## Illustrations

### Dimensional drawing

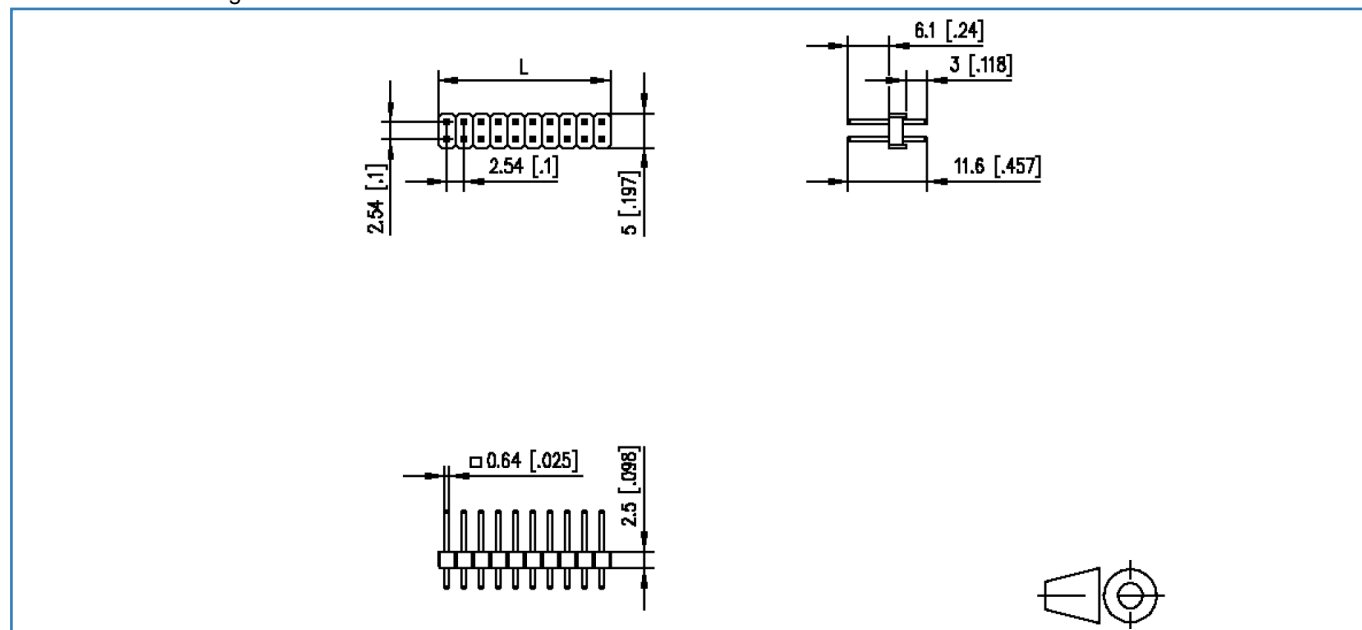

$L = (\text{pole size} - 1) \times \text{centerline} + 2.54 \text{ mm} [0.1]$