



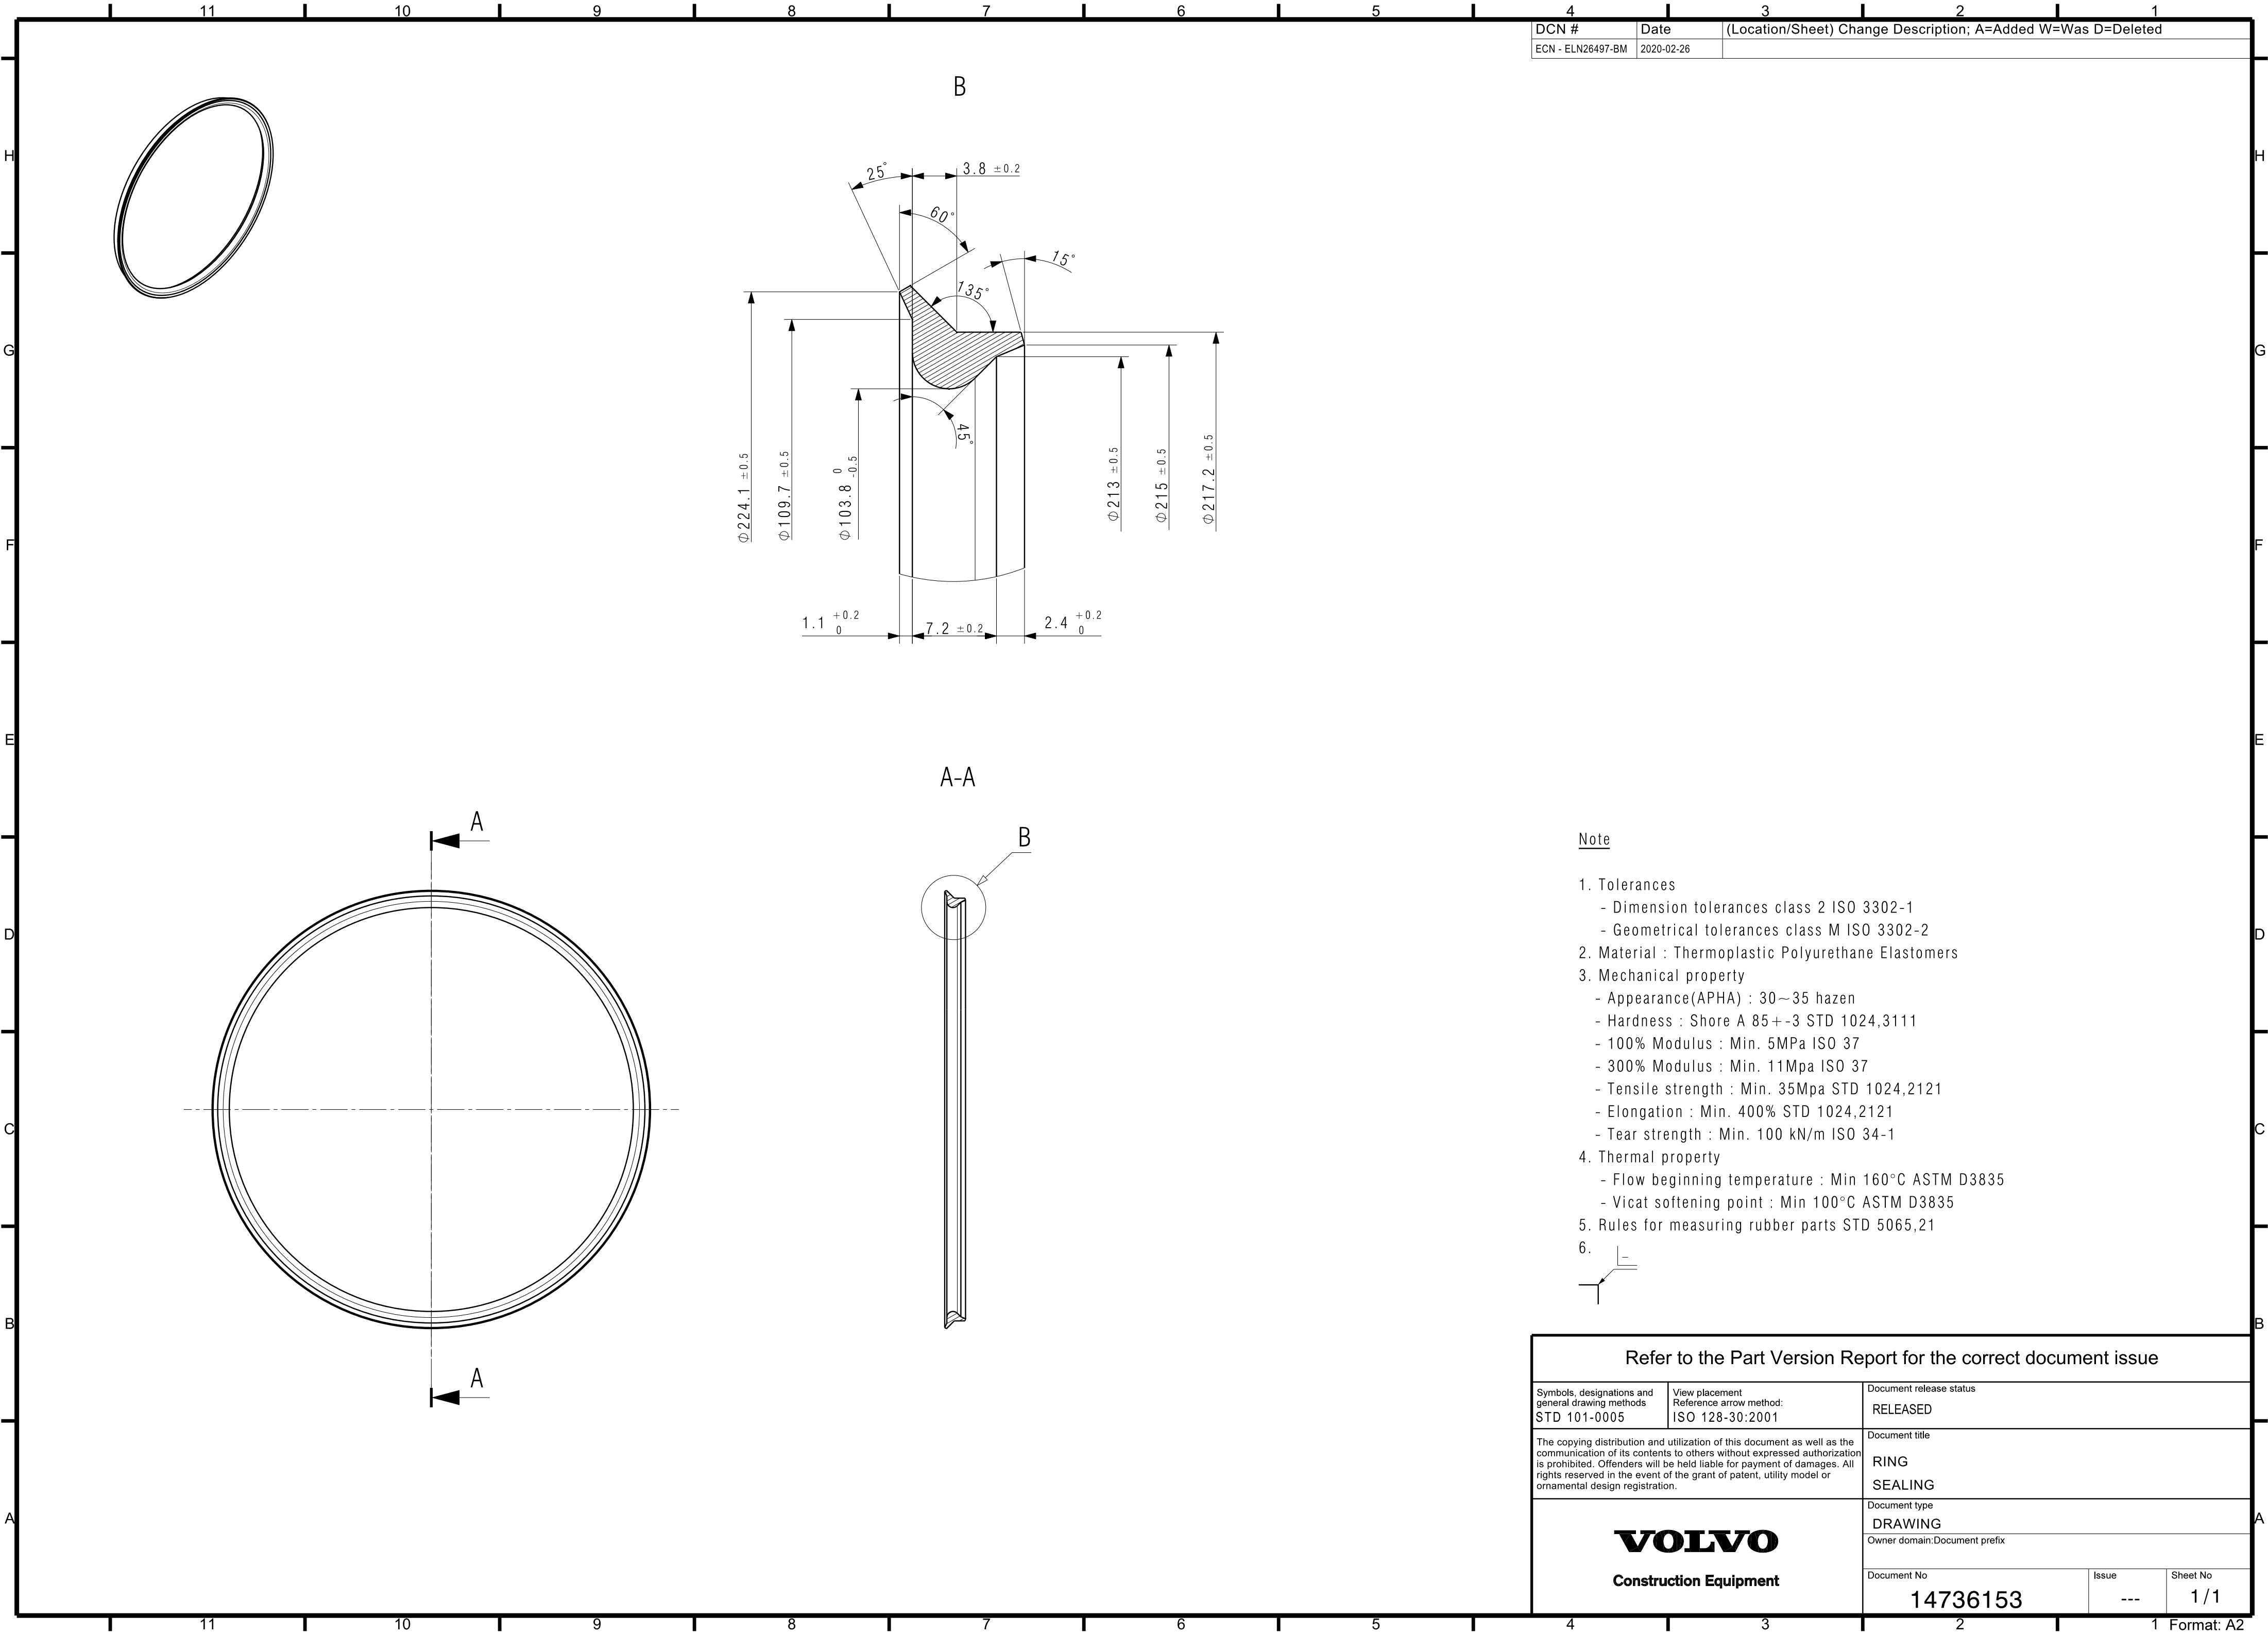

DCN #	Date	(Location/Sheet) Change Description; A=Added W=Was D=Deleted
ECN - ELN26497-BM	2020-02-26	

Note

- Tolerances
 - Dimension tolerances class 2 ISO 3302-1
 - Geometrical tolerances class M ISO 3302-2
- Material : Thermoplastic Polyurethane Elastomers
- Mechanical property
 - Appearance(APHA) : 30~35 hazen
 - Hardness : Shore A 85+ -3 STD 1024,3111
 - 100% Modulus : Min. 5MPa ISO 37
 - 300% Modulus : Min. 11Mpa ISO 37
 - Tensile strength : Min. 35Mpa STD 1024,2121
 - Elongation : Min. 400% STD 1024,2121
 - Tear strength : Min. 100 kN/m ISO 34-1
- Thermal property
 - Flow beginning temperature : Min 160°C ASTM D3835
 - Vicat softening point : Min 100°C ASTM D3835
- Rules for measuring rubber parts STD 5065,21
-



Refer to the Part Version Report for the correct document issue			
Symbols, designations and general drawing methods STD 101-0005	View placement Reference arrow method: ISO 128-30:2001	Document release status RELEASED	
The copying distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for payment of damages. All rights reserved in the event of the grant of patent, utility model or ornamental design registration.		Document title RING SEALING	
 Construction Equipment		Document type DRAWING	
		Owner domain:Document prefix	
		Document No 14736153	Issue ---