


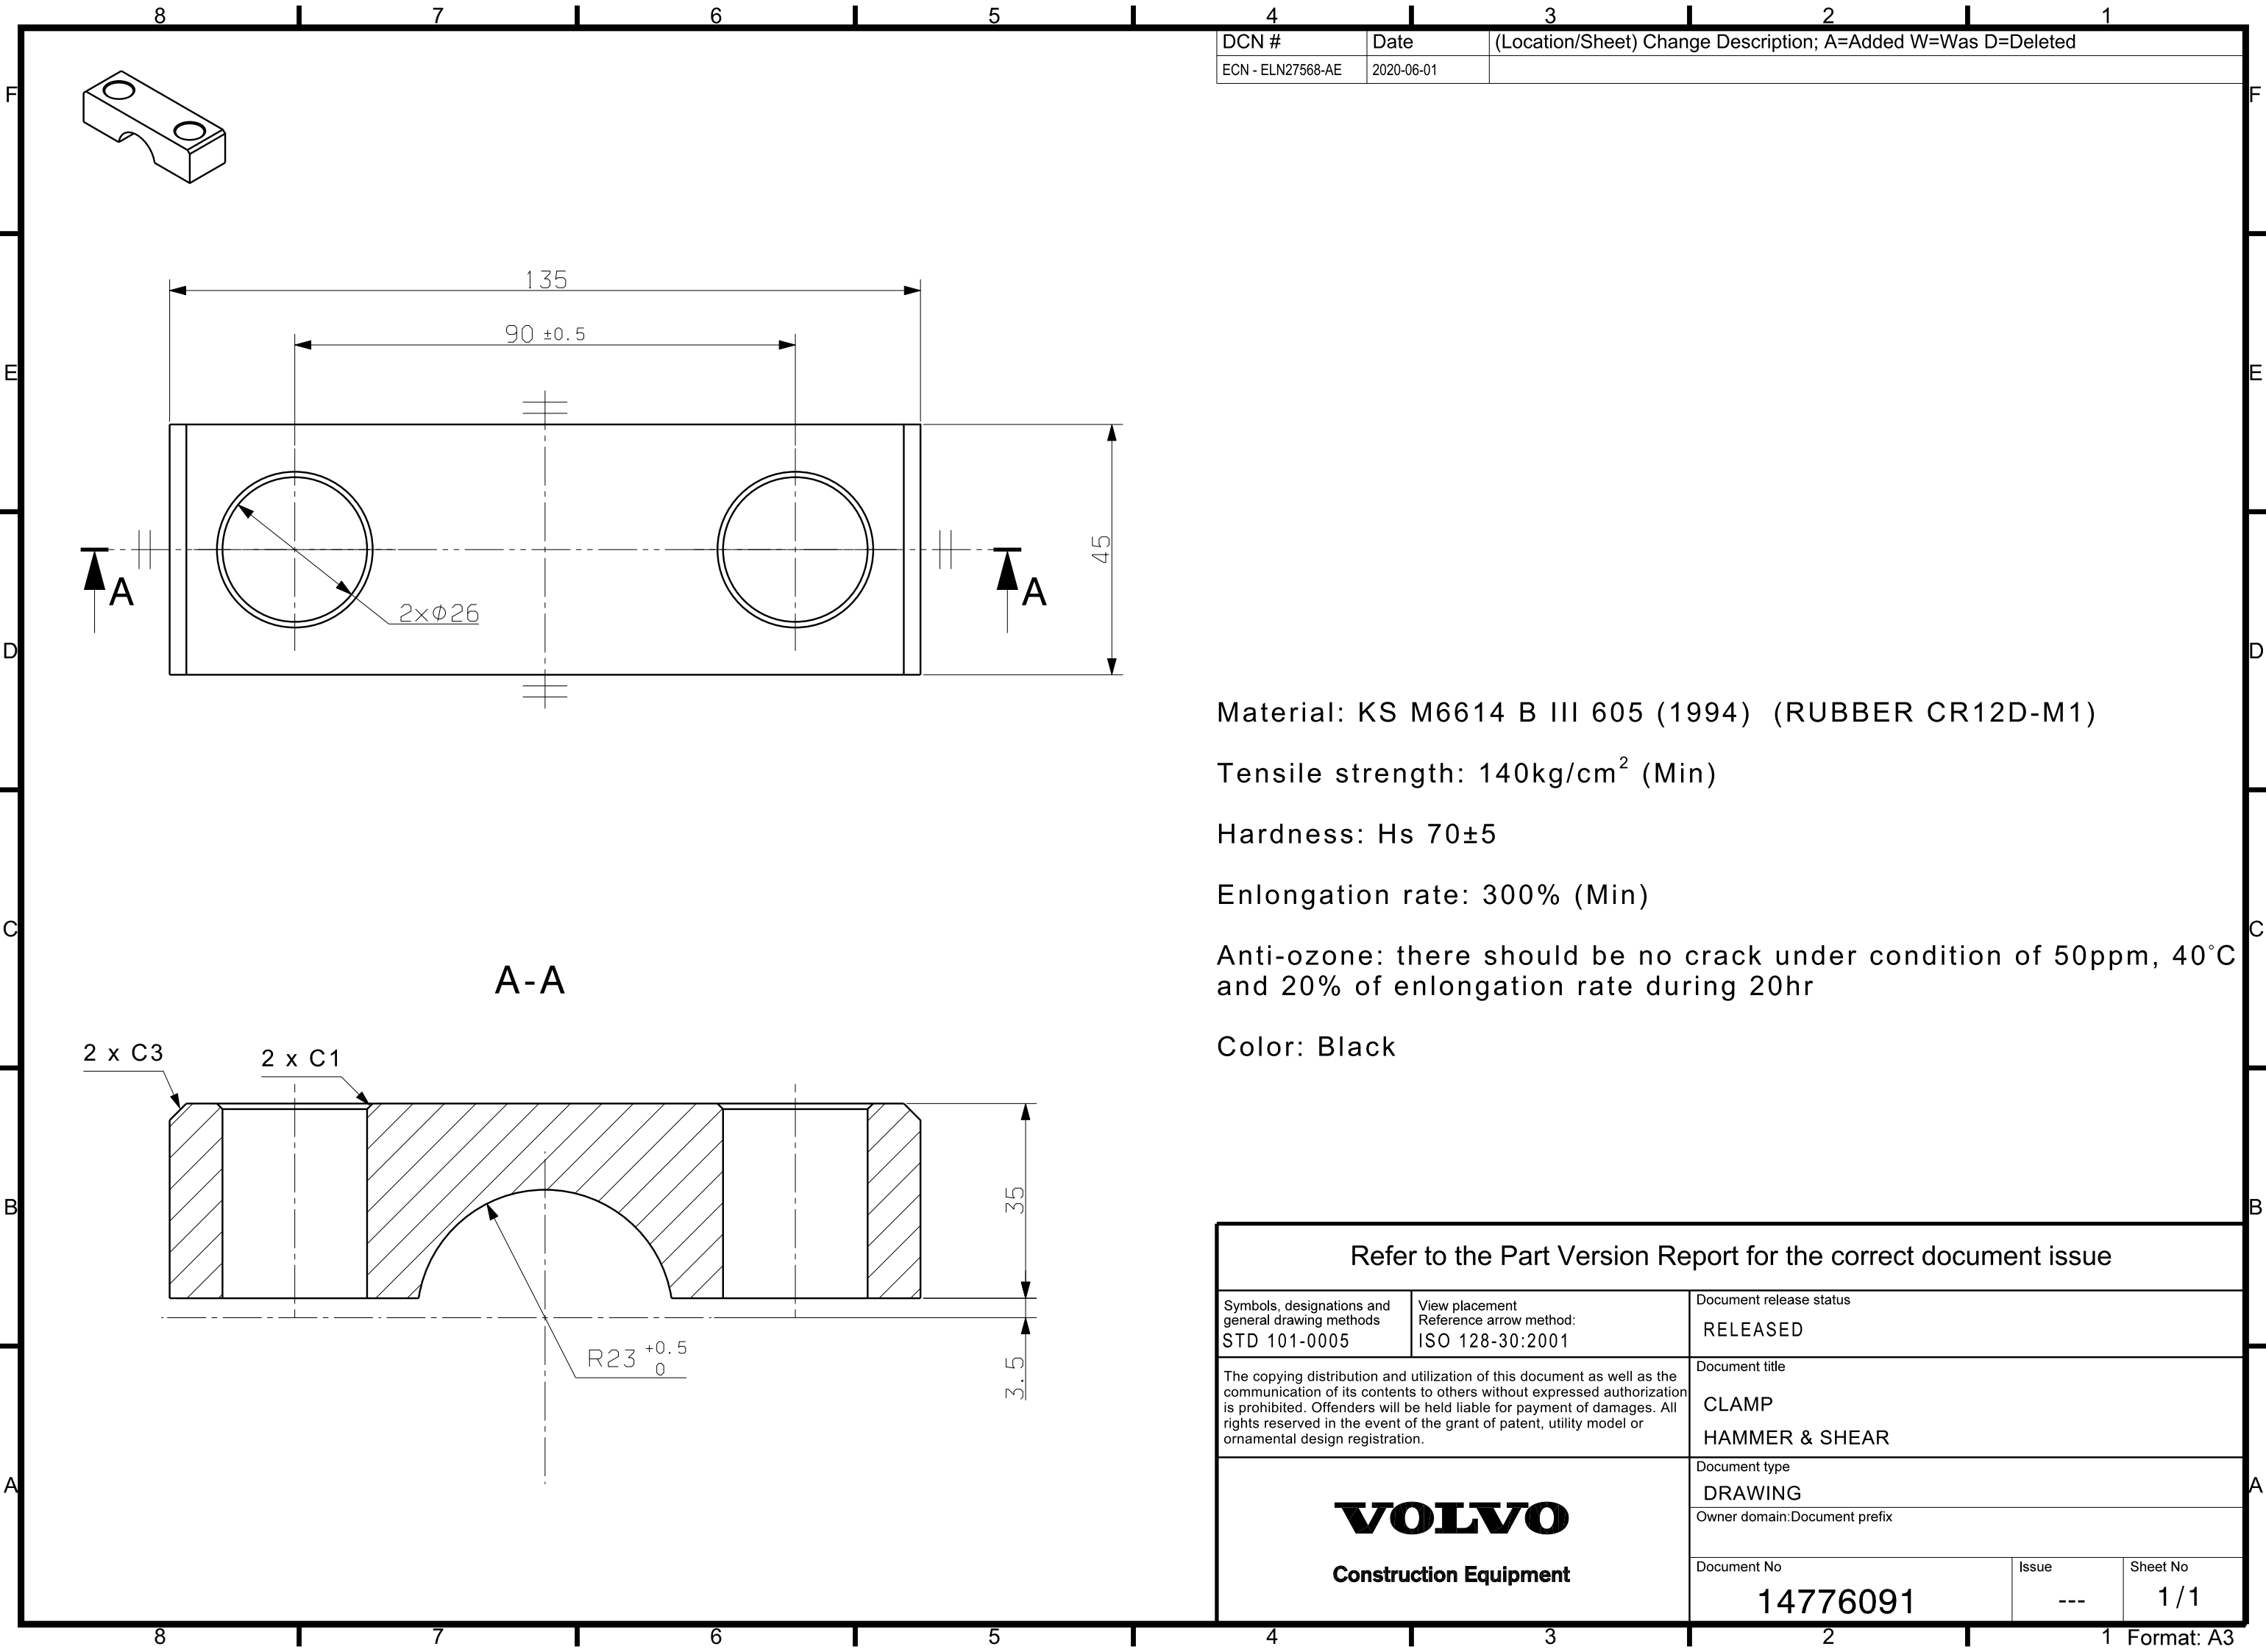

DCN #	Date	(Location/Sheet) Change Description; A=Added W=Was D=Deleted
ECN - ELN27568-AE	2020-06-01	

Material: KS M6614 B III 605 (1994) (RUBBER CR12D-M1)

Tensile strength: 140kg/cm² (Min)

Hardness: Hs 70±5

Elongation rate: 300% (Min)

Anti-ozone: there should be no crack under condition of 50ppm, 40°C and 20% of elongation rate during 20hr

Color: Black

Refer to the Part Version Report for the correct document issue		
Symbols, designations and general drawing methods STD 101-0005	View placement Reference arrow method: ISO 128-30:2001	Document release status RELEASED
The copying distribution and utilization of this document as well as the communication of its contents to others without expressed authorization is prohibited. Offenders will be held liable for payment of damages. All rights reserved in the event of the grant of patent, utility model or ornamental design registration.		Document title CLAMP HAMMER & SHEAR
		Document type DRAWING
		Owner domain:Document prefix
		Document No 14776091
		Issue ---
		Sheet No 1 / 1