


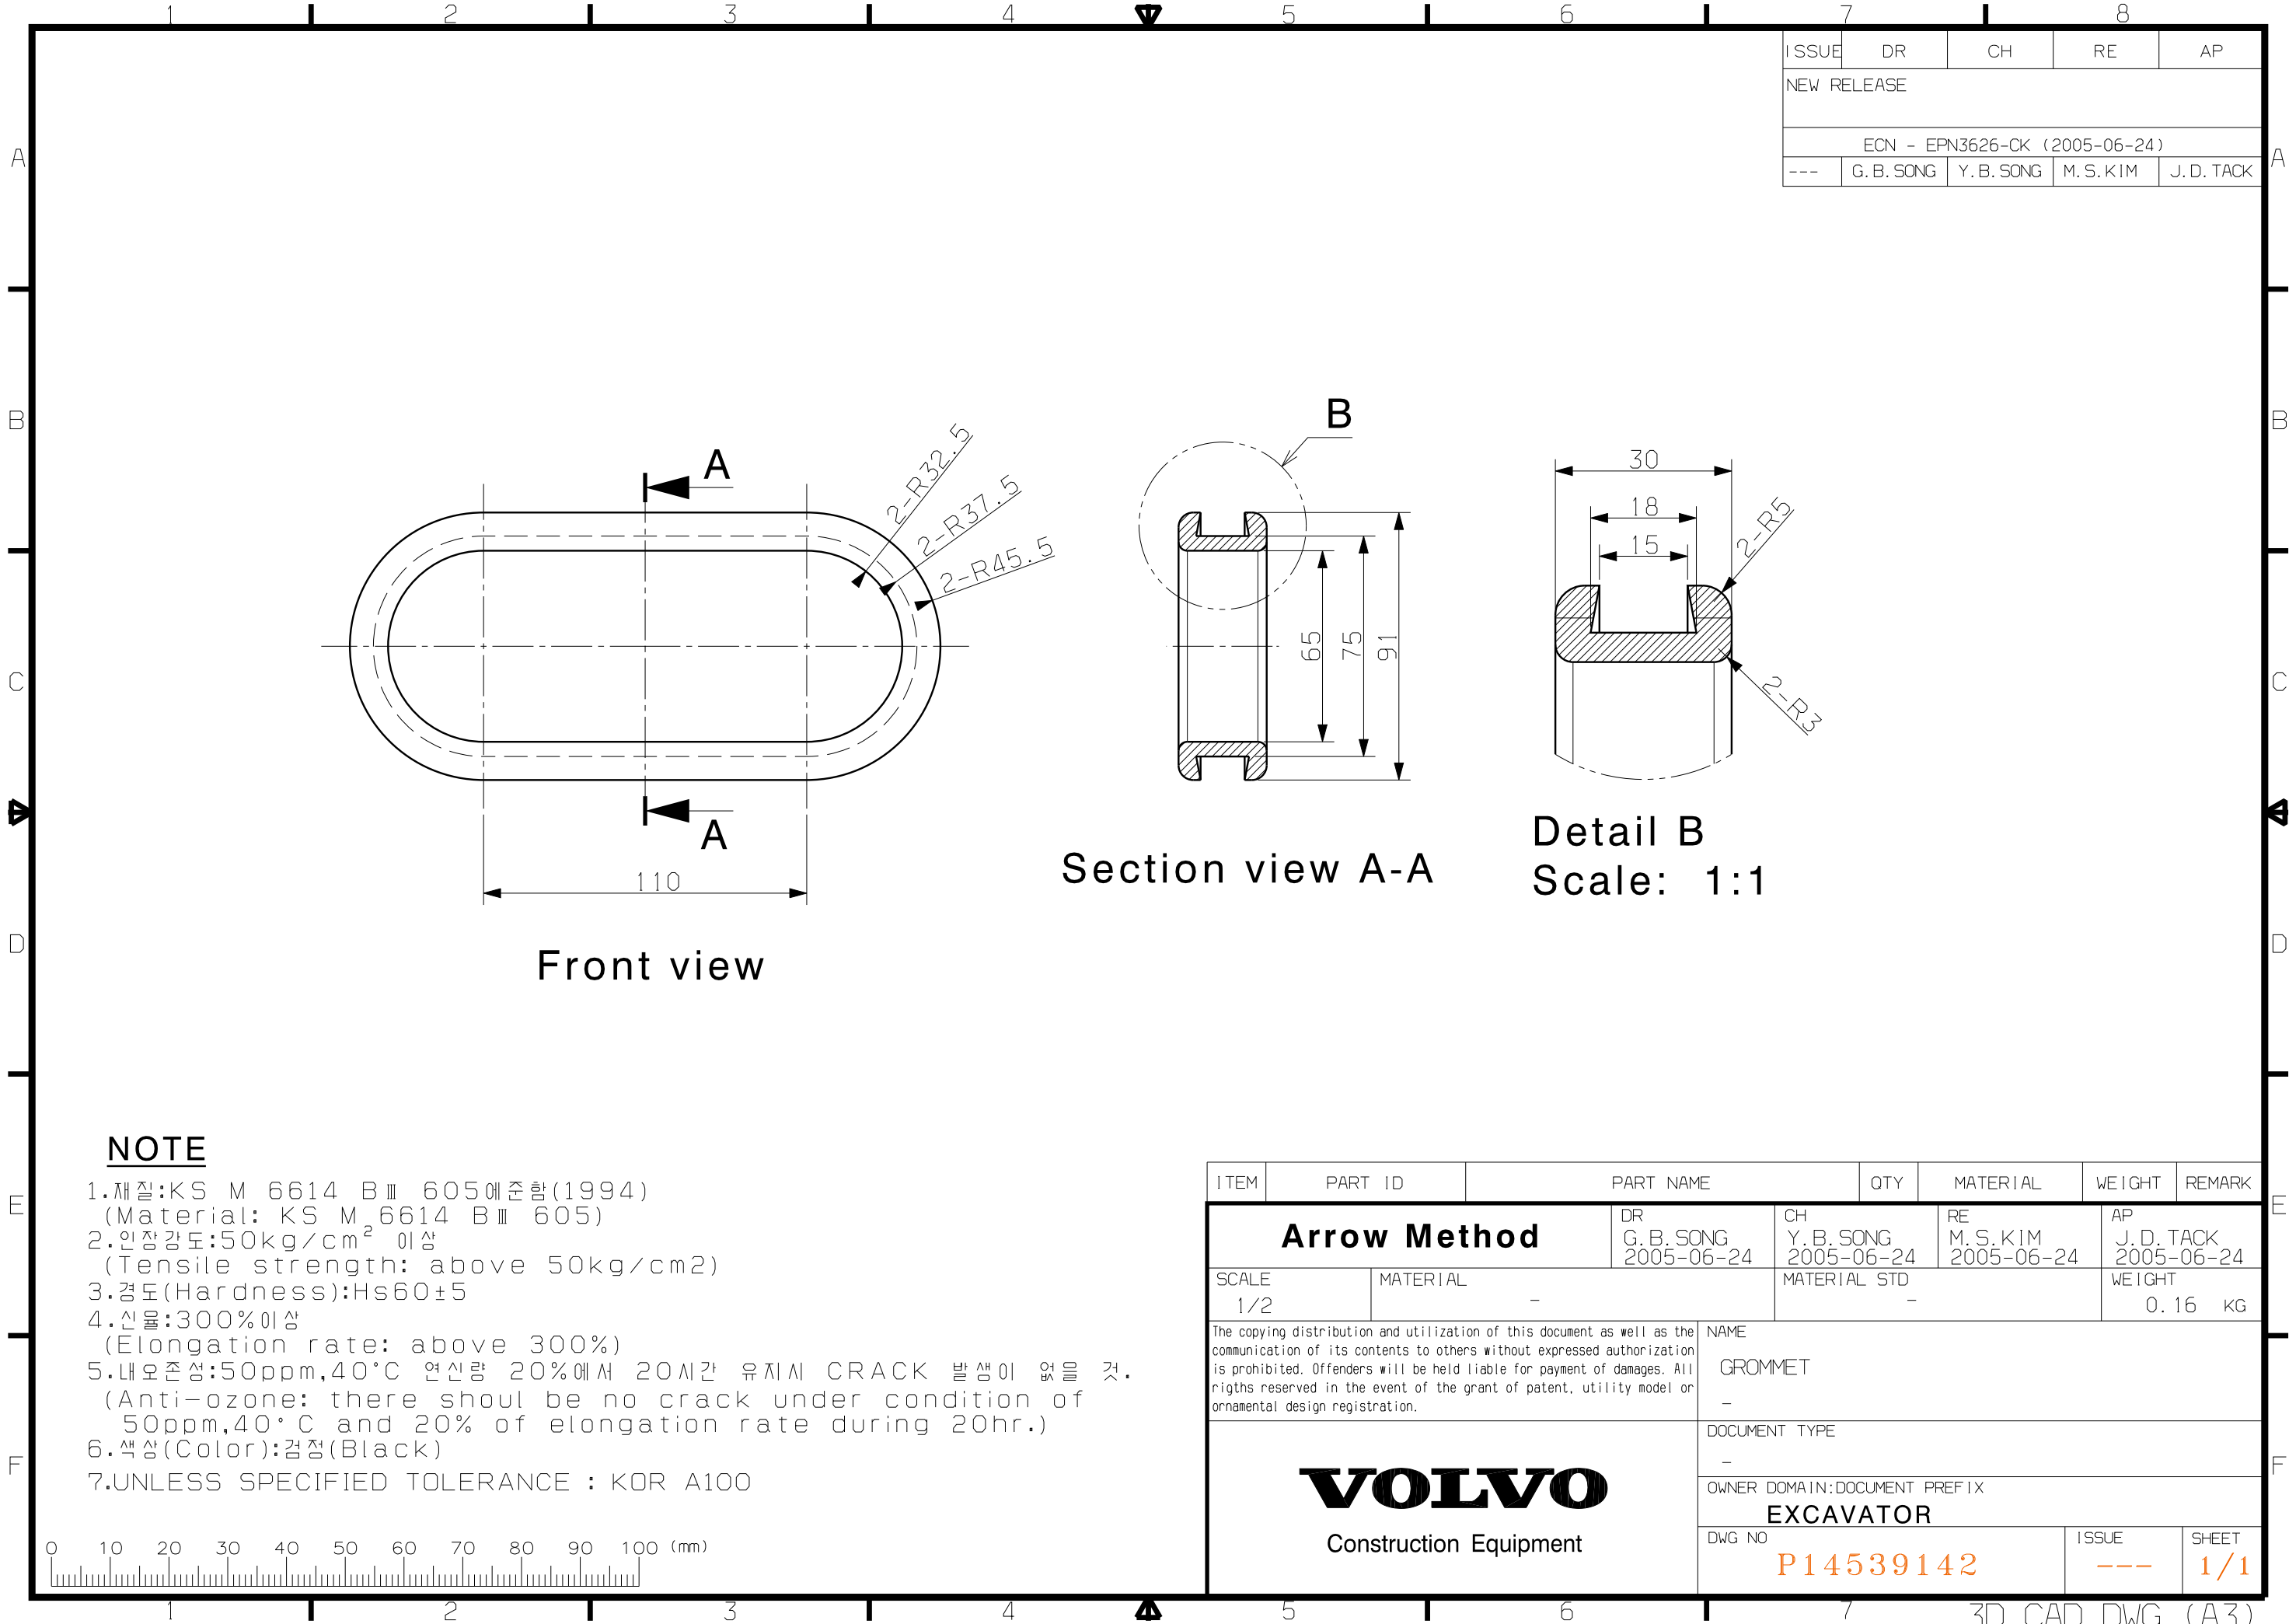

ISSUE	DR	CH	RE	AP
NEW RELEASE				
ECN - EPN3626-CK (2005-06-24)				
---	G. B. SONG	Y. B. SONG	M. S. KIM	J. D. TACK

Section view A-A

Detail B
Scale: 1:1

NOTE

- 1.재질:KS M 6614 BⅢ 605에준함(1994)
(Material: KS M 6614 BⅢ 605)
- 2.인장강도:50kg/cm² 이상
(Tensile strength: above 50kg/cm2)
- 3.경도(Hardness):Hs60±5
- 4.신율:300%이상
(Elongation rate: above 300%)
- 5.내오존성:50ppm,40°C 연신량 20%에서 20시간 유지시 CRACK 발생이 없을 것.
(Anti-ozone: there shoul be no crack under condition of 50ppm,40°C and 20% of elongation rate during 20hr.)
- 6.색상(Color):검정(Black)
- 7.UNLESS SPECIFIED TOLERANCE : KOR A100

ITEM	PART ID	PART NAME	QTY	MATERIAL	WEIGHT	REMARK	
Arrow Method			DR G. B. SONG 2005-06-24	CH Y. B. SONG 2005-06-24	RE M. S. KIM 2005-06-24	AP J. D. TACK 2005-06-24	
SCALE 1/2	MATERIAL -		MATERIAL STD -			WEIGHT 0.16 KG	
 Construction Equipment			NAME GROMMET -				
			DOCUMENT TYPE -				
			OWNER DOMAIN:DOCUMENT PREFIX EXCAVATOR				
			DWG NO P14539142			ISSUE ---	SHEET 1/1