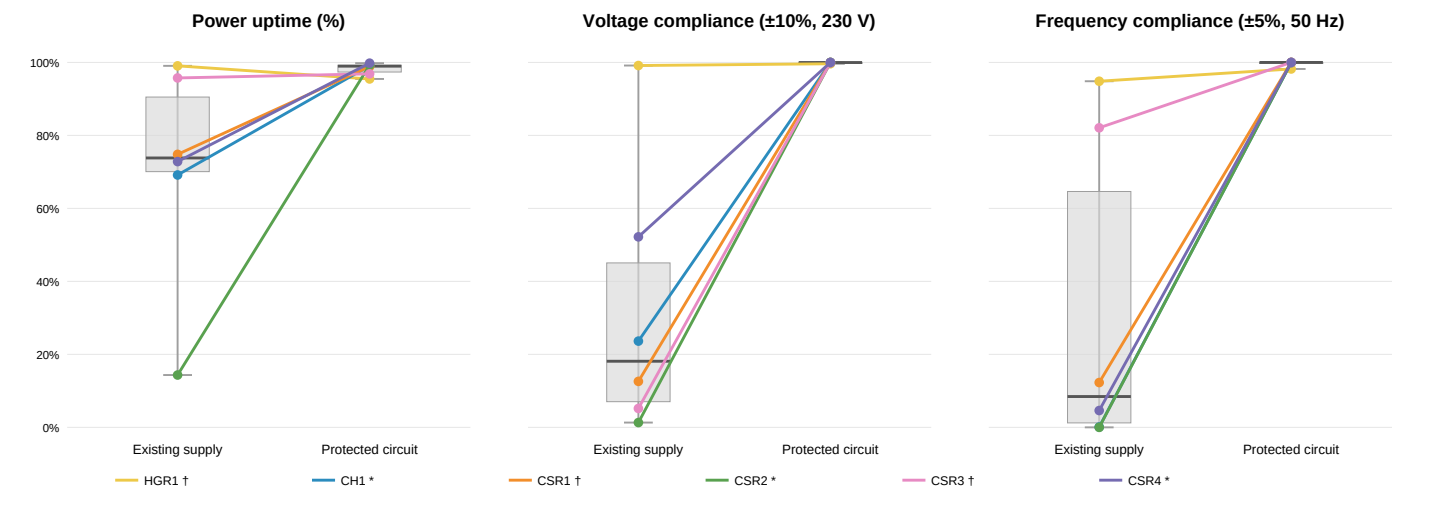

* Single-PowerWatch existing-source comparisons; † two-PowerWatch pre-source baselines, with variable coverage.

Follow-up uptime: paired HOP/PowerWatch, expected-window denominator. PQR: separate voltage and frequency denominators (sensitivity).