# Coupled Slug & Hydrate Prediction in a Deepwater Crude-Oil Subsea Tie-back

*A comprehensive flow-assurance case study with the SHCT transient solver — case definition, model equations, inputs, all generated outputs, validation and calibration*

**Author: Akosa Samuel Onyejekwe**

Solver: SHCT — Slug–Hydrate Coupled-Transient multiphase flow-assurance solver (transient, compositional, probabilistic).

Scope: this single document consolidates EVERYTHING produced for the study — the engineering background and problem, the well-defined case study, every governing equation and closure used to build the solver, the numerical method, the contribution to knowledge, a like-for-like comparison with existing commercial and academic solvers, the complete input-data deck, and every generated output (all metrics, CSV tables, per-column graphs of every CSV, and the full chart/curve/contour/map gallery) for the three engineering scenarios, plus the published-data validation and the calibration, with all sources recorded. Nothing is left out.

*Figure/chart style: no black and no dark colours are used in any figure, curve, contour or map; all backgrounds are white and all ink is a medium, legible hue.*

## Executive summary

A 32 km, 10.75-inch deepwater subsea tie-back carrying a ~30° API medium crude oil with 35 % water cut over a cold (4 °C), strongly undulating seabed and a steel catenary riser is analysed for the two flow-assurance threats that dominate such systems and that physically reinforce one another: hydrodynamic / terrain / severe-riser SLUGGING and gas-HYDRATE formation. The SHCT solver runs the full transient, compositional, probabilistic prediction end-to-end for three scenarios.

- As-operated (degraded insulation, no inhibitor): the line is BOTH slug- and hydrate-critical — peak coupling number Φ_SH = 6101.49, plug probability 100%, P50 time-to-plug 2.8 h, peak wall deposit 117 mm, max subcooling 20.9 °C.
- Inhibitor demand the model predicts to clear that risk: MEG ≈ 60 wt% (94470 L/h); under-inhibited length 24.2 km.
- Unplanned shut-in: essentially no safe window — no-touch time ≈ 0.00 h.
- Engineered fix (restored insulation U_eff = 2.38 W/m²K + continuous MEG): the subcooling is removed, the plug probability falls to 25% and 17 h of no-touch time is restored — the model used as a design tool.
- Numerics are mass-consistent and stable: liquid mass error 1.51e-03, gas 1.77e-15, 0 solver fallbacks.

Scope and standing of these numbers. Read the results below with three limitations in view. (1) The field is a representative industrial archetype built from literature-typical values, not proprietary operator data. (2) The Φ_SH = 1 criticality threshold is physically reasoned and dimensionally coherent but has not been measured, so it is a proposed criterion rather than a validated one. (3) The kinetic and coupling constants C, n and k_g0 are literature-typical defaults fitted to no dataset, so the absolute magnitudes reported here — the peak Φ_SH, the time-to-plug and the required MEG dose in particular — are model outputs, not calibrated predictions. Section 8.3 reports how far each of them moves when those three constants are swept across their plausible ranges. What the study demonstrates is the coupled mechanism and the design workflow; what it does not yet demonstrate is quantitative accuracy against a specific line.

# 1. Background to the case study

Deepwater subsea tie-backs transport unprocessed well fluids — oil, produced water and associated gas — over tens of kilometres of cold seabed (typically 4 °C) before reaching a host facility. Two production-chemistry / multiphase-flow threats dominate the integrity of such lines:

## 1.1 Hydrodynamic, terrain and severe-riser slugging

In multiphase pipe flow the gas and liquid self-organise into intermittent SLUGS — long liquid plugs separated by gas pockets. On a long, near-horizontal, undulating seabed the low spots accumulate liquid and shed it as terrain slugs; at the riser base, liquid fallback and gas blow-through produce large, low-frequency SEVERE slugs. Slugs impose cyclic structural loads, flood the topside slug-catcher, and force unstable operation.

## 1.2 Gas-hydrate formation

Natural-gas components (methane, ethane, propane…) combine with free water at high pressure and low temperature to form ICE-LIKE crystalline hydrates. In a cold deepwater line the operating point sits well inside the hydrate-stability region; with a 35 % water cut there is ample free water. Hydrates can deposit on the cold wall, consolidate and grow a PLUG that blocks the line — the single most feared flow-assurance failure, slow and dangerous to remediate.

## 1.3 Why the two threats must be solved together

Slugging and hydrates are not independent. The same cold, gassy, water-wet, intermittent flow that drives slugging also drives hydrates; and the two interact at the wall: slug passage scours and re-warms the wall (suppressing deposition), while between slugs the cold wall lets hydrate deposit and consolidate. Whether a line plugs or stays open is therefore set by a COMPETITION between hydrate-formation rate and slug-renewal rate. A medium-crude tie-back of this geometry and fluid is the textbook case in which BOTH threats are simultaneously active, which is exactly why it is chosen here.

# 2. Problem statement and how the problem is solved

## 2.1 Problem statement

Existing tools predict slugging OR hydrates well, but treat them as separate analyses run in different software, with the slug–hydrate WALL interaction left to engineering judgement. There is no single, transient, probabilistic predictor that resolves the competition between hydrate growth and slug scouring along the whole route and in time, and returns an actionable, quantified, UNCERTAINTY-aware plugging risk together with the slug loads, the inhibitor demand and the mitigation design.

The engineering question for THIS asset: given the geometry, fluid and operating conditions, (a) where and when does the line slug and how big are the slugs; (b) where and when does it enter the hydrate region and form a consolidating wall deposit; (c) what is the probabilistic time-to-plug; (d) how much inhibitor (and what insulation) removes the risk; and (e) how long is the no-touch time after a shut-in?

### 2.2 How the problem is solved — the SHCT approach

SHCT integrates, in time, a coupled system of conservation PDEs for multiphase flow, heat transfer and hydrate formation on the ACTUAL terrain, closed by published flow-assurance correlations and a compositional Peng–Robinson PVT engine, and run as a Monte-Carlo ensemble for genuine probabilistic output. The slug–hydrate interaction is made explicit through a single dimensionless coupling number Φ_SH — the ratio of the wall hydrate-formation tendency to the slug-renewal rate — mapped in space and time. The full set of governing equations and closures is given in Section 4; the numerical method in Section 5.

- Resolve flow regime, holdup, slug frequency and slug length along the route (hydraulics).
- Track P, T and the hydrate-equilibrium temperature T_eq → local subcooling ΔT_sub.
- Form hydrate by stochastic nucleation + growth in the bulk (slurry) and on the wall (deposit).
- Combine the two through Φ_SH(x,t); Φ_SH > 1 marks plugging-critical locations/times.
- Repeat over a Monte-Carlo ensemble → P10/P50/P90 time-to-plug and design margins.
- Invert for the required MEG dose and the insulation that removes the risk (design mode).

## 3. The case study — clearly defined

A representative deepwater West-Africa-style medium-crude-oil tie-back. The geometry, fluid and operating values are realistic, self-consistent values typical of such developments in the open literature; they are NOT proprietary operator data. The PHYSICS and PREDICTIONS are produced by the real solver, and the hydrate thermodynamics and the hydraulic closures are validated against published data (Sections 7–8).

### 3.1 Asset and geometry

- Route length: 32 km step-out flowline + steel catenary riser (SCR).
- Internal diameter: 0.2545 m (~10.75-inch carbon-steel flowline).
- Water depth at the riser base: ~1100 m; cold seabed at 4 °C.
- Terrain: long, strongly undulating seabed (multiple low spots → terrain slugging) climbing into a steep SCR (→ severe-riser slugging).

### 3.2 Fluid — a medium crude oil (≈30° API black oil)

Moderate-GOR live crude with a substantial heavy C7+ tail; the associated gas (C1 ≈ 43 mol%) liberates along the cold line and, with the long near-horizontal step-out, drives slugging, while the 35 % water cut plus water-wet gas in the cold wall drives hydrates.




*Feed composition — medium-crude makeup (mole fraction per component) that feeds the Peng–Robinson flash.*

| component | mol_fraction |
|---|---|
| **N2** | 0.0040 |
| **CO2** | 0.0200 |
| **C1** | 0.4300 |
| **C2** | 0.0750 |
| **C3** | 0.0580 |
| **iC4** | 0.0120 |
| **nC4** | 0.0280 |
| **iC5** | 0.0130 |
| **nC5** | 0.0160 |
| **C6** | 0.0300 |
| **C7+** | 0.3140 |

## 3.3 The three engineering scenarios

- (A) As-operated normal production — degraded / water-flooded wet insulation (behaves close to bare steel, U ≈ 22 W/m²K), NO inhibitor: the high-risk prediction.
- (B) Unplanned shut-in — the line cools toward the seabed; the no-touch (cooldown) time before hydrate onset is measured from the transient.
- (C) Engineered mitigation — restored multi-layer insulation (steel + syntactic foam + coating → low U_eff) plus continuous MEG: the model used as a DESIGN tool.
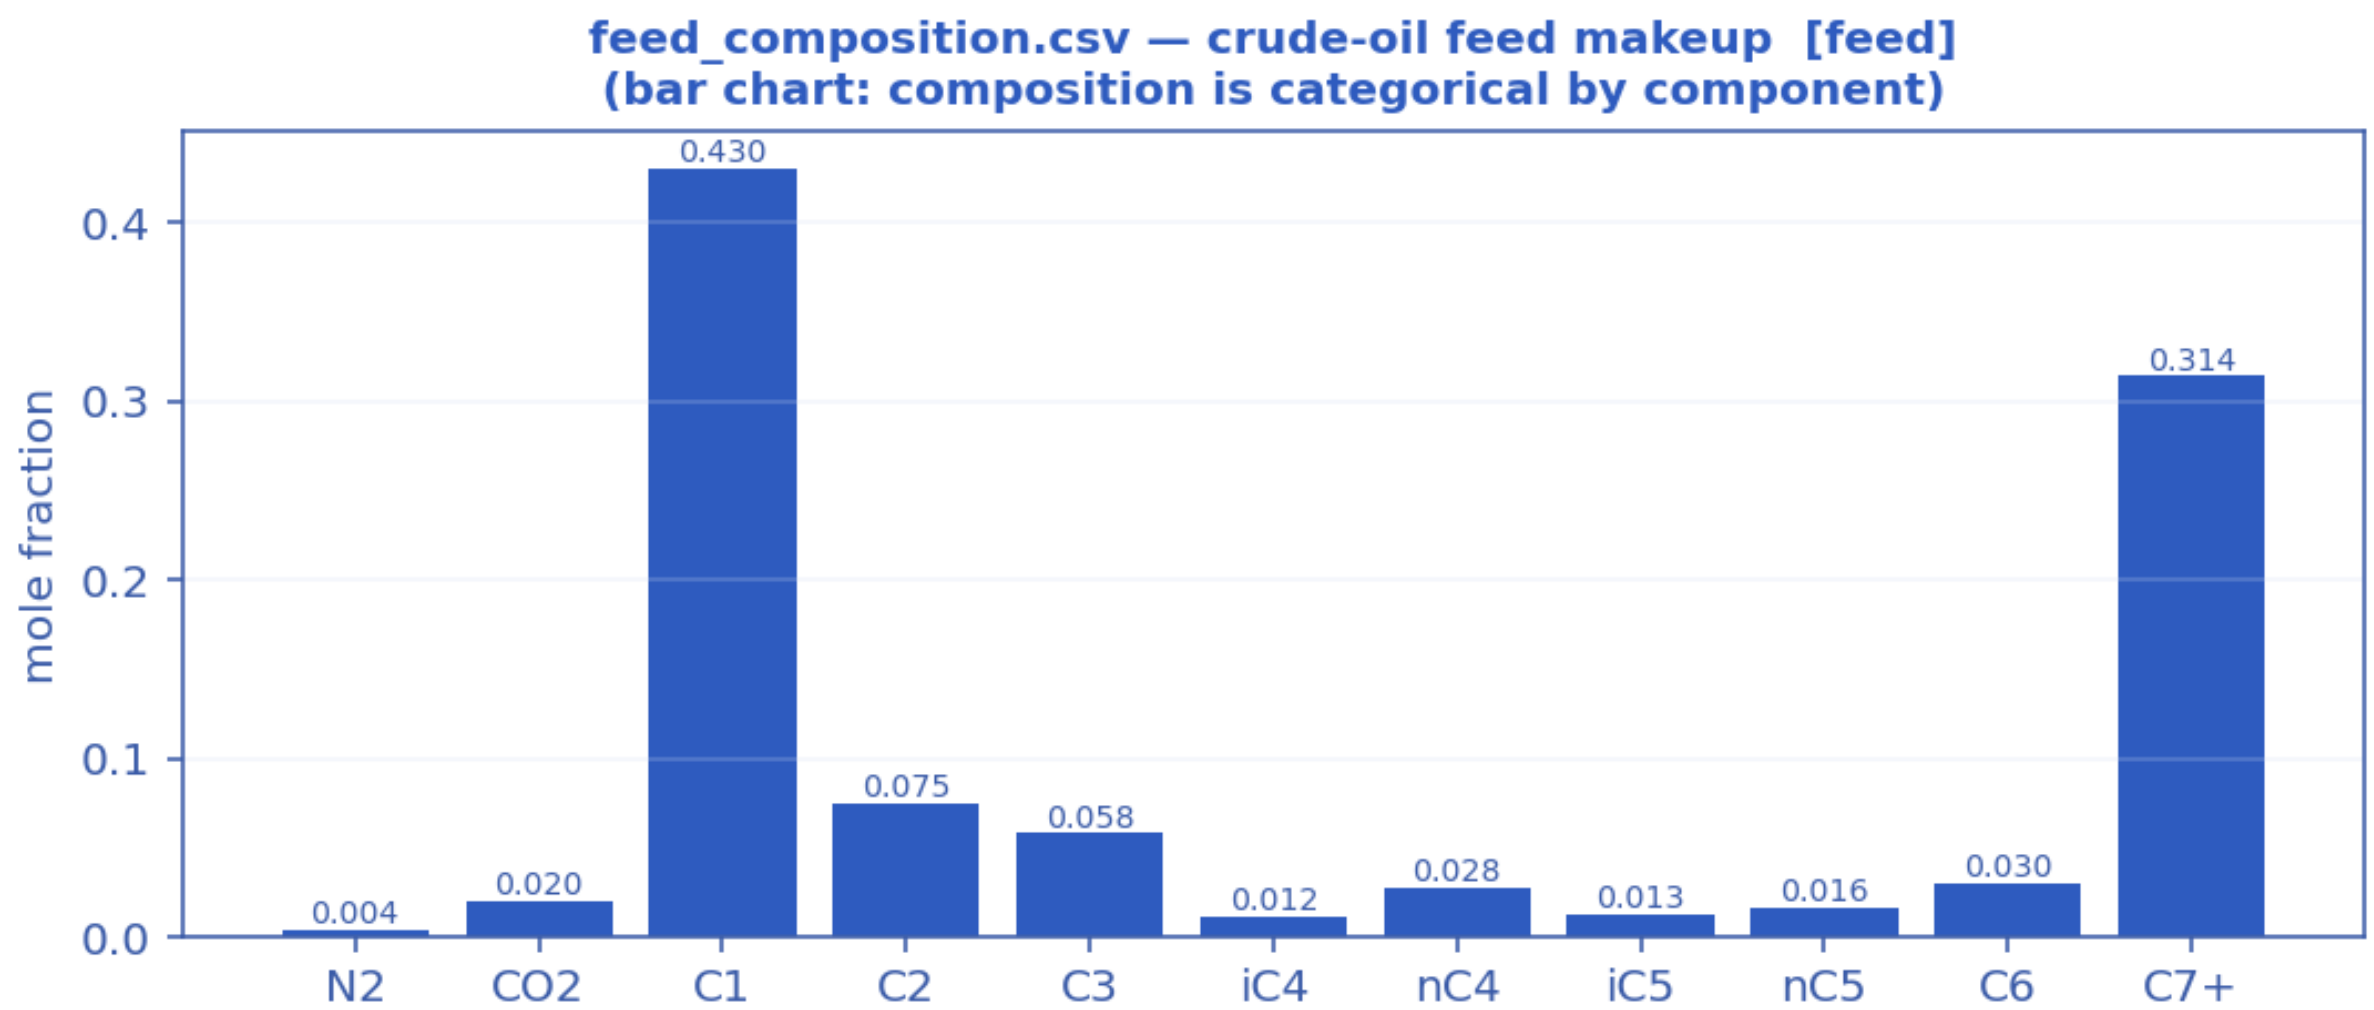
## 4. Model equations used to build the solver

The SHCT solver integrates, in time, a system of coupled partial-differential equations for multiphase flow, heat transfer and hydrate formation on arbitrary terrain, closed by published flow-assurance correlations and a compositional Peng–Robinson PVT engine. Every equation actually used to build the solver is listed below, grouped by role, with its symbolic form, a one-line description and its source. Symbols: $\alpha_l/\alpha_g$ liquid/gas holdup, $A$ flow area, $v_l/v_g/u_m$ phase & mixture velocities, $j$ mixture (superficial) velocity, $p$ pressure, $T$ temperature, $T_{eq}$ hydrate-equilibrium temperature, $\Delta T_{sub}$ subcooling, $\phi$ bulk hydrate fraction, $\delta$ wall-deposit thickness, $f_{slug}$ slug frequency, $a_i$ interfacial area, $\theta$ inclination, $\rho$ density, $\mu$ viscosity, $U_{eff}$ effective heat-transfer coefficient.

### A. Governing transient conservation PDEs (finite-volume, CFL-adaptive)

#### Liquid-holdup transport (drift-flux kinematic wave)

$$\partial(\alpha_l \cdot A)/\partial t + \partial(\alpha_l \cdot v_l \cdot A)/\partial x = - S_l$$

Volume-conservative liquid continuity, discretised by a conservative finite-volume scheme with signed upwinding (optionally 2nd-order TVD). $S_l$ is the liquid (water) volume sink to hydrate formation. Holdup is recovered as $\alpha_l = (\alpha_l \cdot A)/A$ each step.

*Source / basis: Conservative FV; Bendiksen drift-flux closure.*

#### Gas-mass continuity (conservative, mass-consistent)

$$\partial(\rho_g \cdot \alpha_g \cdot A)/\partial t + \partial(\rho_g \cdot V_{sg} \cdot A)/\partial x = - \dot{m}_{(gas \to hydrate)}$$

Solved alongside the liquid so liquid AND gas mass balance to ~0%. The mass-consistent superficial gas velocity $V_{sg} = (\rho_{g,in} \cdot q_{g,in})/(\rho_g \cdot A)$ makes the mass flux $\rho_g \cdot V_{sg} \cdot A$ equal to the inlet gas mass rate along the line.

*Source / basis: Conservative FV gas continuity.*

#### Mixture momentum → implicit pressure (default engine)

$$u_m = U_0 - C_u \cdot \partial p/\partial x \;; \quad R(p^{n+1}-p^n) + \partial/\partial x[\, U_0 - C_u \cdot \partial p^{n+1}/\partial x \,] = 0$$

Transient mixture momentum with the pressure gradient and wall drag treated implicitly; eliminating velocity gives a tridiagonal (Poisson-type) pressure equation solved each step (Thomas algorithm). Predictor $u^* = u_m - dt \cdot (\text{advection} + g \cdot \sin\theta)$; wall-drag rate $\beta = f/(2D) \cdot |u_m|$; $U_0 = u^*/(1+dt \cdot \beta)$; compressible storage $R = \alpha_g/(p \cdot dt)$. Inlet pressure Dirichlet (pinned in-system), outlet through-flux (rate control).

*Source / basis: Implicit-pressure mixture-momentum; drift-flux slip closure.*

#### Full two-fluid momentum (alternative engine)

**two independent phase momenta + interfacial drag, shared pressure; slip emerges from balance**

RELAP/TRACE-style semi-implicit: advection+gravity explicit; pressure gradient, wall drag and stiff interfacial drag implicit. A 2×2 per-cell velocity system → tridiagonal pressure; an interfacial-pressure correction keeps the characteristics real (well-posed).

*Source / basis: Two-fluid model with interfacial-pressure regularisation.*

#### Energy transport (advection + seabed loss + latent + Joule–Thomson)

$$\partial T/\partial t + j \cdot \partial T/\partial x = - U_{eff} \cdot (4/D) \cdot (T - T_{sink})/(\rho_m \cdot c_p) + q_{latent} + q_{JT}$$

Signed-upwind (optionally TVD) advection; the stiff wall-loss term is implicit (backward Euler), with a Heun 2nd-order corrector on advection. $\beta_{loss} = U_{eff} \cdot 4/(D \cdot \rho_m \cdot c_p)$. $q_{latent} = L_{hyd} \cdot \rho_{hyd} \cdot R_{g,bulk}/(\rho_m \cdot c_p)$ (exothermic bulk hydrate, self-limiting); $q_{JT} = \mu_{JT} \cdot (1-\alpha_l) \cdot j \cdot (\partial p/\partial x)$ (real-gas cooling on expansion).

*Source / basis: Transient energy balance; implicit wall loss; Strang/Heun split.*

### Hydrate phase-field (advected reaction–diffusion, stochastic)

$$\partial\phi/\partial t + v_l \cdot \partial\phi/\partial x = D_\phi \cdot \partial^2\phi/\partial x^2 + R_{grow} + R_{nuc} + \xi$$

Advected reaction–diffusion field for the bulk hydrate fraction $\phi$, carrying its $D_\phi$ diffusion term and a stochastic nucleation source $\xi$ (Monte-Carlo ensemble).

*Source / basis: Phase-field hydrate model with stochastic nucleation.*

## B. Hydrate thermodynamics, kinetics and the slug–hydrate coupling

### Hydrate equilibrium temperature (natural-gas correlation)

$$T_{eq} = 7.7 \cdot \ln(P) - 23.2 + 18 \cdot (SG - 0.60) - 0.74 \cdot S_{wt} \qquad [°C,\ P \text{ in bar}]$$

Base natural-gas hydrate curve (≈3 °C @30 bar, 10 °C @70 bar, 13 °C @100 bar, 18 °C @200 bar), shifted for gas specific gravity SG and depressed by produced-water salinity $S_{wt}$ (wt% NaCl-eq). An optional measured/PVT [P,$T_{eq}$] table overrides it (monotonic interpolation).

*Source / basis: Natural-gas hydrate equilibrium (GPSA/Sloan-anchored).*

### Subcooling (bulk and wall driving forces)

$$\Delta T_{sub} = T_{eq} - T \ ; \quad \Delta T_{sub,wall} = T_{eq} - T_{front}$$

$\Delta T_{sub}$ is the local thermodynamic hydrate driving force. The deposition-relevant WALL subcooling uses the deposit-front temperature $T_{front}$ (see deposit-insulation feedback).

*Source / basis: Definition.*

### Stochastic nucleation (induction time, Monte-Carlo)

$$\tau_{ind} = \tau_0 \cdot 3600 \cdot \exp(\ \min(\beta/\Delta T_{sub},\ cap)\ ) \ ; \quad p_{nuc} = 1 - \exp(-dt/\tau_{ind})$$

Classical induction-time nucleation: a cell nucleates when a uniform random draw < $p_{nuc}$ and $\Delta T_{sub}$ > $\Delta T_{sub,min}$. Growth proceeds only after onset, so subcooling builds during induction → a genuine onset spread across the ensemble (P10/P50/P90).

*Source / basis: Classical stochastic nucleation.*

### Growth-rate constant (Arrhenius)

$$k_g = k_{g0} \cdot \exp(\ -(E_a/R) \cdot (1/T - 1/T_{ref})\ )$$

Temperature dependence of the intrinsic hydrate growth-rate constant.

*Source / basis: Arrhenius / CSMHyK-type kinetics.*

### Bulk slurry growth (CSMHyK-type, self-limiting)

$$R_{g,bulk} = k_g \cdot a_i \cdot \Delta T_{sub}^n \cdot (1 - \phi/\phi_{max}) \cdot \mathbb{1}_{nucleated}$$

Bulk hydrate formation driven by the local bulk subcooling; its exothermic latent heat warms the fluid, so it self-limits ($\phi$ stays low → transportable slurry). $a_i$ is the interfacial area.

*Source / basis: CSMHyK-type growth law.*

### Wall-deposit growth (sustained cold-wall driving force)

$$R\_g,wall = k\_g,wall \cdot a\_i \cdot \Delta T\_sub,wall^n \cdot \mathbb{1}\_nucleated$$

Deposit growth driven by the sustained cold-wall subcooling (the wall sits at the cold seabed; its latent heat is rejected to the sea, not the bulk) — this is what lets a plug grow while the bulk slurry stays dilute.

*Source / basis: Cold-wall deposition kinetics.*

### Deposit-insulation feedback (self-limiting late growth)

$$frac\_warm = k\_dep \cdot R\_dep/(R\_dep + R\_ext), \quad R\_dep = \delta/k\_hyd \;; \quad T\_front = T\_sea + (T - T\_sea) \cdot frac\_warm$$

As the deposit thickens it insulates its own growth front from the cold sea, warming the front toward the bulk and reducing the wall subcooling that drives further deposition.

*Source / basis: Conductive-resistance deposit feedback.*

### Slug–Hydrate Coupling Number Φ_SH (the claimed invention)

$$\Phi\_SH = C \cdot k\_g,wall \cdot a\_i \cdot \Delta T\_sub,wall^n \,/\, f\_slug$$

Dimensionless ratio of hydrate-formation tendency to slug-renewal rate, evaluated at the sustained wall subcooling. $\Phi\_SH > 1 \Rightarrow$ hydrate formation outruns slug scouring $\Rightarrow$ consolidation / plugging criticality. The central coupled-risk metric mapped in $\Phi\_SH(x,t)$.

*Source / basis: SHCT invention (physically reasoned; flow-loop validation pending).*

### Wall-deposit evolution (growth vs slug scouring)

$$d\delta/dt = f\_wall \cdot R\_g,wall \cdot D/4 - k\_ero \cdot f\_slug \cdot \delta$$

Annulus deposit-thickness rate: consolidating wall growth minus slug erosion/scouring. f_wall is a Φ_SH-gated capture fraction (consolidation only above criticality); erosion acts where $\Phi\_SH<1$.

*Source / basis: Deposit mass balance with slug scouring.*

### Hydrate liquid/gas sinks (mass coupling)

$$hyd\_vol\_rate = (R\_g,bulk + f\_wall \cdot R\_g,wall) \cdot A \quad \rightarrow \text{removed from liquid \& gas inventories}$$

The water and gas consumed by both bulk and consolidating-wall hydrate are removed from the conserved liquid and gas inventories, so the balances close WITH the hydrate consumption.

*Source / basis: Mass-consistent hydrate sink.*

## C. Multiphase-hydrodynamic closures (published correlations)

### Bendiksen drift-flux slip

$$C_0 = 1.05 + 0.15 \cdot \sin|\theta| \;; \quad v\_d = 0.35 \cdot \sqrt{gD} \cdot \sin\theta + 0.20 \cdot \sqrt{gD} \cdot \cos\theta \;; \quad u\_g = C_0 \cdot u\_m + v\_d$$

Distribution coefficient and drift velocity closing the gas/liquid slip; keeps the system unconditionally well-posed (no complex characteristics).

*Source / basis: Bendiksen (1984) drift-flux.*

### Flow-regime classification

$$regime = f(V\_sg, V\_sl, \theta) \rightarrow \{\text{stratified-smooth/wavy, slug, annular, dispersed-bubble, churn}\}$$

Threshold map on the superficial gas/liquid velocities and inclination selecting the local flow regime, which then sets the friction multiplier, interfacial area and Nusselt enhancement.

*Source / basis: Taitel–Dukler-style regime transitions.*

### Slug frequency (Gregory–Scott / Zabaras)

$$f_{slug} = 0.0226\cdot\left[ \left(\frac{V_{sl}}{gD}\right)\cdot\left(\frac{19.75}{V_m} + V_m\right) \right]^{1.2} \cdot (0.836 + 2.75\cdot\sin|\theta|^{0.25})$$

Hydrodynamic slug frequency with an inclination factor; drives the renewal term in $\Phi_{SH}$ and the slug-catcher sizing.

*Source / basis: Gregory–Scott (1969) / Zabaras (2000).*

### Slug unit length

$$L_u = V_t/f_{slug} \;, \quad V_t = 1.2\cdot V_m + 0.35\cdot\sqrt{gD}$$

Reduced-order (sub-grid) mean slug length from the translational velocity $V_t$ (Dukler–Hubbard / Gregory–Scott scaling) — resolves metre-scale slugs a 200-m grid cannot.

*Source / basis: Dukler–Hubbard / Gregory–Scott.*

### Haaland friction factor

$$1/\sqrt{f} = -1.8\cdot\log_{10}\left[ (\varepsilon/D/3.7)^{1.11} + 6.9/Re \right] \;; \quad f = 64/Re \quad (Re < 2300)$$

Explicit Darcy friction factor (turbulent Haaland, laminar Poiseuille floor).

*Source / basis: Haaland (1983).*

### Interfacial area per unit volume (geometry-resolved)

$$\text{stratified: } a_i = \sin\gamma / D \;; \quad \text{annular: } a_i = 4\sqrt{\alpha_l}/D \;; \quad \text{dispersed: } a_i = 6\cdot\alpha_g/d_b \;\; (d_b=0.1D)$$

Regime-specific gas–liquid interfacial area; the stratified wetted half-angle $\gamma$ comes from the Biberg approximation of the Taitel–Dukler circular-segment geometry.

*Source / basis: Taitel–Dukler geometry; Biberg angle approximation.*

### Regime wall-friction multiplier & Nusselt

$$Nu = 0.023\cdot Re^{0.8}\cdot Pr^{0.4} \cdot \mathrm{enh}(\mathrm{regime}) \;; \quad \text{friction } \times\{0.9\ldots1.7 \text{ by regime}\}$$

Dittus–Boelter inner heat-transfer with a regime enhancement (slug/churn mixing raises both wall shear and the inner film coefficient).

*Source / basis: Dittus–Boelter + regime enhancement.*

### Droplet entrainment (Ishii–Mishima)

$$E = 1 - \exp(-We/1e5) \;, \quad We = \rho_g\cdot V_{sg}^2\cdot D/\sigma$$

Liquid fraction entrained into the gas core; significant only in high-shear annular/churn flow.

*Source / basis: Ishii–Mishima (1989).*

### Mixture sound speed (Wood's equation)

$$1/(\rho_m\cdot c^2) = \alpha_l/(\rho_l\cdot c_l^2) + \alpha_g/(\gamma\cdot p)$$

Two-phase sound speed for water-hammer / fast-transient screening; even a little gas drops c to O(10–100 m/s). Used by the optional acoustic (water-hammer) storage term.

*Source / basis: Wood's equation.*

## D. Fluid properties & compositional PVT (Peng–Robinson EOS)

### Peng–Robinson cubic EOS

$$a_i = 0.45724 \cdot R^2 \cdot T_c^2 / P_c \cdot \alpha \ , \quad b_i = 0.07780 \cdot R \cdot T_c / P_c \ , \quad \alpha = [1 + \kappa(1 - \sqrt{T/T_c})]^2$$

with $\kappa = 0.37464 + 1.54226 \cdot \omega - 0.26992 \cdot \omega^2$. The cubic in Z (with van der Waals mixing rules and binary $k_{ij}$) is solved for the vapour/liquid roots; the multicomponent vapour–liquid flash iterates K-values to fugacity equality $\phi_l \cdot x = \phi_v \cdot y$.

*Source / basis: Peng & Robinson (1976); Reid–Prausnitz–Poling; Whitson–Brulé.*

### Gas Z-factor (real gas)

$$Z = A + (1-A)/\exp(B) + C \cdot Pr^D \quad \text{(Beggs-Brill explicit; Sutton pseudo-criticals from SG)}$$

Standing-Katz-equivalent explicit correlation used when an EOS/Z-table is not supplied; reproduces Standing-Katz to a few % over $1.2 \le Tr \le 2.4$, $Pr \le 10$.

*Source / basis: Beggs–Brill / Sutton; Standing–Katz.*

### Gas density

$$\rho_g = P \cdot M / (Z \cdot R \cdot T)$$

Real-gas density from the Z-factor (or a user PVT table).

*Source / basis: Real-gas law.*

### Gas viscosity (Lee–Gonzalez–Eakin)

$$\mu_g = 10^{-4} \cdot K \cdot \exp(X \cdot \rho_g^{Y}) \ , \quad K, X, Y = f(M, T)$$

Pressure/temperature-dependent gas viscosity (rises with density) — matters for friction at high P.

*Source / basis: Lee–Gonzalez–Eakin (1966).*

### Oil density (black-oil P,T correction)

$$\rho_o = \rho_{o,ref} \cdot [\ 1 + c_P \cdot (P - 1) - \beta \cdot (T - 15)\ ] \quad (\beta = 7\text{e-}4\ /K,\ c_P = 1\text{e-}4\ /bar)$$

Thermal-expansion + isothermal-compressibility correction about the reference state (or a user PVT table / EOS surface).

*Source / basis: Black-oil correlation.*

### Compositional liquid viscosity (Lohrenz–Bray–Clark)

$\mu_L$ via LBC residual-viscosity polynomial in reduced density ($\eta$ from $T_r$, $\xi$ scaling)

Compositional dense-phase liquid/condensate viscosity from the PR EOS state.

*Source / basis: Lohrenz–Bray–Clark (1964).*

### Joule–Thomson coefficient

$$\mu_{JT} = (T/(c_p \cdot M \cdot \rho_{mol} \cdot Z)) \cdot (\partial Z/\partial T)_P$$

Real-gas cooling on expansion, evaluated from the Z-factor temperature slope; feeds $q_{JT}$ in the energy equation.

*Source / basis: EOS-based Joule–Thomson.*

## E. Thermal design, inhibitor and engineering deliverables

### Effective overall heat-transfer coefficient (multi-layer)

$$1/U_{eff} = 1/h_{in} + \Sigma_k (th_k/k_k) + 1/h_{out}$$

Series thermal resistances of the inner film, each wall/insulation/coating layer, and the outer film → the effective U referred to the inner area (else the constant $U_{wall}$).

*Source / basis: Series-resistance heat transfer.*

### Cooldown / no-touch time (lumped capacitance)

$$t_{cd} = (m \cdot c_p)/(U \cdot \pi \cdot D) \cdot \ln[ (T_{op} - T_{sea})/(T_{eq} - T_{sea}) ]$$

Lumped-capacitance time for the coldest critical point to cool from operating T to the hydrate onset after shut-in (preferred: measured directly from the transient when the monitor crosses $\Delta T_{sub} = 0$).

*Source / basis: Lumped-capacitance cooldown.*

### MEG hydrate suppression (Nielsen–Bucklin)

$$\Delta T = -72 \cdot \ln(1 - x_{MEG}) \qquad (x_{MEG} = \text{MEG mole fraction in the aqueous phase})$$

Equilibrium-temperature depression for a local MEG concentration; valid to high wt% where the classical Hammerschmidt linear form breaks down.

*Source / basis: Nielsen–Bucklin (1983).*

### Required MEG dose (inverse design)

$$x = 1 - \exp(-\Delta T_{req}/72) \ ; \ \ W = 100 \cdot x \cdot M_{MEG}/[ (1-x) \cdot M_{H_2O} + x \cdot M_{MEG} ] \ ; \ \ \dot{m}_{MEG} = \dot{m}_{water} \cdot W/(100-W)$$

Inverts Nielsen–Bucklin for the required MEG wt%, mass rate and volume rate to achieve the design subcooling depression (with a design margin).

*Source / basis: Nielsen–Bucklin inversion.*

### Erosional velocity limit (API RP 14E)

$$V_e = C/\sqrt{\rho_m}$$

Maximum recommended mixture velocity from the API erosional C-factor and the mixture density.

*Source / basis: API RP 14E.*

### Slug-catcher surge volume

$$V_{surge} = (q_l/f_{slug}) \cdot surge\_factor$$

Reduced-order slug-catcher sizing from the liquid rate and the monitored slug frequency (reported at P90 across the ensemble).

*Source / basis: Slug-volume sizing.*

### Slurry transportability (Camargo–Palermo)

$$\mu_{rel} = (1 - \phi/\phi_{max})^{(-exp)}$$

Relative viscosity of the hydrate slurry; transportable while $\mu_{rel}$ stays below the threshold.

*Source / basis: Camargo–Palermo (2000).*

### Probabilistic time-to-plug

```
Monte-Carlo ensemble → P10/P50/P90 ;  Kaplan–Meier (right-censored) CDF
```

Stochastic nucleation + parameter spread give a genuine probabilistic time-to-plug band rather than a single deterministic time.

*Source / basis: Monte-Carlo UQ; Kaplan–Meier estimator.*

## F. Numerical scheme

### Conservative finite-volume + adaptive CFL

```
flux-form updates; dt from a CFL condition (advective + acoustic + diffusion caps)
```

Volume-conservative flux differencing for holdup, gas-mass, energy and phase-field; a single predictor–corrector dt per step shared by momentum and transport.

*Source / basis: Conservative FV; CFL control.*

### TVD flux limiters (2nd-order)

```
ϕ(r): minmod = max(0,min(1,r)) ; van Leer = (r+|r|)/(1+|r|) ; superbee
```

Optional 2nd-order TVD reconstruction of advected face values (upwind → 1st order).

*Source / basis: TVD slope limiters.*

### Tridiagonal (Thomas) implicit pressure solve

$$\text{solve}\quad a\cdot p_{i-1} + b\cdot p_i + c\cdot p_{i+1} = d \quad \text{per step (vectorised over the ensemble)}$$

The implicit pressure equation is a tridiagonal system solved by the Thomas algorithm each step.

*Source / basis: Thomas algorithm.*

### Bounded fallback

```
non-finite step → auto-degrade to a proven quasi-steady solver (time always advances)
```

Measured robustness: 0 fallbacks triggered on the case study (liquid mass error 1.51e-03, gas 1.77e-15).

*Source / basis: Graceful degradation.*

## 5. Numerical method

The coupled PDE system is advanced by a conservative finite-volume scheme with adaptive CFL time-stepping. Holdup, gas-mass, energy and the hydrate phase-field are updated in flux form (optionally 2nd-order TVD: minmod / van Leer / superbee); the stiff terms — the pressure gradient, wall drag, interfacial drag and wall heat loss — are treated implicitly. Eliminating velocity from the implicit mixture momentum gives a tridiagonal (Poisson-type) pressure equation solved each step by the Thomas algorithm, vectorised over the whole Monte-Carlo ensemble. A bounded-fallback guard auto-degrades any non-finite step to a proven quasi-steady solver so that time always advances (0 fallbacks on this case). Full equation forms are in Section 4 (group F).

## 6. Input data (complete deck)

All three scenarios share the same asset and feed; they differ only in thermal design and inhibition. The complete machine-readable configuration (case_config.json) accompanies each scenario folder; the human-readable deck and the per-scenario design follow.

### 6.1 Input data deck (pipeline / fluid / operating / numerics)

| group | parameter | value | units |
|---|---|---|---|
| **Pipeline** | Route length | 32.0 | km |
| **Pipeline** | Internal diameter | 254.5 | mm |
| **Pipeline** | Wall roughness | 46.0 | µm |
| **Pipeline** | Numerical cells | 70 | - |
| **Pipeline** | Water depth (riser base) | 1100.0 | m |
| **Pipeline** | Riser fraction of route | 5.500000000000005 | % |
| **Fluid** | Live-oil density | 858.0 | kg/m3 |
| **Fluid** | Water density | 1025.0 | kg/m3 |
| **Fluid** | Water cut | 35.0 | % |
| **Fluid** | Liquid viscosity | 5.0 | cP |
| **Fluid** | Interfacial tension | 0.022 | N/m |
| **Fluid** | Formation-water salinity | 4.5 | wt% NaCl-eq |
| **Fluid** | Wax appearance temperature | 32.0 | °C |
| **Fluid** | PVT model | Peng-Robinson compositional flash | - |
| **Operating** | In-situ gas rate | 0.15 | m3/s |
| **Operating** | In-situ liquid rate | 0.055 | m3/s |
| **Operating** | Inlet pressure | 150.0 | bar |
| **Operating** | Inlet temperature | 58.0 | °C |
| **Operating** | Seabed temperature | 4.0 | °C |
| **Operating** | Wall-loss coefficient U | 22.0 | W/m2K |
| **Operating** | MEG injected at inlet | 0.0 | wt% |

| | | | |
|---|---|---|---|
| **Numerics** | Engine | implicit | - |
| **Numerics** | Simulated time | 48.0 | h |
| **Numerics** | Ensemble realisations | 12 | - |
| **Numerics** | Random seed | 13 | - |

## 6.2 Per-scenario thermal & inhibition design

### As-operated normal production — degraded/flooded insulation, no inhibitor [as-operated]

| group | parameter | value | units |
|---|---|---|---|
| **Pipeline** | Route length | 32.0 | km |
| **Pipeline** | Internal diameter | 254.5 | mm |
| **Pipeline** | Wall roughness | 46.0 | µm |
| **Pipeline** | Numerical cells | 70 | - |
| **Pipeline** | Water depth (riser base) | 1100.0 | m |
| **Pipeline** | Riser fraction of route | 5.500000000000005 | % |
| **Fluid** | Live-oil density | 858.0 | kg/m3 |
| **Fluid** | Water density | 1025.0 | kg/m3 |
| **Fluid** | Water cut | 35.0 | % |
| **Fluid** | Liquid viscosity | 5.0 | cP |
| **Fluid** | Interfacial tension | 0.022 | N/m |
| **Fluid** | Formation-water salinity | 4.5 | wt% NaCl-eq |
| **Fluid** | Wax appearance temperature | 32.0 | °C |
| **Fluid** | PVT model | Peng-Robinson compositional flash | - |
| **Operating** | In-situ gas rate | 0.15 | m3/s |
| **Operating** | In-situ liquid rate | 0.055 | m3/s |
| **Operating** | Inlet pressure | 150.0 | bar |
| **Operating** | Inlet temperature | 58.0 | °C |
| **Operating** | Seabed temperature | 4.0 | °C |
| **Operating** | Wall-loss coefficient U | 22.0 | W/m2K |
| **Operating** | MEG injected at inlet | 0.0 | wt% |
| **Numerics** | Engine | implicit | - |
| **Numerics** | Simulated time | 48.0 | h |
| **Numerics** | Ensemble realisations | 12 | - |
| **Numerics** | Random seed | 13 | - |

### Unplanned shut-in — cooldown / no-touch time [shut-in]

| group | parameter | value | units |
|---|---|---|---|
| **Pipeline** | Route length | 32.0 | km |
| **Pipeline** | Internal diameter | 254.5 | mm |
| **Pipeline** | Wall roughness | 46.0 | µm |

| | | | |
|---|---|---|---|
| **Pipeline** | Numerical cells | 70 | - |
| **Pipeline** | Water depth (riser base) | 1100.0 | m |
| **Pipeline** | Riser fraction of route | 5.500000000000005 | % |
| **Fluid** | Live-oil density | 858.0 | kg/m3 |
| **Fluid** | Water density | 1025.0 | kg/m3 |
| **Fluid** | Water cut | 35.0 | % |
| **Fluid** | Liquid viscosity | 5.0 | cP |
| **Fluid** | Interfacial tension | 0.022 | N/m |
| **Fluid** | Formation-water salinity | 4.5 | wt% NaCl-eq |
| **Fluid** | Wax appearance temperature | 32.0 | °C |
| **Fluid** | PVT model | Peng-Robinson compositional flash | - |
| **Operating** | In-situ gas rate | 0.15 | m3/s |
| **Operating** | In-situ liquid rate | 0.055 | m3/s |
| **Operating** | Inlet pressure | 150.0 | bar |
| **Operating** | Inlet temperature | 58.0 | °C |
| **Operating** | Seabed temperature | 4.0 | °C |
| **Operating** | Wall-loss coefficient U | 22.0 | W/m2K |
| **Operating** | MEG injected at inlet | 0.0 | wt% |
| **Numerics** | Engine | implicit | - |
| **Numerics** | Simulated time | 24.0 | h |
| **Numerics** | Ensemble realisations | 12 | - |
| **Numerics** | Random seed | 13 | - |

## Engineered mitigation — restored insulation + continuous MEG  [mitigated]

| group | parameter | value | units |
|---|---|---|---|
| **Pipeline** | Route length | 32.0 | km |
| **Pipeline** | Internal diameter | 254.5 | mm |
| **Pipeline** | Wall roughness | 46.0 | µm |
| **Pipeline** | Numerical cells | 70 | - |
| **Pipeline** | Water depth (riser base) | 1100.0 | m |
| **Pipeline** | Riser fraction of route | 5.500000000000005 | % |
| **Fluid** | Live-oil density | 858.0 | kg/m3 |
| **Fluid** | Water density | 1025.0 | kg/m3 |
| **Fluid** | Water cut | 35.0 | % |
| **Fluid** | Liquid viscosity | 5.0 | cP |
| **Fluid** | Interfacial tension | 0.022 | N/m |
| **Fluid** | Formation-water salinity | 4.5 | wt% NaCl-eq |
| **Fluid** | Wax appearance temperature | 32.0 | °C |
| **Fluid** | PVT model | Peng-Robinson compositional flash | - |
| **Operating** | In-situ gas rate | 0.15 | m3/s |

| | | | |
|---|---|---|---|
| **Operating** | In-situ liquid rate | 0.055 | m3/s |
| **Operating** | Inlet pressure | 150.0 | bar |
| **Operating** | Inlet temperature | 58.0 | °C |
| **Operating** | Seabed temperature | 4.0 | °C |
| **Operating** | Wall-loss coefficient U | 22.0 | W/m2K |
| **Operating** | MEG injected at inlet | 25.0 | wt% |
| **Numerics** | Engine | implicit | - |
| **Numerics** | Simulated time | 48.0 | h |
| **Numerics** | Ensemble realisations | 12 | - |
| **Numerics** | Random seed | 13 | - |

## 7. Validation against published data (sources recorded)

Every closure the hydraulics and thermodynamics actually USE is scored against universally-cited, reproducible PUBLISHED references — each reference attributed to its PRIMARY source (where the value originated), with later works tagged as corroborating. The combined results are written to validation_summary.json; the hydrate curve is also plotted below.

### 7.1 Hydrate-equilibrium curve vs experimental data

Methane Lw–H–V three-phase equilibrium, n = 11 points: as-shipped RMSE = 1.72 °C (bias -0.71 °C, max |err| 3.31 °C); after the single allowable T_eq offset of +0.71 °C, RMSE = 1.57 °C.




*Hydrate-equilibrium validation: SHCT closure (as-shipped and 1-parameter calibrated) vs published experimental methane Lw–H–V data.*

*Source — hydrate data: Deaton, W.M. & Frost, E.M. (1946), 'Gas Hydrates and Their Relation to the Operation of Natural-Gas Pipe Lines', U.S. Bureau of Mines Monograph 8 (PRIMARY); reproduced/corroborated in Sloan, E.D. & Koh, C.A. (2008), 'Clathrate Hydrates of Natural Gases', 3rd ed., CRC Press (Appendix A); the 274.7 K / 3.27 MPa point is independently corroborated by the Blake Ridge measurement (ODP Leg 164).*

### 7.2 Hydraulic closures vs their primary references

- Friction factor: Haaland (1983) explicit fit vs the Colebrook–White equation computed in-code — RMS deviation 0.62%, max 1.34% over the turbulent Re × roughness grid.
- Slug frequency: reproduces the Gregory–Scott (1969) / Zabaras (2000) correlation to 0.0e+00% (published accuracy band ≈ ±60%).

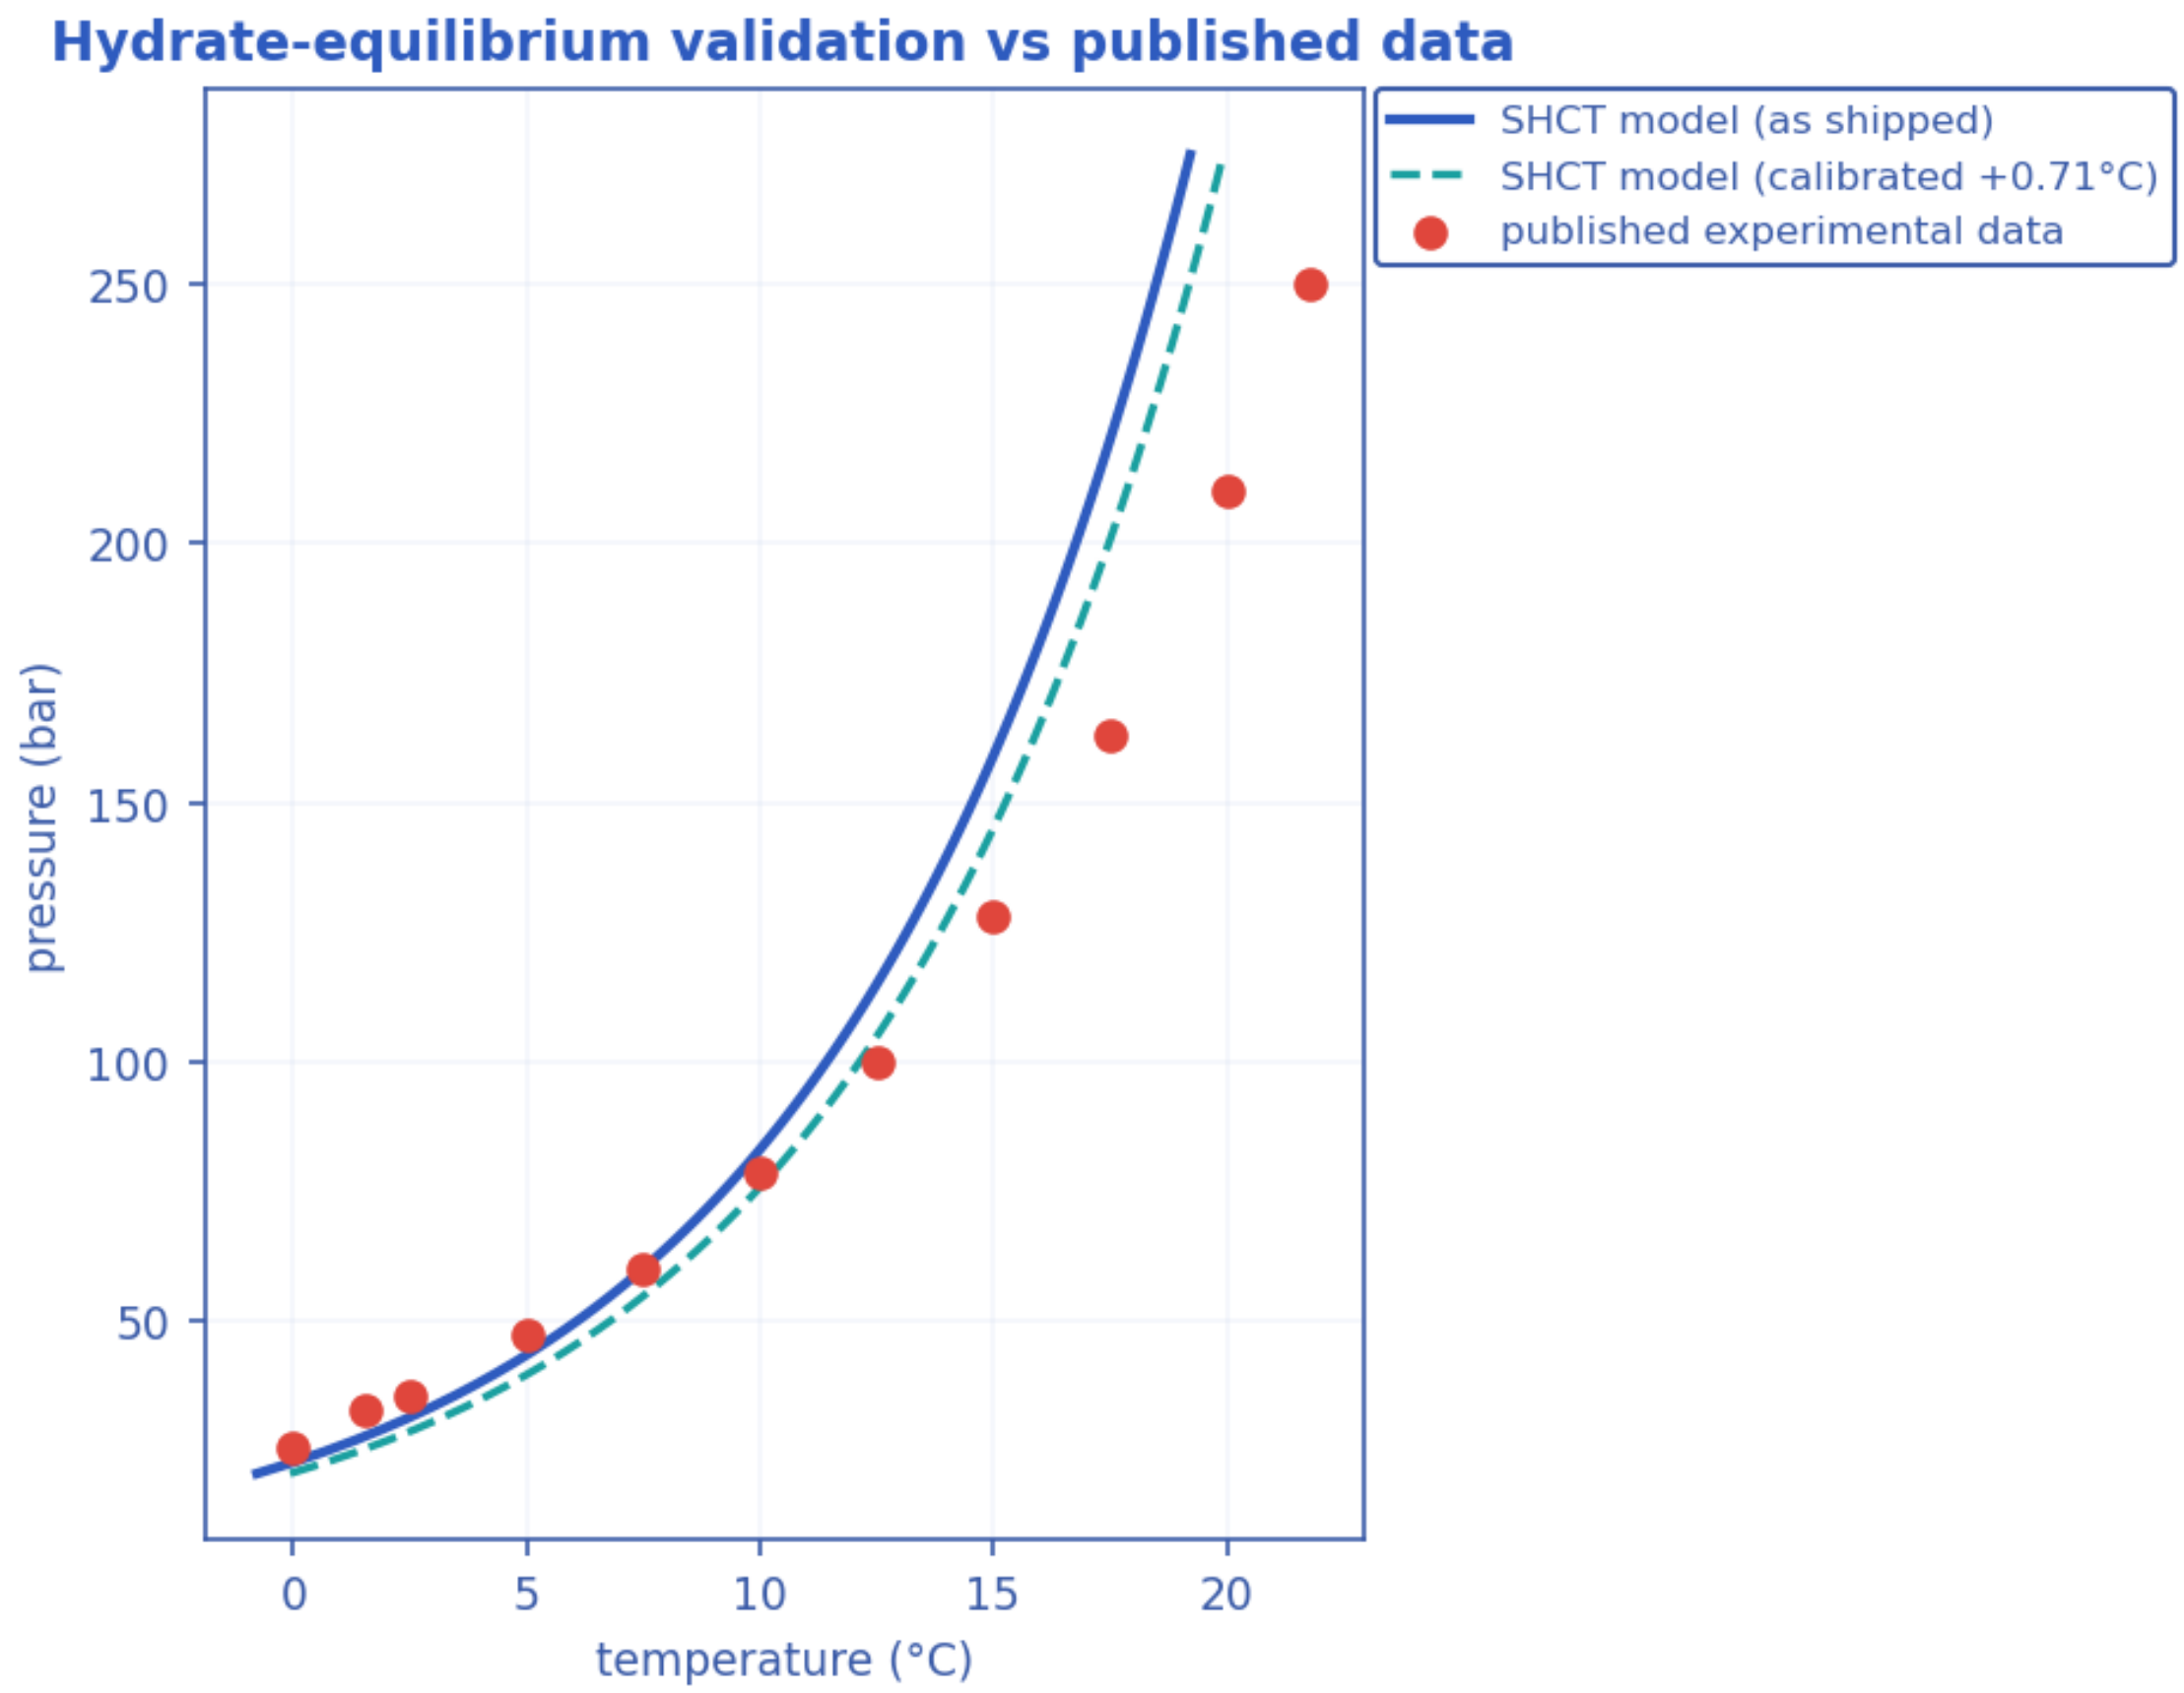- Drift-flux slip: distribution coefficient and drift velocity scored against the canonical ANALYTICAL values — vertical Taylor-bubble Froude 0.35 and horizontal nose Froude 0.542 — that the closure is built from.




*Friction-closure validation: Haaland (1983) explicit factor vs the Colebrook–White equation across the turbulent Re × relative-roughness grid.*

*Sources — closures: friction reference Colebrook, C.F. (1939), J. Inst. Civ. Eng. 11:133–156 (PRIMARY) with the Moody (1944) chart corroborating, closure under test Haaland, S.E. (1983), J. Fluids Eng. 105(1):89–90. Drift-flux: Dumitrescu (1943) ZAMM 23:139–149 and Nicklin et al. (1962) for the vertical terms, Benjamin, T.B. (1968) J. Fluid Mech. 31:209–248 and Bendiksen (1984) for the horizontal terms. Slug frequency: Gregory, G.A. & Scott, D.S. (1969), AIChE J. 15:933–935 (PRIMARY base term) and Zabaras (2000), SPE J. 5(3):252–258 (inclination factor / implemented form).*

## 7.3 What remains open

*Full production-flow pressure-drop and arrival-temperature along a SPECIFIC operating line cannot be closed by public data; it needs an operator's measured dP / arrival-T for that line. The holdup, friction, slip, slug-frequency and hydrate-equilibrium PHYSICS the predictions rest on are validated above against published data; this is stated plainly so the evidentiary standard is not overstated.*
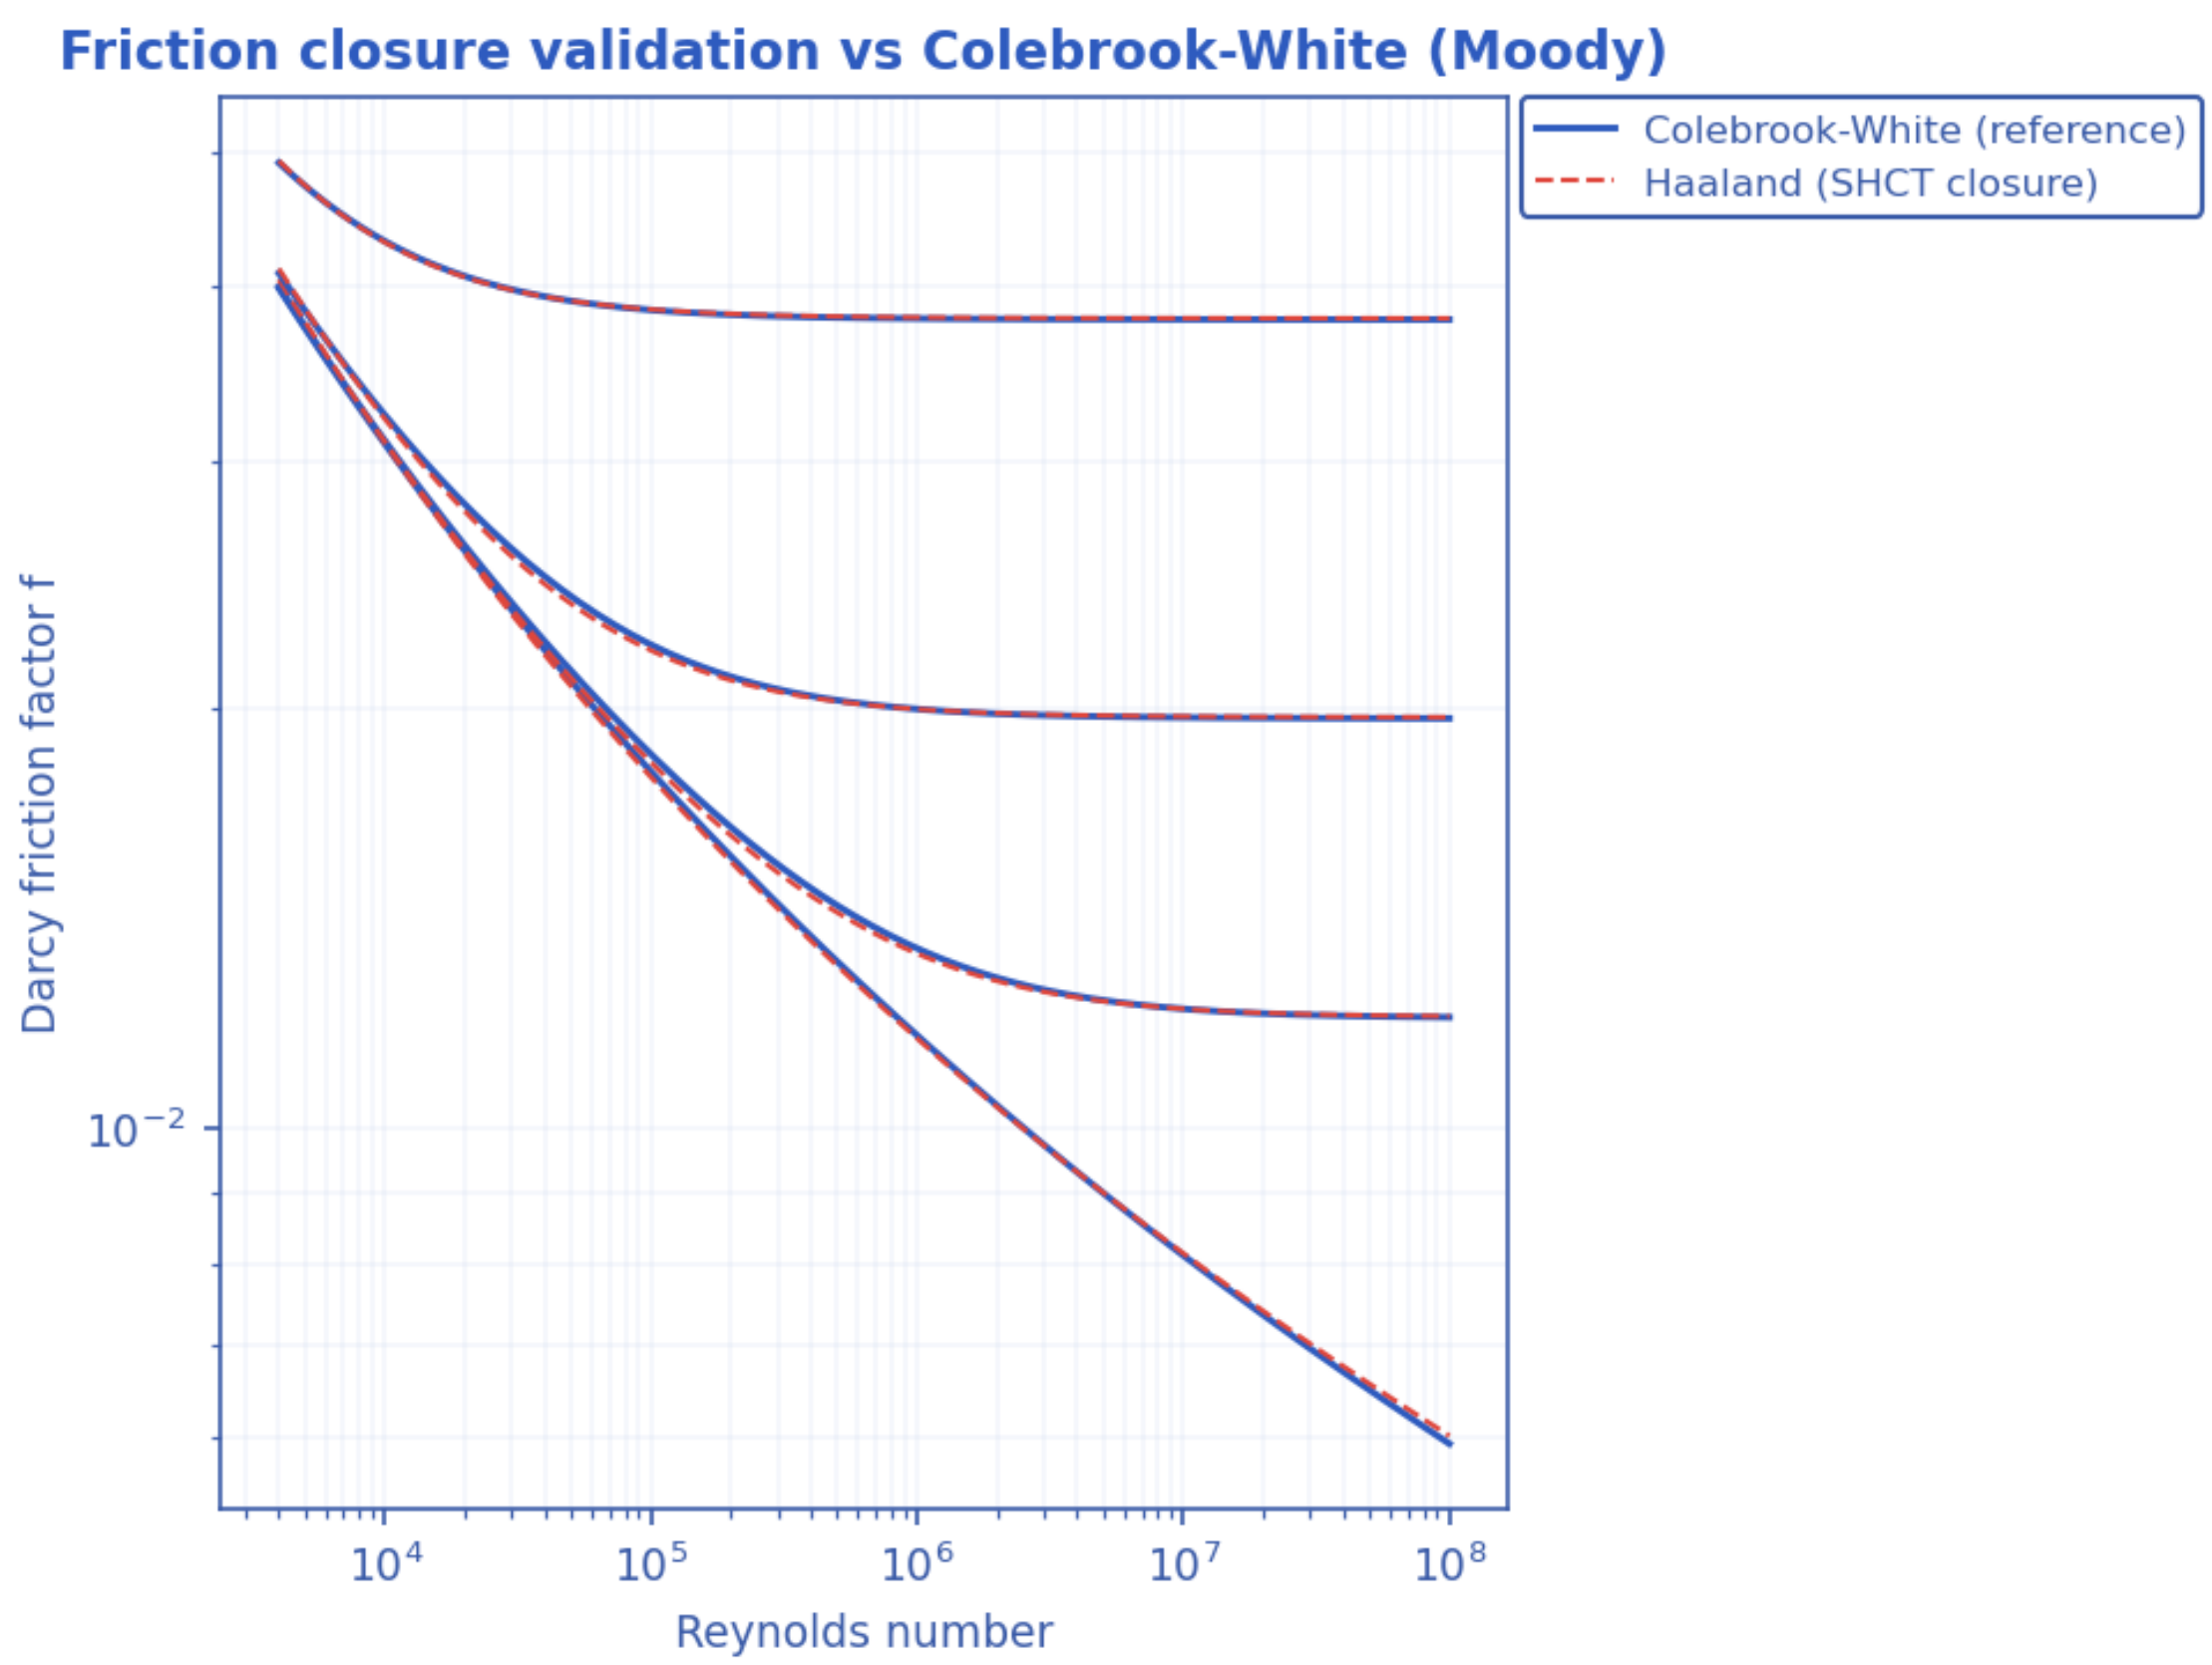
## 8. Calibration of the solver to the case study (sources)

Calibration discipline: the solver ships with literature-DEFAULT closures and is run on this case WITHOUT bespoke tuning; where a single, physically-meaningful calibration knob exists it is exposed and reported, never silently fitted.

### 8.1 Anchored / calibrated closures and their sources

- Hydrate-equilibrium curve: anchored to the GPSA / Sloan natural-gas hydrate correlation and shifted for gas specific gravity and produced-water salinity; a single allowable T_eq offset is the only hydrate calibration parameter (reported in Section 7.1). Source: Sloan & Koh (2008); Deaton & Frost (1946).
- Drift-flux slip: Bendiksen (1984) distribution coefficient and drift velocity, with the single verified numerics.drift_C0_factor knob available for a 1-parameter holdup calibration. Source: Bendiksen (1984); Dumitrescu (1943); Nicklin et al. (1962).
- Friction: Haaland (1983), calibrated against Colebrook–White (1939) to ≈2 %. Slug frequency / length: Gregory–Scott (1969) / Zabaras (2000); Dukler–Hubbard scaling.
- Compositional PVT: Peng–Robinson (1976) with Sutton pseudo-criticals, Lee–Gonzalez–Eakin gas viscosity and Lohrenz–Bray–Clark liquid viscosity. Hydrate kinetics: CSMHyK-type Arrhenius growth; MEG suppression by Nielsen–Bucklin (1983).

### 8.2 Calibration of the case definition itself

The asset geometry, fluid makeup and operating conditions are calibrated to realistic, self-consistent values representative of deepwater medium-crude-oil tie-backs in the open literature (≈30° API live oil, 35 % water cut, ~1100 m water depth, 32 km step-out, 10.75-inch line, 4 °C seabed). The erosional limit uses the API RP 14E C-factor. These anchor the case to industry-standard design practice rather than to one proprietary line.

## 8.3 Sensitivity of the headline numbers to the three assumed constants

The coupling number is assembled from three constants that this work does not fit to data: the growth-rate prefactor k_g0, the subcooling exponent n, and the coupling coefficient C. Because Φ_SH = C · k_g,wall · a_i · ΔT_sub,wall^n / f_slug is linear in both C and k_g0, the reported magnitude of the coupling number is proportional to the product of two numbers that were chosen from the literature rather than measured, and the exponent n enters the same expression as a power of a subcooling of order twenty. It would be indefensible to report a peak Φ_SH of several thousand, a P50 time-to-plug of under three hours and a required glycol dose of some sixty weight per cent without also reporting how far each of those numbers moves when the three constants are moved across the ranges the literature actually permits. This section does that.

The study is a one-at-a-time sweep: each run varies a single constant and holds the other two at their assumed values. The prefactor k_g0 is swept from 0.2 to 5 times its default, which is the range the solver's own calibration bounds declare admissible. The exponent n is swept from unity, appropriate to growth controlled by heat and mass transfer, to two, the quadratic dependence also reported in the hydrate kinetics literature. The coefficient C is swept over a factor of three either side of its assumed value of 1500, for which no measured value exists at all. Every run in the table, the baseline included, uses the same reduced configuration (scenario asoperated, n_ensemble=6, n_cells=70, t_end=24.0 h), so the rows are directly comparable with one another; they are not directly comparable with the headline predictions of Chapters 9 and 10, which use the fuller twelve-realization, 48-hour configuration. The sweep is reproducible with the command `python3 solver.py --sensitivity`, or for this particular case with `python3 case/scripts/run_sensitivity.py`, and it writes `sensitivity_phiSH.csv` and `sensitivity_phiSH.json` alongside the other case outputs.

| Case | k_g0 | n | C | Φ_SH max (uncapped) | Ψ = Φ_SH/C | gate sat. | P50 (h) | MEG (wt%) | Deposit (mm) |
|---|---|---|---|---|---|---|---|---|---|
| baseline | ×1 | 1 | 1500 | 6627 | 4.42 | 44% | 2.47 | 59.5 | 117.1 |
| kg0_x0.2 | ×0.2 | 1 | 1500 | 1325 | 0.884 | 1% | 17.53 | 60.0 | 1.3 |
| kg0_x0.5 | ×0.5 | 1 | 1500 | 3341 | 2.23 | 14% | 3.97 | 59.6 | 117.1 |
| kg0_x2 | ×2 | 1 | 1500 | 13253 | 8.84 | 57% | 1.48 | 60.0 | 117.1 |
| kg0_x5 | ×5 | 1 | 1500 | 33133 | 22.1 | 52% | 0.88 | 60.0 | 117.1 |
| n_1.25 | ×1 | 1.25 | 1500 | 13472 | 8.98 | 57% | 1.47 | 60.0 | 117.1 |
| n_1.5 | ×1 | 1.5 | 1500 | 27390 | 18.3 | 53% | 1.04 | 60.0 | 117.1 |
| n_1.75 | ×1 | 1.75 | 1500 | 55685 | 37.1 | 47% | 0.67 | 60.0 | 117.1 |
| n_2 | ×1 | 2 | 1500 | 113210 | 75.5 | 42% | 0.46 | 60.0 | 117.1 |
| C_500 | ×1 | 1 | 500 | 2209 | 4.42 | 2% | 2.98 | 59.9 | 117.1 |
| C_1000 | ×1 | 1 | 1000 | 4418 | 4.42 | 26% | 2.29 | 59.5 | 117.1 |
| C_3000 | ×1 | 1 | 3000 | 13266 | 4.42 | 69% | 2.48 | 59.5 | 117.1 |
| C_4500 | ×1 | 1 | 4500 | 19895 | 4.42 | 74% | 2.48 | 59.4 | 117.1 |

Three things follow, and none of them is comfortable. First, the peak coupling number is not a robust quantity: across the sweep its uncapped value ranges from 1325 to 113210, and it tracks C and k_g0 exactly linearly, as the definition requires. A reader who disagrees with the assumed value of C by a factor of three will disagree with every Φ_SH reported in this work by the same factor, and the position of the Φ_SH = 1 contour moves with it. The magnitude therefore carries no independent information; the C-free ratio Ψ = Φ_SH / C, tabulated alongside it, is the part the model actually predicts, and it is invariant across the C sweep, constant at 4.42. Second, the time-to-plug is the most sensitive of the engineering deliverables: varying k_g0 alone over its admissible range moves the P50 from 17.5 h to 0.9 h, a factor of roughly 20. The 2.8-hour figure quoted in Chapter 9 should be read as one point in a band that spans most of a day, not as a prediction accurate to the hour. Third, and in contrast, the required inhibitor dose is remarkably insensitive: across the whole sweep it moves only between 59.4 and 60.0 wt%.

That third result deserves emphasis, because it bears directly on the most questionable number in this work. A required glycol dose near sixty weight per cent sits well outside normal field practice, where continuous doses of twenty to fifty weight per cent are typical, and the natural suspicion is that it is an artefact of over-tuned kinetics. The sweep shows that it is not. The inhibitor demand is set by the Nielsen–Bucklin inversion of the wall subcooling, and the wall subcooling is set by the thermal problem — the seabed temperature, the degraded overall heat-transfer coefficient and the route length — not by the hydrate kinetics. Changing the kinetic and coupling constants by factors of five and three barely moves it. The sixty weight per cent figure is therefore an honest consequence of the deliberately extreme scenario that Chapter 8 defines: a water-flooded, effectively uninsulated 32 km line carrying 35 % water cut across a 4 °C seabed with no inhibition at all. It is the dose that scenario demands, and the fact that such a line would not be operated in that state is the point the scenario is making rather than an error in the model.

The behaviour of the C column has a specific cause in the model, and it is worth stating plainly because it changes how the coupling number should be read. The deposition core does not consume $\Phi_{SH}$ directly; it consumes a gating variable, the excess of $\Phi_{SH}$ over unity clipped to the interval from zero to one, so the wall-capture driver is fully saturated once $\Phi_{SH}$ reaches two. The solver now measures how much of the field sits above that point: in the baseline run 44% of all hydrate-forming cell-timesteps are already saturated, and across the sweep the figure stays in the range 1% to 74%. Multiplying or dividing C by three therefore rescales the reported $\Phi_{SH}$ exactly linearly while leaving the deposit (117.1 to 117.1 mm), the inhibitor demand (59.4 to 59.9 wt%) and the time-to-plug very nearly unchanged. The consequence cuts both ways. It is reassuring, because the engineering deliverables this framework is used to produce do not depend on a constant that has never been measured. It is also a real limitation of the coupling number as originally presented: above $\Phi_{SH} \approx 2$ the magnitude carries no predictive information, because the physics it gates is already fully open. A peak value of six thousand is not a hundred times more critical than a peak of sixty; both mean only that the location is far inside the critical region, and quoting the larger number implies a precision the model does not possess. Nor does the threshold escape the problem: $\Phi_{SH}$ is linear in C, so the $\Phi_{SH} = 1$ contour moves with C too. On a line where the criticality were marginal rather than overwhelming, that choice would matter a great deal; it does not matter here only because the cold section of this particular case sits orders of magnitude inside the critical region. Three changes follow from this and have been made. The solver reports the uncapped magnitude, so a quoted $\Phi_{SH}$ is never a cap in disguise. It reports the C-free ratio $\Psi = \Phi_{SH} / C$, which is the part of the coupling number the model genuinely predicts and which a future calibration would fit C against. And it reports the gate-saturated fraction, so that any large $\Phi_{SH}$ is accompanied by the statement of how much of it is doing no work. What the $\Phi_{SH}$ field can be trusted to show in this case is the shape of the criticality — where along the route and at what times the competition is worst, and how that pattern responds to insulation and inhibition — rather than an absolute magnitude or a sharply located threshold. By contrast $k_{g0}$ enters the wall growth rate itself as well as the coupling number, which is why it, and not C, moves the time-to-plug.

A reporting point, recorded because it affected an earlier draft of this table. The $\Phi_{SH}$ field carries a finite cap of $1\times10^4$ so that contour plots remain legible, and 8 of the 13 runs in this sweep exceed it. A magnitude quoted from the capped field would therefore be the cap rather than the value. The solver now reports the uncapped maximum separately, and it is the uncapped figure that is tabulated above and quoted throughout this section; the capped field is retained only for the maps of Chapters 9 and 10, where it is a plotting device and is labelled as such.

The purpose of this section is not to defend the absolute magnitudes but to bound them honestly, and the bounds are wide. They will stay wide until C, n and $k_{g0}$ are fitted to measurements from the experiment described in Section 5.9 — a wall held at controlled subcooling and swept by slugs of controlled frequency. Until that experiment is done, the framework's contribution is the coupled mechanism, the mapped criticality field and the workflow that turns them into a design decision; it is not a calibrated prediction of when a particular line will plug. A variance-based global sensitivity analysis, which would apportion the output variance among the three constants rather than merely bounding it, remains outstanding.

## 9. Contribution to knowledge

- A single dimensionless Slug–Hydrate Coupling Number $\Phi_{SH} = C \cdot k_{g,wall} \cdot a_i \cdot \Delta T_{sub,wall}^n / f_{slug}$ that quantifies, locally and in time, the competition between wall hydrate growth and slug scouring — turning a qualitative engineering concern into a mapped, critical-threshold ($\Phi_{SH} = 1$) field $\Phi_{SH}(x,t)$.
- Genuine TWO-WAY coupling of slugging and hydrates at the wall (slug scouring vs consolidating deposition) inside one transient solver, rather than two separate analyses.
- A transient, PROBABILISTIC time-to-plug (Monte-Carlo stochastic nucleation + parameter spread, Kaplan–Meier right-censored CDF) instead of a single deterministic number.
- Self-consistent integration of compositional Peng–Robinson PVT, multiphase hydraulics, heat transfer, hydrate kinetics, deposition with self-insulating feedback, and inhibitor / insulation inverse-design in ONE auditable model.
- Closures anchored to, and validated against, universally-cited published references (Section 7), with an explicit one-parameter calibration discipline (Section 8).
- A bounded fallback strategy (mass-consistent; 0 fallbacks triggered) that keeps the solver usable across unattended parameter sweeps and ensembles.

## 10. Comparison with existing solvers and software

The table contrasts SHCT with the tools normally used for these analyses. The honest position: established commercial transient simulators are mature, extensively field-validated products; SHCT's distinct contribution is to UNIFY slug and hydrate prediction through the explicit Φ_SH coupling, to be transient AND probabilistic in one pass, and to be fully open and auditable — capabilities that are split across several tools elsewhere.

| Capability | OLGA / LedaFlow | PIPESIM (steady) | PVTsim / Multiflash + CSMHyK | SHCT (this work) |
|---|---|---|---|---|
| **Transient multiphase flow** | Yes | No (steady) | No | Yes |
| **Hydrate equilibrium / kinetics** | Add-on module | Equilibrium screen | Yes (specialist) | Yes (integrated) |
| **Explicit slug–hydrate wall coupling (Φ_SH)** | No | No | No | Yes (core invention) |
| **Probabilistic time-to-plug (Monte-Carlo)** | Limited / manual | No | No | Yes (P10/P50/P90) |
| **Compositional PR PVT in-loop** | Yes | Yes | Yes | Yes |
| **Inhibitor & insulation inverse design** | Manual sweeps | Partial | Inhibitor only | Yes (direct) |
| **Severe-riser + terrain slug screening** | Yes | Correlation | No | Yes |
| **Open / auditable / scriptable** | No (commercial) | No | No | Yes (open source) |
| **Bounded-fallback numerical guard** | — | — | — | Yes (0 fallbacks) |

### 10.1 What this solver covers, and what that coverage rests on

- It spans the whole chain — hydraulics + thermal + compositional PVT + hydrate kinetics + deposition + probabilistic risk + inhibitor/insulation design — in one consistent model.
- It works on ARBITRARY terrain and any composition (PR EOS), so it is not tied to one asset type; the same code runs gas, condensate and crude tie-backs.
- Its closures are the SAME published correlations the commercial tools use, and they are validated here against the original reference data (Section 7), so its hydraulic and thermodynamic ingredients are on the established footing.
- The Φ_SH coupling and the probabilistic time-to-plug add information no single existing tool returns in one pass.

*Honest caveat: full production-flow validation of pressure drop and arrival temperature along a SPECIFIC operating line still requires an operator's measured data; the holdup, friction, slip, slug-frequency and hydrate-equilibrium closures that those predictions rest on are validated against published data in Section 7.*

## 11. Generated outputs — every scenario (nothing left out)

For each scenario the report gives: the headline prediction metrics, the complete solver chart/curve/contour/map gallery (embedded exactly as generated under the no-black palette), a per-column graph of every CSV the solver writes, and every CSV as a data table. The machine-readable summary.json / key_metrics.json accompany each folder.

**Animated outputs (GIF): each scenario folder additionally contains a set of transient GIF animations that show, as motion, the time-evolution the static charts below capture as single**

**frames. They are a supplementary visualisation layer for presentation and review — a static document cannot play them, so they are provided as files alongside the outputs (under the no-black style, with every label/legend kept off the data):**

- anim_flow_line.gif — liquid holdup $\alpha_l$ along the terrain-following pipe, showing slug bodies travelling down the route in time.
- anim_crosssection.gif — the 2-D pipe bore at the monitor: the stratified liquid level and the hydrate deposit ring closing the bore toward a plug (open bore in the mitigated case).
- anim_PT_cooldown.gif — the monitor P–T point tracking across the hydrate-stability envelope in time (green = safe, red = inside the hydrate zone).
- anim_riser_cycle.gif — the riser-region monitor $\alpha_l$–P trajectory (repeating loops = intermittent / slug flow; a settled point = stable flow, as in the mitigated case).
- anim_profile_wave.gif — the P(x,t) and T(x,t) profile wave marching along the line (the thermal cooling front and the pressure profile evolving in time).

*These GIFs are generated by case/scripts/make_animations.py from the same transient solve as the charts; they add no new data beyond the fields already tabulated and plotted here.*

## 11.1 As-operated normal production — degraded/flooded insulation, no inhibitor

### 11.1.1 Headline prediction metrics

| Metric | Value | Units |
|---|---|---|
| **Total ΔP** | 113.8 | bar |
| **Peak velocity** | 5 | m/s |
| **Erosional limit (API 14E)** | 5.838 | m/s |
| **Max slug length** | 36.64 | m |
| **Mean slug length** | 15.59 | m |
| **Slug/intermittent fraction** | 0.8137 | – |
| **Slug-catcher surge (P90)** | 0.3575 | $m^3$ |
| **Max subcooling** | 20.91 | °C |
| **Design subcooling (P90)** | 23.73 | °C |
| **Max Φ_SH (coupling)** | 6101 | – |
| **Coupling hot-spot** | 28.57 | km |
| **Plug probability** | 1 | frac |
| **Time-to-plug P50** | 2.775 | h |
| **Time-to-plug P10** | 2.133 | h |
| **Time-to-plug P90** | 3.593 | h |
| **Peak wall deposit** | 117.1 | mm |
| **MEG required** | 59.68 | wt% |
| **MEG rate** | 9.447e+04 | L/h |
| **Under-inhibited length** | 24.23 | km |
| **No-touch time** | 1.51e-14 | h |
| **Effective U** | 22 | $W/m^2K$ |
| **Slurry rel. viscosity** | 11.29 | – |
| **Hydrate mass formed** | 9.755e+06 | kg |
| **Min mixture sound speed** | 161.8 | m/s |
| **Wax onset** | 9.371 | km |
| **Max scaling index** | 0.4708 | – |
| **Liquid mass error** | 0.001514 | frac |
| **Gas mass error** | 1.772e-15 | frac |
| **Solver fallbacks** | 0 | # |

### 11.1.2 Charts, curves, contours and maps (20 figures)




*Final-state P50 profiles: seabed elevation, liquid holdup, pressure & temperature vs hydrate T_eq, and subcooling along the whole route. [as-operated]*




*Slug-formation prediction: terrain, intermittent (slug/churn) bands, slug frequency and slug-unit length, and liquid holdup. [as-operated]*

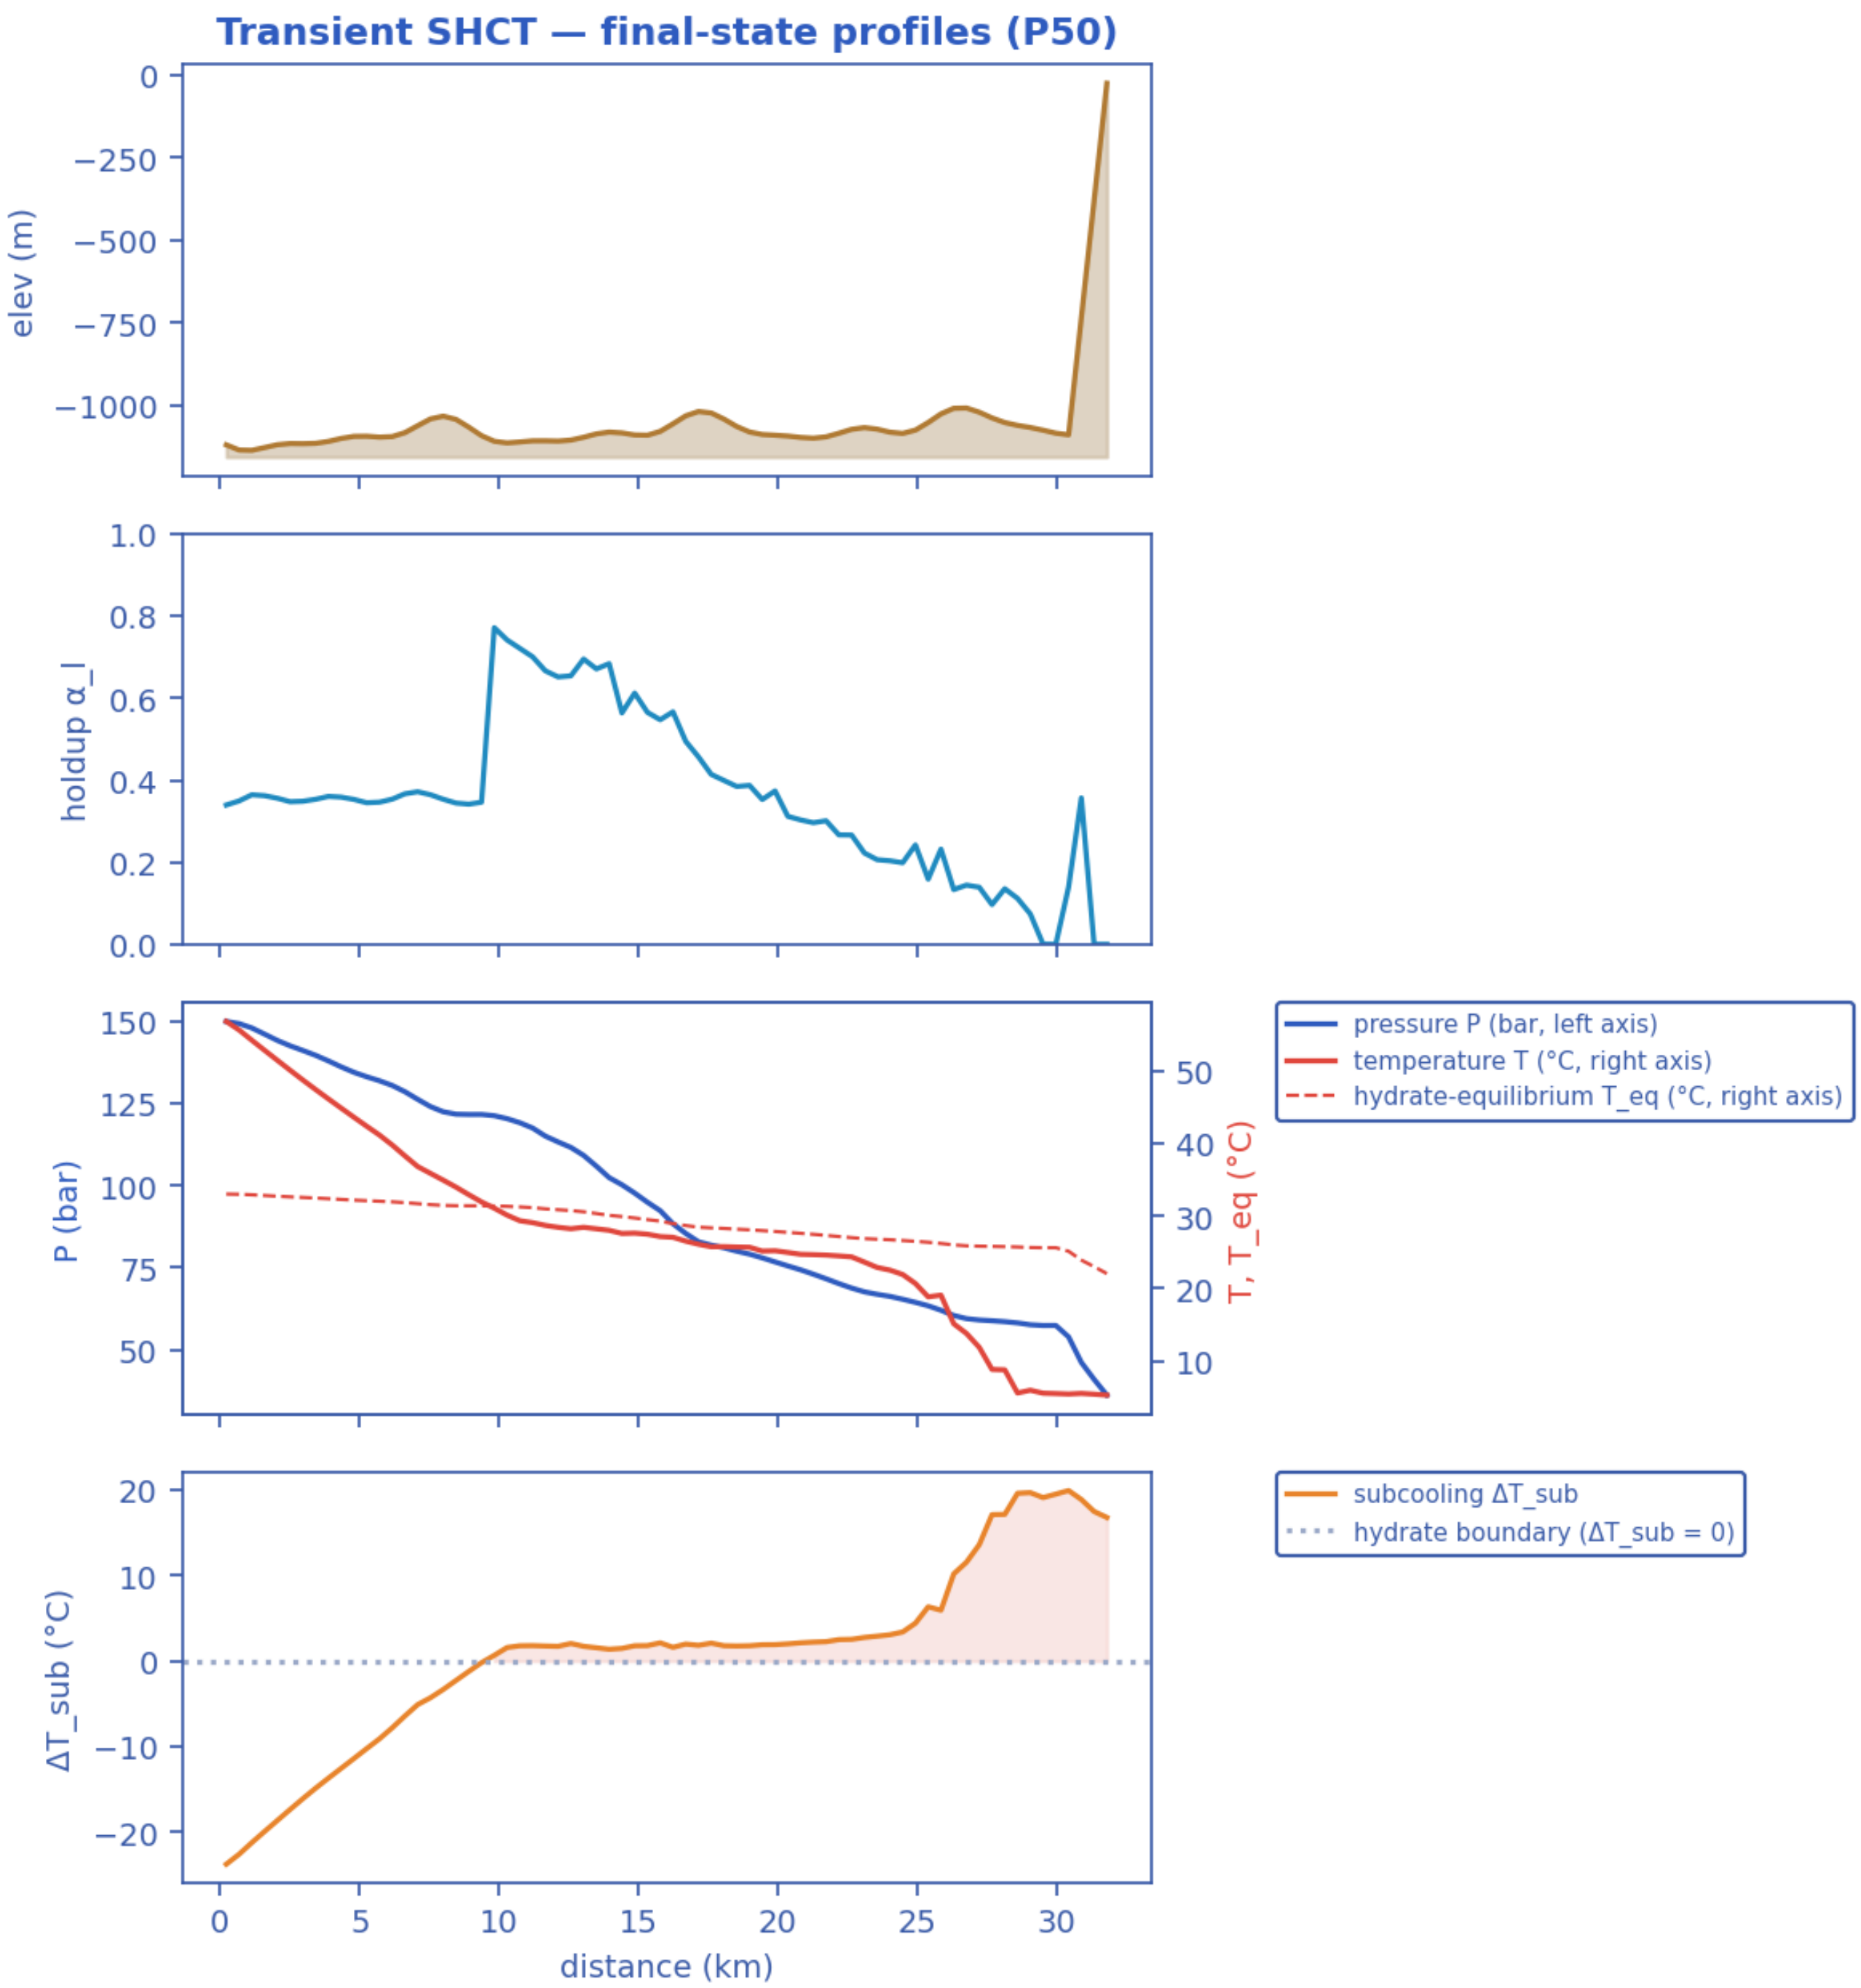


*Severe-slugging screen at the steel-catenary-riser base and ascent (last 6 km). [as-operated]*

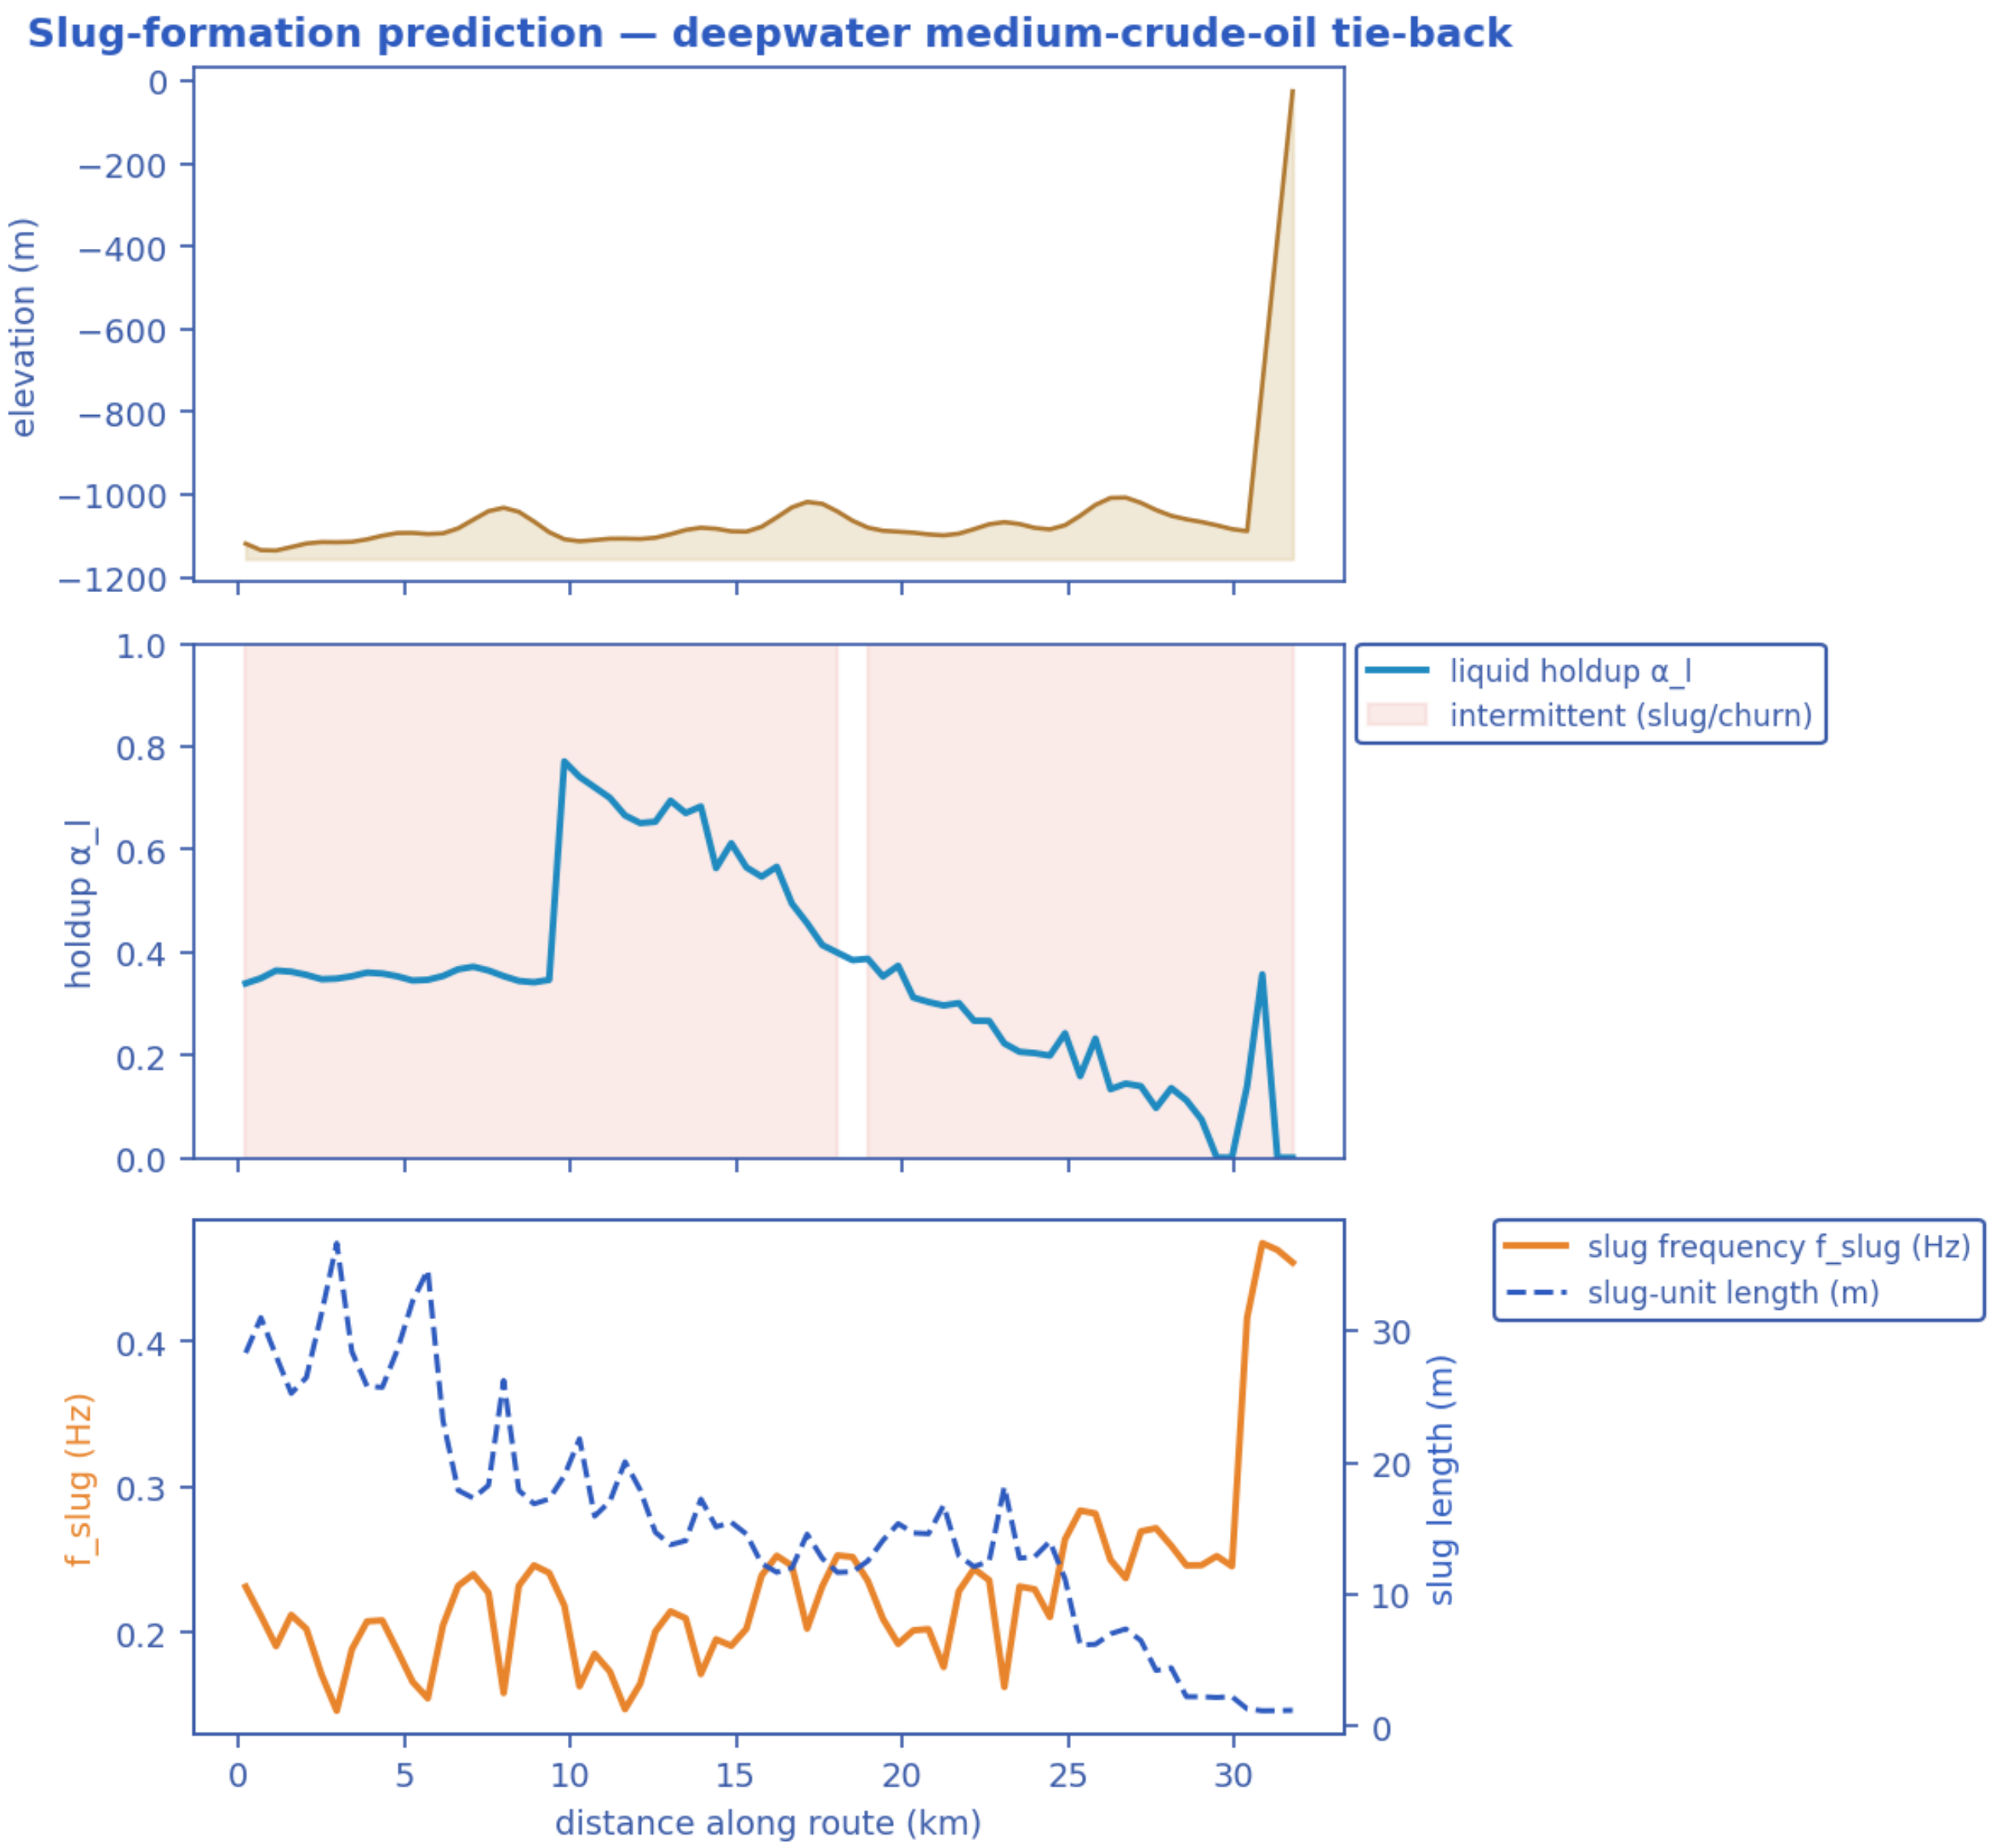


*Liquid-holdup field α_l(x,t) — the bands are slug activity migrating along the line in time (space-time contour map). [as-operated]*

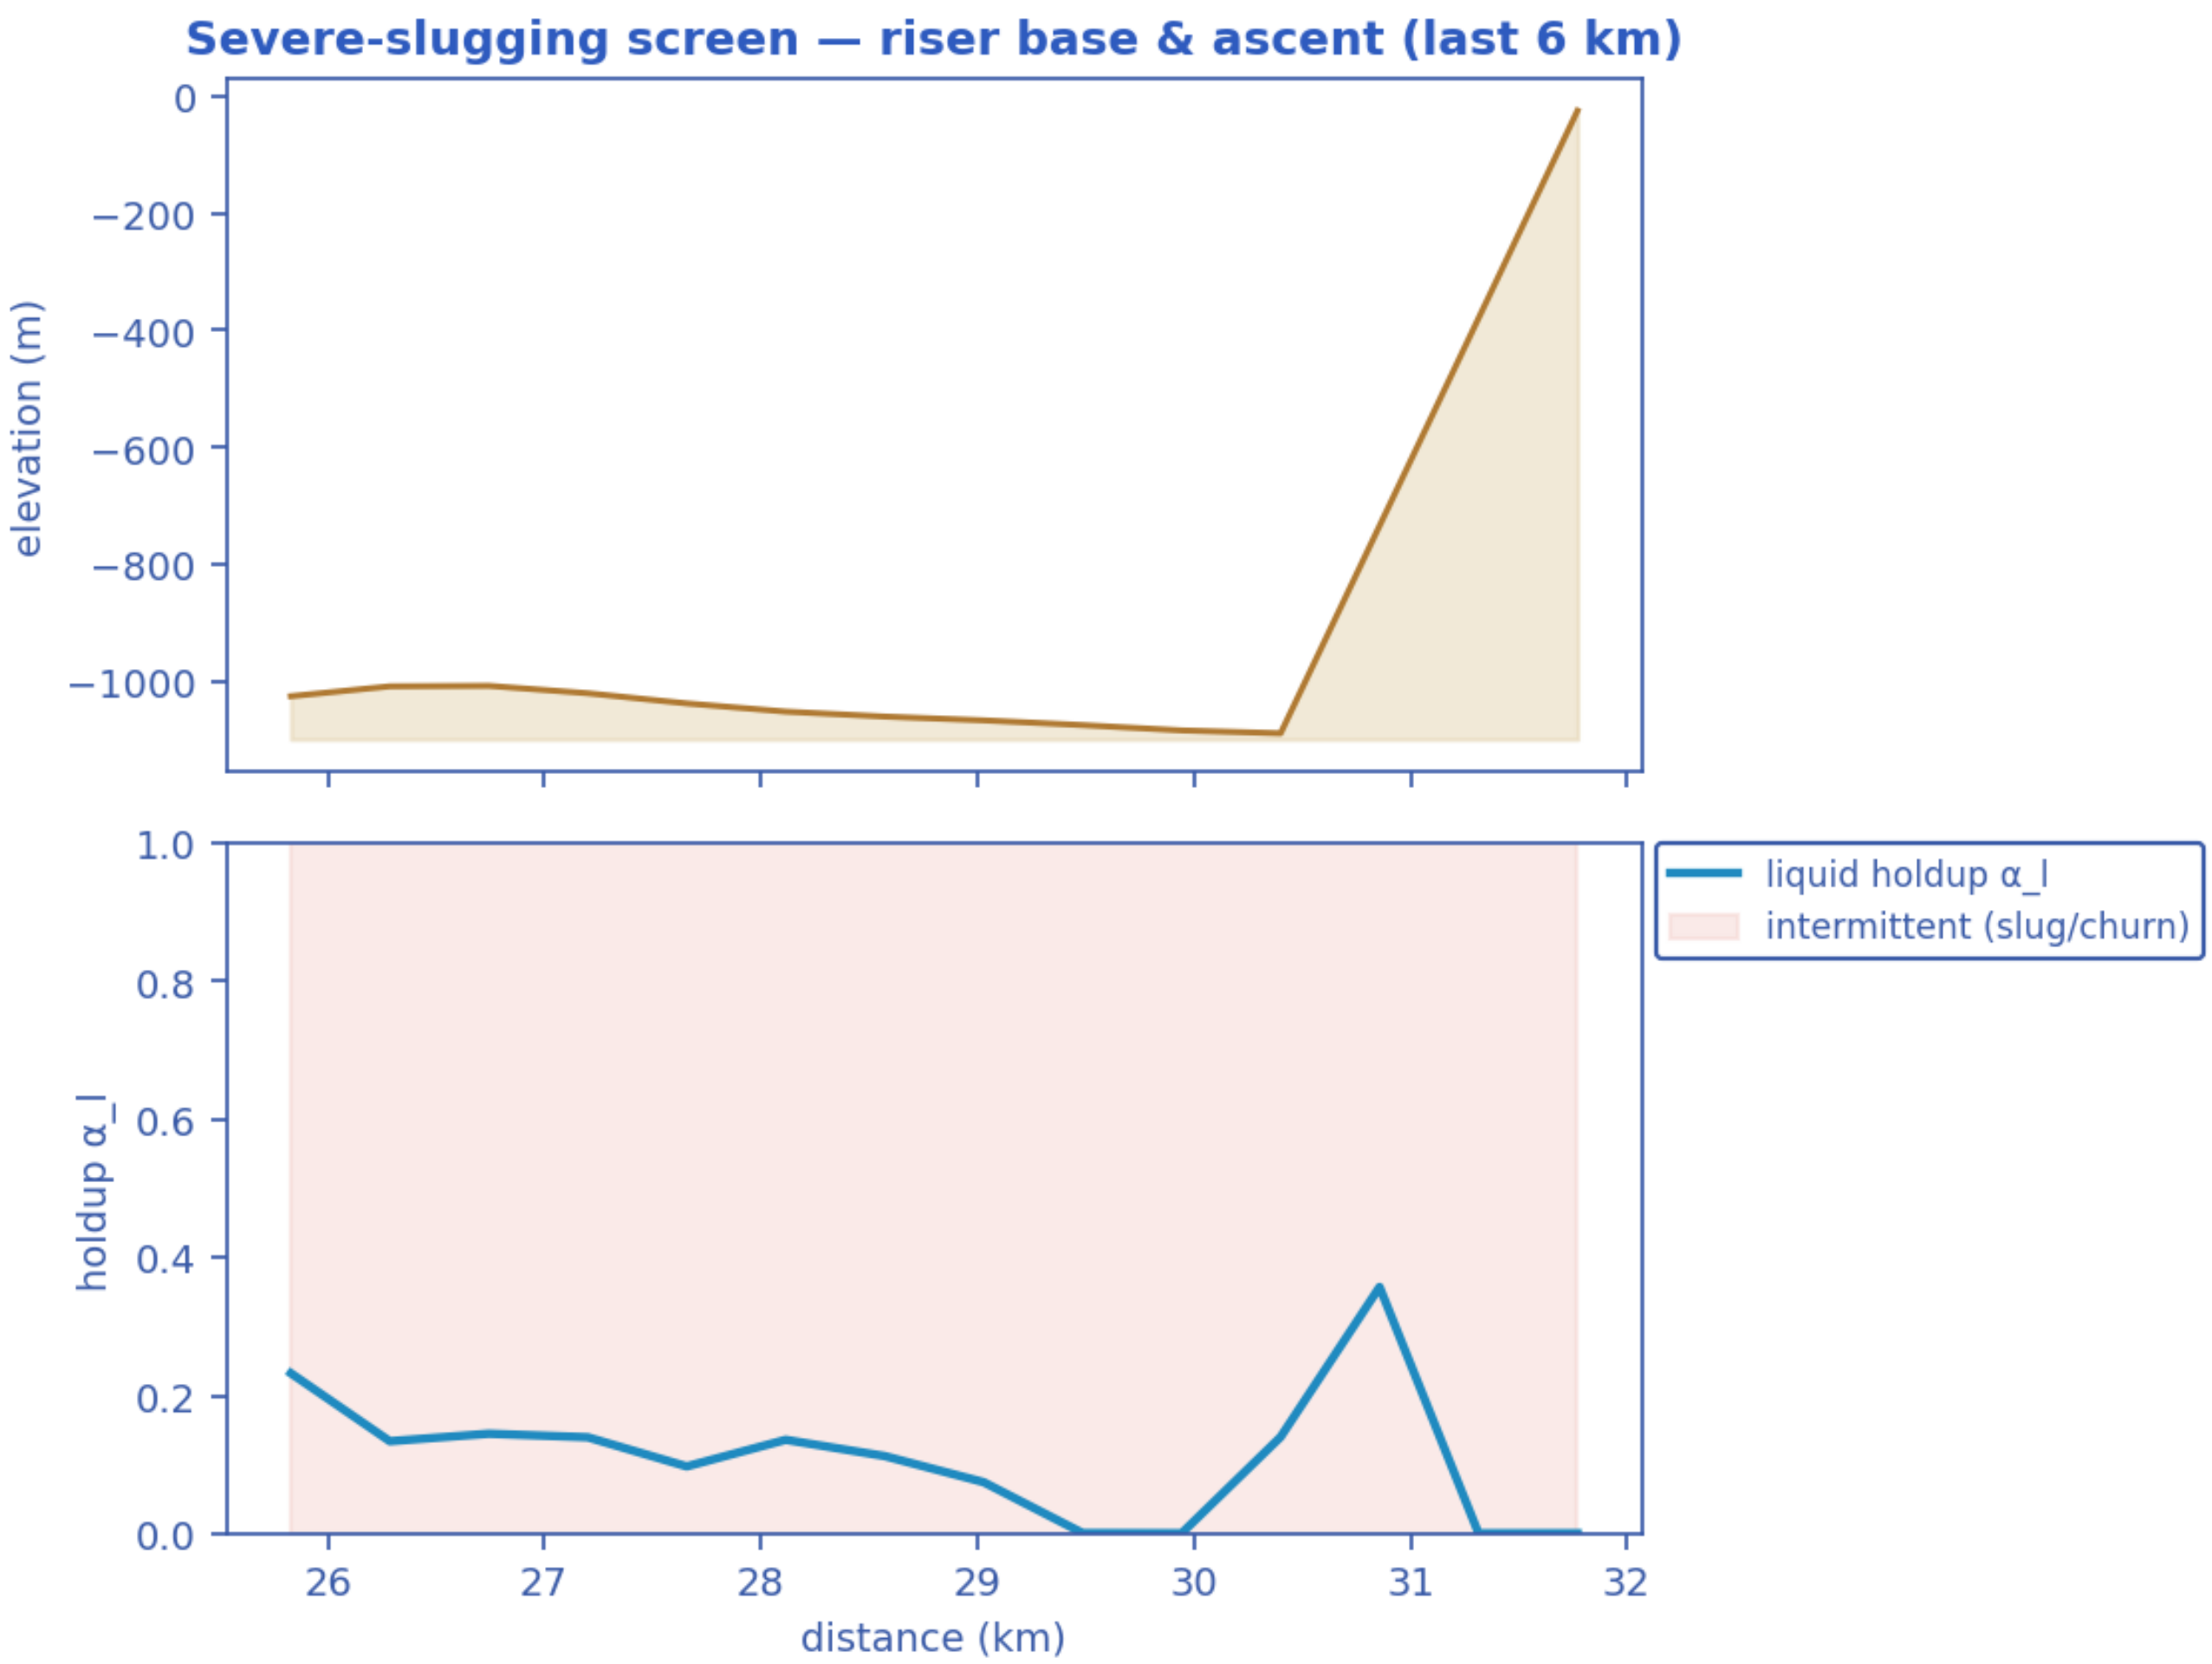


*Production P–T trajectory against the hydrate-stability envelope (curve). [as-operated]*

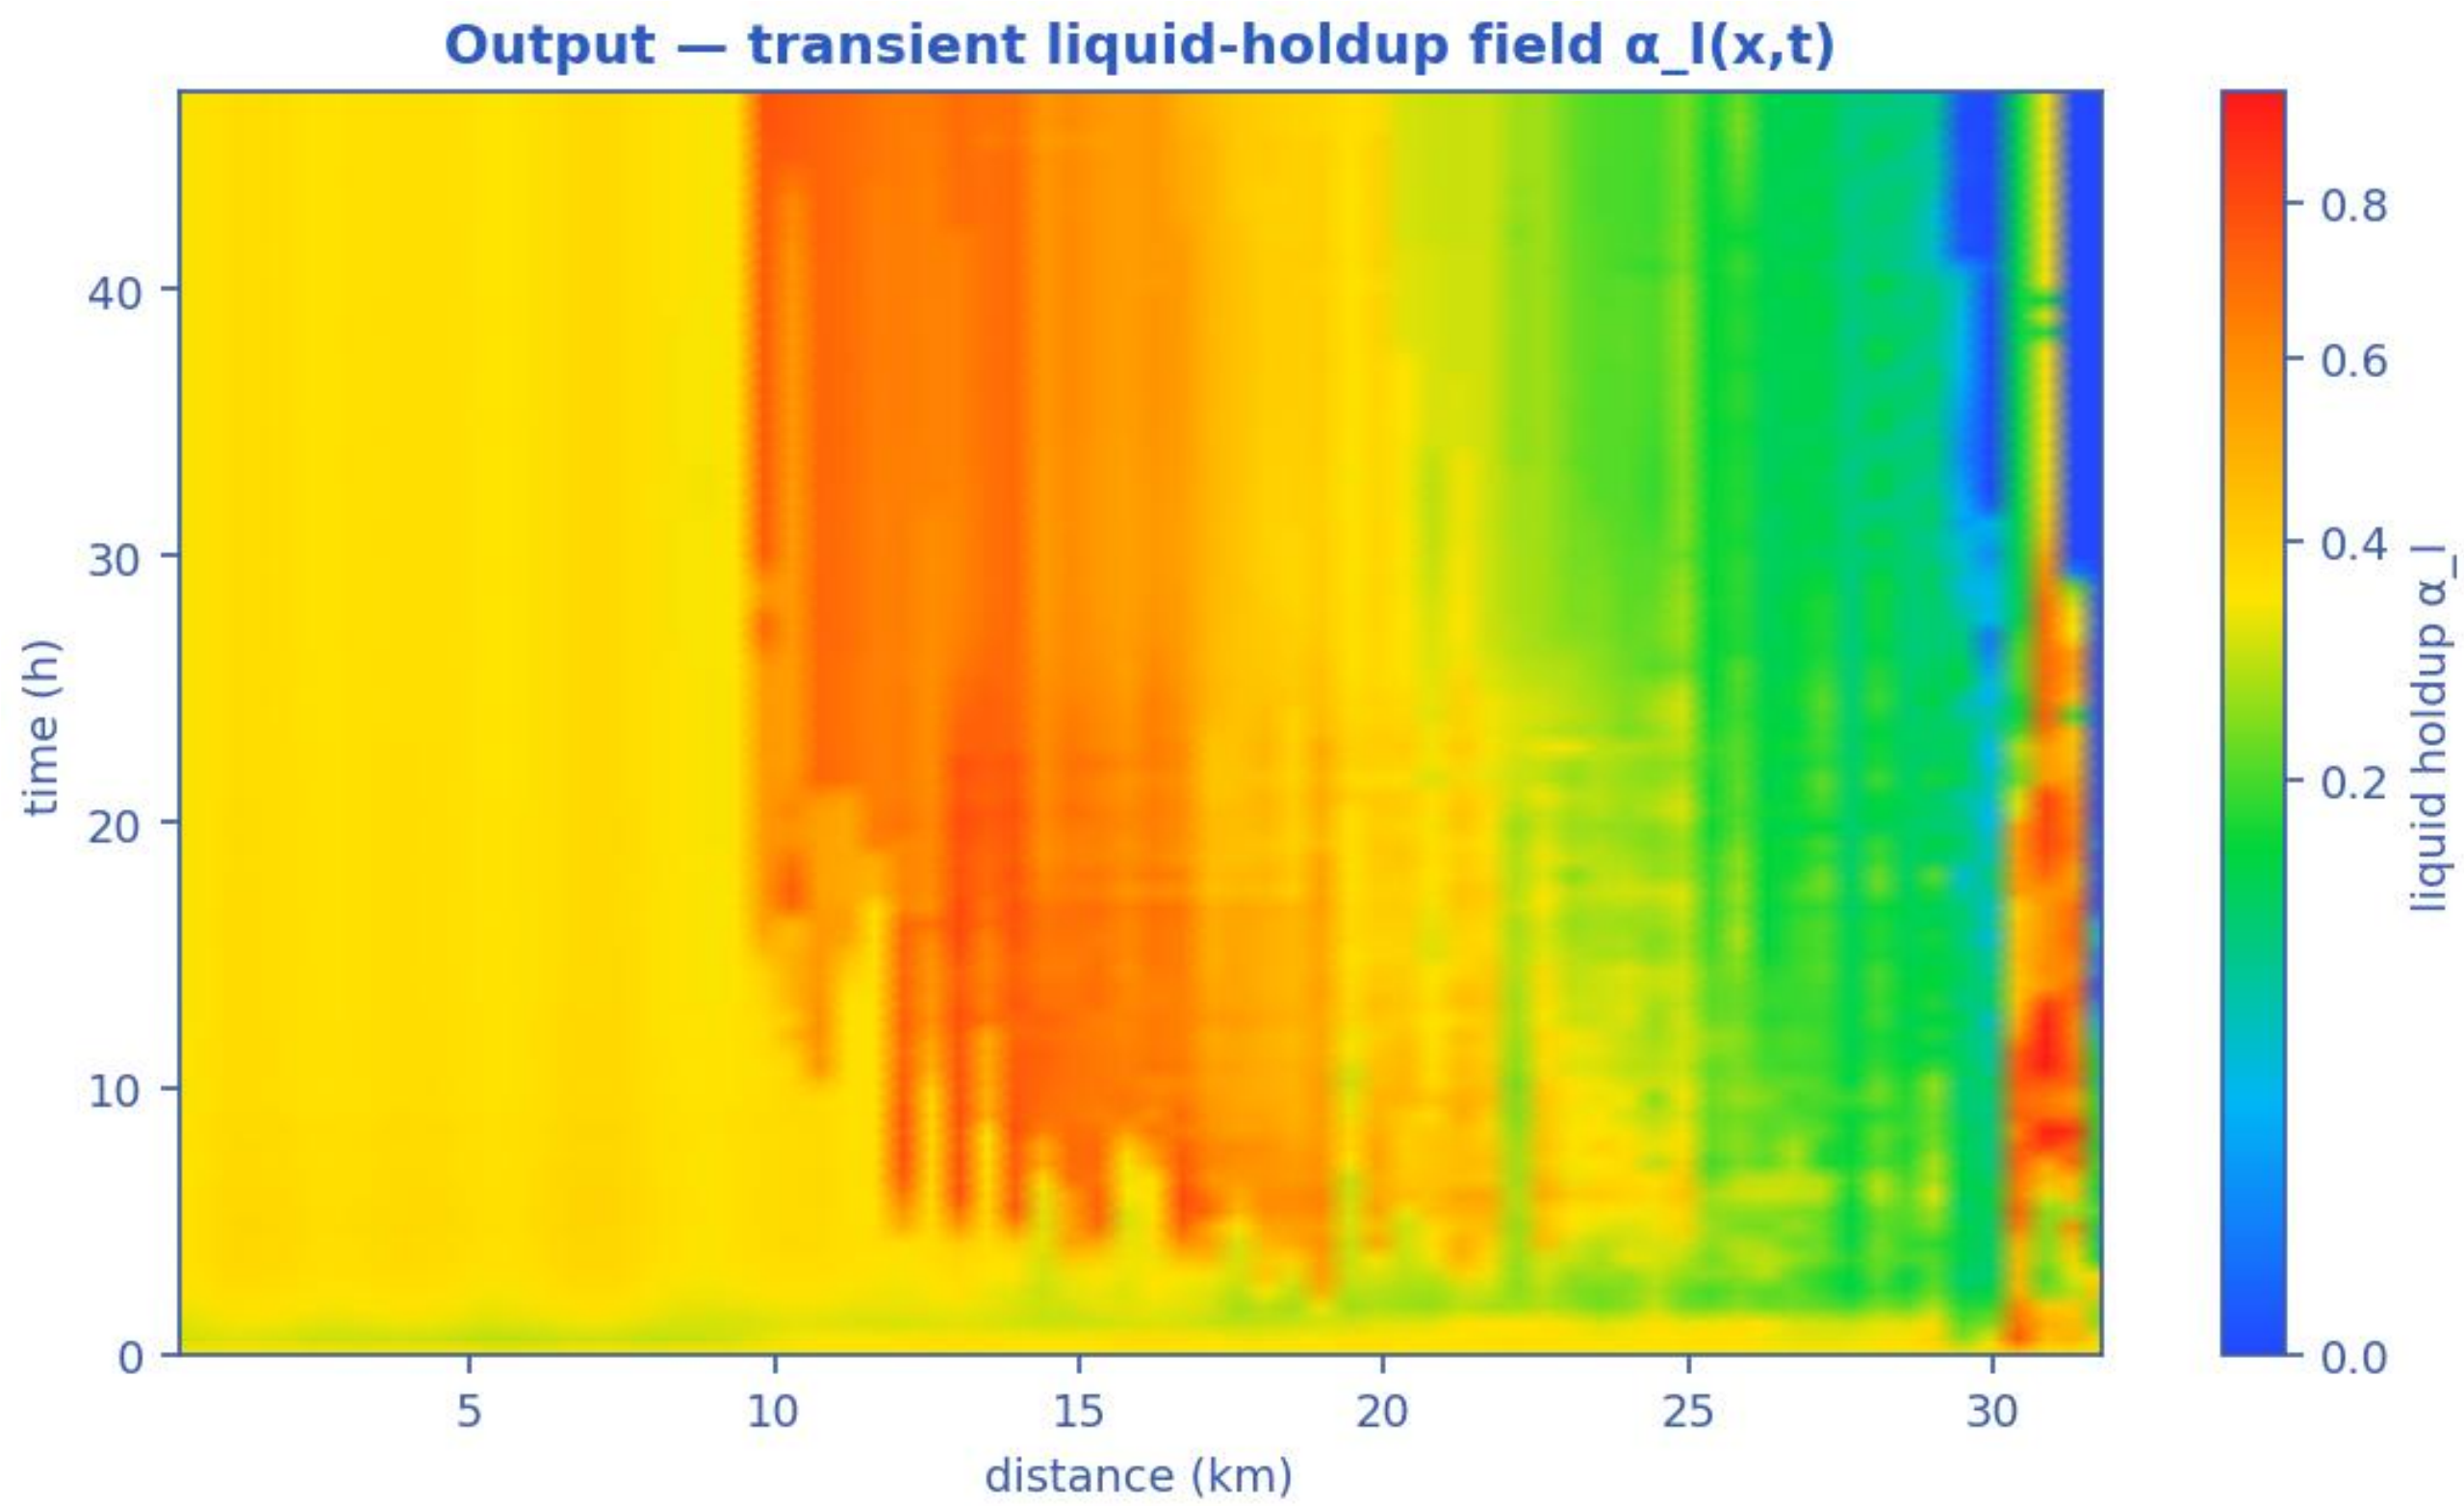


*Hydrate-formation prediction: production AND shut-in P–T trajectories overlaid on the hydrate envelope. [as-operated]*

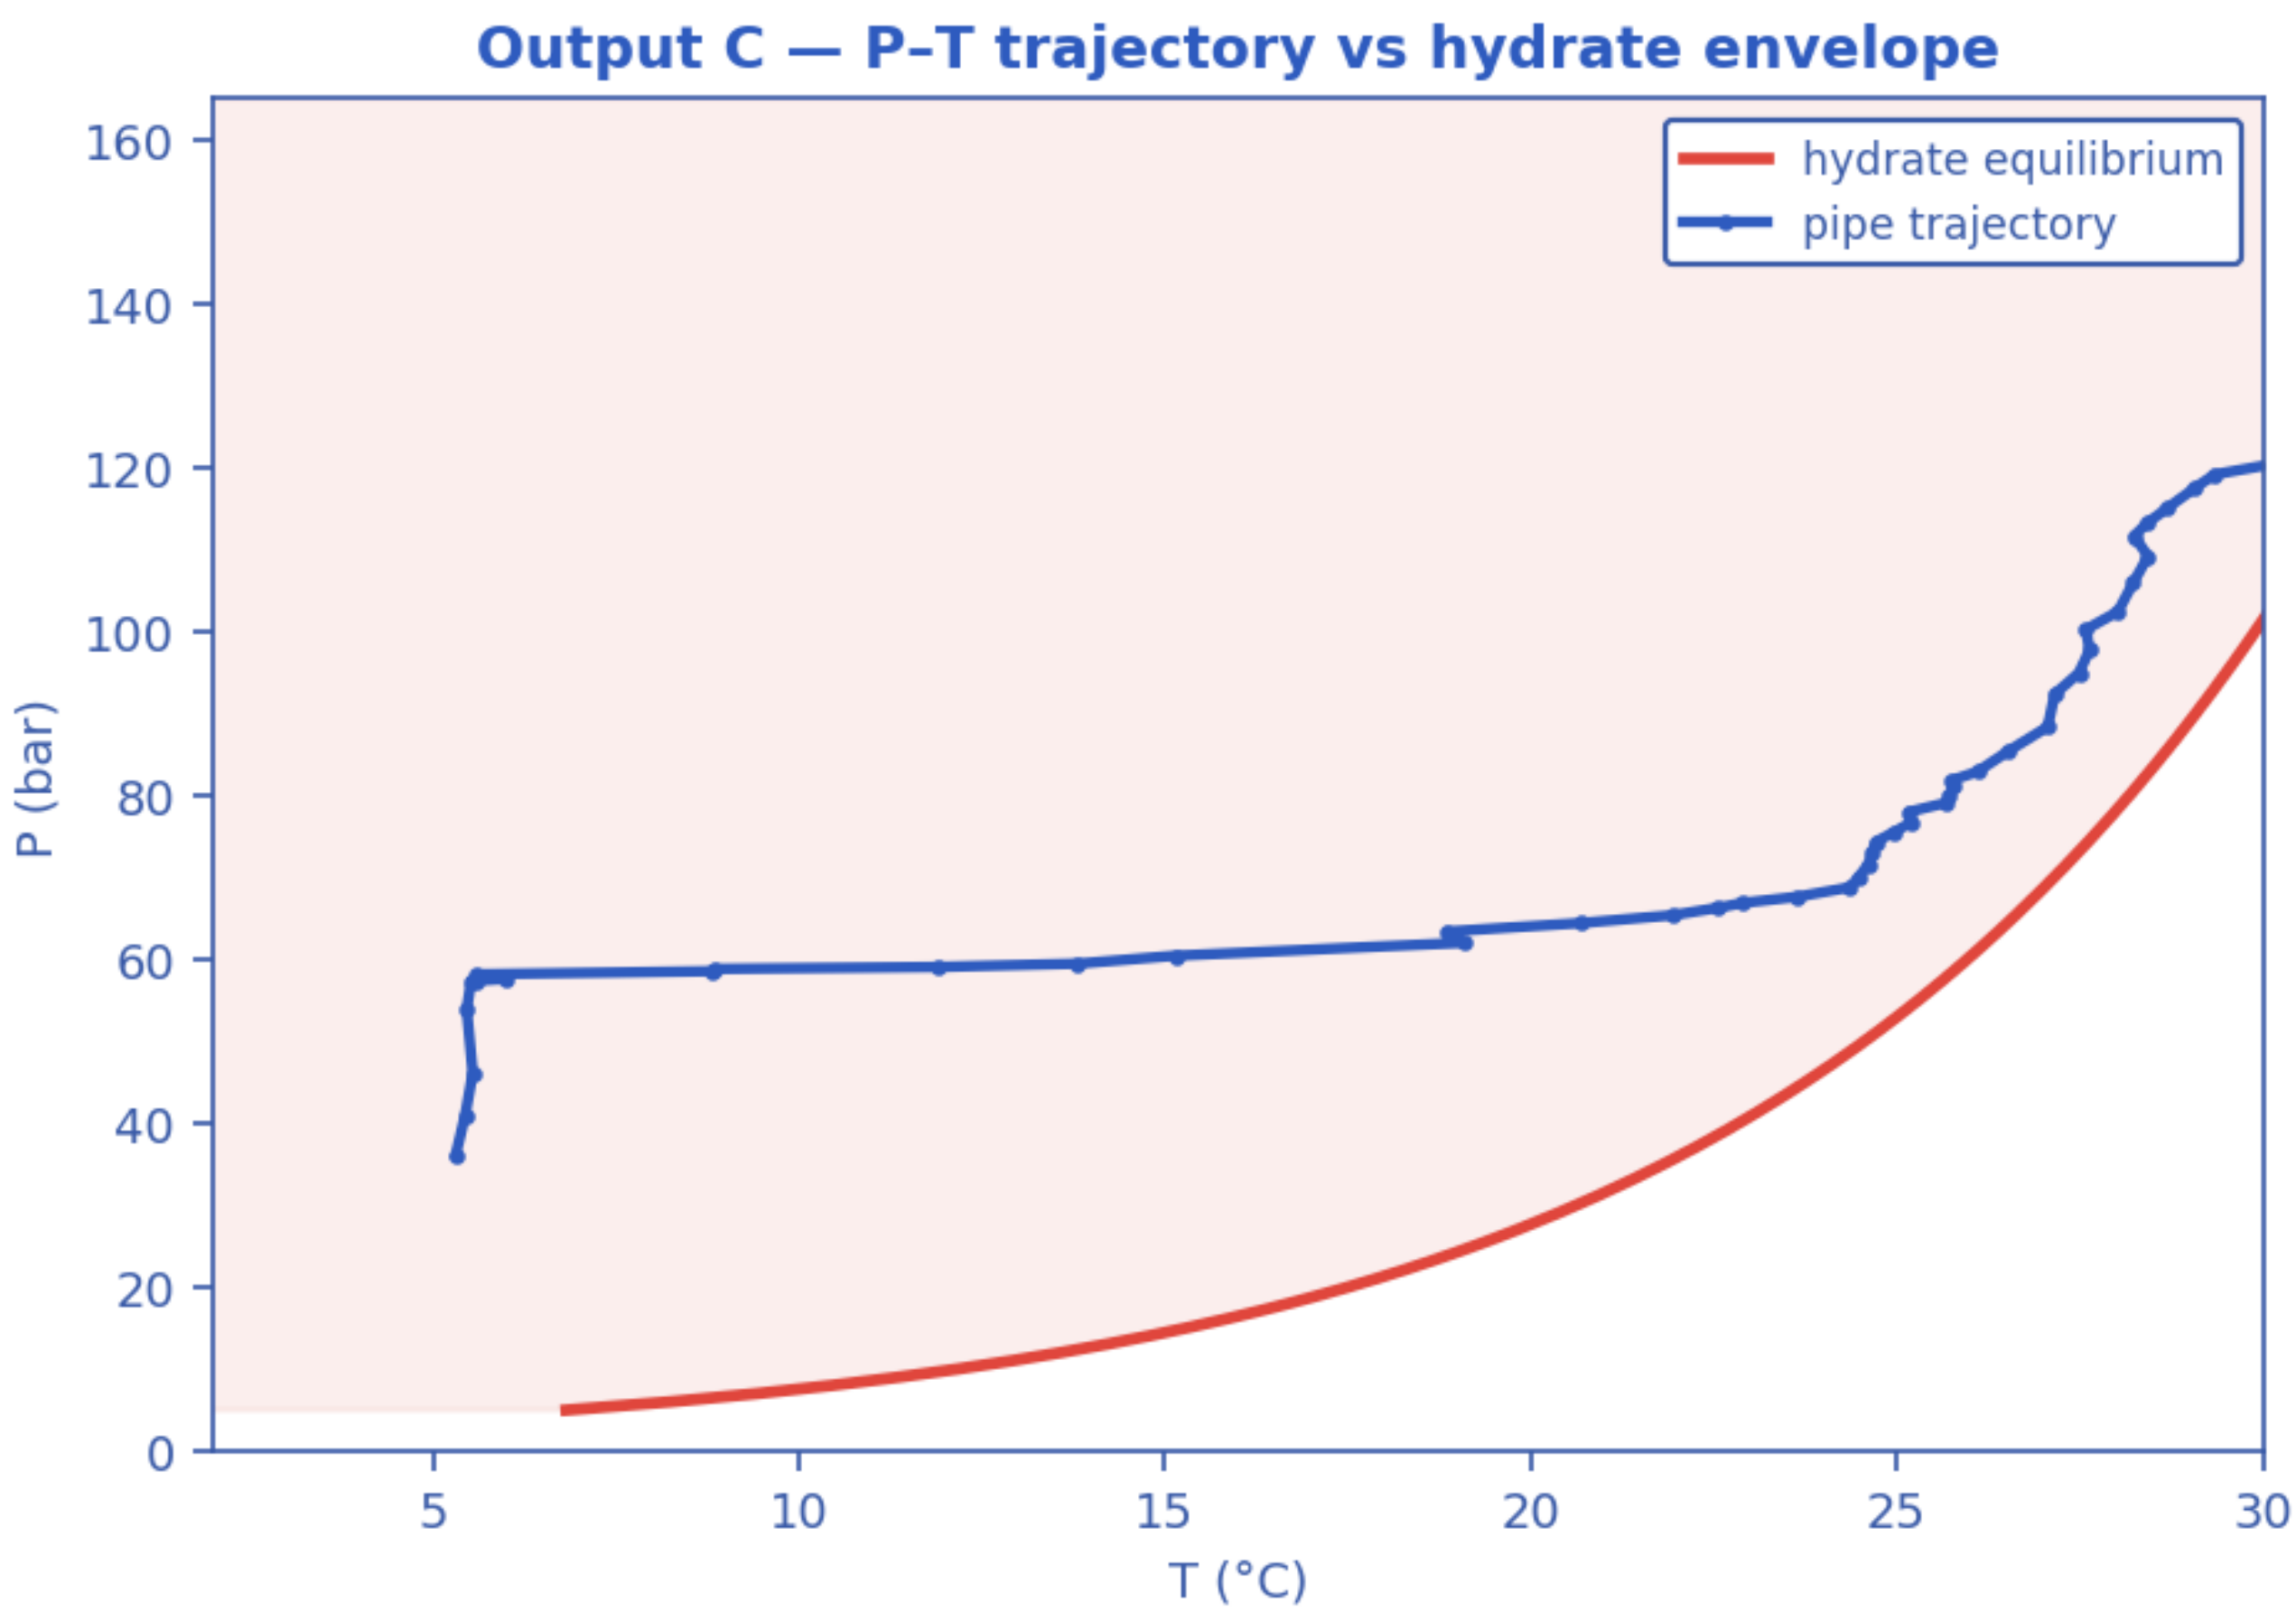


*Slug–Hydrate coupling-criticality map Φ_SH(x,t); the Φ_SH = 1 contour separates slug-scoured from plugging-critical (space-time map). [as-operated]*

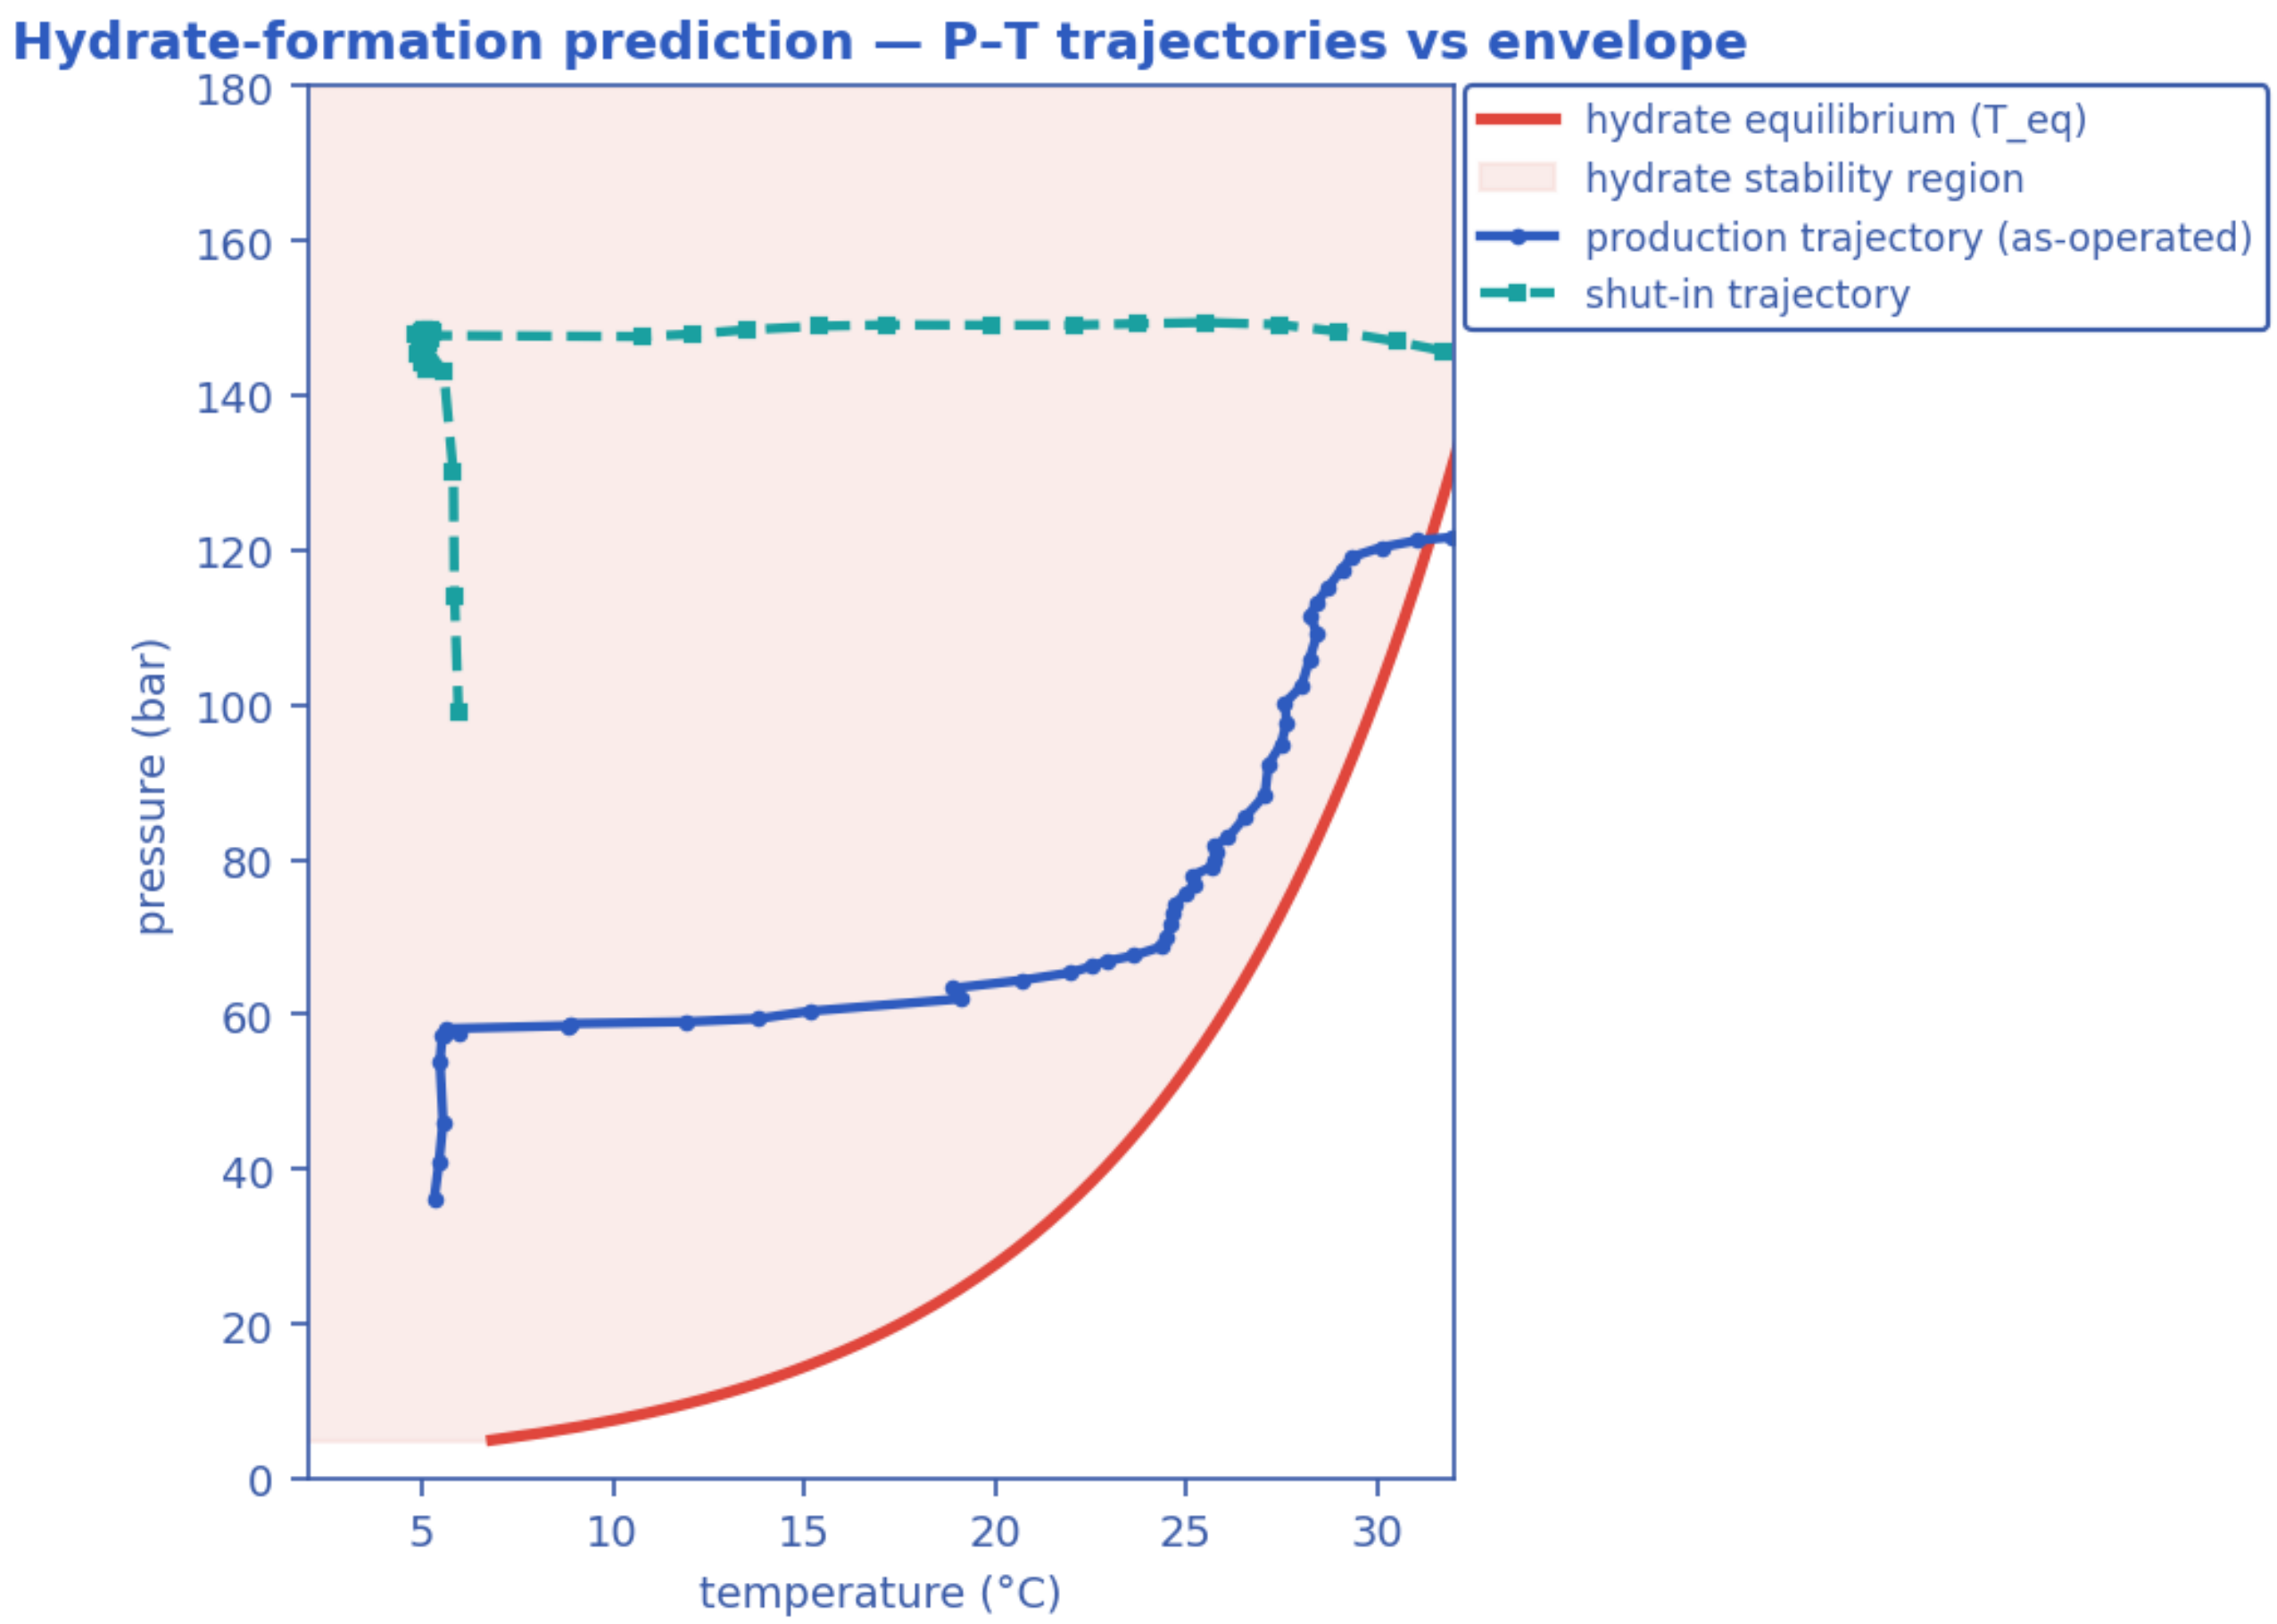


*Monitored-station transient response vs time (curves). [as-operated]*

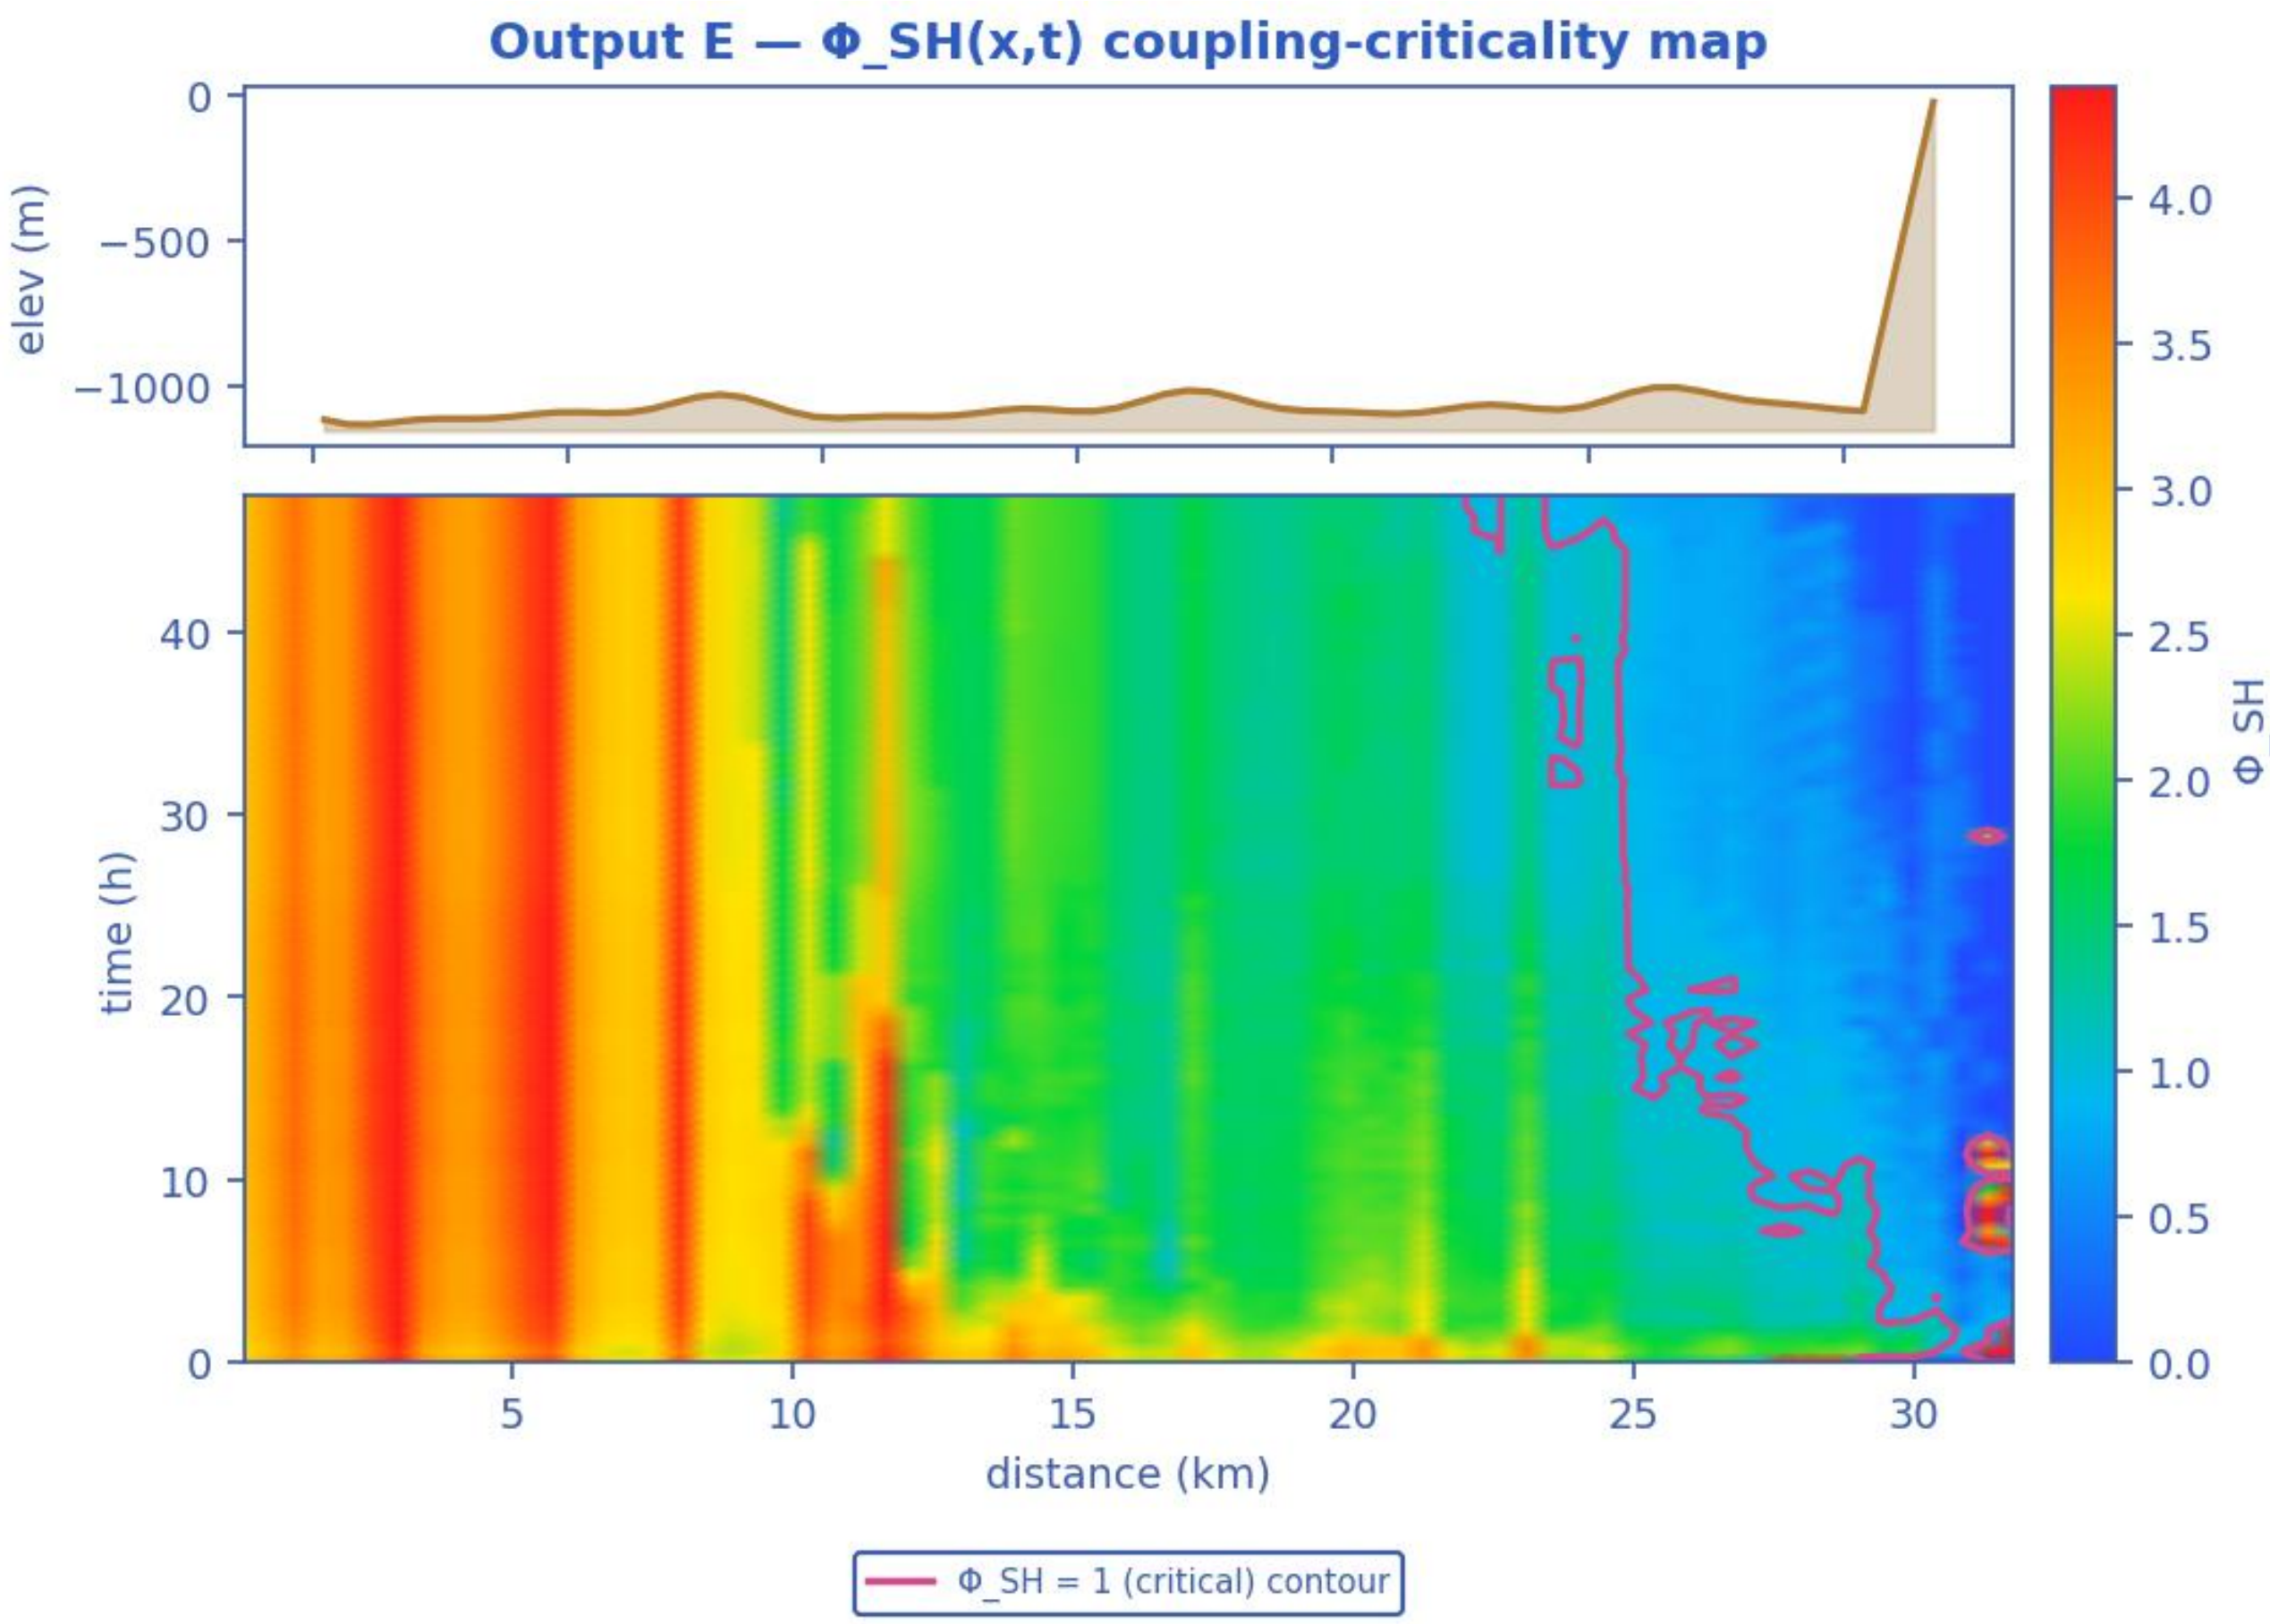


*Wall-deposit growth at the monitor station vs time (curve). [as-operated]*

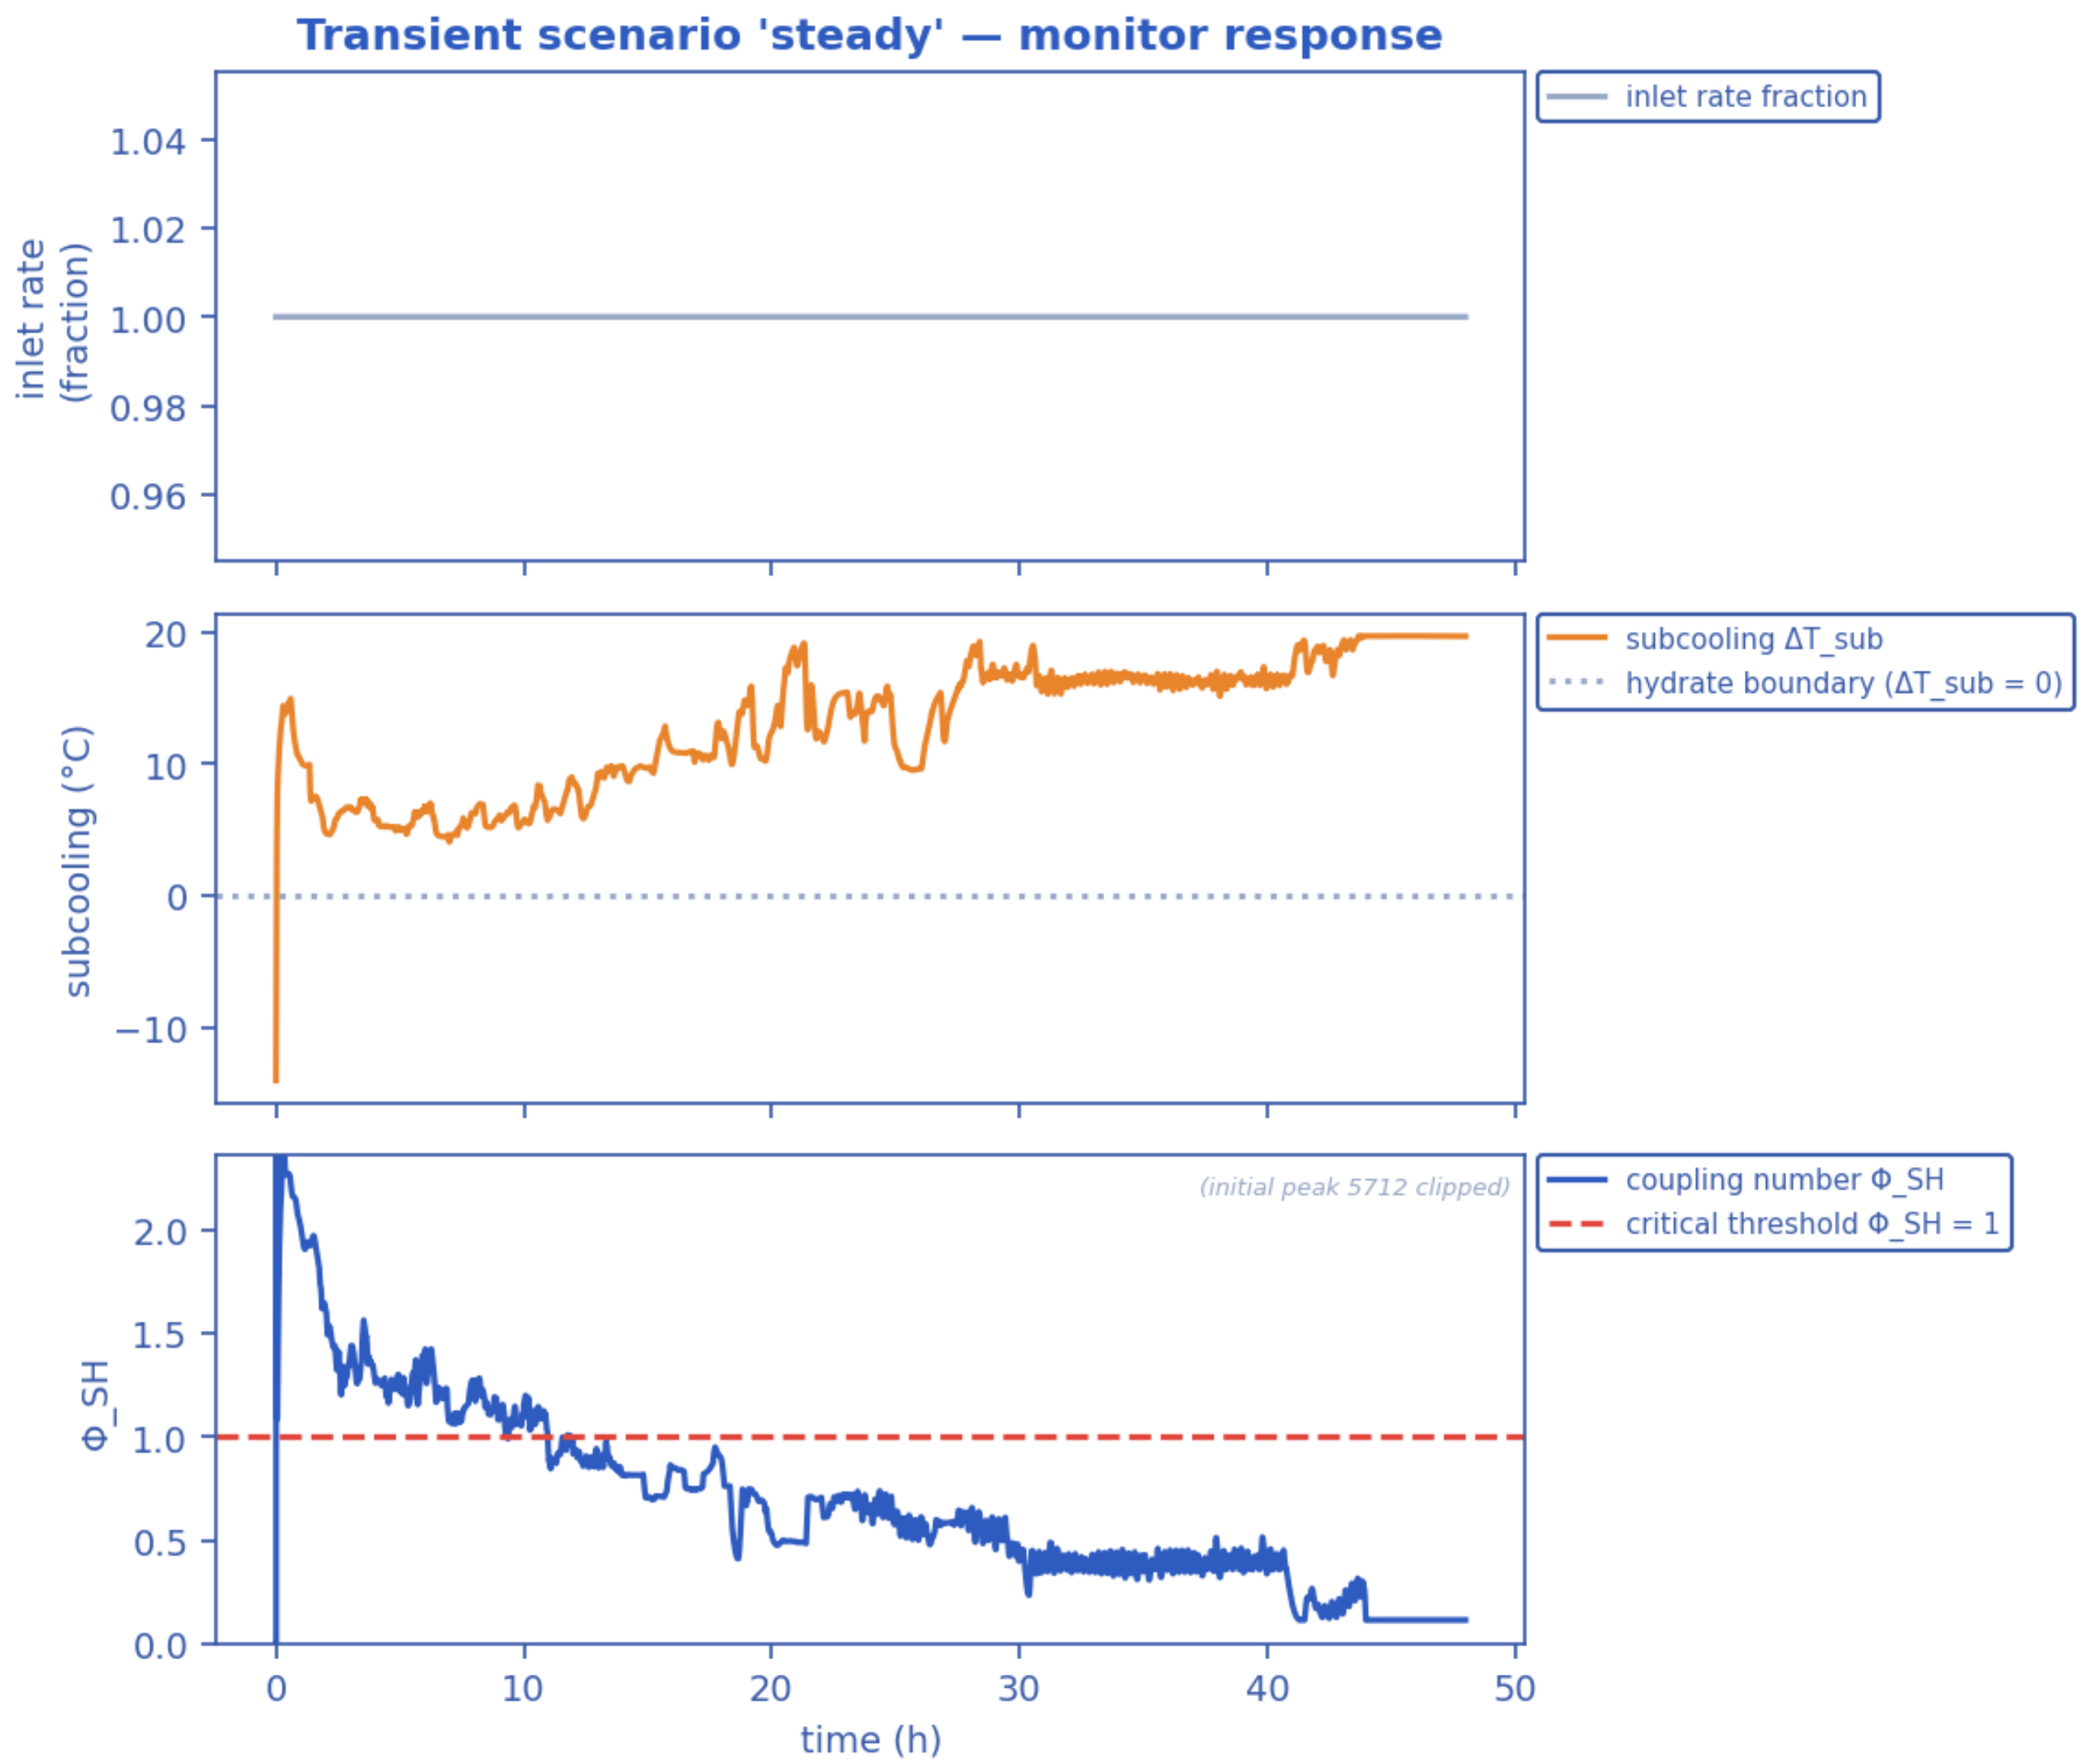


*Probabilistic time-to-plug CDF and the max-Φ_SH P10–P90 uncertainty band (Monte-Carlo ensemble). [as-operated]*

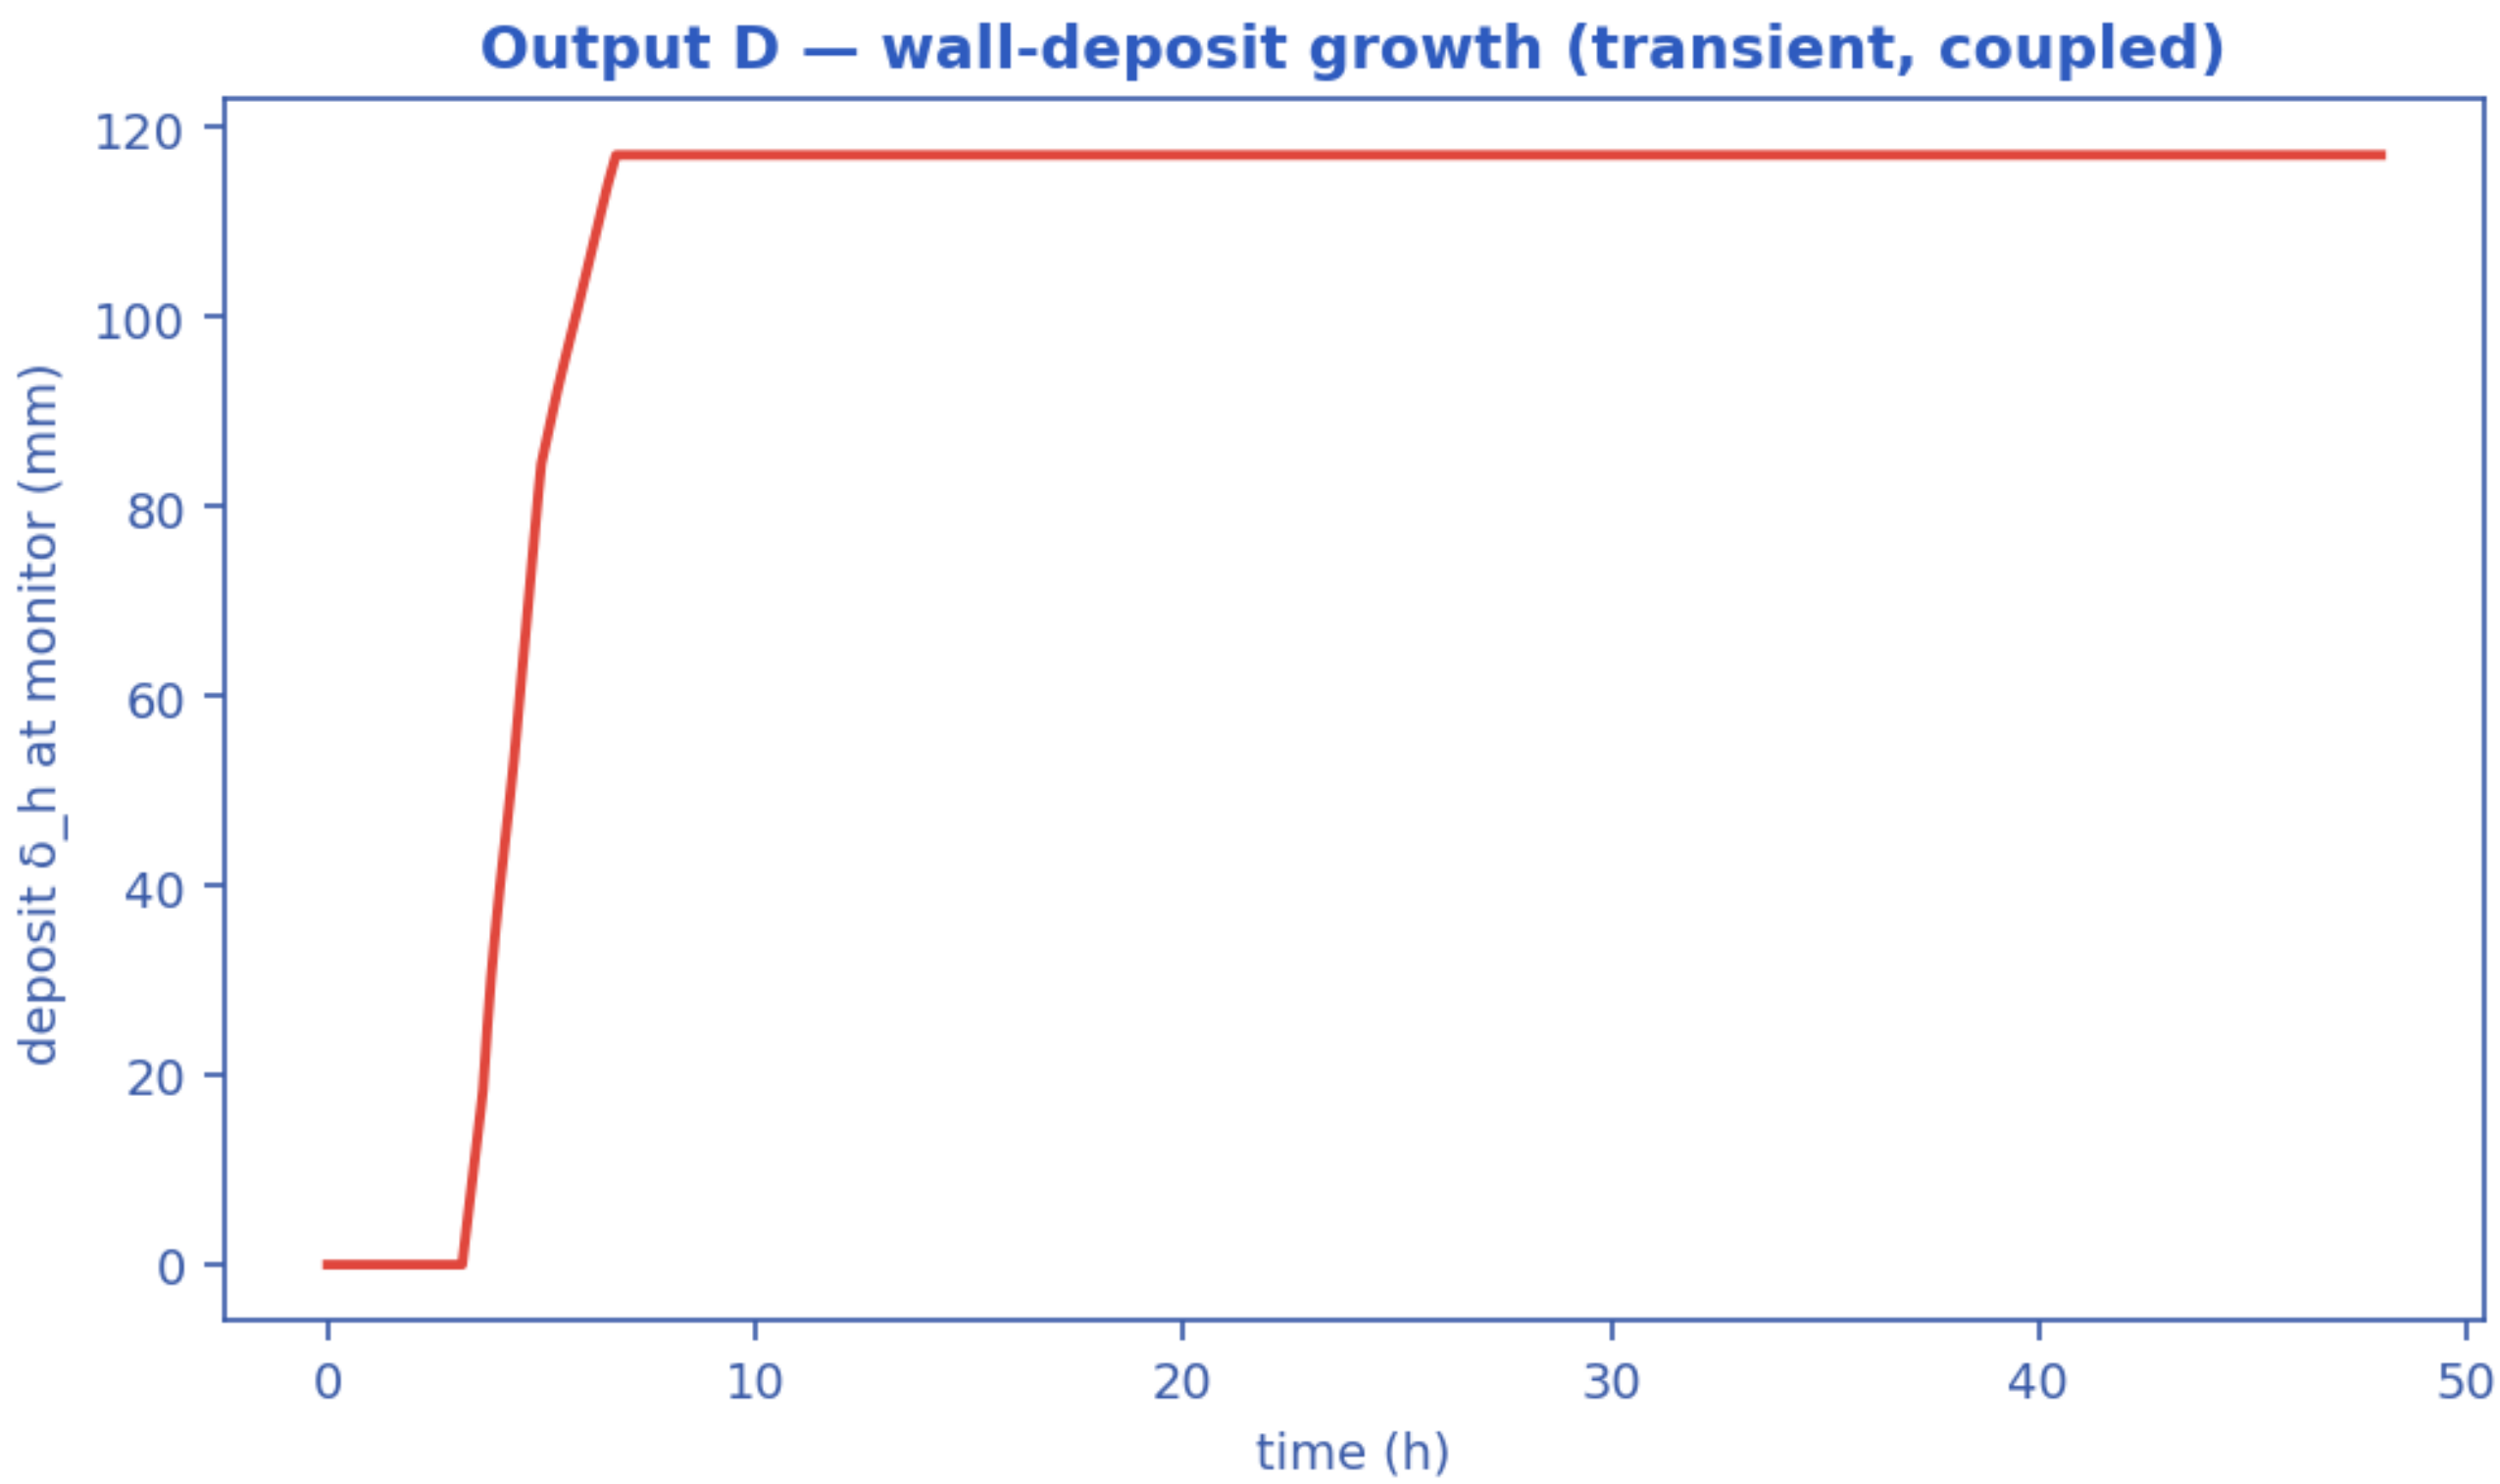


*Solver diagnostics: liquid & gas mass balances, clip activity, slug length and numerical consistency.  [as-operated]*

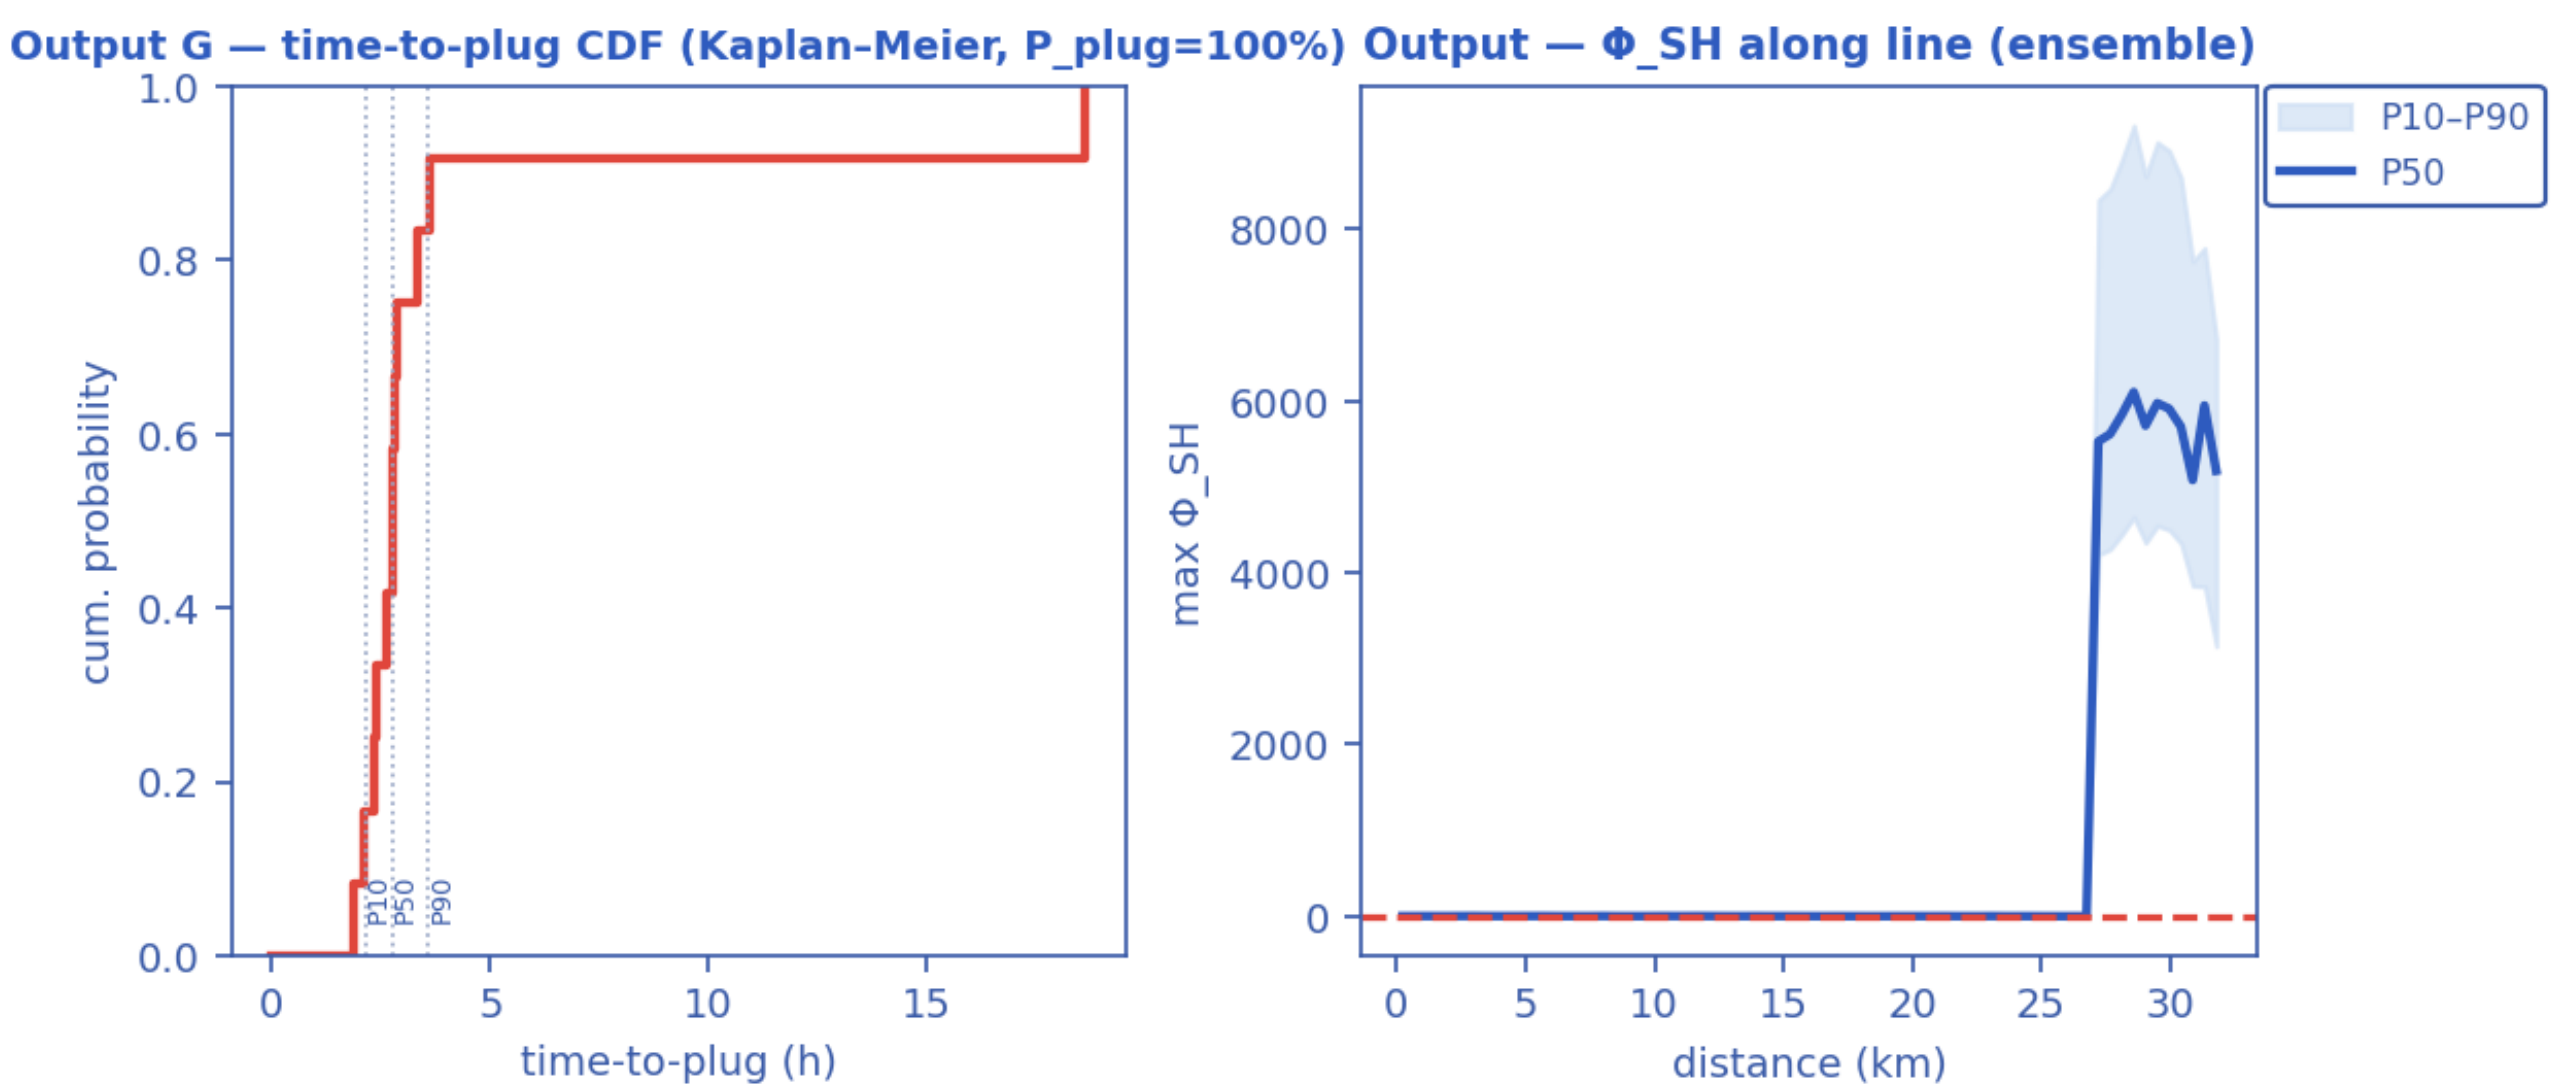


*Quasi-3-D cross-section geometry reconstructed along the line (curves). [as-operated]*

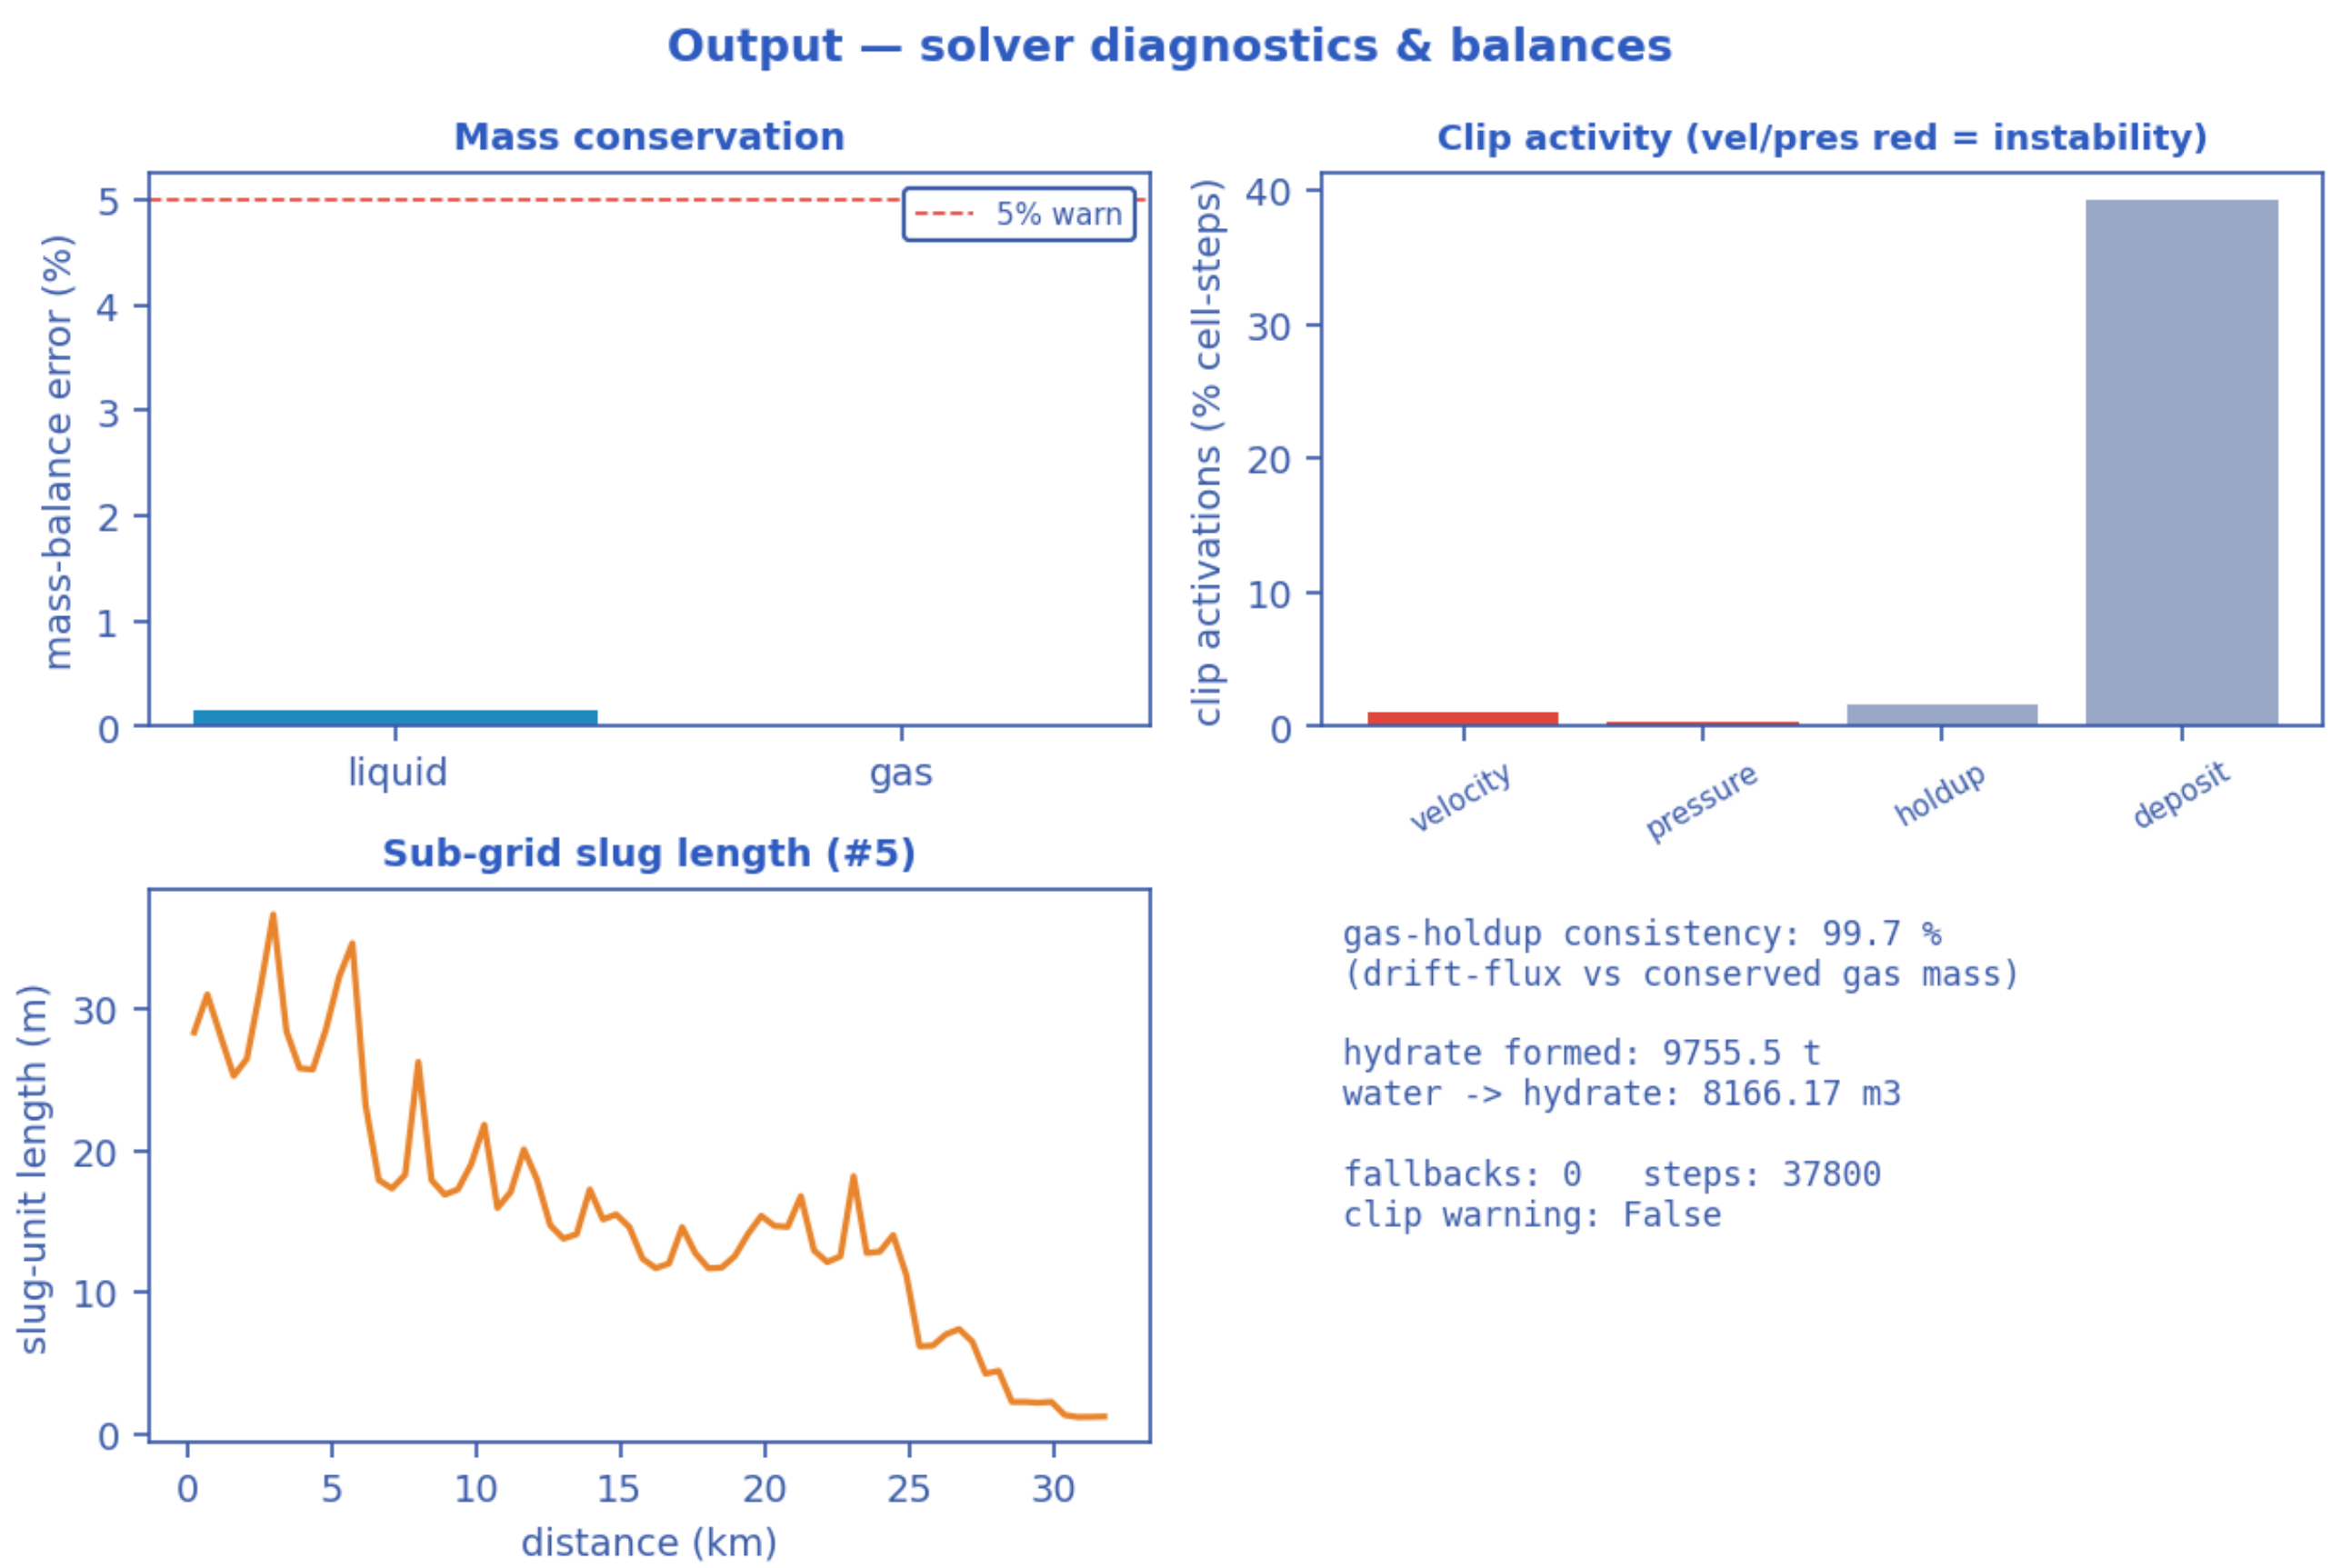


*Azimuthal (bottom-of-line) wall-deposit map around the pipe circumference along the route (contour map).  [as-operated]*

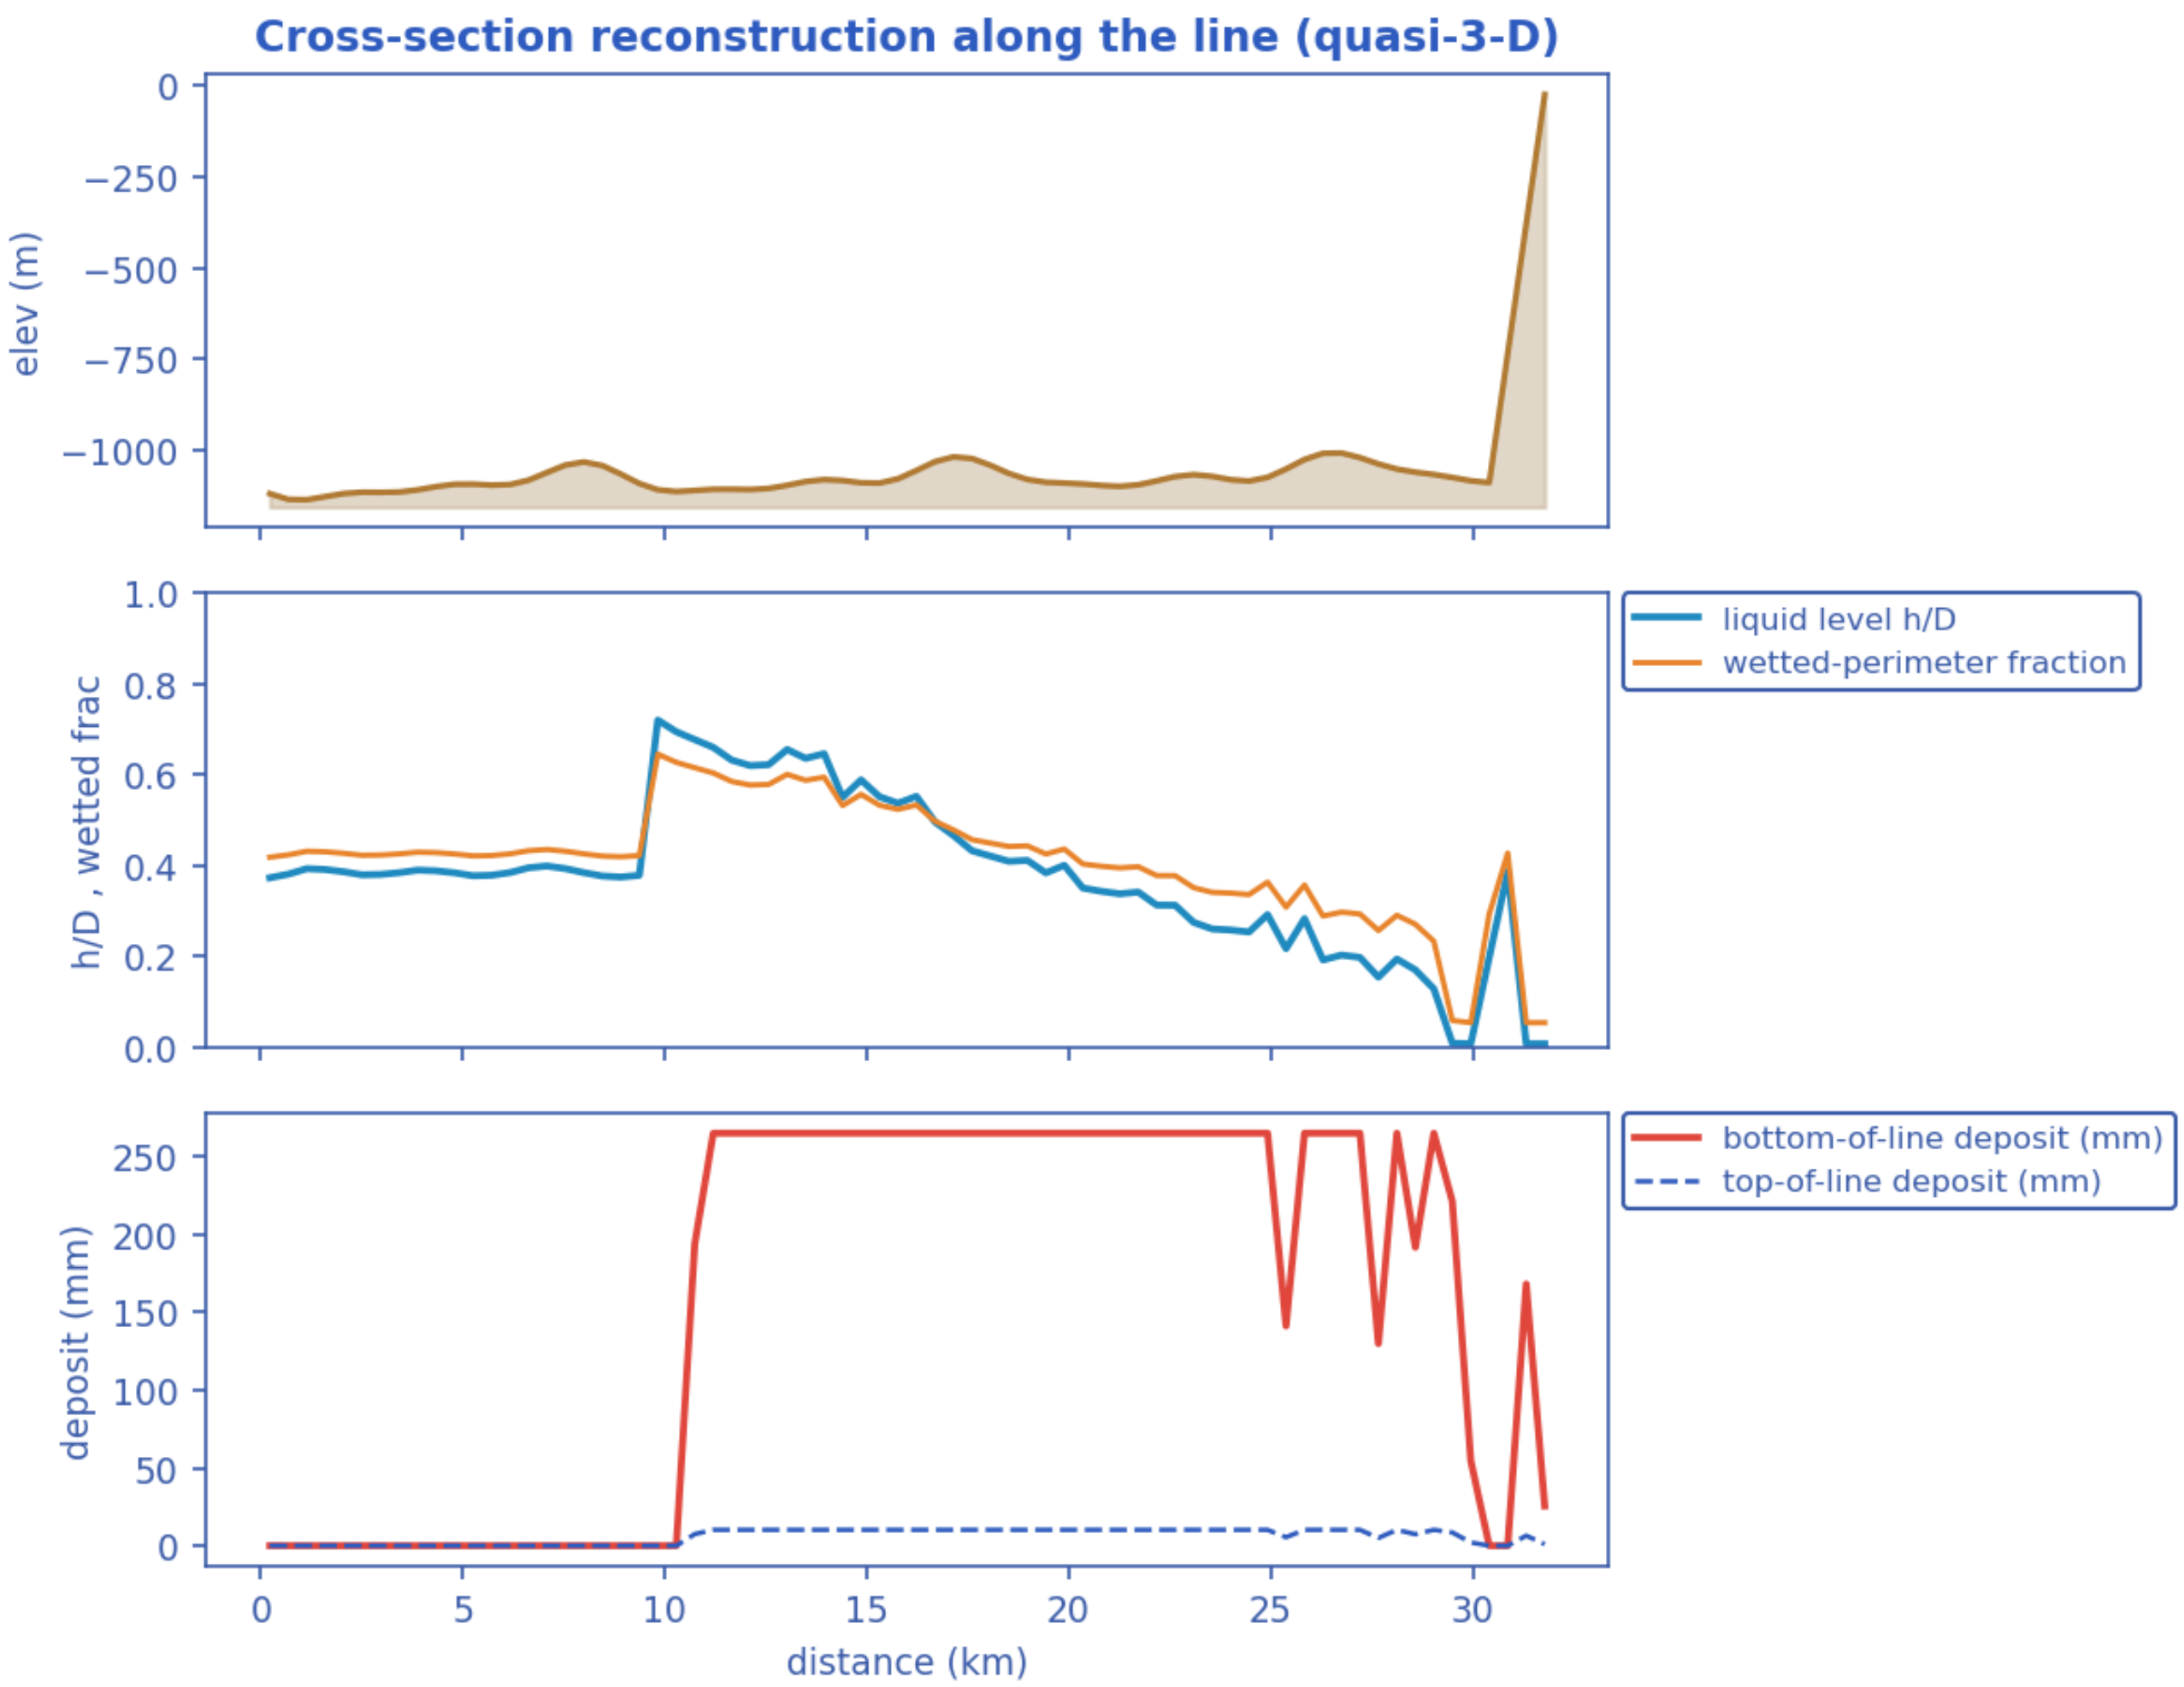


*2-D pipe cross-section reconstructions at selected stations (holdup level + deposit ring).  [as-operated]*

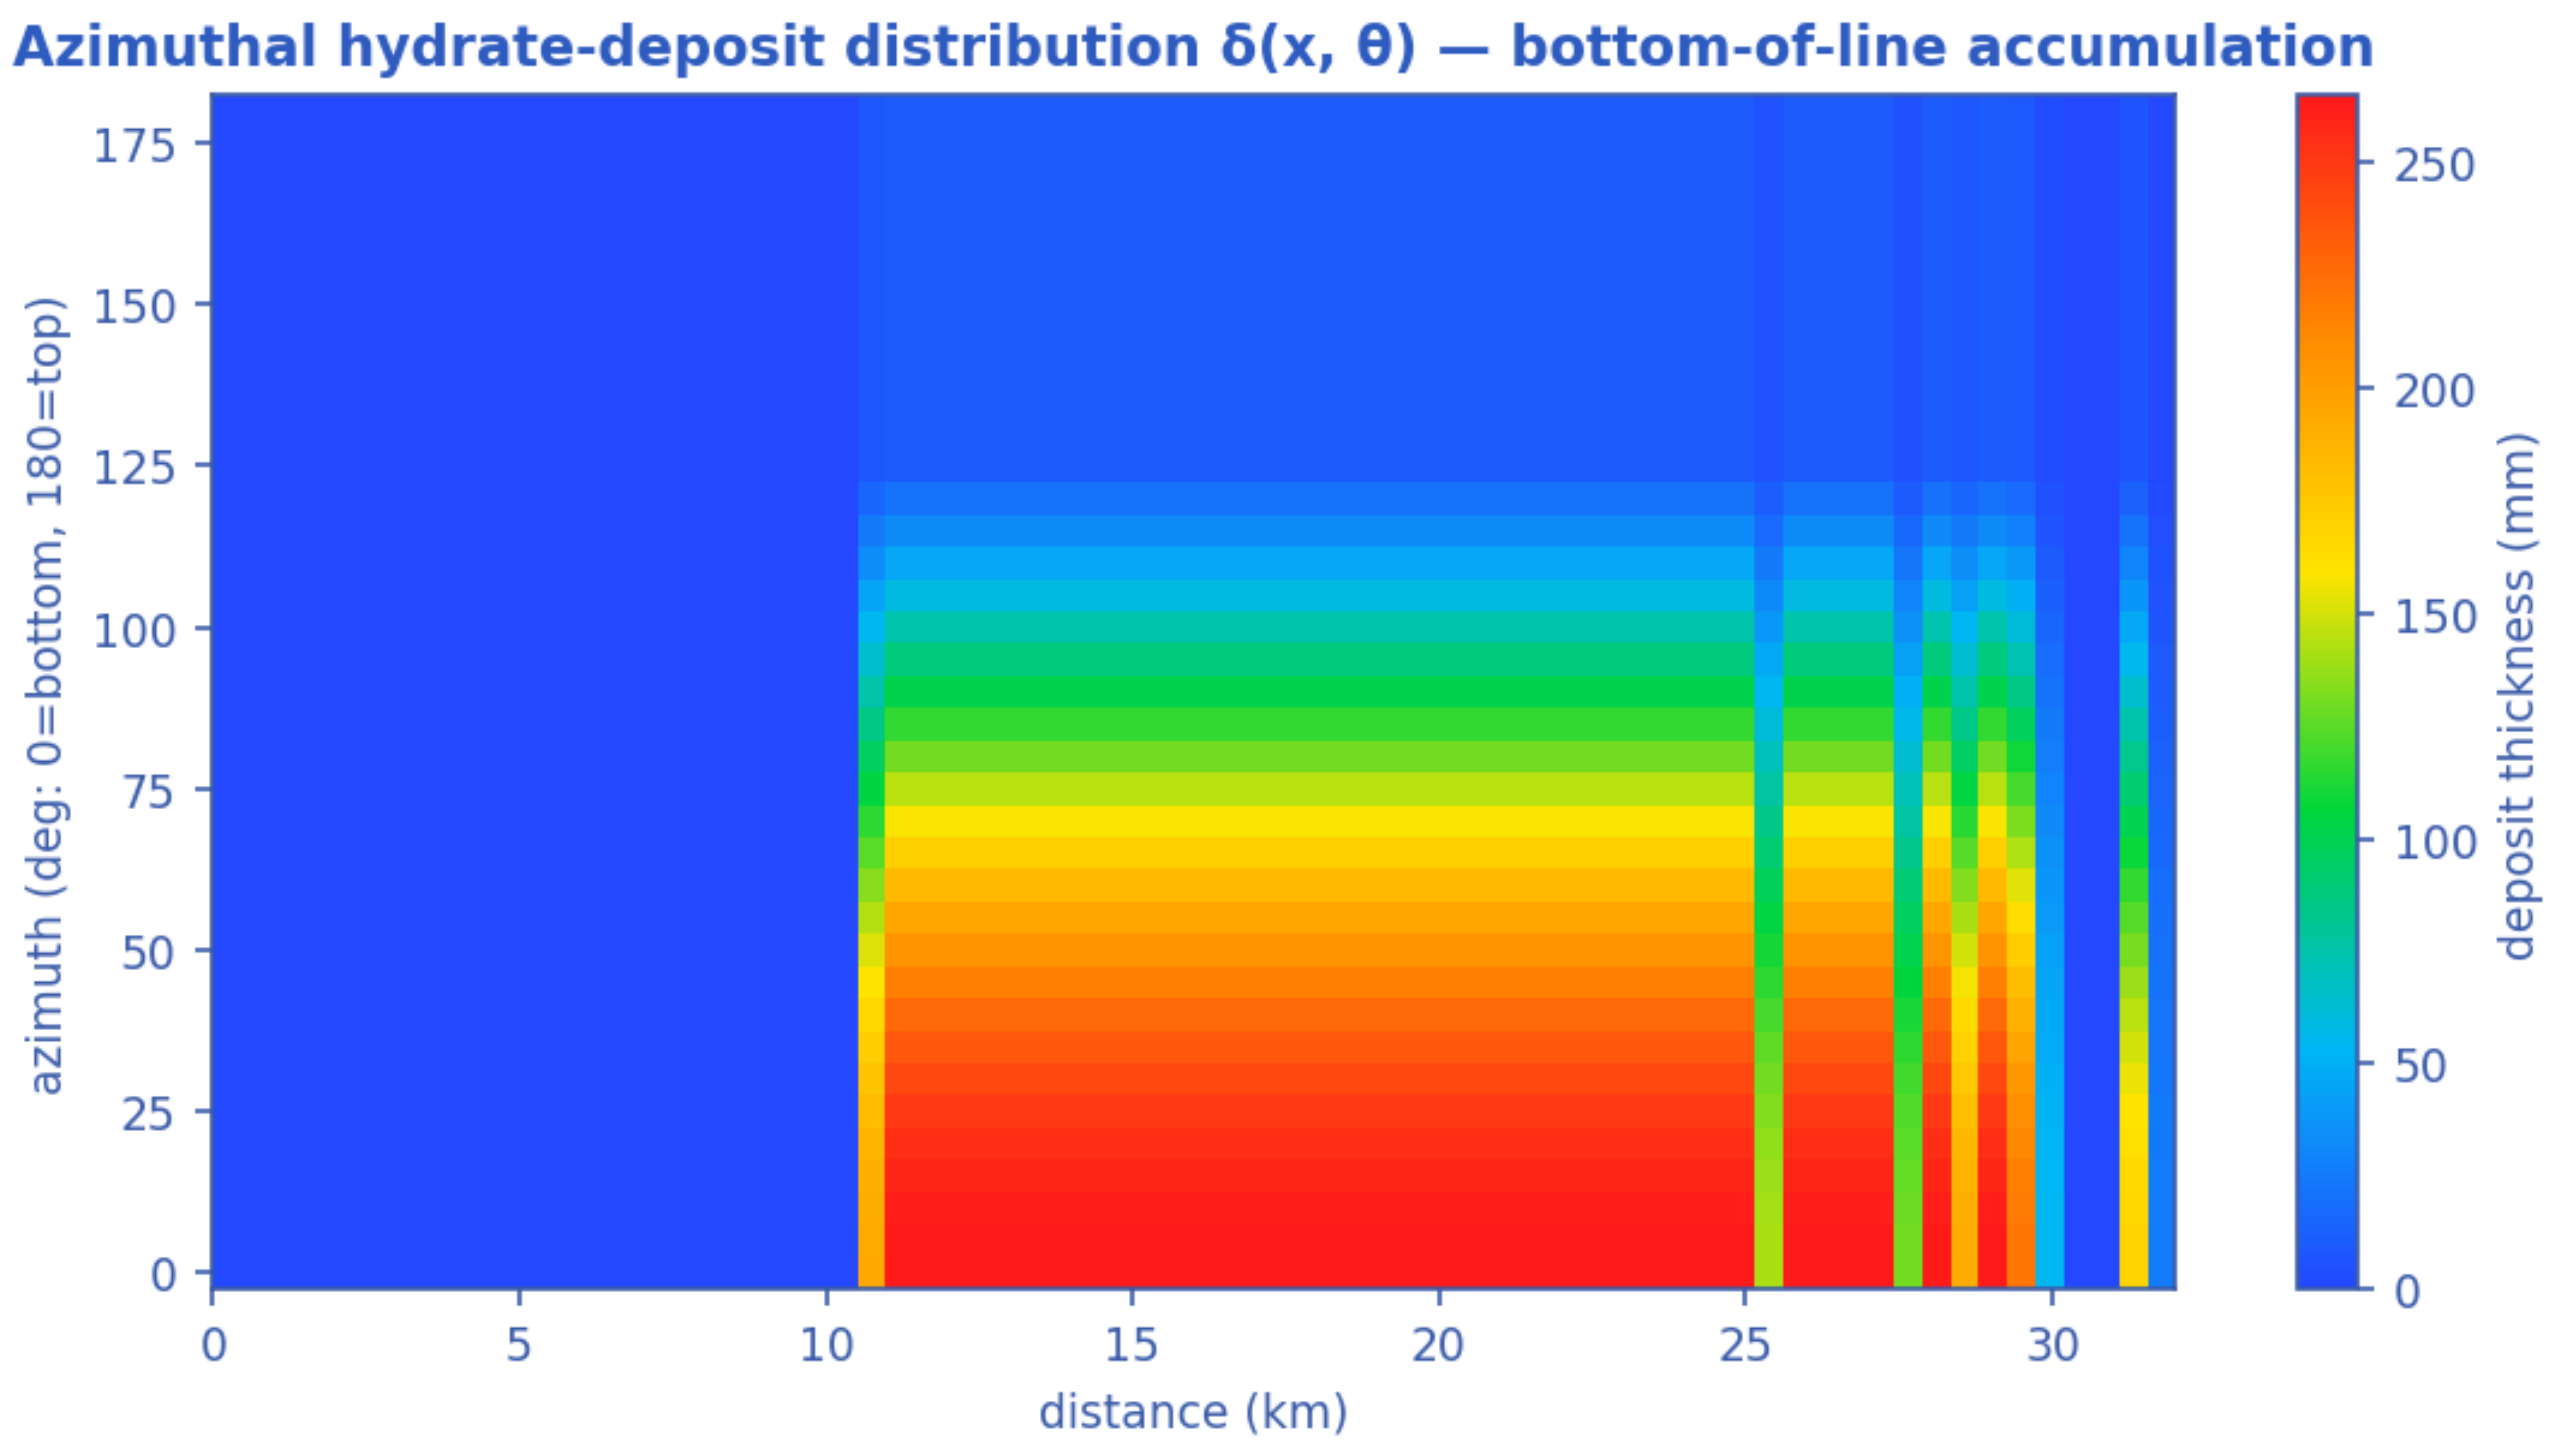


*Compositional PVT tracking along the line (Peng–Robinson flash): gas/liquid split, K-values, densities.  [as-operated]*

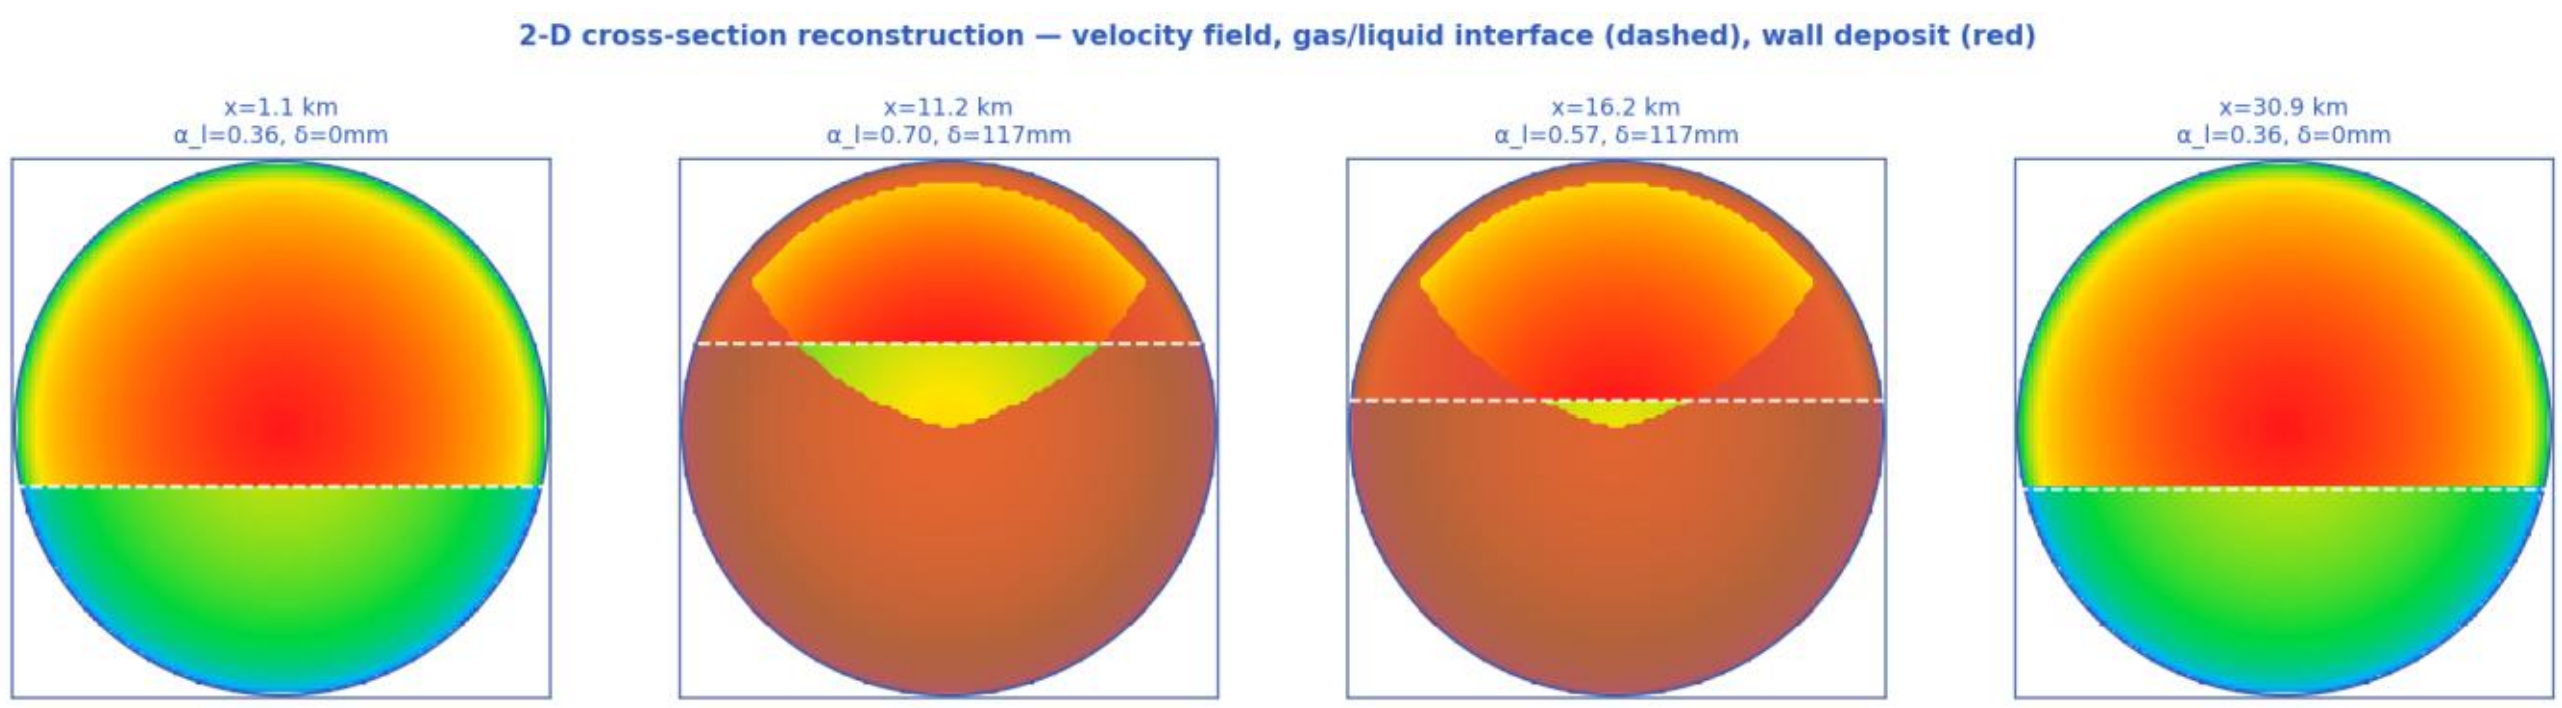


*Compositional grading along the route — preferential depletion of the hydrate-forming light ends.  [as-operated]*

## 3-D reconstructed pipe — hydrate wall-deposit distribution

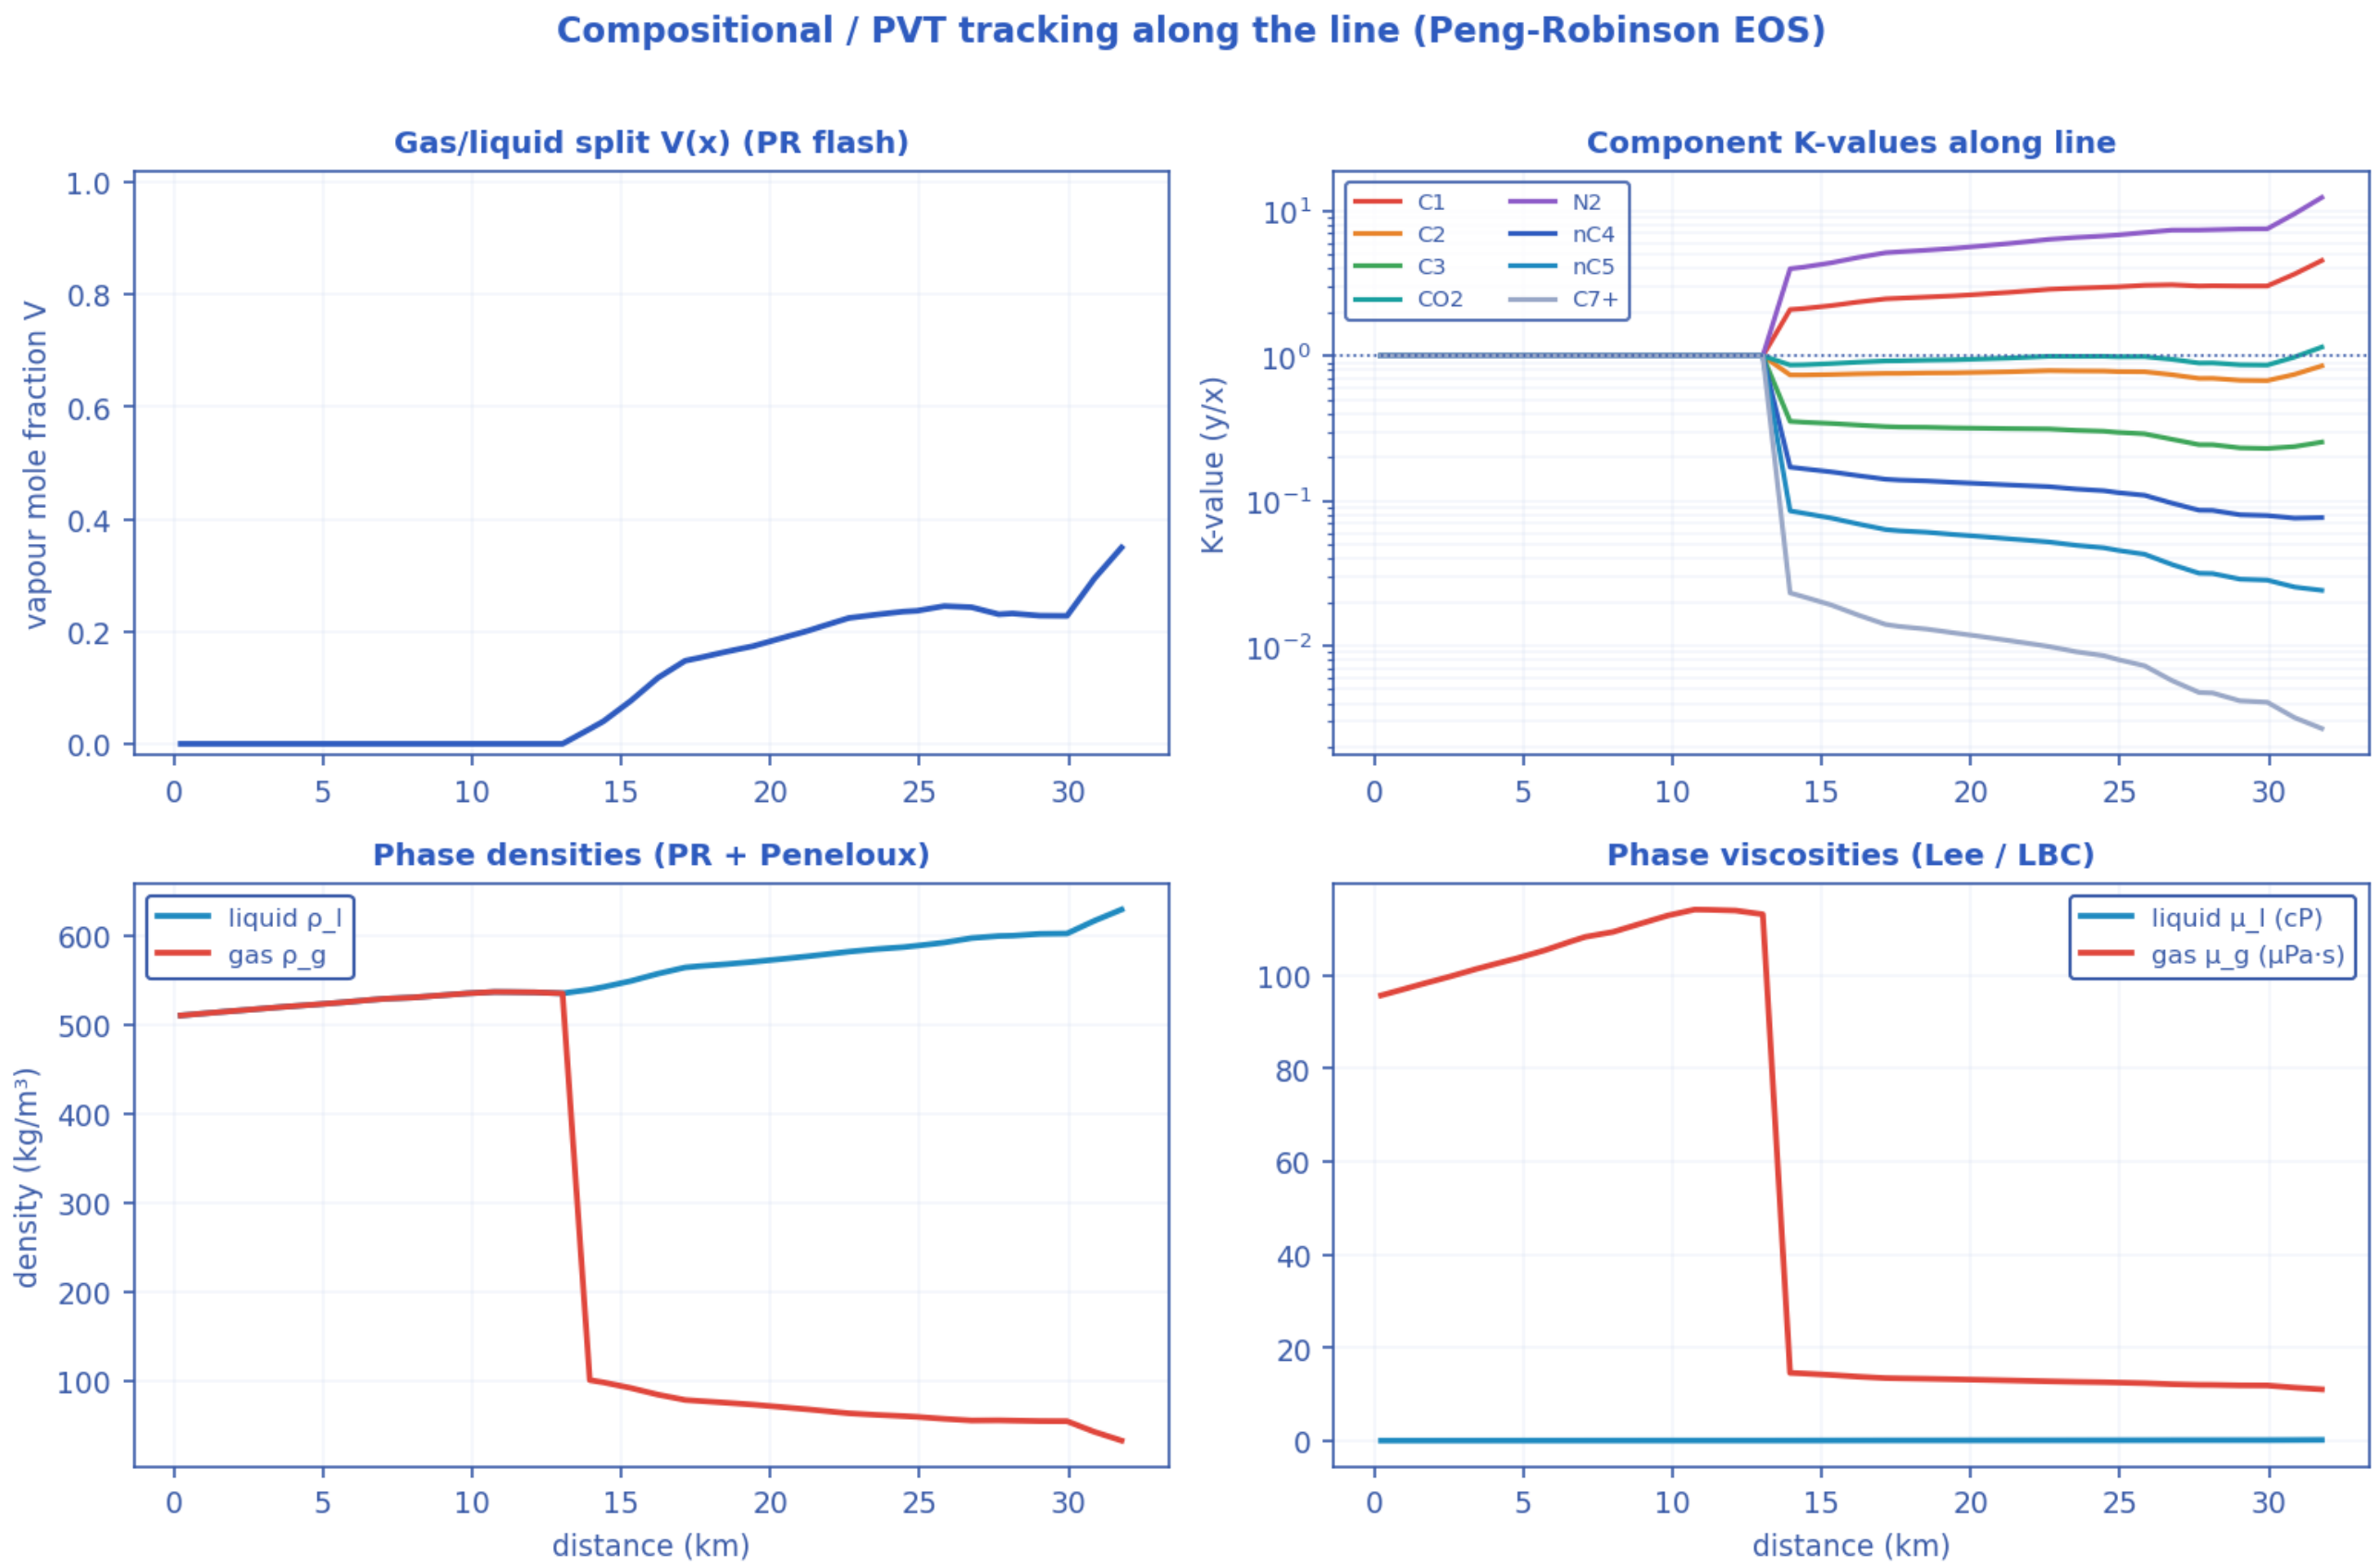


*3-D reconstructed pipe coloured by wall-deposit thickness. [as-operated]*

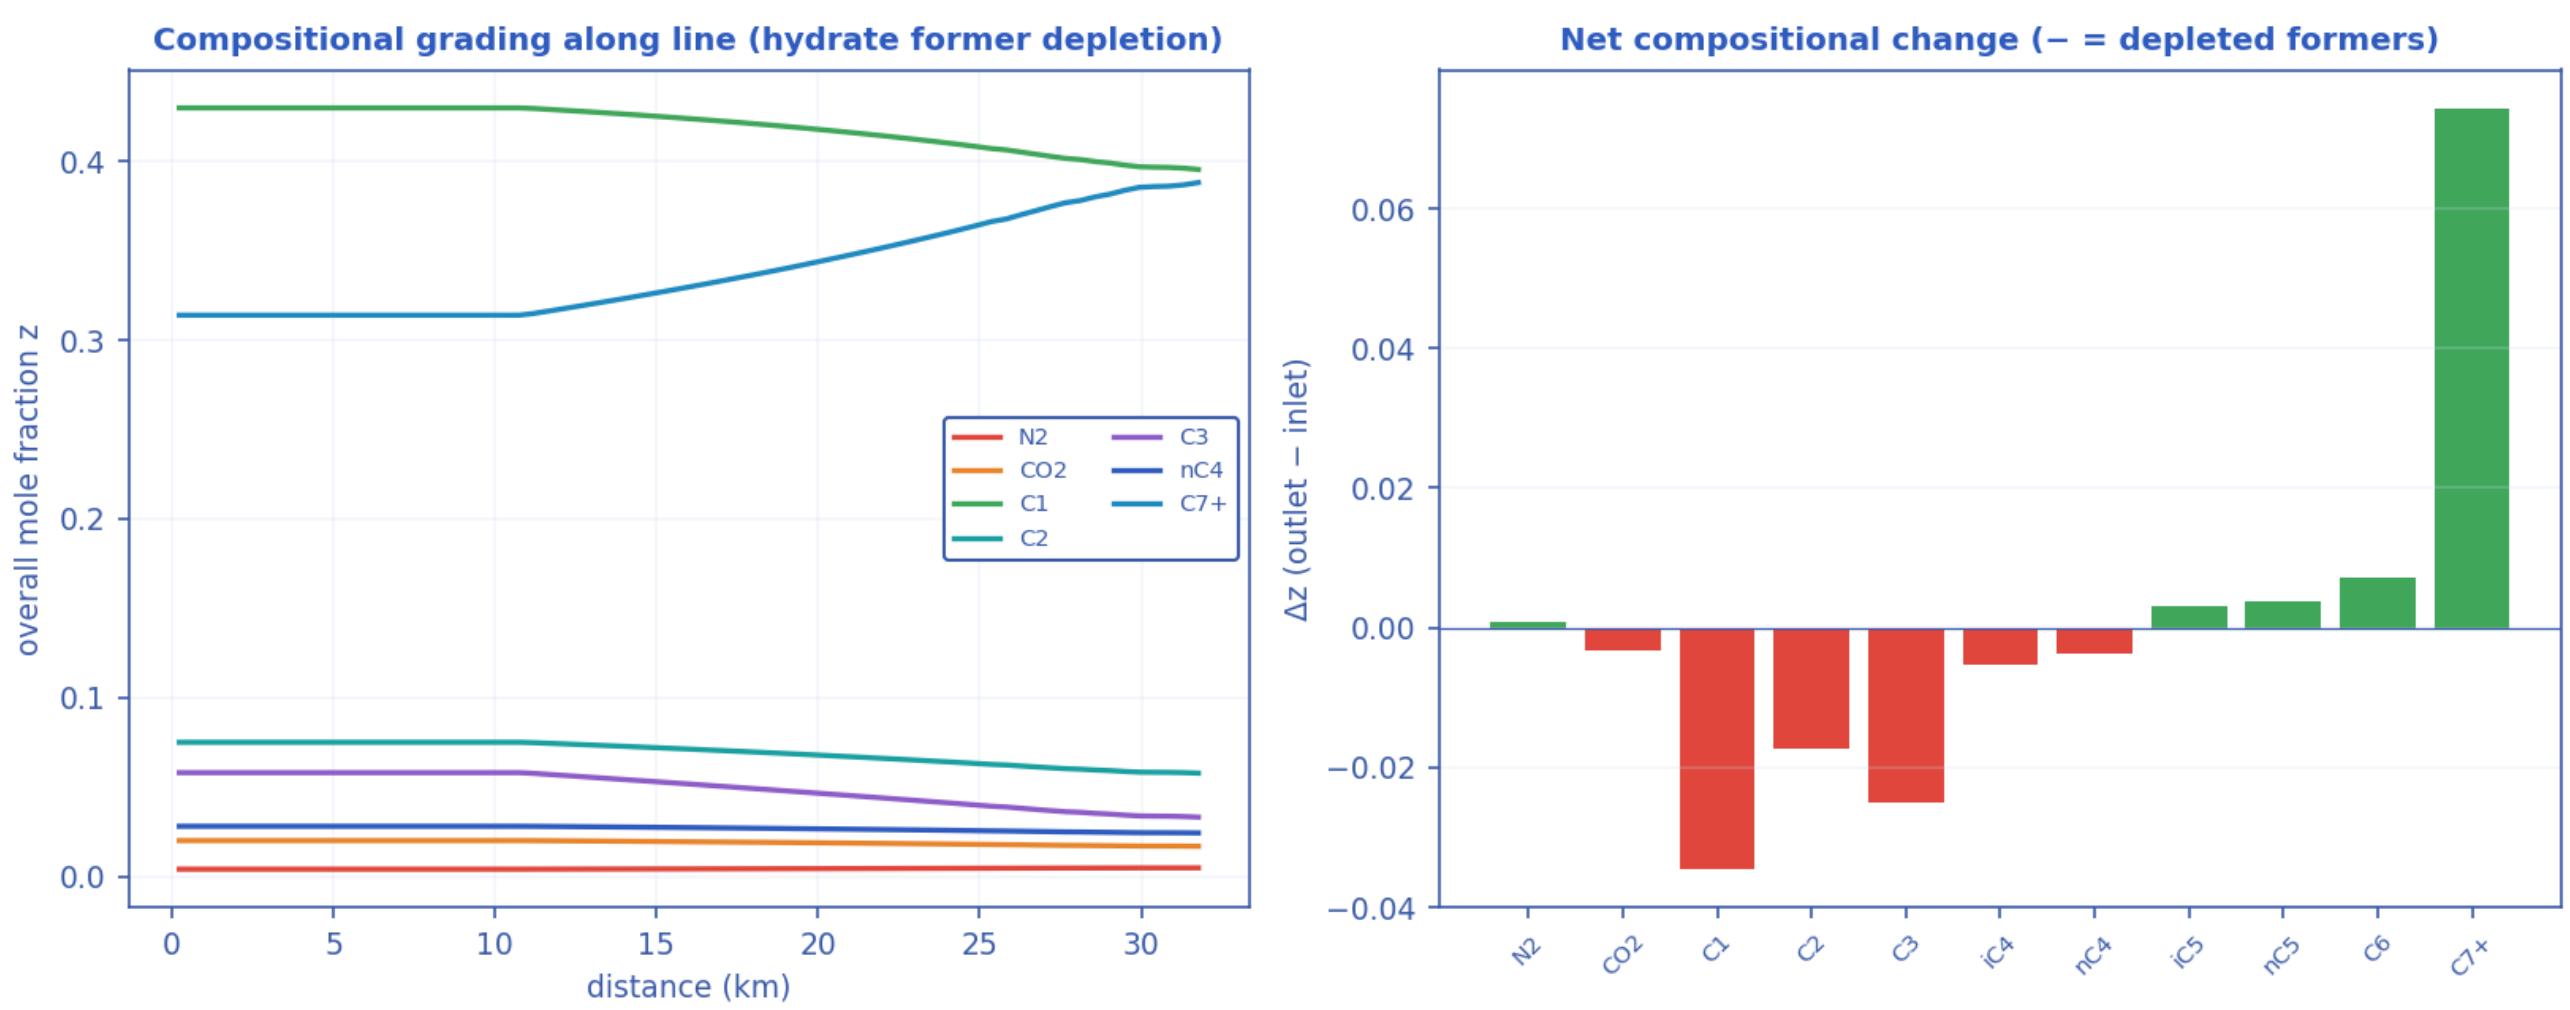


*3-D reconstructed pipe coloured by wall temperature. [as-operated]*

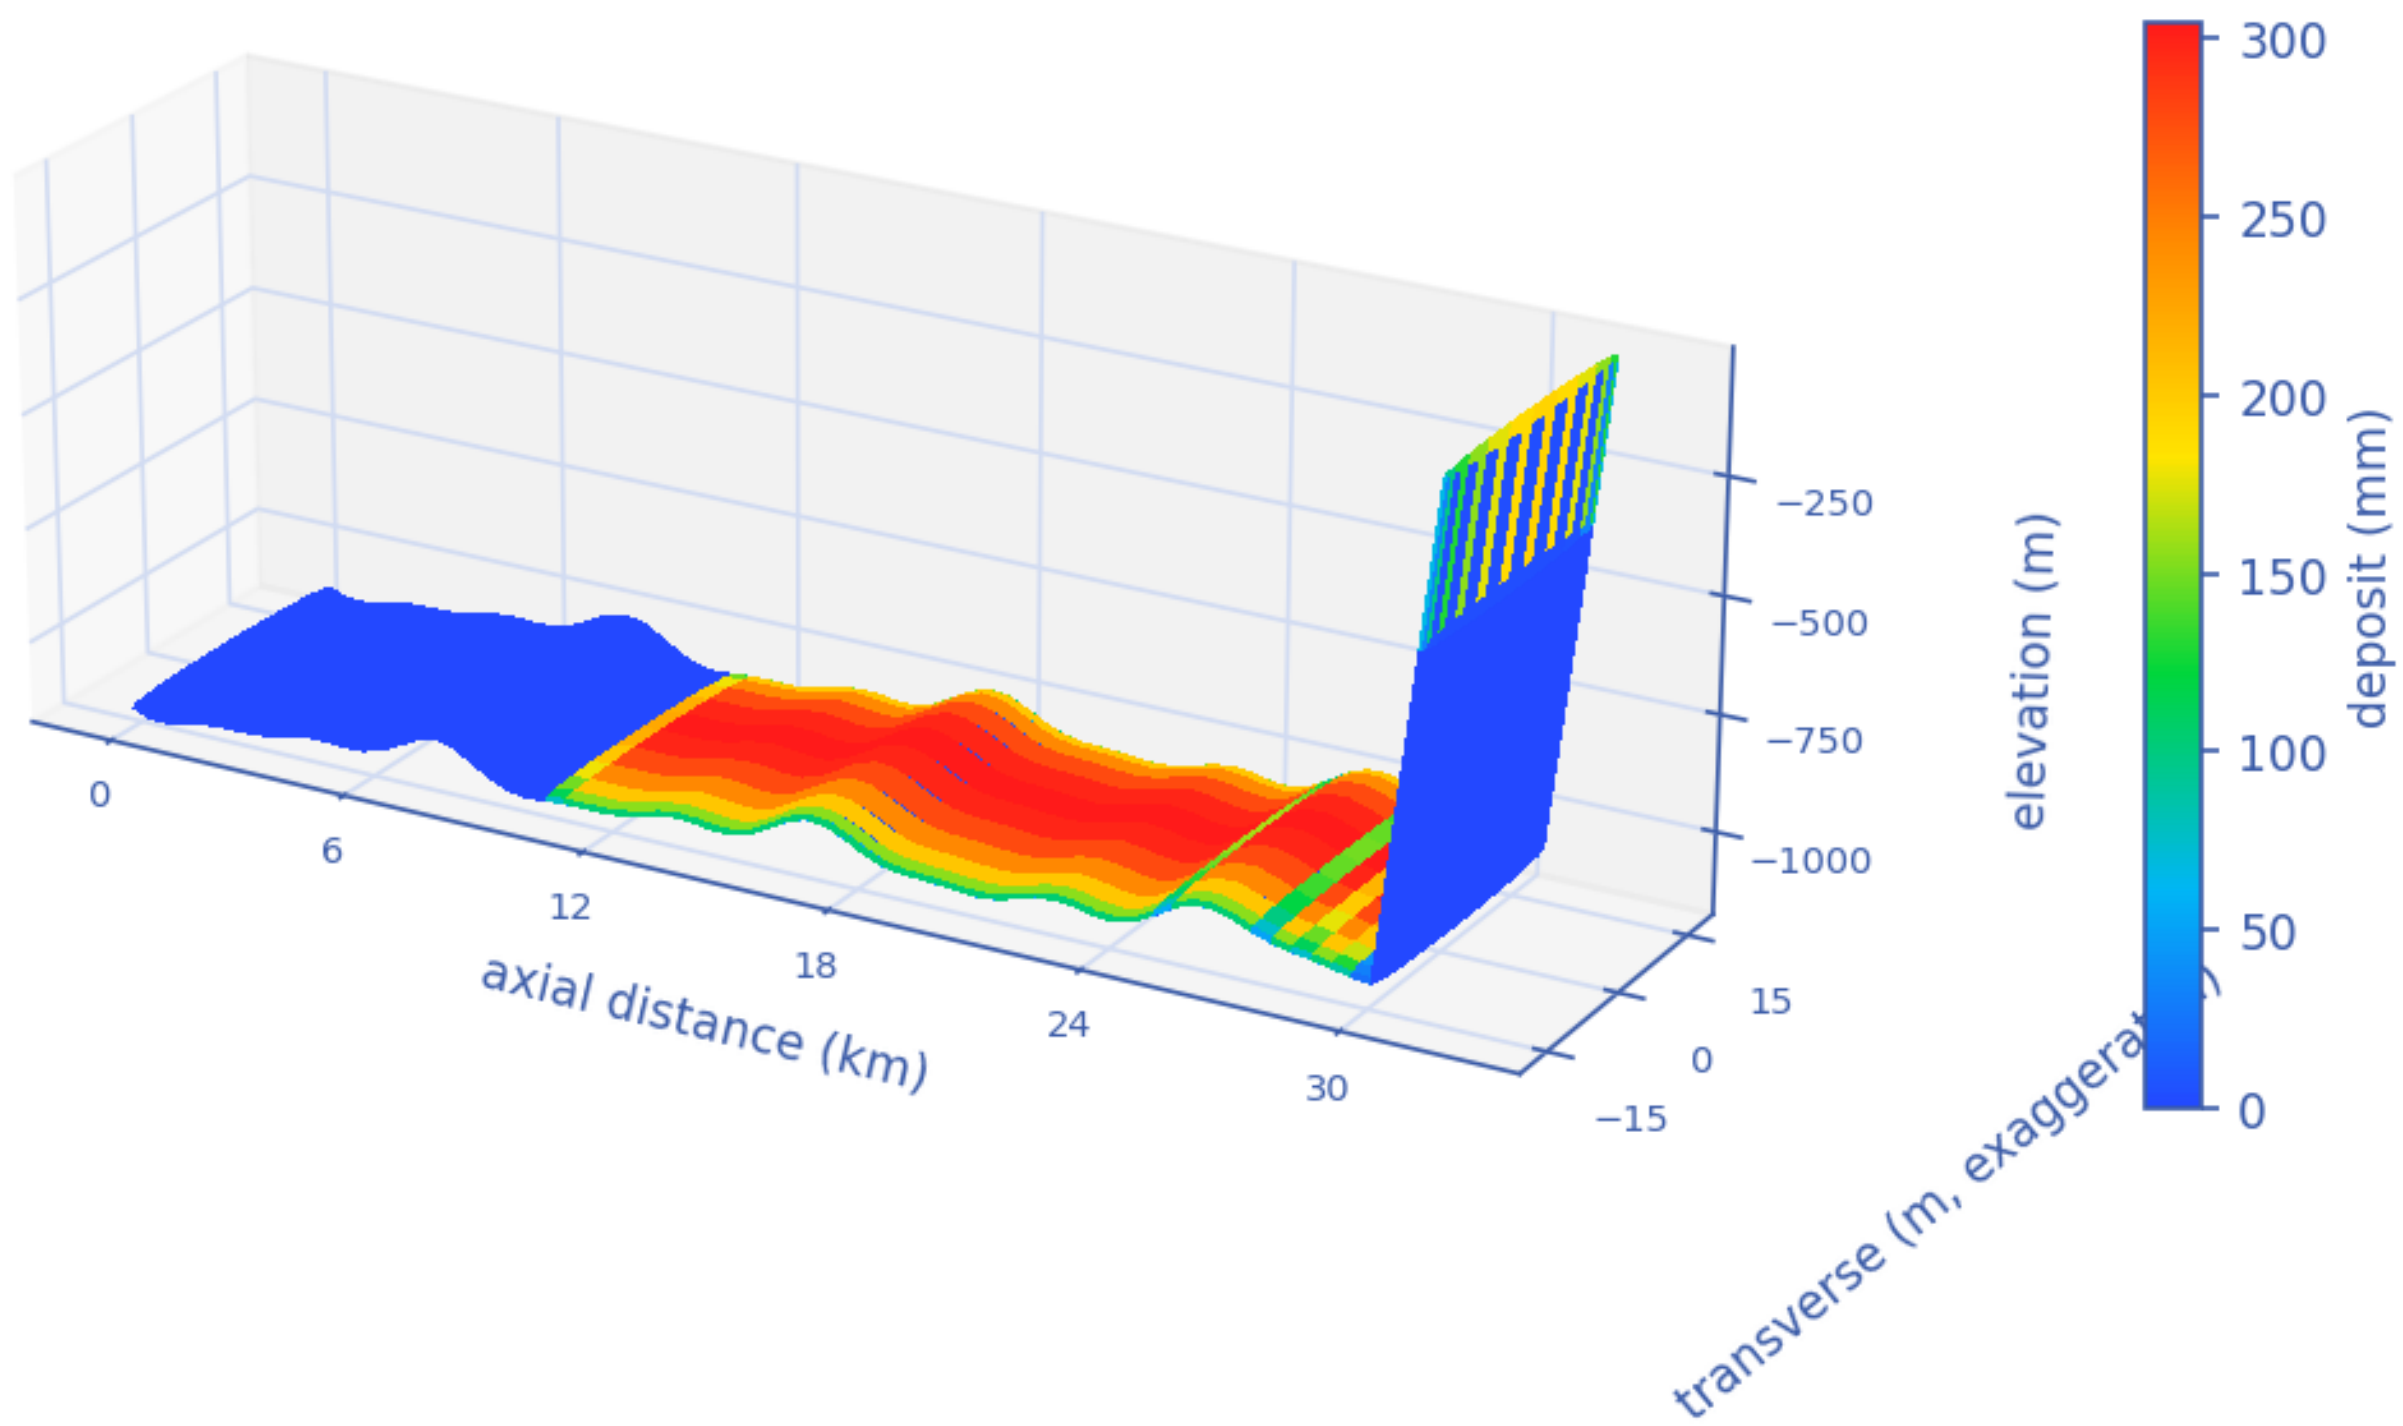


*Solver hydrate-equilibrium closure vs published experimental data (validation curve).  [as-operated]*

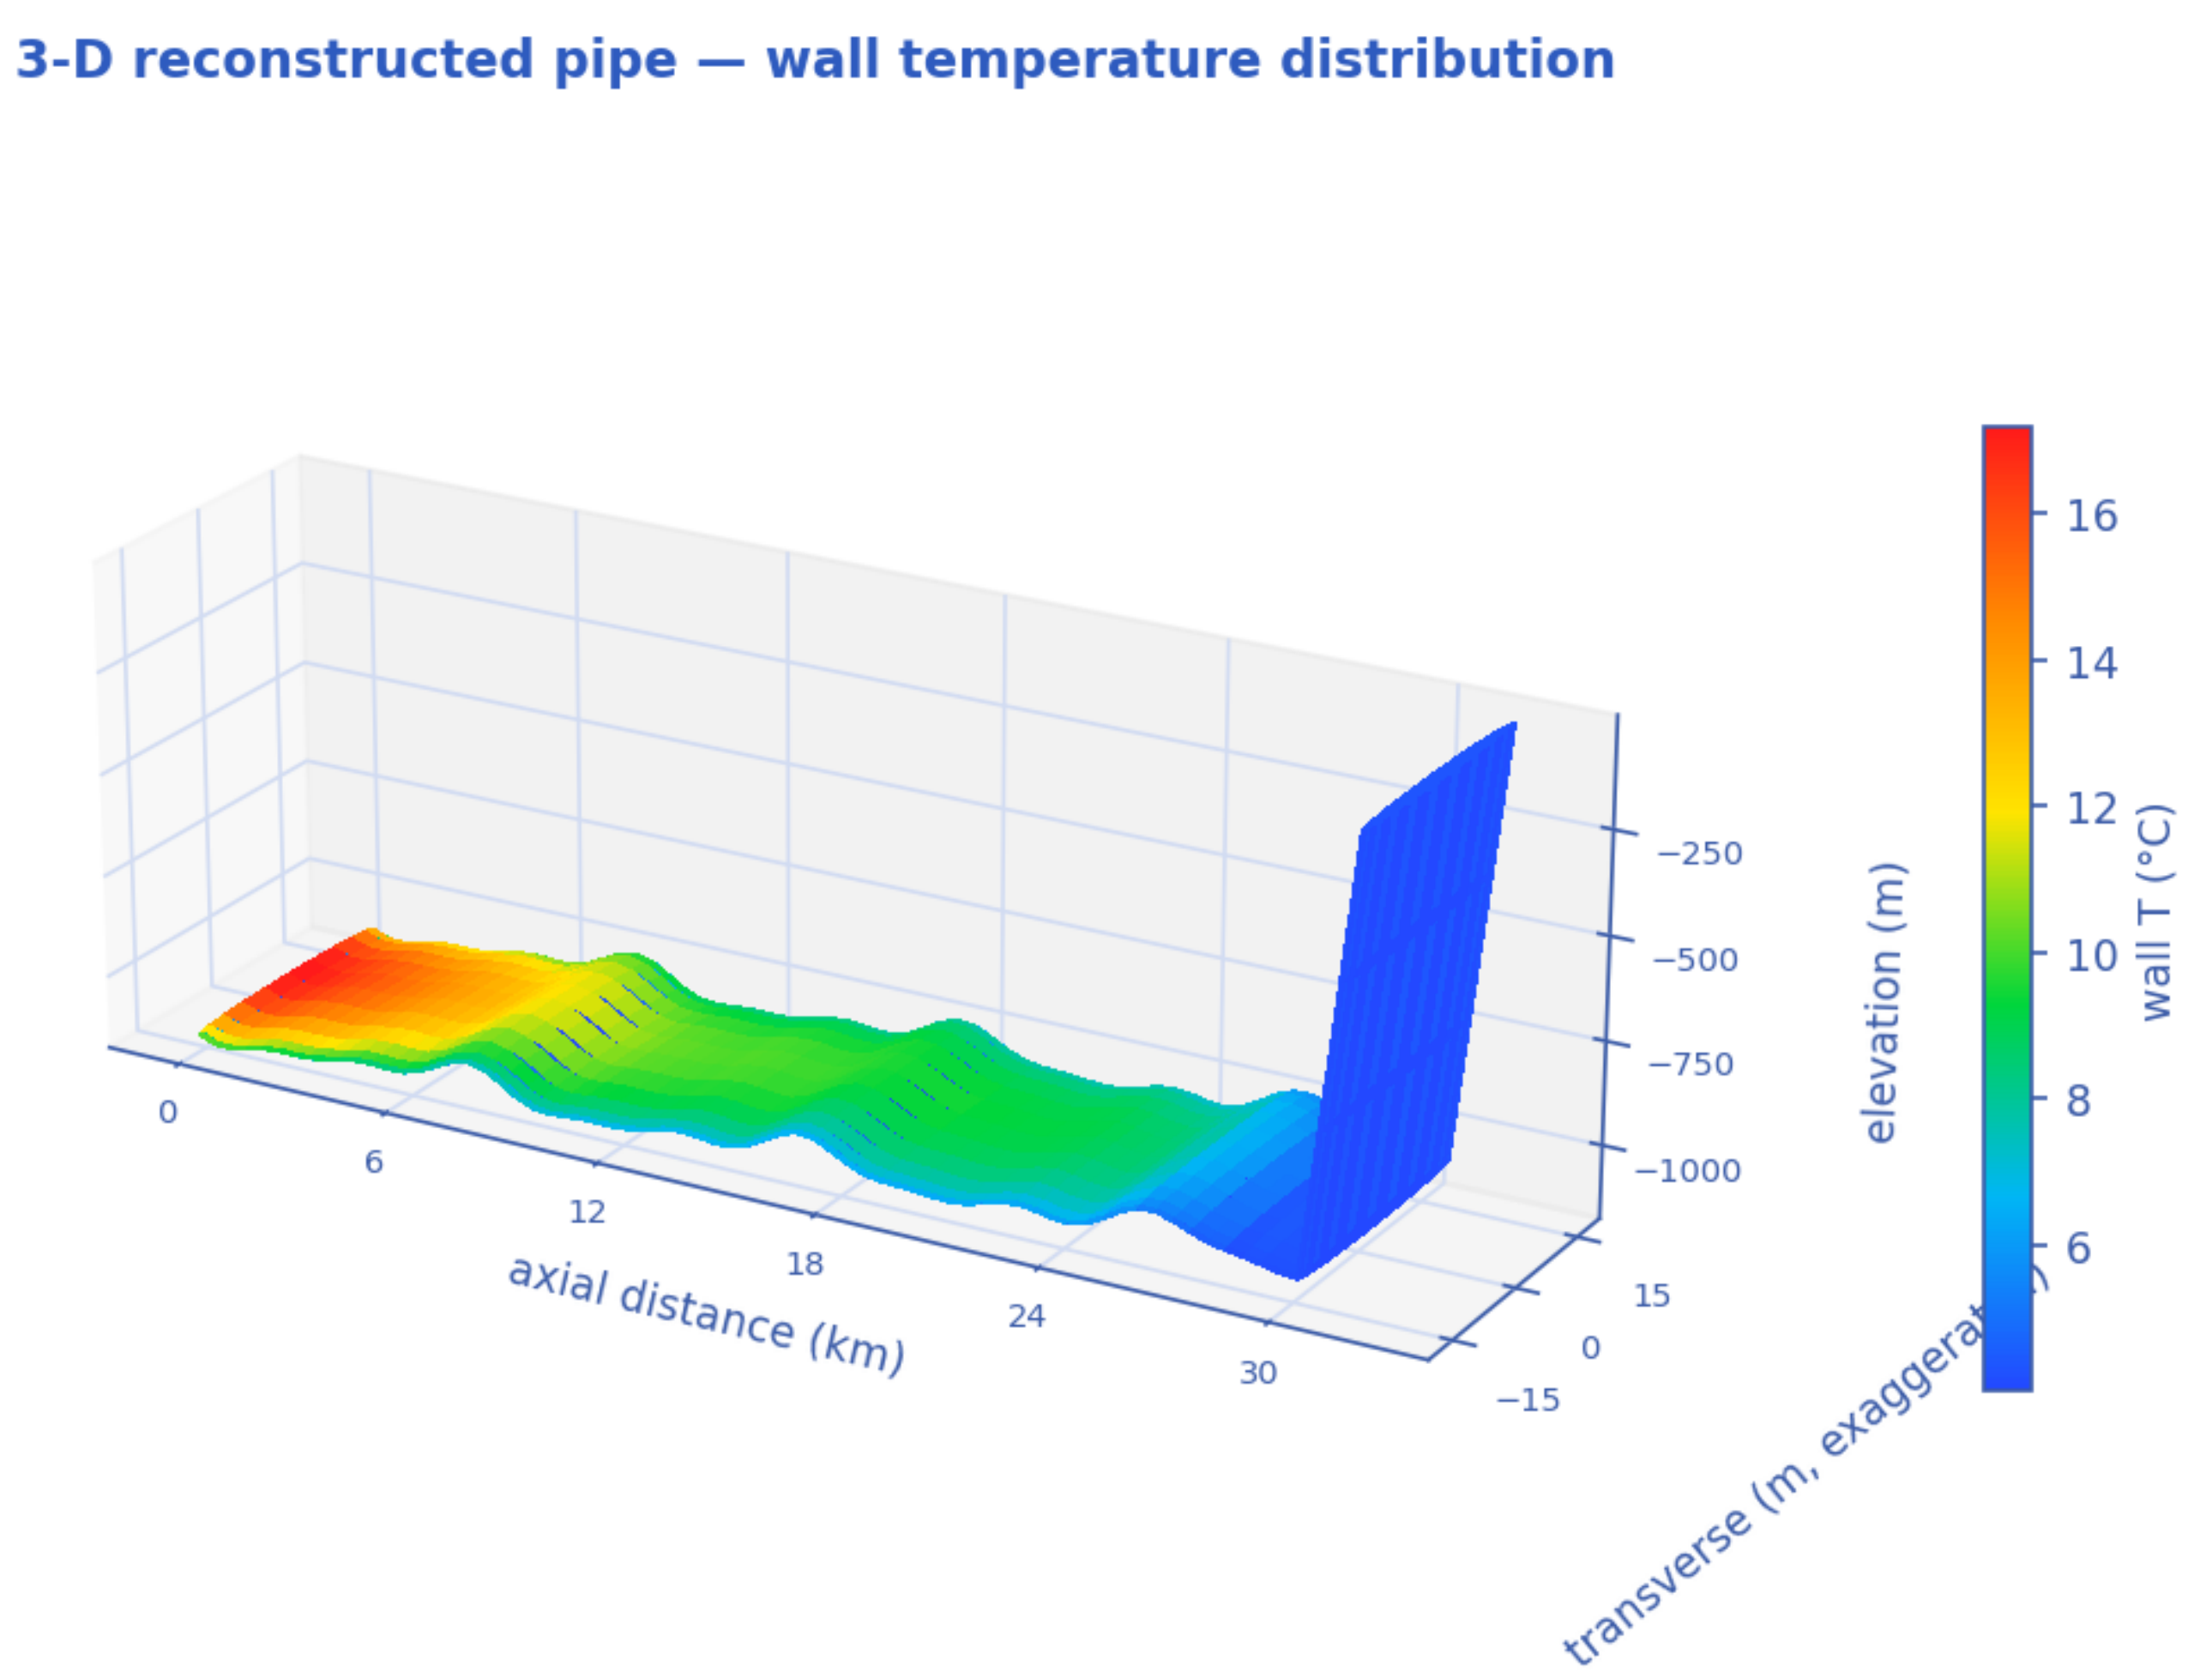


*Mitigation comparison — as-operated vs the engineered fix across the key flow-assurance metrics (bar chart). [as-operated]*

### 11.1.3 Engineering deliverables (engineering_deliverables.csv)

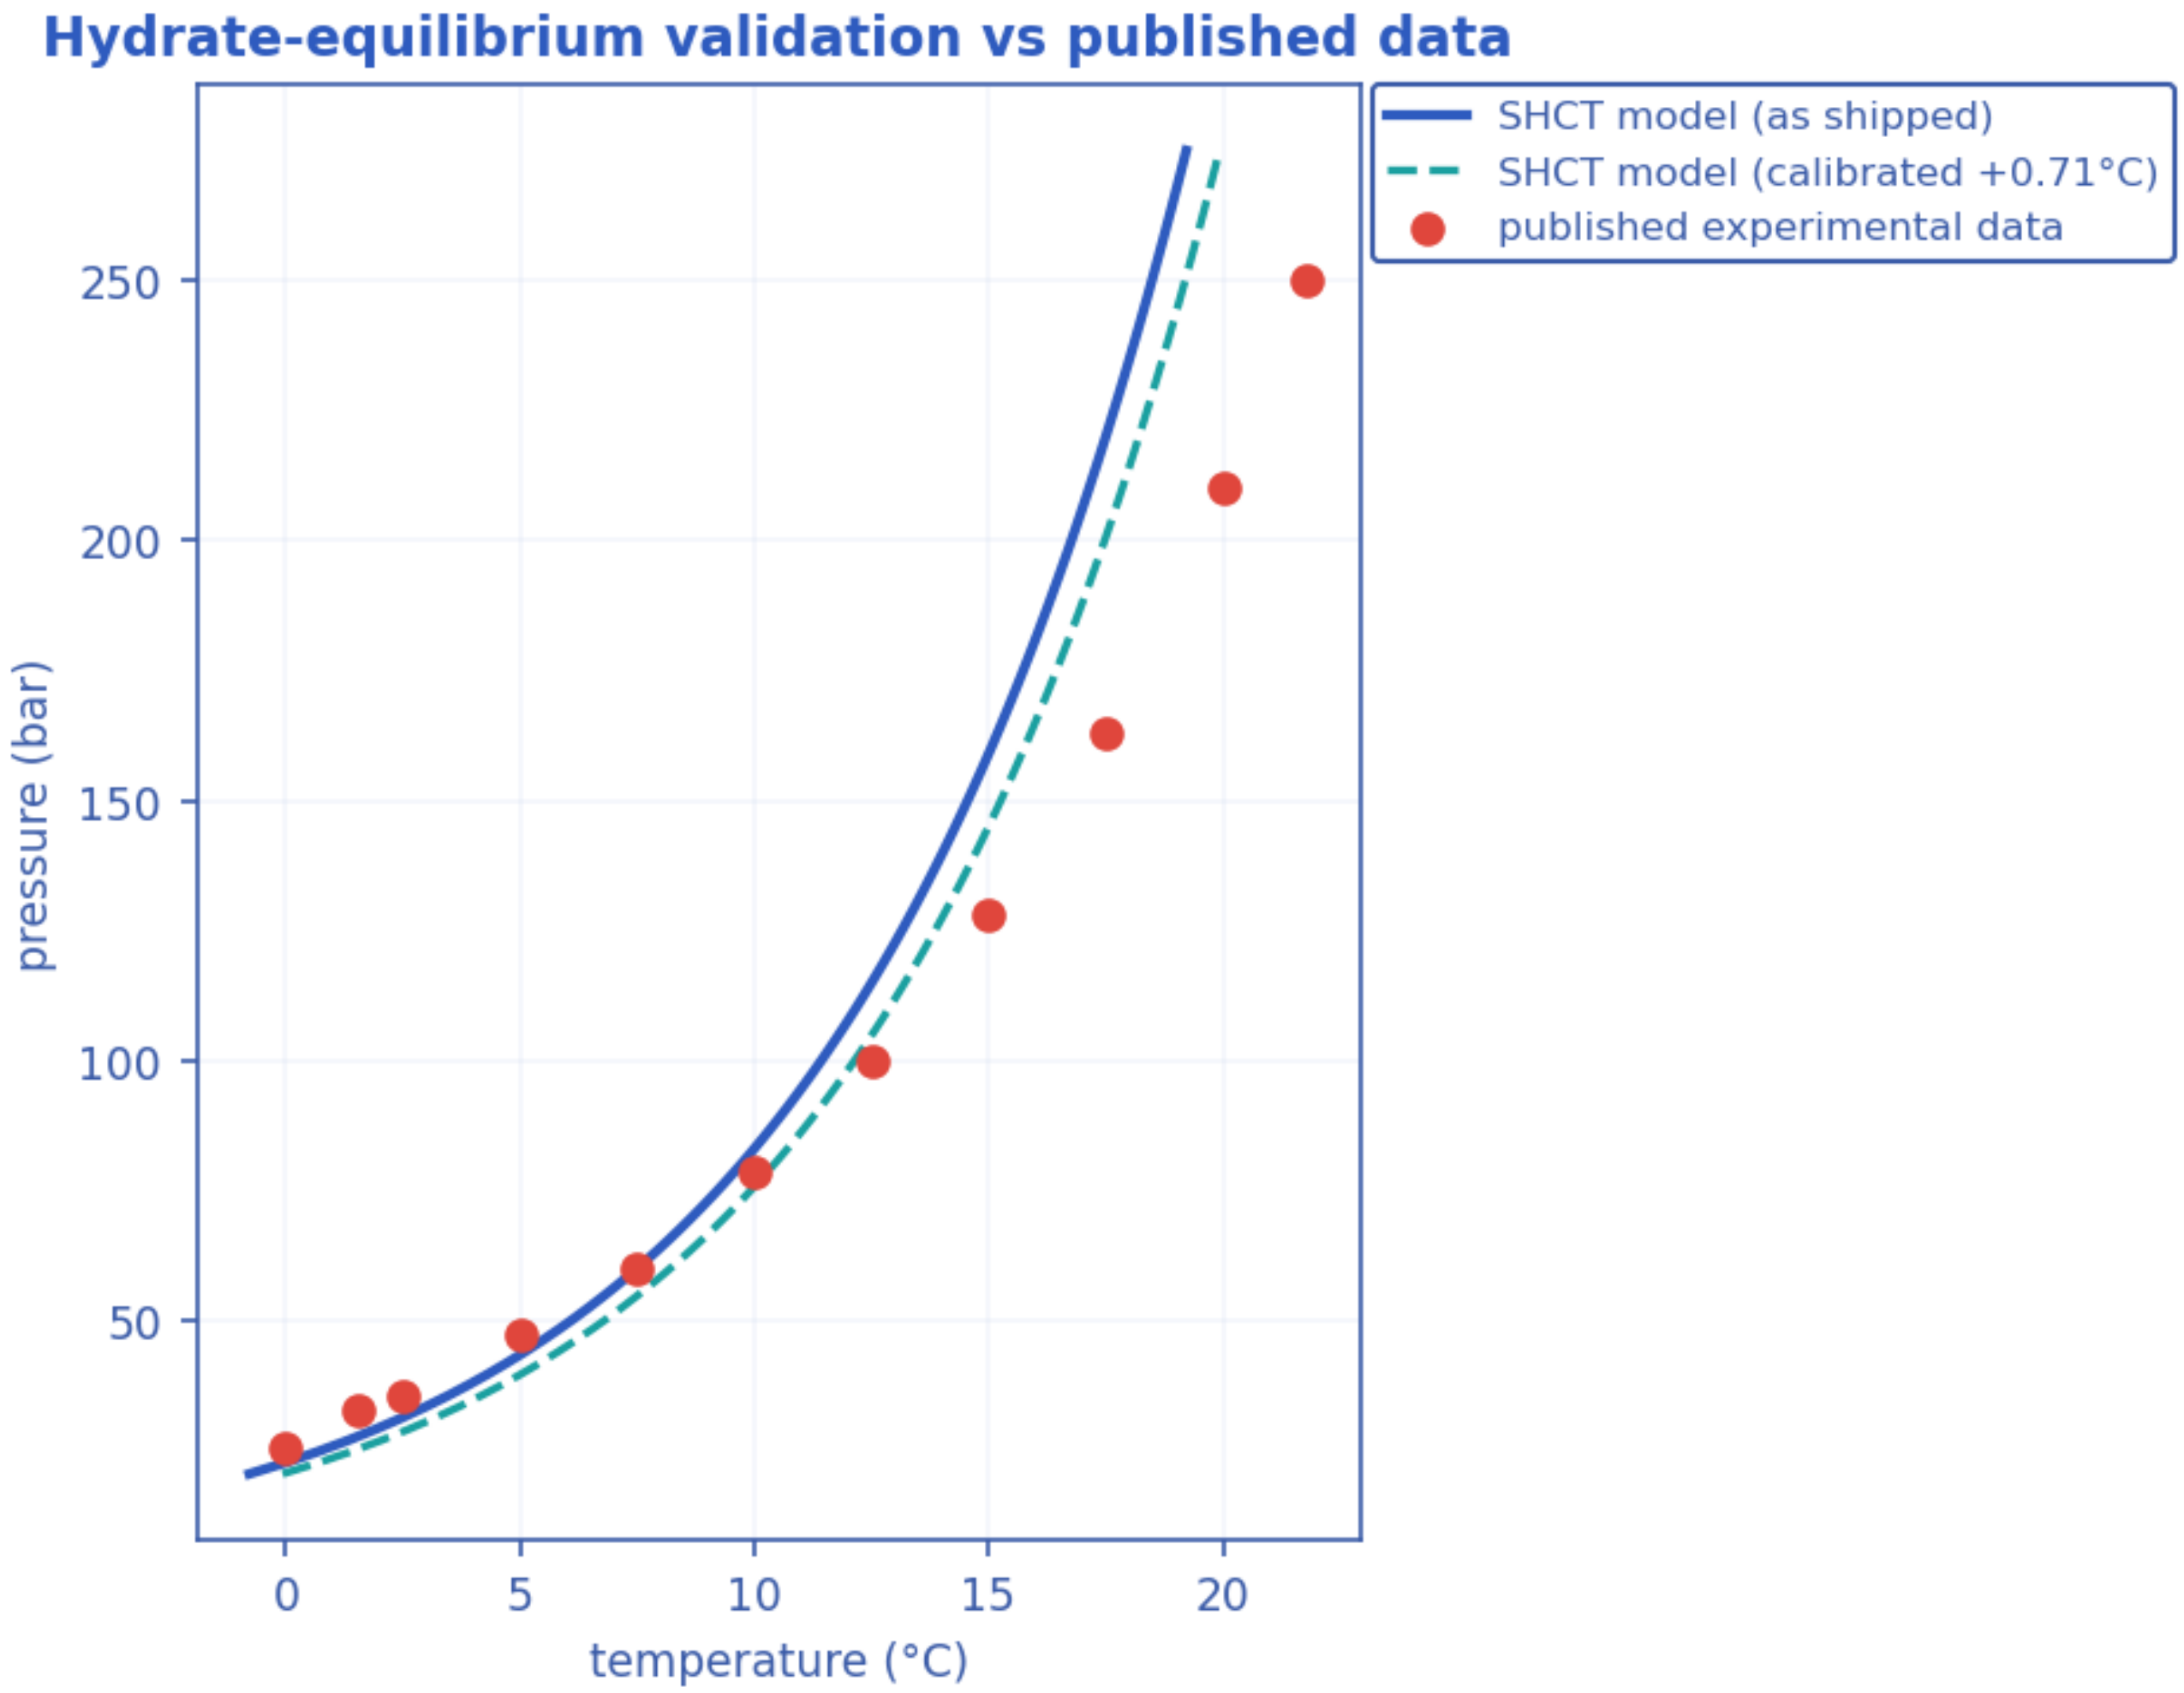


*Numeric engineering deliverables as a magnitude chart [as-operated].*
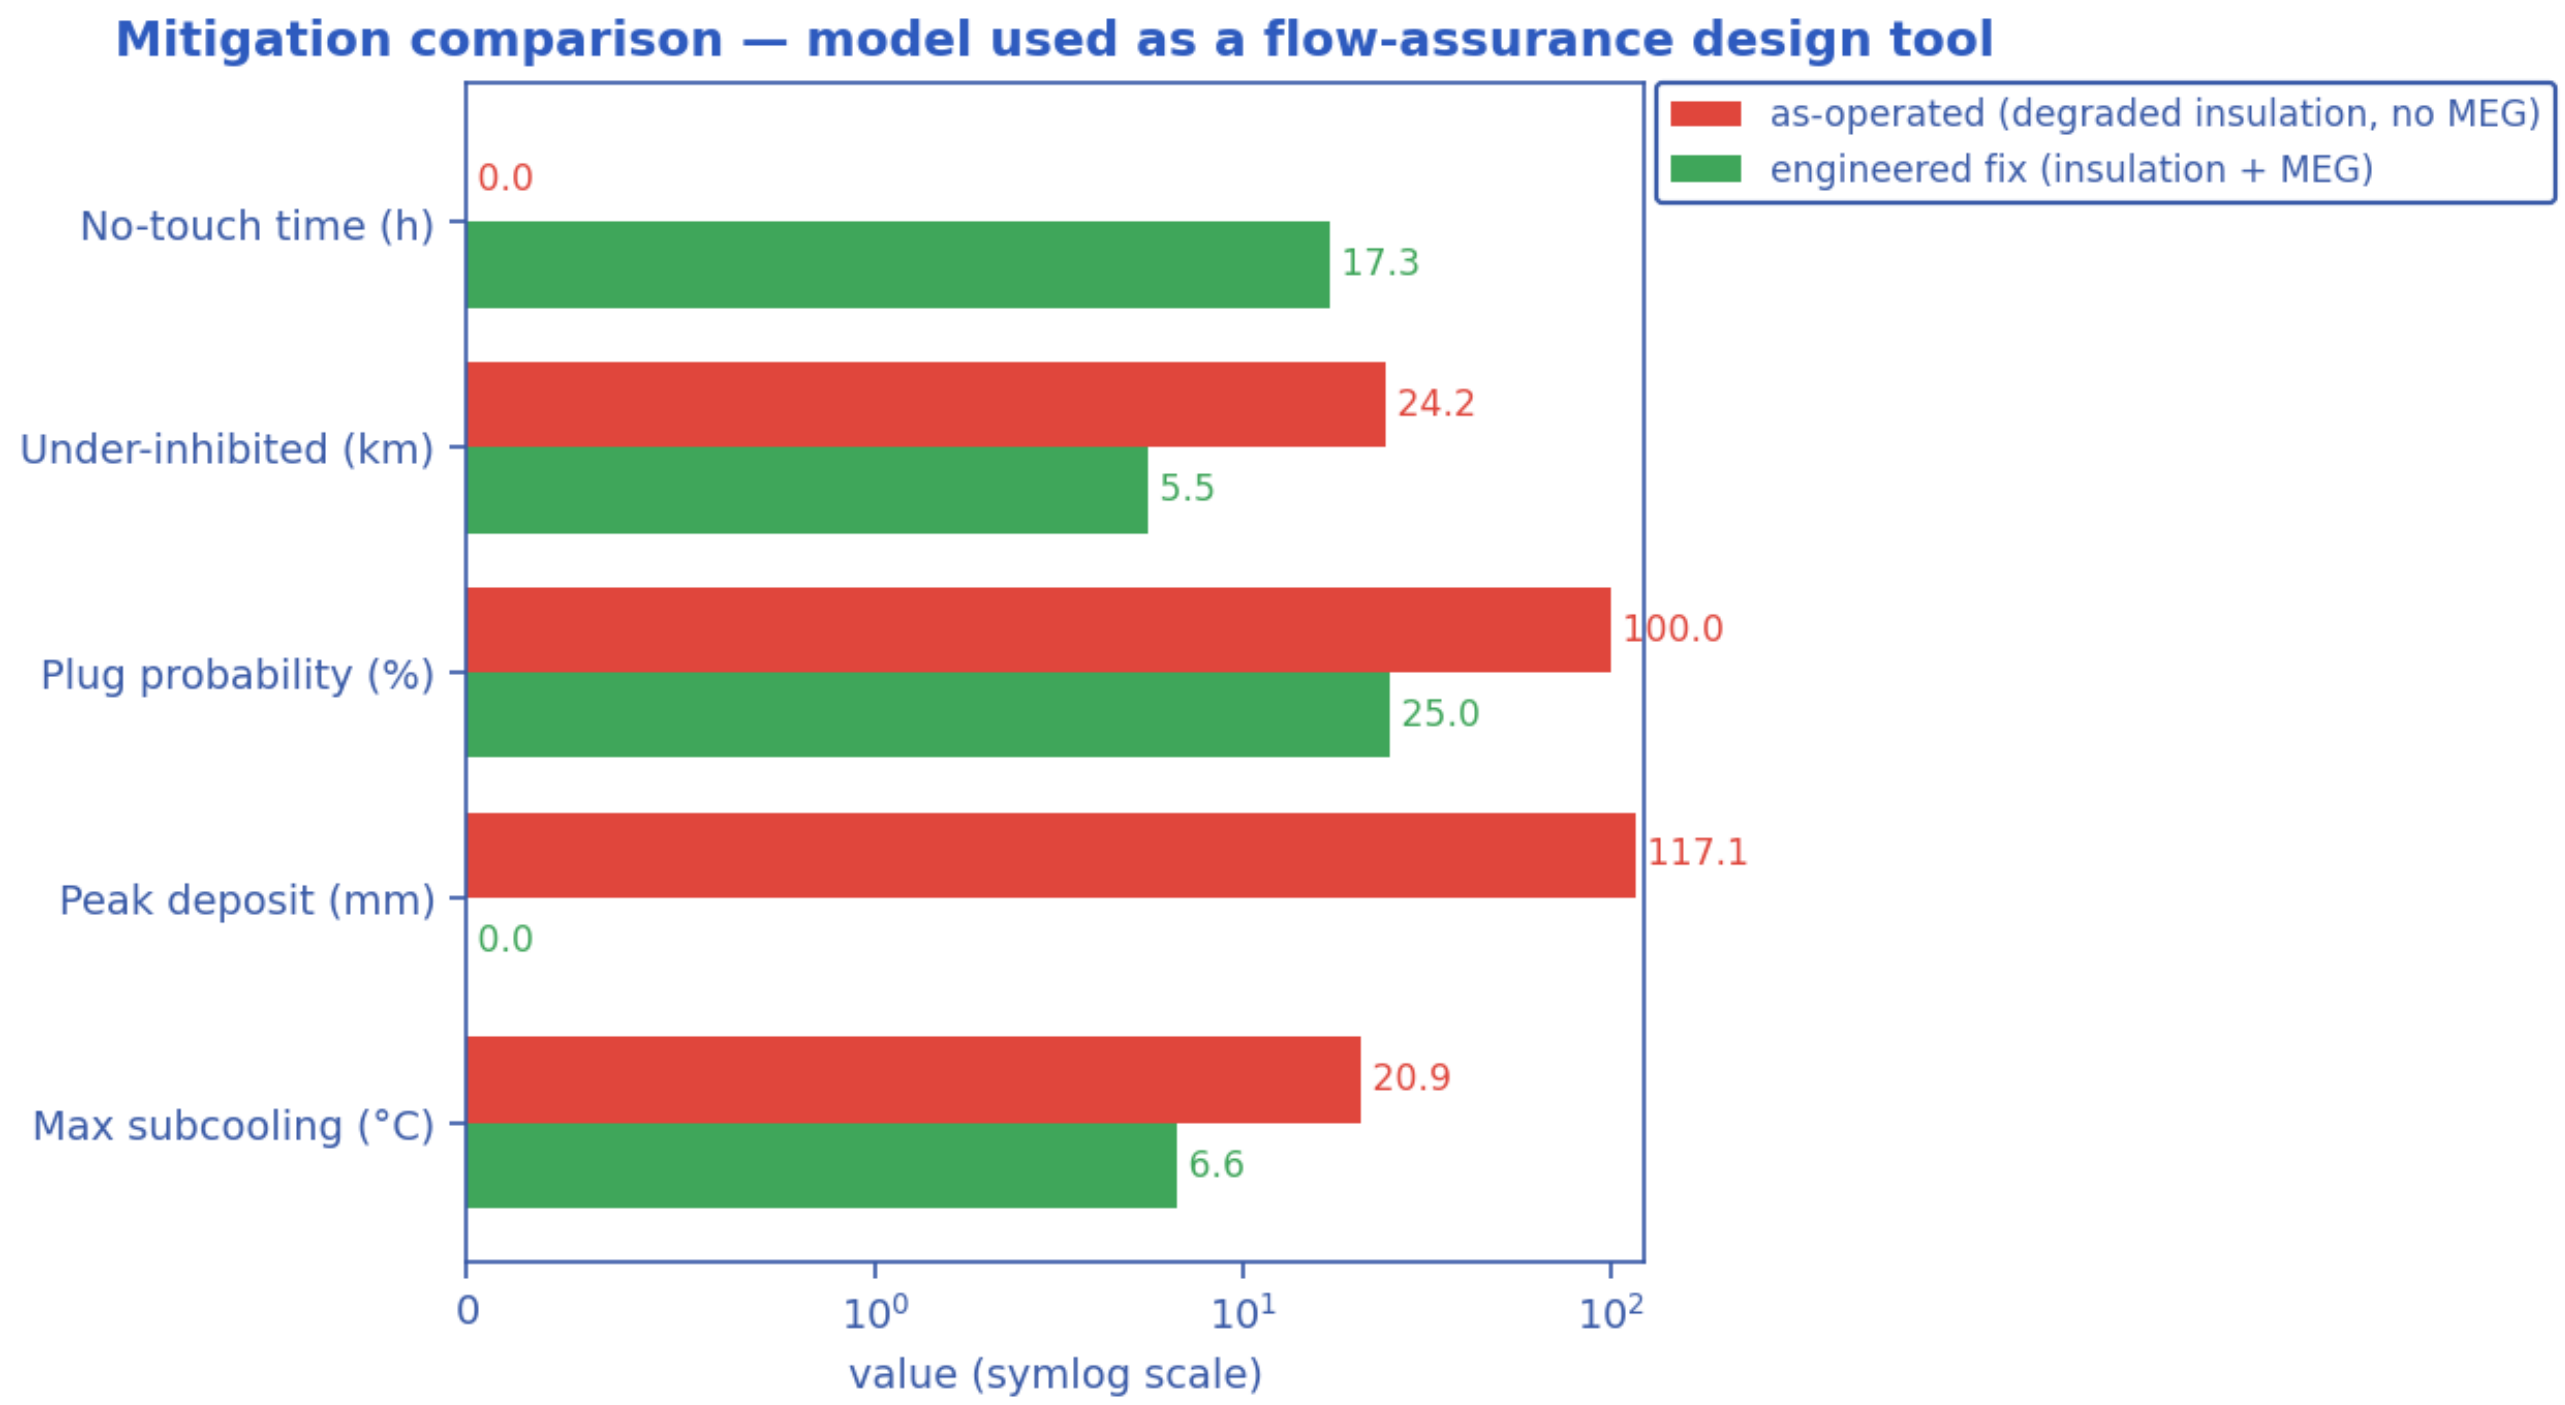
| deliverable | value | units |
|---|---|---|
| **Slug-catcher surge volume (P90)** | 0.36 | m3 |
| **Design subcooling (P90)** | 23.73 | C |
| **Required MEG concentration** | 59.7 | wt% |
| **MEG injection rate** | 94470.1 | L/h |
| **MEG injected at inlet** | 0.0 | wt% |
| **Under-inhibited length** | 24.23 | km |
| **Effective heat-transfer U** | 22.00 | W/m2K |
| **Cooldown to hydrate (no-touch time)** | 0.00 | h |
| **Slurry relative viscosity** | 11.29 | - |
| **Slurry transportable?** | False | - |
| **Peak mixture velocity** | 5.00 | m/s |

| | | |
|---|---|---|
| **Erosional velocity limit (API 14E)** | 5.84 | m/s |
| **Total line pressure drop** | 113.8 | bar |
| **Probability of plugging (run)** | 100 | % |
| **Time-to-plug (P50)** | 2.8 | h |
| **Coupled hot-spot location** | 28.57 | km |
| **Max coupling number Phi_SH** | 6101 | - |
| **Phi_SH reported at plot cap (saturated)?** | False | - |
| **Monitor location** | 29.03 | km |
| **Monitor temperature** | 6.0 | C |
| **Bulk superficial liquid velocity** | 1.08 | m/s |
| **Line-median mixture velocity** | 2.00 | m/s |
| **Peak wall deposit** | 117.1 | mm |
| **Wall deposit at full bore?** | True | - |
| **Deposit (hydrate-mass equivalent)** | 21.7 | mm |
| **No-touch time source** | transient | - |
| **Mass-conservation error** | 0.15 | % |
| **Mass-balance reliability warning** | False | - |

### 11.1.4 Probabilistic summary (probabilistic_summary.csv)

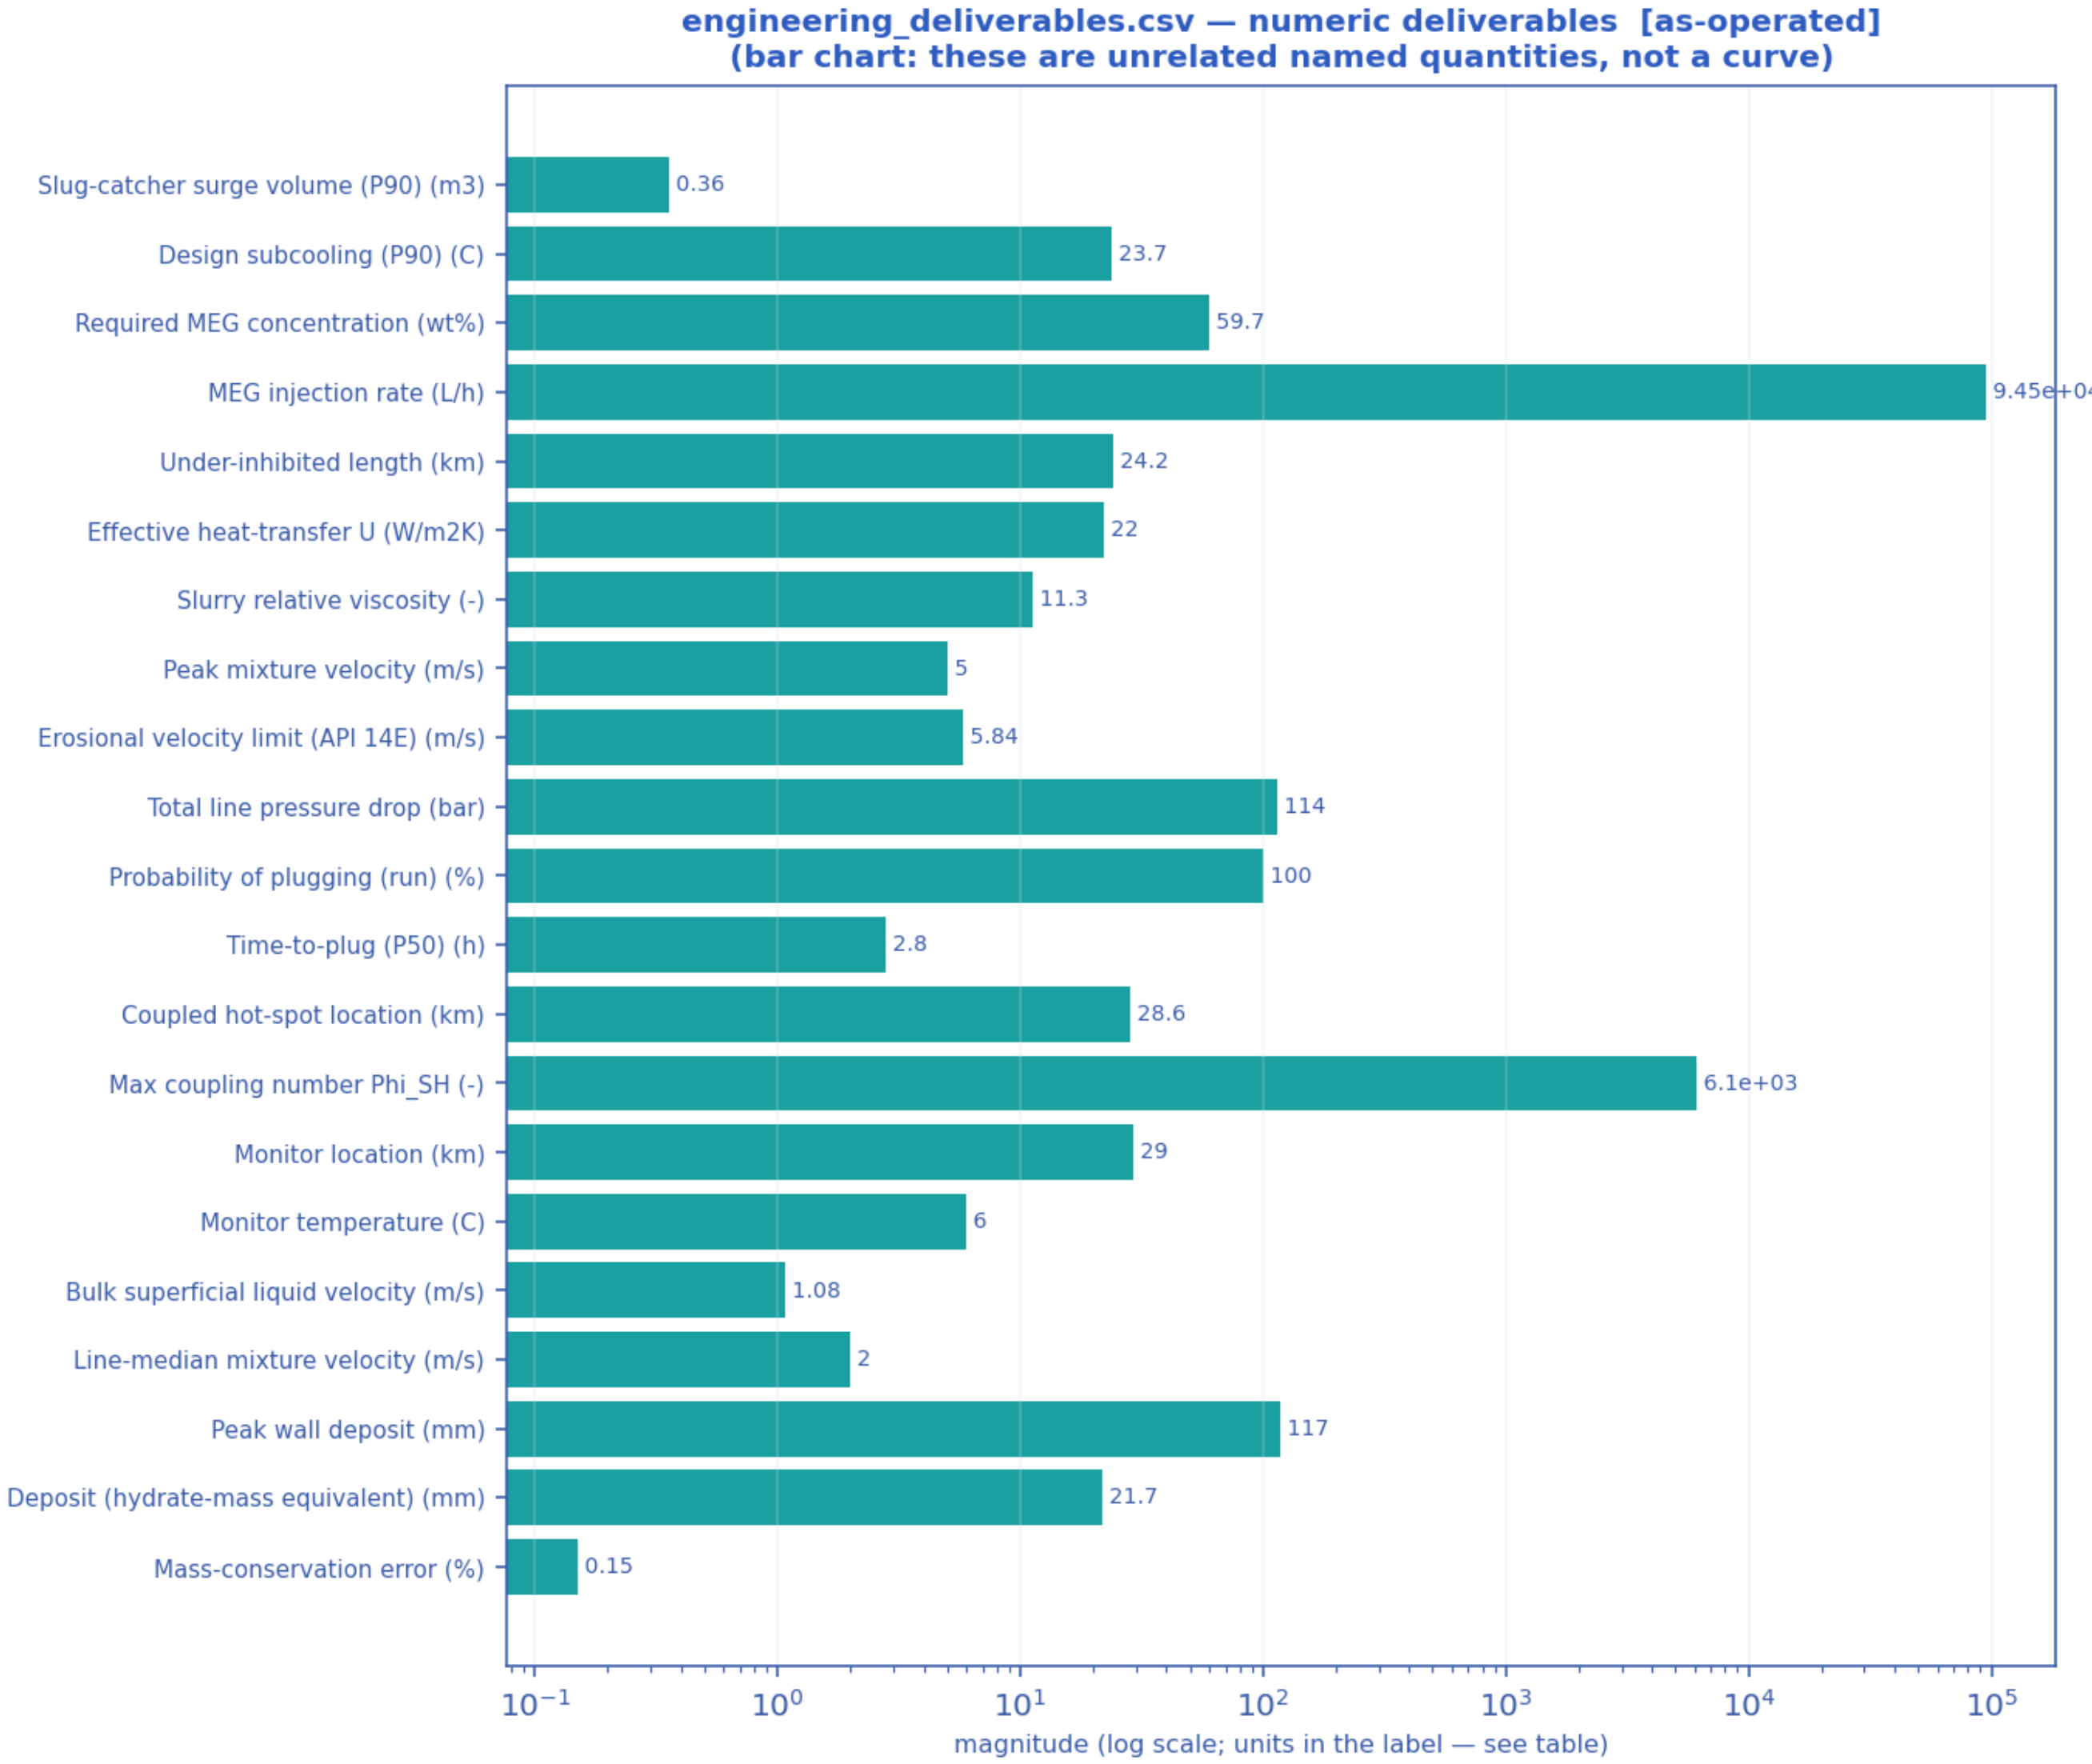


*P10 → P90 uncertainty range with the P50 marker per metric [as-operated].*

| metric | P10 | P50 | P90 |
|---|---|---|---|
| **max_subcooling_C** | 21.1 | 22.4 | 23.7 |
| **max_Phi_SH** | 4.65e+03 | 6.1e+03 | 9.22e+03 |
| **peak_wall_deposit_mm** | 117 | 117 | 117 |
| **peak_deposit_from_phi_mm** | 35 | 35 | 35 |

| | | | |
|---|---|---|---|
| **peak_bulk_hydrate_frac** | 0.55 | 0.55 | 0.55 |
| **time_to_plug_h** | 2.13 | 2.77 | 3.59 |

### 11.1.5 fields_profile.csv — steady-state spatial profile of every field along the route

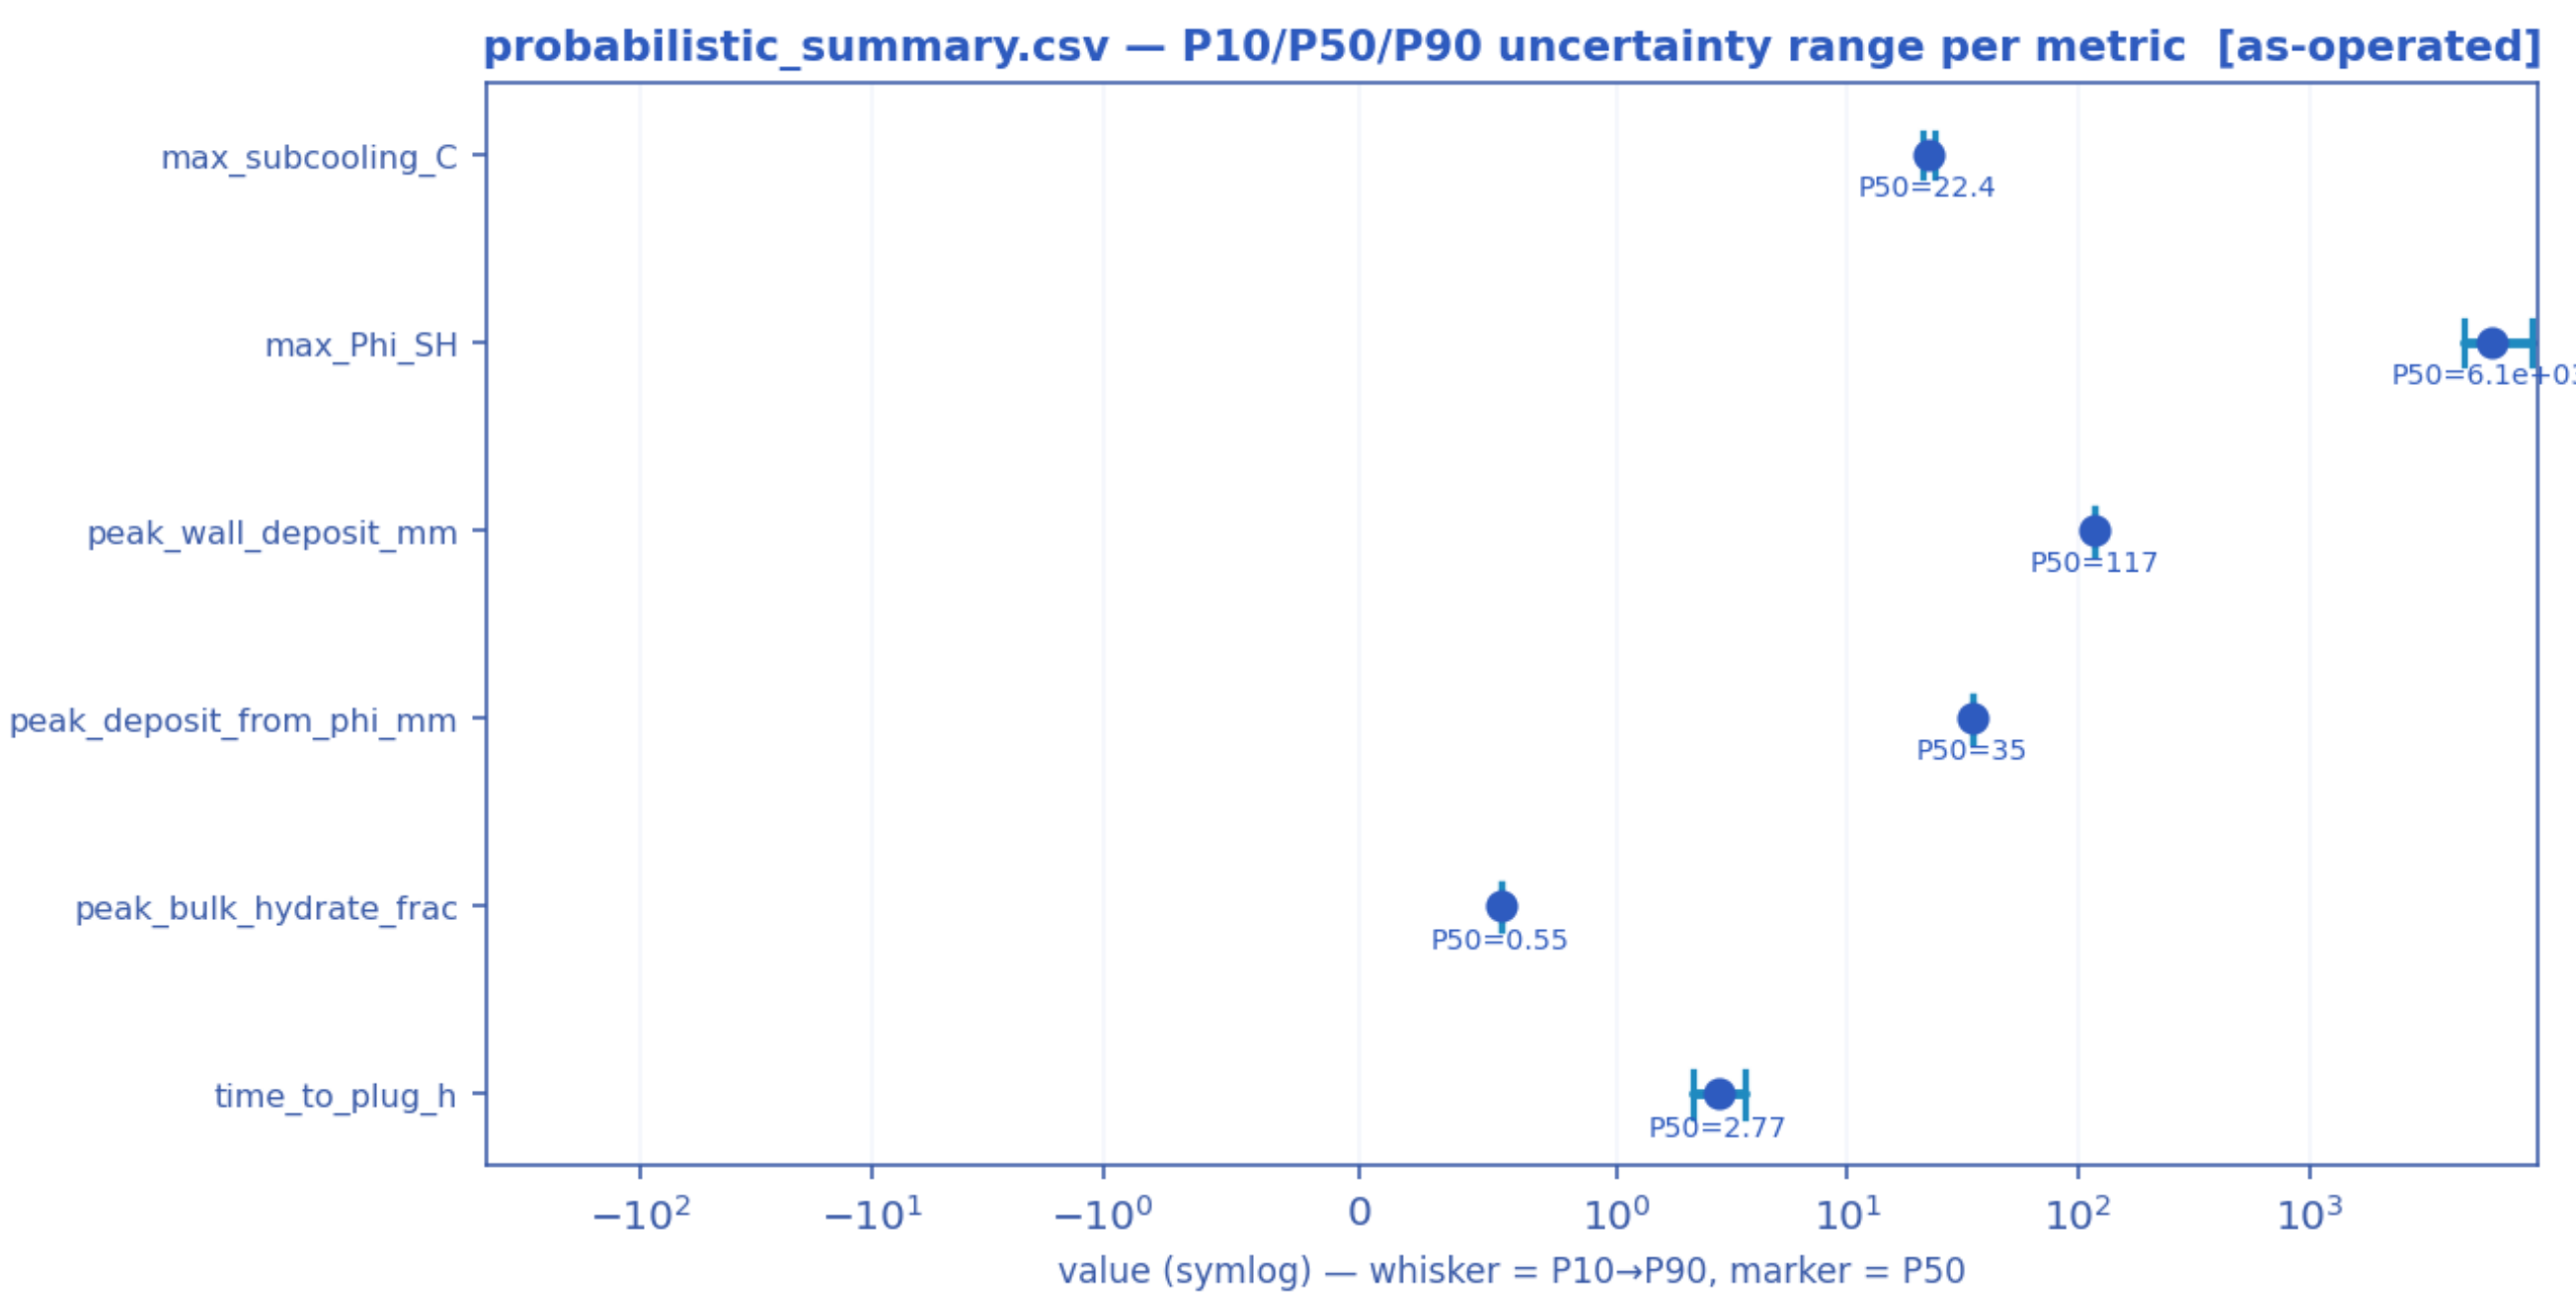


*Every column of fields_profile.csv drawn as a curve [as-operated].*

| x_km | elevation_m | incl_deg | P_bar | T_C | Teq_C | subcooling_C | holdup | v_m_mps | regime | a_i_1perm | f_slug_Hz | phi_hydrate | deposit_mm | Phi_SH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **0.228** | -1118.4 | -1.960 | 150 | 56.7 | 33.0 | -23.777 | 0.3398 | 5 | slug | 24.679 | 0.2313 | 0 | 0 | 3.09 |

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **57** | | 8 | | 89 | 12 | | 5 | | | | 4 | | | 21 |
| **2.5143** | -1114.5 | 0.18865 | 142.58 | 50.068 | 32.622 | -17.377 | 0.34792 | 4 | slug | 24.955 | 0.17091 | 0 | 0 | 4.1812 |
| **4.8** | -1092.7 | 0.42362 | 134.51 | 43.594 | 32.173 | -11.418 | 0.35347 | 4 | slug | 25.137 | 0.18739 | 0 | 0 | 3.7839 |
| **7.0857** | -1060.5 | 2.601 | 126.27 | 36.795 | 31.686 | -5.1052 | 0.37212 | 3 | slug | 25.701 | 0.23988 | 0 | 0 | 2.961 |
| **9.8286** | -1107.7 | -1.3732 | 121.28 | 31.063 | 31.376 | 0.6568 | 0.77127 | 3 | slug | 19.354 | 0.21847 | 0 | 0 | 3.0654 |
| **12.114** | -1107 | 0.13701 | 113.29 | 28.425 | 30.851 | 1.7129 | 0.65145 | 2 | slug | 23.867 | 0.16466 | 0.003053 | 117.07 | 3.811 |
| **14.4** | -1082.3 | -0.54271 | 100.25 | 27.581 | 29.91 | 1.4669 | 0.5639 | 2 | slug | 24.016 | 0.19518 | 0.022578 | 117.07 | 3.1022 |
| **17.143** | -1017.6 | 0.54352 | 82.885 | 26.095 | 28.444 | 1.8274 | 0.45692 | 2 | slug | 24.091 | 0.20254 | 0.05178 | 117.07 | 3.0535 |
| **19.429** | -1087.1 | -0.61307 | 77.979 | 25.157 | 27.975 | 1.8934 | 0.35323 | 2 | churn | 24.35 | 0.20926 | 0.087707 | 117.07 | 2.999 |
| **21.714** | -1094.2 | 0.93887 | 71.603 | 24.604 | 27.316 | 2.2561 | 0.30149 | 2 | churn | 21.522 | 0.22819 | 0.10598 | 117.07 | 2.7615 |
| **24.457** | -1083.8 | 0.40028 | 65.375 | 21.93 | 26.611 | 3.3868 | 0.19937 | 2 | churn | 16.247 | 0.21049 | 0.17227 | 117.07 | 2.8842 |
| **26.743** | -1007 | -0.74006 | 59.468 | 13.803 | 25.884 | 11.554 | 0.14497 | 1 | churn | 11.919 | 0.23724 | 0.20267 | 117.07 | 2.5431 |
| **29.029** | -1066 | -0.91009 | 57.604 | 5.9877 | 25.642 | 19.687 | 0.074876 | 0 | churn | 2.7298 | 0.24613 | 0.077729 | 117.07 | 5712 |
| **31.771** | -25 | 37.781 | 36.176 | 5.3144 | 22.054 | 16.784 | 0.001 | 0 | churn | 0.10991 | 0.45415 | 0.0016832 | 11.277 | 5186.5 |

## 11.1.6 timeseries_monitor.csv — transient response at the monitored station

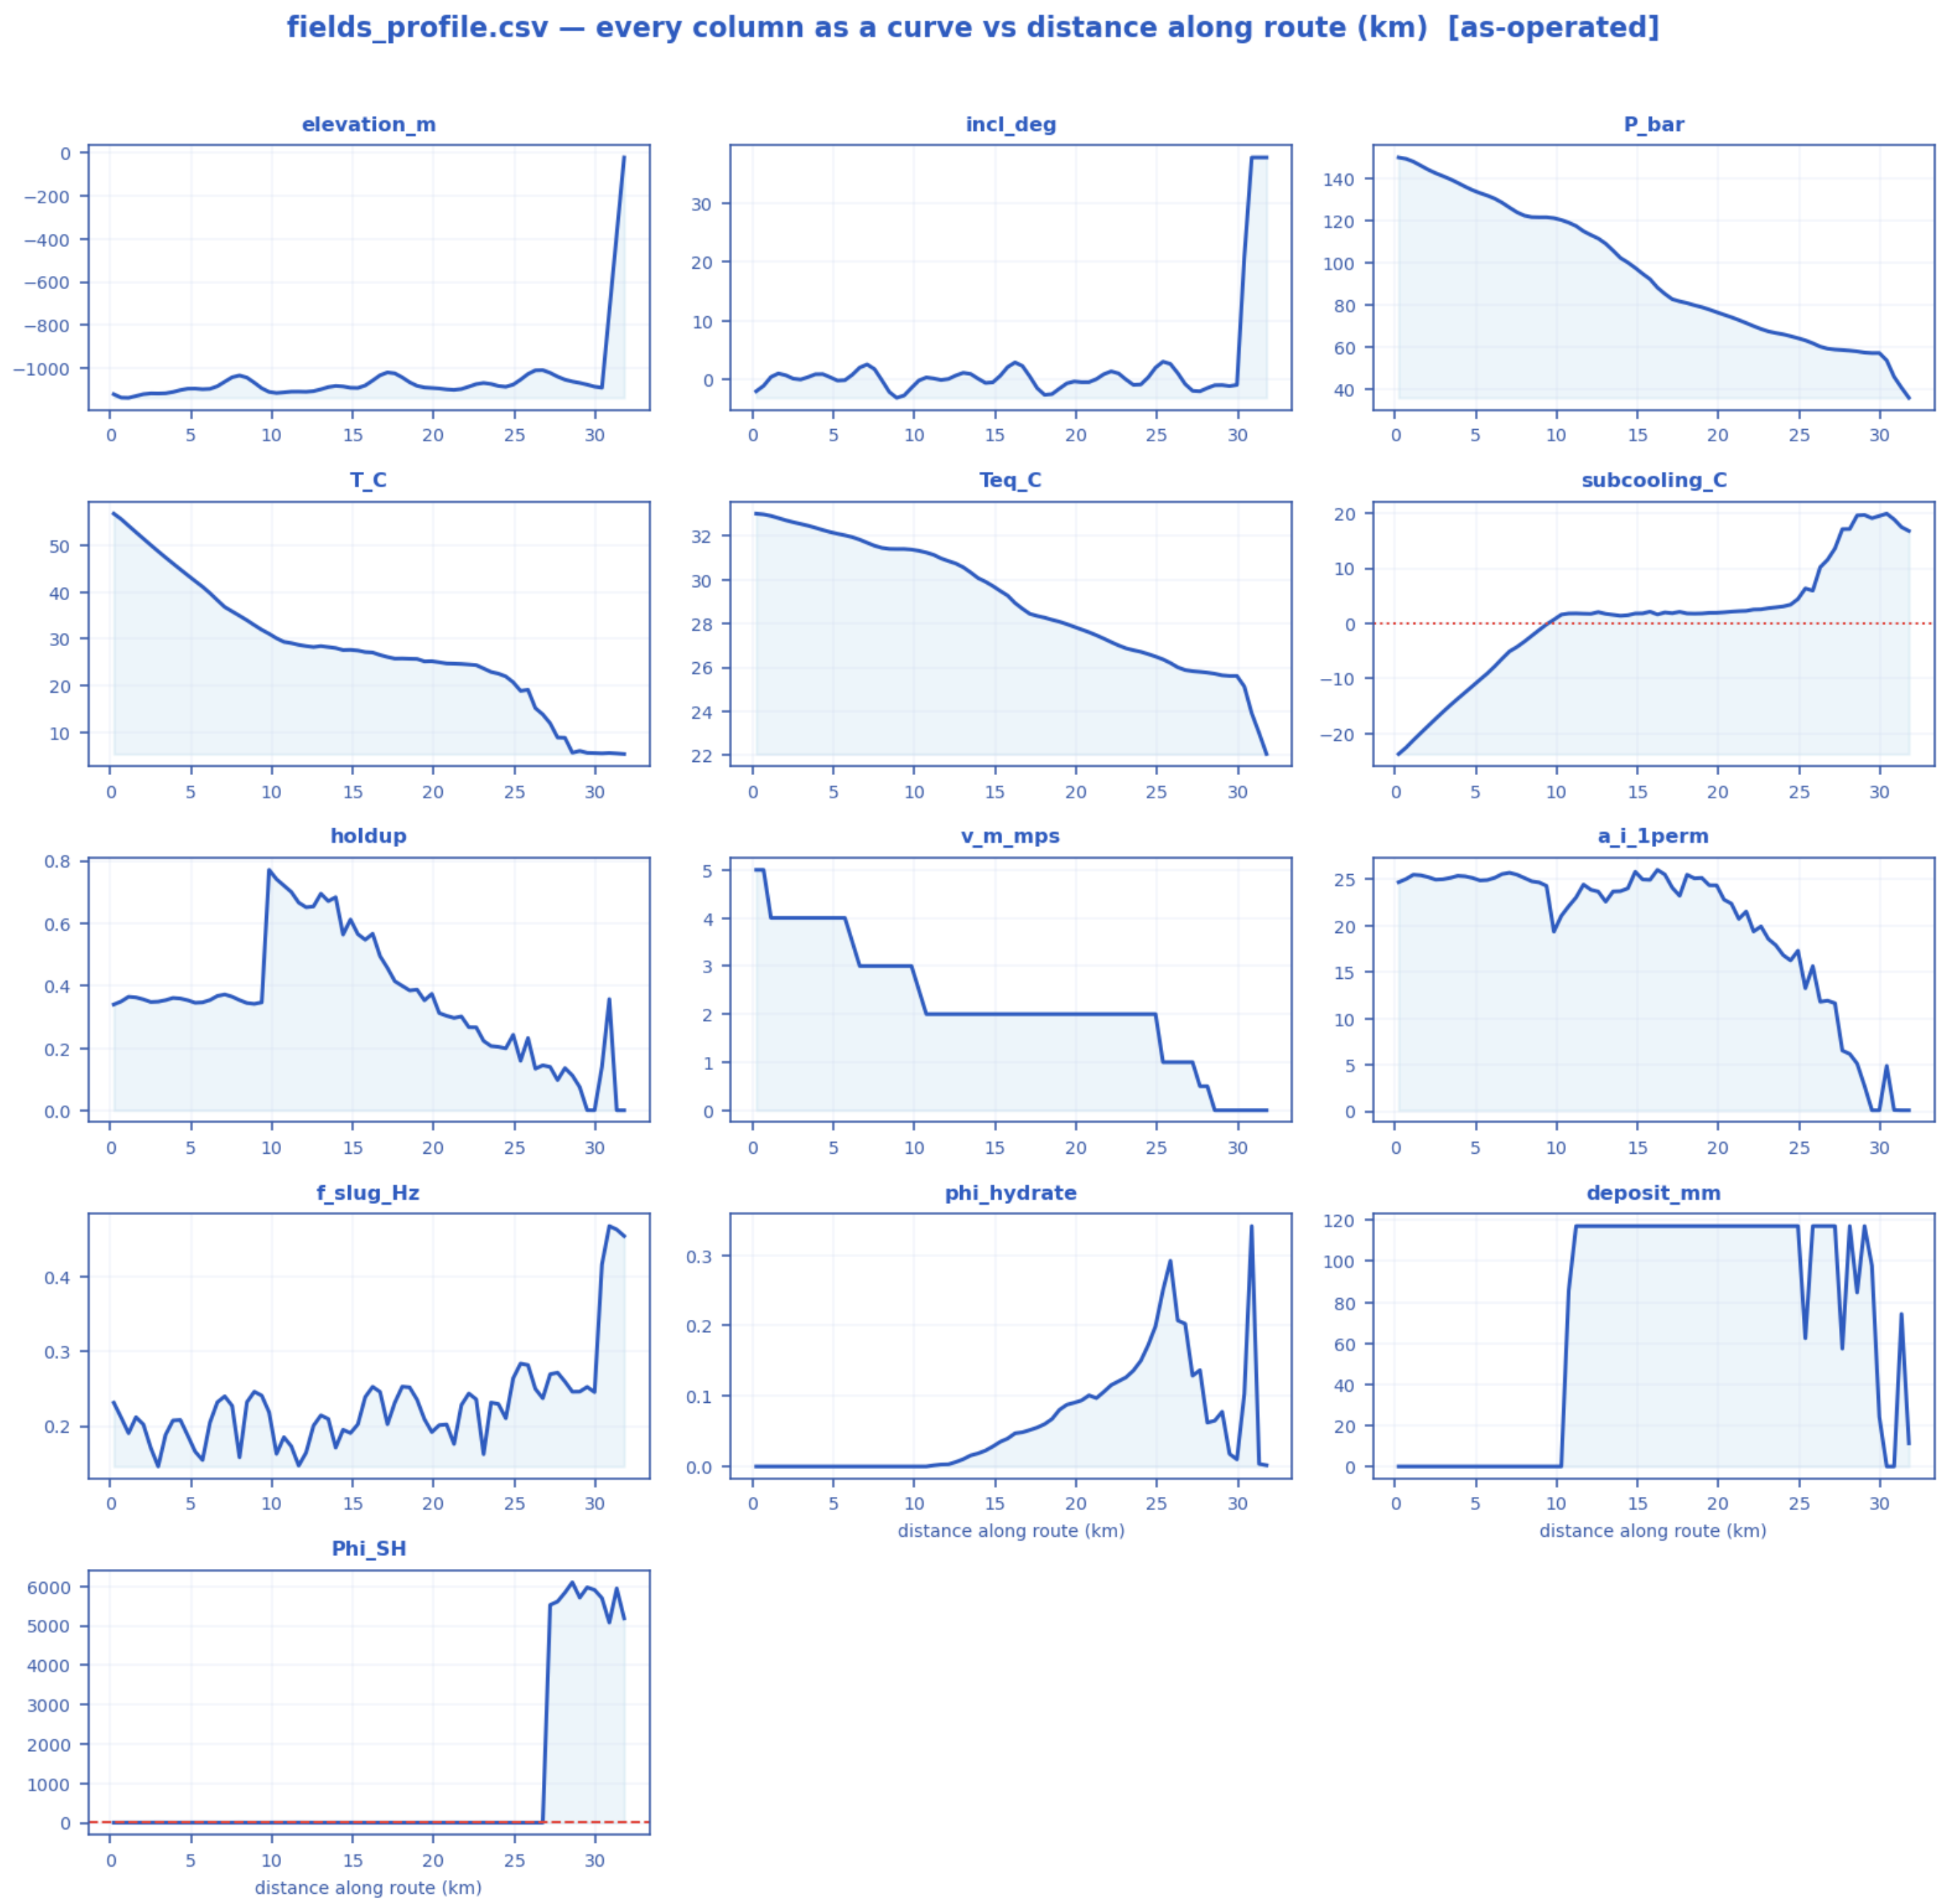


*Every column of timeseries_monitor.csv drawn as a curve [as-operated].*

| time_h | bc_rate_frac | P_bar | T_C | subcooling_C | holdup | v_m_mps | f_slug_Hz | phi_hydrate | deposit_mm | Phi_SH |
|---|---|---|---|---|---|---|---|---|---|---|
| **0** | 1 | 2.0927 | 14.162 | -14.057 | 0.35833 | 1 | 0.0001 | 0 | 0 | 0 |
| **3.6914** | 1 | 68.336 | 20.202 | 6.9258 | 0.19874 | 1.5 | 0.22964 | 0.36979 | 22.17 | 1.4068 |
| **7.3841** | 1 | 64.83 | 21.668 | 5.1159 | 0.25532 | 2 | 0.23522 | 0.34167 | 117.07 | 1.081 |
| **11.076** | 1 | 64.39 | 20.479 | 6.1166 | 0.14503 | 1.5 | 0.23388 | 0.35988 | 117.07 | 0.85991 |
| **14.768** | 1 | 57.169 | 15.535 | 9.779 | 0.16238 | 1 | 0.24541 | 0.41048 | 117.07 | 0.81515 |
| **18.461** | 1 | 58.86 | 15.545 | 10.369 | 0.14025 | 1 | 0.24346 | 0.22979 | 117.07 | 0.50722 |
| **22.152** | 1 | 55.992 | 13.107 | 11.823 | 0.12096 | 1 | 0.24842 | 0.25116 | 117.07 | 0.61556 |
| **25.845** | 1 | 56.213 | 14.339 | 9.581 | 0.1211 | 1 | 0.24783 | 0.24917 | 117.07 | 0.56649 |
| **29.537** | 1 | 56.17 | 8.3028 | 16.526 | 0.087066 | 0.5 | 0.2476 | 0.28743 | 117.07 | 0.48757 |
| **33.229** | 1 | 55.725 | 8.0725 | 16.599 | 0.10048 | 0 | 0.24864 | 0.16281 | 117.07 | 0.3884 |
| **36.922** | 1 | 55.706 | 8.7018 | 16.245 | 0.10018 | 0.5 | 0.24839 | 0.16377 | 117.07 | 0.34749 |
| **40.613** | 1 | 57.598 | 8.1454 | 16.552 | 0.11604 | 0.5 | 0.24615 | 0.16824 | 117.07 | 0.43864 |
| **44.306** | 1 | 57.607 | 5.8595 | 19.701 | 0.083057 | 0 | 0.24613 | 0.25443 | 117.07 | 0.11549 |

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| **47.999** | 1 | 57.604 | 5.9877 | 19.687 | 0.074876 | 0 | 0.24613 | 0.077729 | 117.07 | 0.11585 |

### 11.1.7 csv_crosssection.csv — cross-section / quasi-3-D geometry along the route

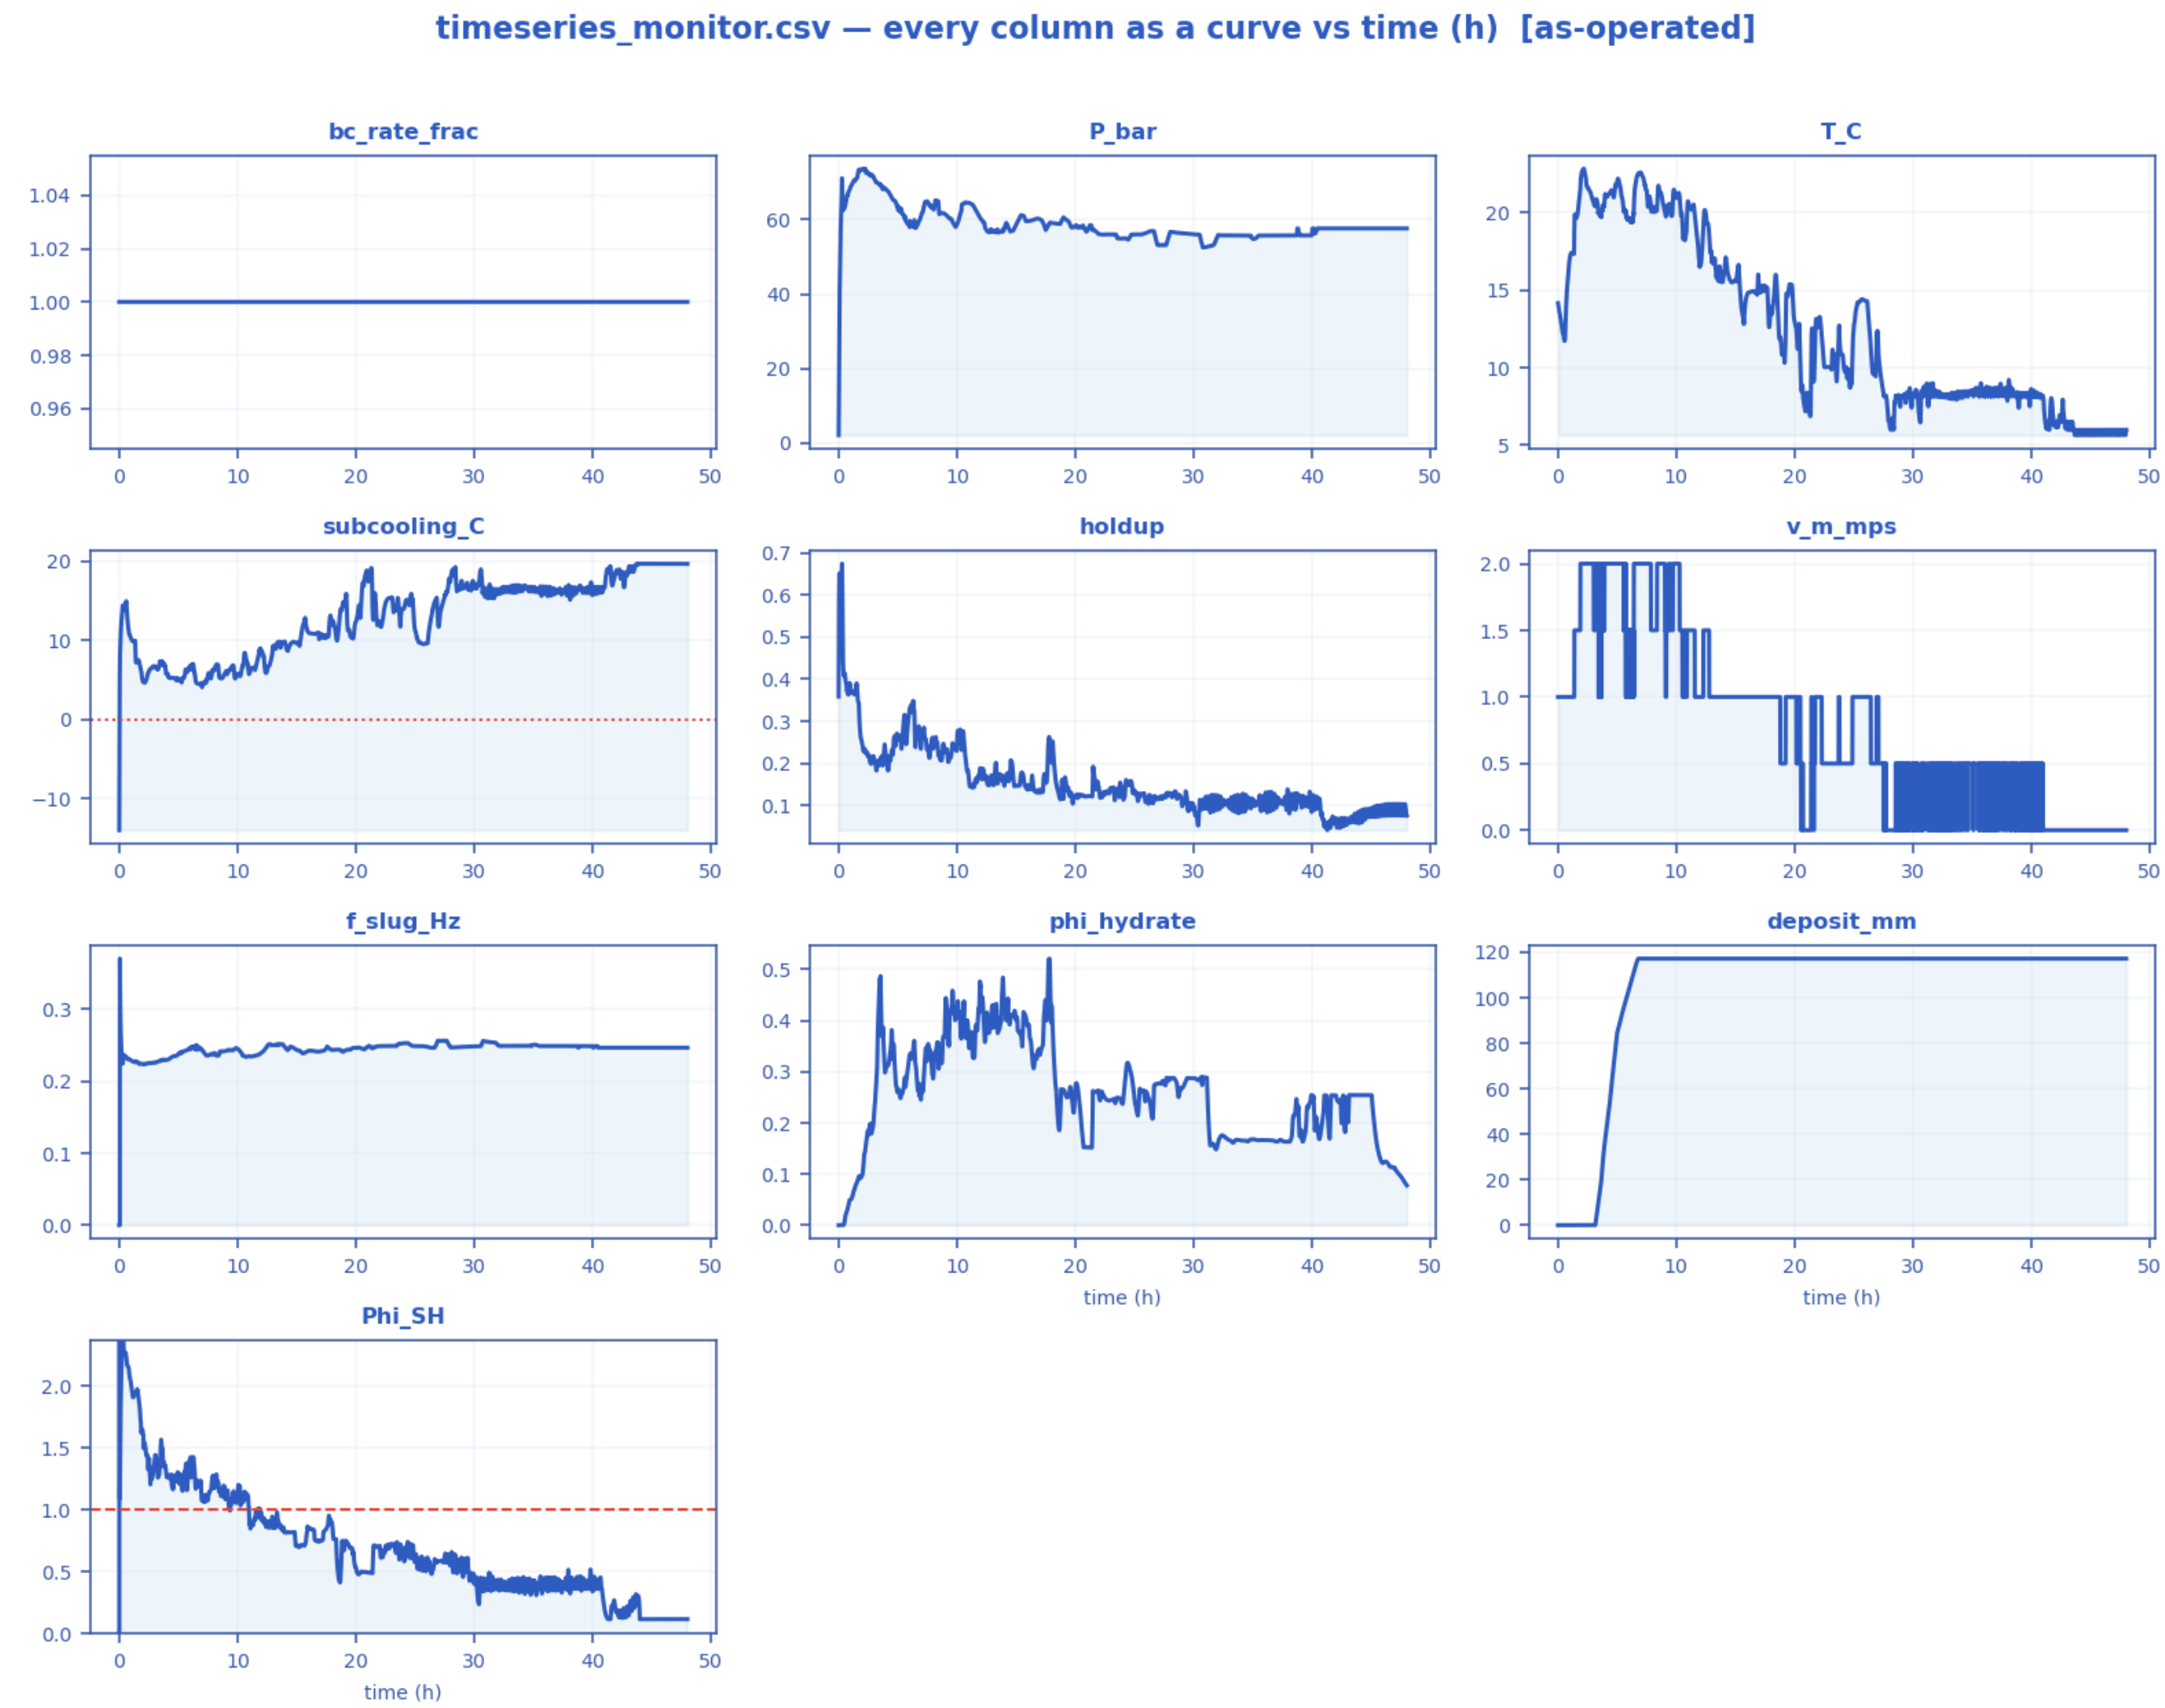


*Every column of csv_crosssection.csv drawn as a curve  [as-operated].*

| x_km | diameter_mm | holdup_alpha_l | liquid_level_h_over_D | liquid_level_mm | wetted_perim_frac | interface_width_mm | deposit_mean_mm | deposit_bottom_mm | deposit_top_mm | u_mix_mps |
|---|---|---|---|---|---|---|---|---|---|---|
| **0.22857** | 254.5 | 0.33985 | 0.37283 | 94.886 | 0.41814 | 246.13 | 0 | 0 | 0 | 5 |
| **2.5143** | 254.5 | 0.34792 | 0.37937 | 96.55 | 0.42244 | 246.98 | 0 | 0 | 0 | 4 |
| **4.8** | 254.5 | 0.35347 | 0.38387 | 97.694 | 0.42539 | 247.54 | 0 | 0 | 0 | 4 |
| **7.0857** | 254.5 | 0.37212 | 0.39887 | 101.51 | 0.43517 | 249.24 | 0 | 0 | 0 | 3 |
| **9.8286** | 254.5 | 0.77127 | 0.72042 | 183.35 | 0.64532 | 228.44 | 0 | 0 | 0 | 3 |
| **12.114** | 152.7 | 0.65145 | 0.62012 | 94.692 | 0.57722 | 148.23 | 117.07 | 265.19 | 10.2 | 2 |

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| **14.4** | 152.7 | 0.5639 | 0.55028 | 84.027 | 0.53206 | 151.93 | 117.07 | 265.19 | 10.2 | 2 |
| **17.143** | 152.7 | 0.45692 | 0.46614 | 71.179 | 0.47842 | 152.35 | 117.07 | 265.19 | 10.2 | 2 |
| **19.429** | 152.7 | 0.35323 | 0.38367 | 58.586 | 0.42525 | 148.51 | 117.07 | 265.19 | 10.2 | 2 |
| **21.714** | 152.7 | 0.30149 | 0.34139 | 52.13 | 0.39725 | 144.81 | 117.07 | 265.19 | 10.2 | 2 |
| **24.457** | 152.7 | 0.19937 | 0.2535 | 38.709 | 0.3359 | 132.85 | 117.07 | 265.19 | 10.2 | 2 |
| **26.743** | 152.7 | 0.14497 | 0.20254 | 30.928 | 0.29719 | 122.74 | 117.07 | 265.19 | 10.2 | 1 |
| **29.029** | 152.7 | 0.074876 | 0.12822 | 19.58 | 0.23314 | 102.11 | 117.07 | 265.19 | 10.2 | 0 |
| **31.771** | 231.95 | 0.001 | 0.0070369 | 1.6322 | 0.053466 | 38.777 | 11.277 | 25.545 | 0.98249 | 0 |

#### 11.1.8 csv_compositional.csv — compositional / PVT state along the route (PR EOS)

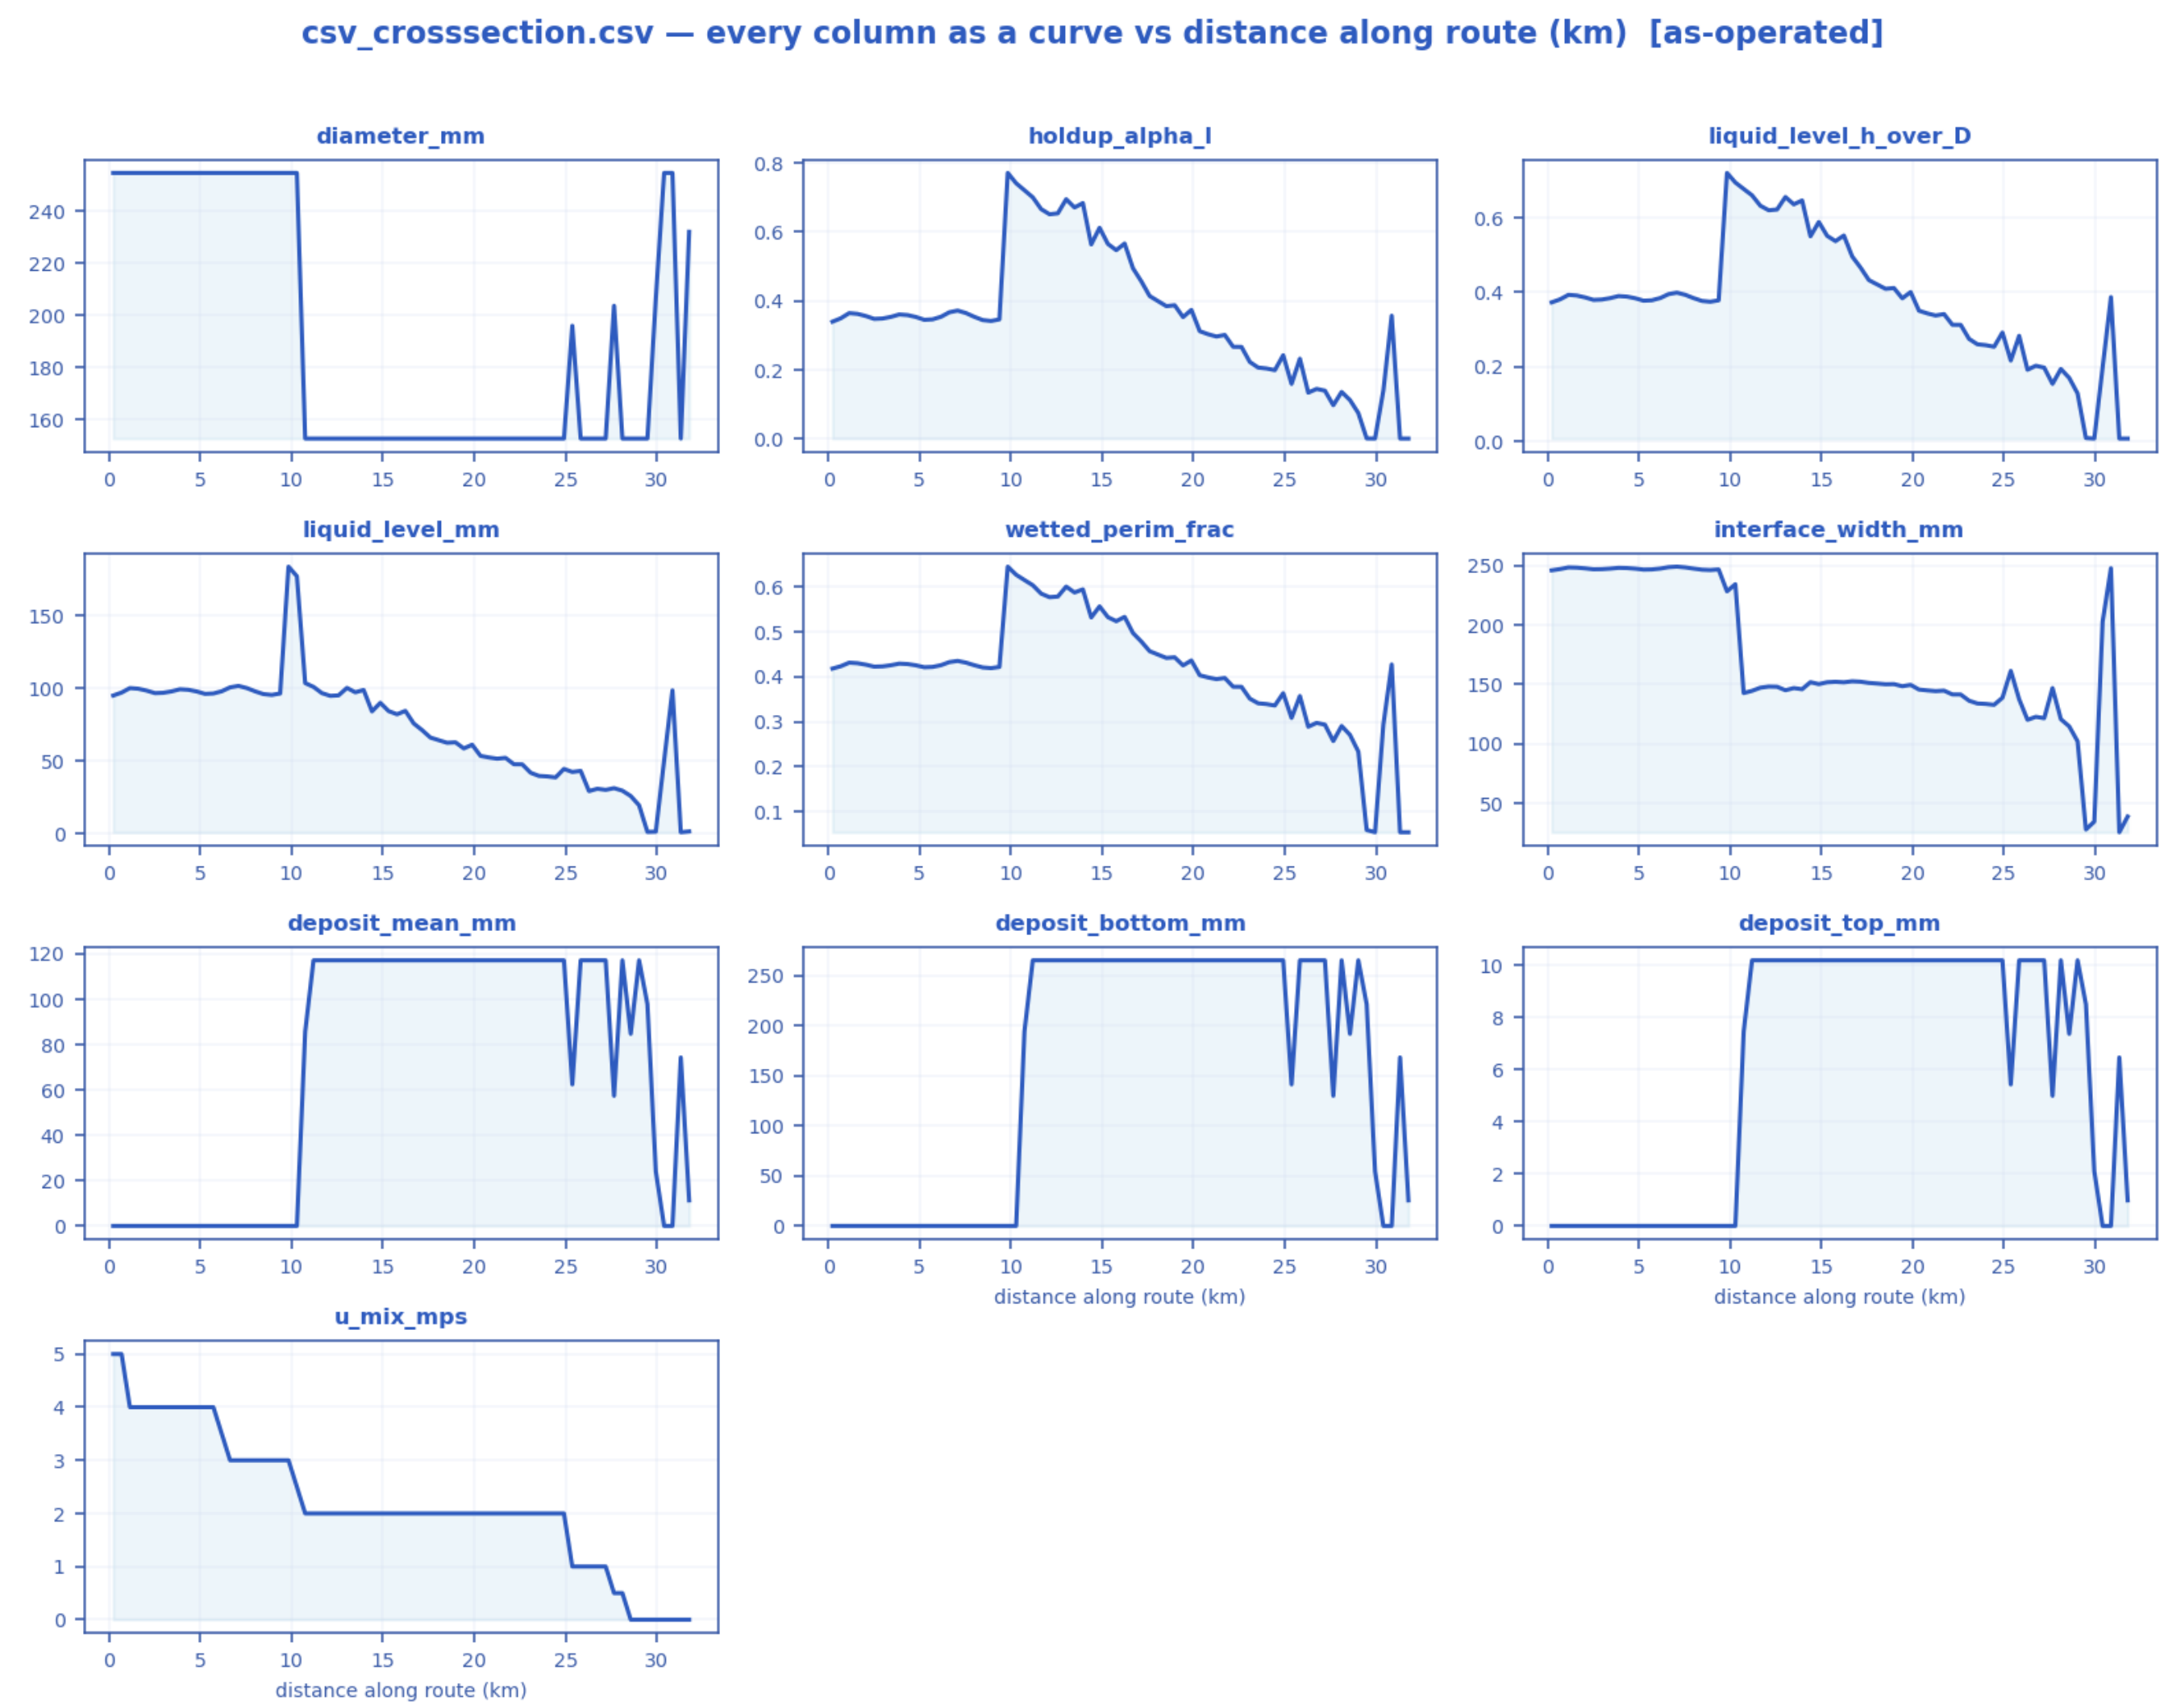**csv_compositional.csv — every column as a curve vs distance along route (km)  [as-operated]**



*Every column of csv_compositional.csv drawn as a curve  [as-operated].*

| x_km | P_bar | T_C | vapour_frac_V | rho_gas_kgm3 | rho_liq_kgm3 | mu_gas_Pas | mu_liq_Pas | Z_gas | gas_sg | K_N2 | K_CO2 | K_C1 | K_C2 | K_C3 | K_iC4 | K_nC4 | K_iC5 | K_nC5 | K_C6 | K_C7+ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **0.22857** | 150 | 56.789 | 0 | 510.41 | 510.41 | 9.5718e-05 | 9.5397e-05 | 0.53715 | 1.7645 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| **2.5143** | 142.58 | 50.068 | 0 | 516.85 | 516.85 | 9.9723e-05 | 0.00010001 | 0.51459 | 1.7645 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| **4.8** | 134.51 | 43.594 | 0 | 522.82 | 522.82 | 0.00010371 | 0.00010464 | 0.4896 | 1.7645 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| **7.0857** | 126.27 | 36.795 | 0 | 529.22 | 529.22 | 0.0001083 | 0.00011004 | 0.46392 | 1.7645 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| **9.8286** | 121.28 | 31.063 | 0 | 535.19 | 535.19 | 0.00011285 | 0.00011553 | 0.44883 | 1.7645 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| **12.114** | 113.29 | 28.425 | 0 | 536.37 | 536.37 | 0.00011394 | 0.00011664 | 0.42197 | 1.7645 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| **14.4** | 100.25 | 27.581 | 0.040102 | 98.471 | 542.33 | 1.4508e-05 | 0.00012117 | 0.76693 | 0.6637 | 4.0958 | 0.86785 | 2.121 | 0.73769 | 0.34864 | 0.20846 | 0.16638 | 0.097785 | 0.082138 | 0.041781 | 0.021781 |
| **17.143** | 82.885 | 26.095 | 0.148 | 78.693 | 564.35 | 1.3522e-05 | 0.00014167 | 0.79382 | 0.65814 | 5.1446 | 0.92207 | 2.4737 | 0.75697 | 0.32502 | 0.18103 | 0.14093 | 0.077077 | 0.063383 | 0.029442 | 0.014045 |
| **19.429** | 77.979 | 25.157 | 0.17408 | 73.465 | 570.66 | 1.3264e-05 | 0.00014855 | 0.80151 | 0.65665 | 5.5181 | 0.93933 | 2.5947 | 0.76348 | 0.31833 | 0.17351 | 0.13405 | 0.071722 | 0.05859 | 0.026469 | 0.012288 |
| **21.714** | 71.603 | 24.604 | 0.20904 | 66.682 | 578.55 | 1.2956e-05 | 0.00015757 | 0.81309 | 0.65632 | 6.0824 | 0.97421 | 2.7839 | 0.78121 | 0.31421 | 0.16673 | 0.12764 | 0.066464 | 0.053868 | 0.023515 | 0.010556 |
| **24.457** | 65.375 | 21.93 | 0.23545 | 60.553 | 587.09 | 1.2627e-05 | 0.00016895 | 0.8223 | 0.65344 | 6.7173 | 0.99227 | 2.9731 | 0.78563 | 0.30221 | 0.15524 | 0.11744 | 0.059166 | 0.047451 | 0.019856 | 0.0085521 |
| **26.743** | 59.468 | 13.803 | 0.2432 | 55.652 | 597.27 | 1.2203e-05 | 0.00018616 | 0.8246 | 0.64329 | 7.3644 | 0.94661 | 3.0919 | 0.74137 | 0.26598 | 0.13009 | 0.096448 | 0.046221 | 0.0364 | 0.014263 | 0.0057628 |
| **29.029** | 57.604 | 5.9877 | 0.22817 | 55.011 | 601.99 | 1.1956e-05 | 0.00019692 | 0.81779 | 0.63334 | 7.4975 | 0.86761 | 3.0335 | 0.67831 | 0.23181 | 0.1097 | 0.080116 | 0.037114 | 0.028824 | 0.010793 | 0.0041725 |
| **31.771** | 36.176 | 5.3144 | 0.3495 | 33.103 | 629.32 | 1.1094e-05 | 0.00024547 | 0.8761 | 0.64539 | 12.37 | 1.1488 | 4.546 | 0.85243 | 0.25415 | 0.10847 | 0.076625 | 0.031995 | 0.024131 | 0.0079179 | 0.0026879 |

### 11.1.9 csv_compositional_transport.csv — compositional grading (hydrate-former depletion) along the route




*Every column of csv_compositional_transport.csv drawn as a curve [as-operated].*
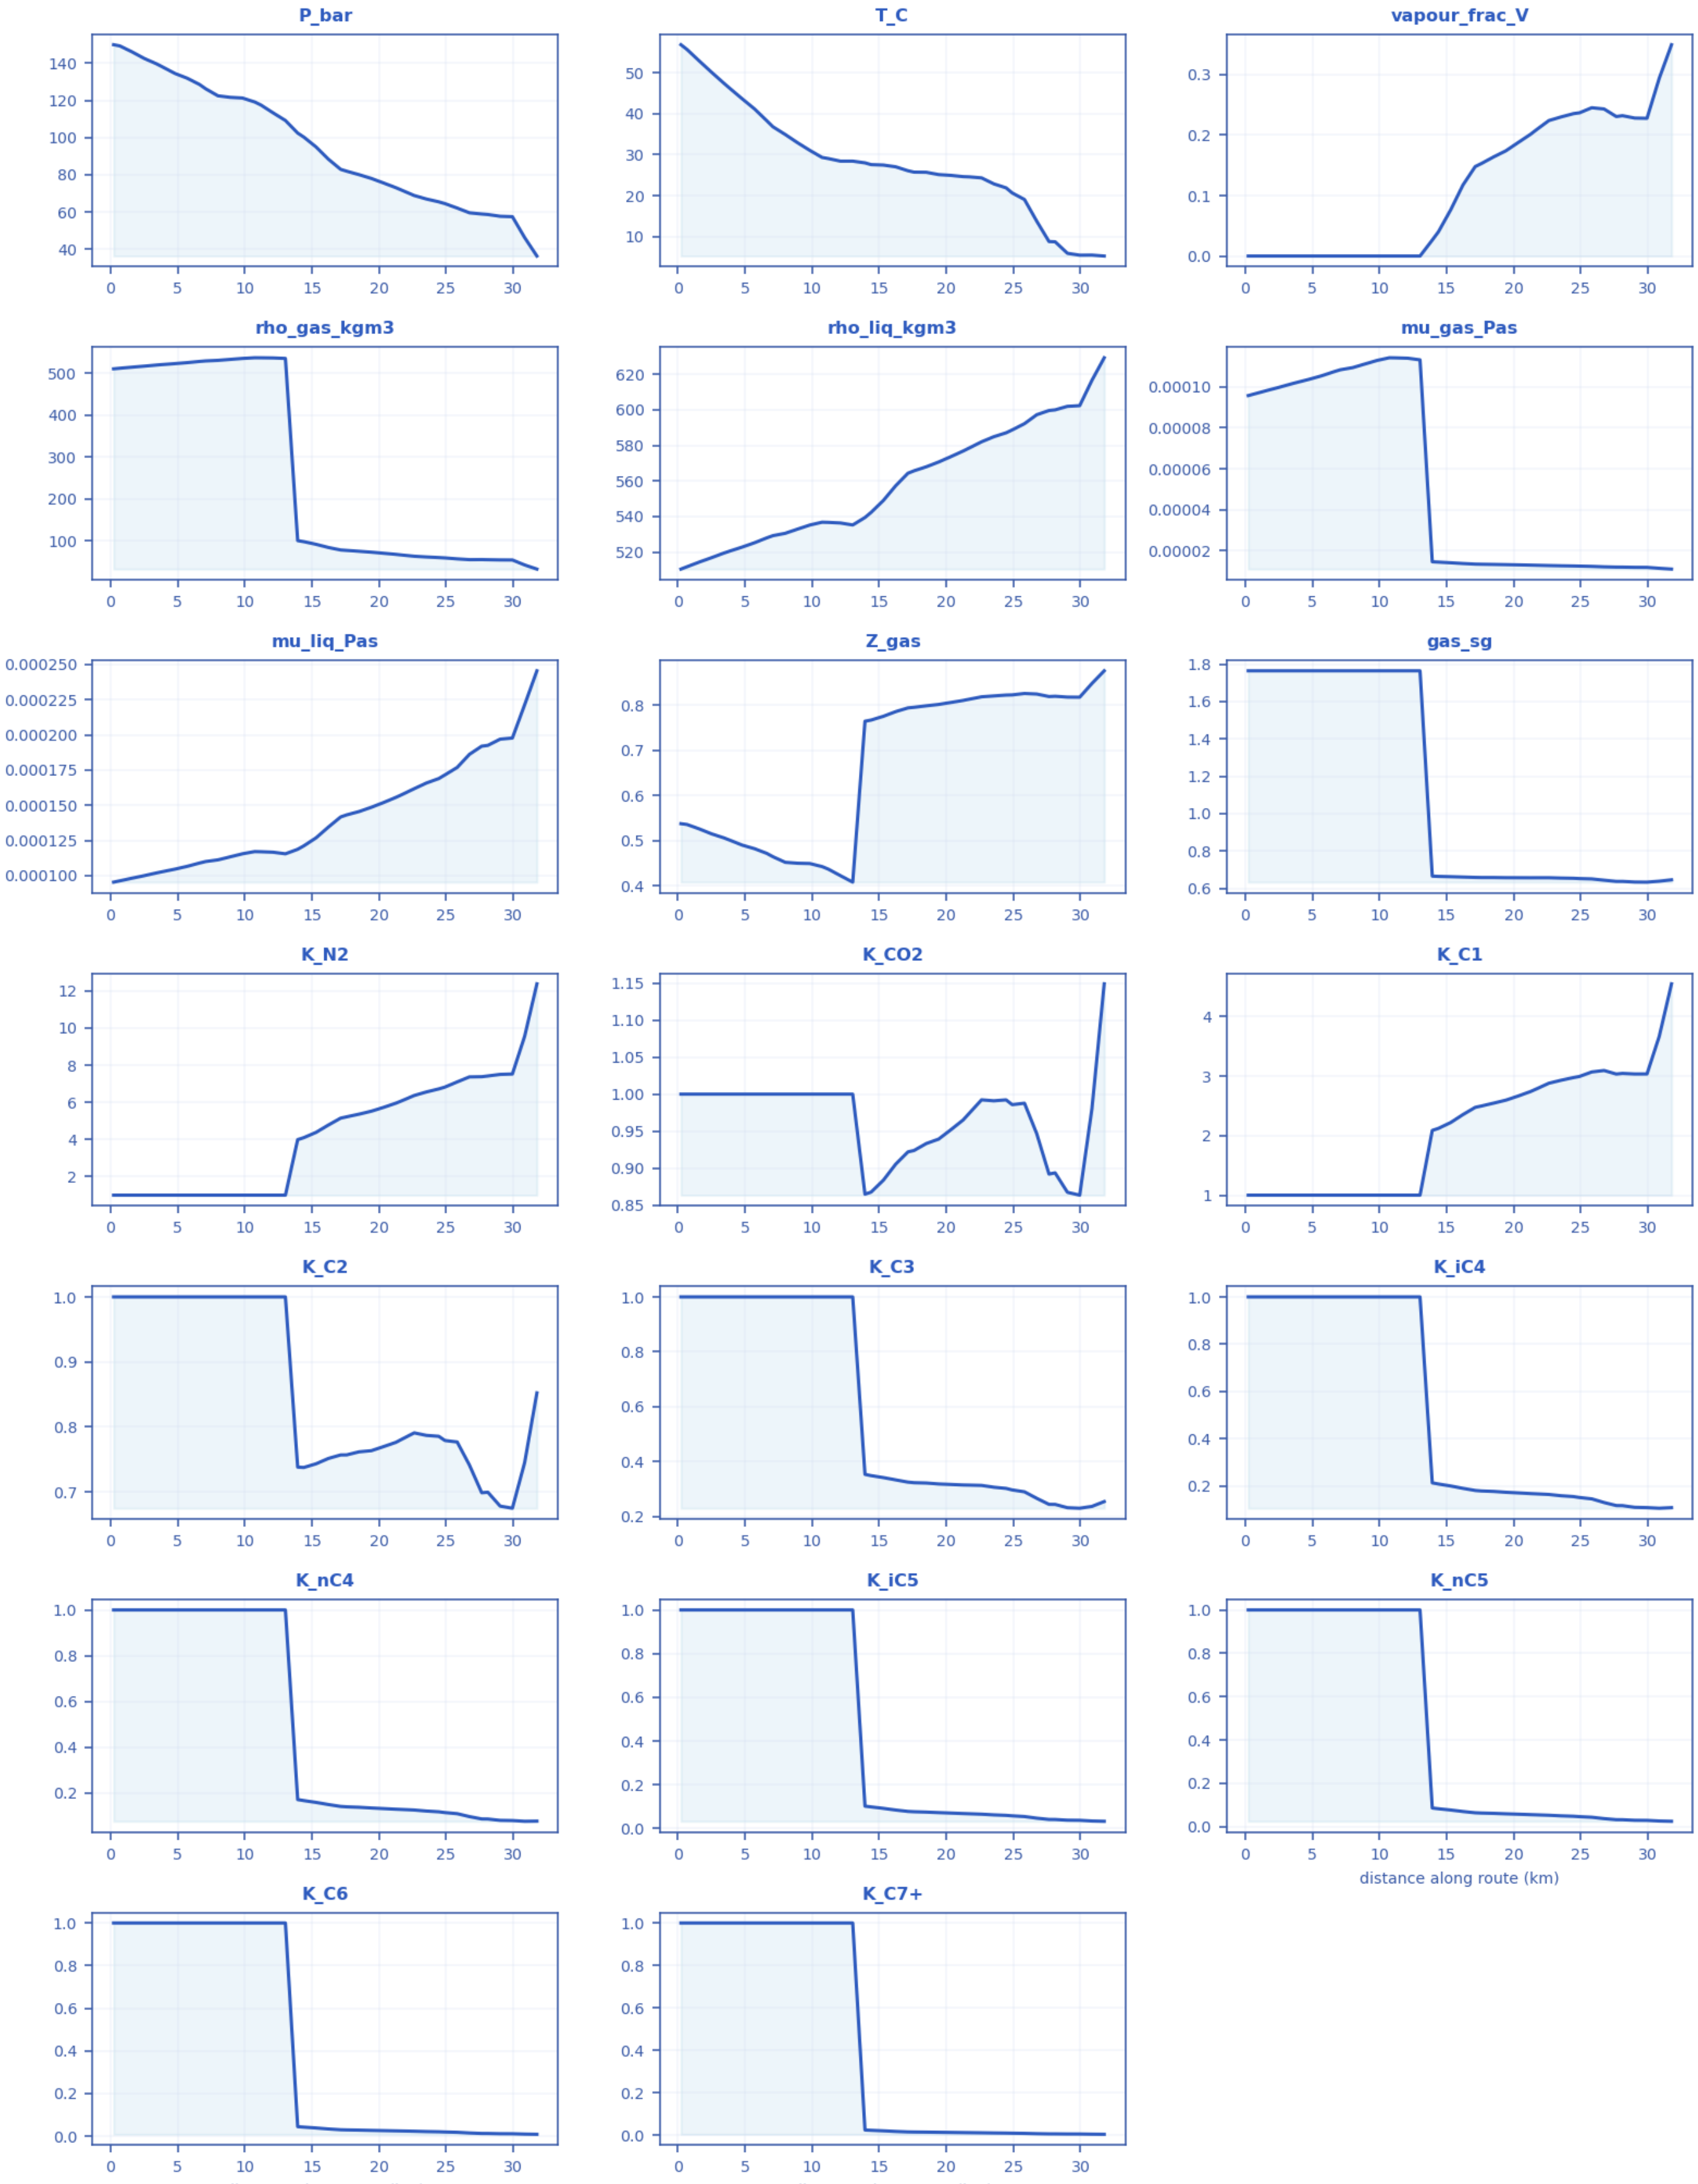
| x_km | P_bar | T_C | z_N2 | z_CO2 | z_C1 | z_C2 | z_C3 | z_iC4 | z_nC4 | z_iC5 | z_nC5 | z_C6 | z_C7+ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **0.228571** | 150 | 56.7892 | 0.004 | 0.02 | 0.43 | 0.075 | 0.058 | 0.012 | 0.028 | 0.013 | 0.016 | 0.03 | 0.314 |
| **2.51429** | 142.583 | 50.068 | 0.004 | 0.02 | 0.43 | 0.075 | 0.058 | 0.012 | 0.028 | 0.013 | 0.016 | 0.03 | 0.314 |
| **4.8** | 134.508 | 43.5937 | 0.004 | 0.02 | 0.43 | 0.075 | 0.058 | 0.012 | 0.028 | 0.013 | 0.016 | 0.03 | 0.314 |
| **7.0857** | 126.2 | 36.79 | 0.004 | 0.02 | 0.43 | 0.075 | 0.058 | 0.012 | 0.028 | 0.013 | 0.016 | 0.03 | 0.314 |

| | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **1** | 72 | 53 | | | | | | | | | | | |
| **9.82857** | 121.284 | 31.0627 | 0.004 | 0.02 | 0.43 | 0.075 | 0.058 | 0.012 | 0.028 | 0.013 | 0.016 | 0.03 | 0.314 |
| **12.1143** | 113.293 | 28.4253 | 0.00403759 | 0.0198515 | 0.428686 | 0.0741161 | 0.0564791 | 0.0116681 | 0.0278328 | 0.0131509 | 0.0161857 | 0.0303482 | 0.317644 |
| **14.4** | 100.251 | 27.5808 | 0.00410895 | 0.0195655 | 0.426056 | 0.0724357 | 0.0536697 | 0.0110565 | 0.0275079 | 0.0134392 | 0.0165405 | 0.0310135 | 0.324607 |
| **17.1429** | 82.8853 | 26.0953 | 0.00420048 | 0.0191889 | 0.42242 | 0.0702764 | 0.0502119 | 0.0103065 | 0.0270769 | 0.0138127 | 0.0170003 | 0.0318755 | 0.33363 |
| **19.4286** | 77.9789 | 25.1572 | 0.00428208 | 0.0188458 | 0.418933 | 0.0683486 | 0.0472629 | 0.0096694 | 0.0266794 | 0.0141494 | 0.0174146 | 0.0326524 | 0.341762 |
| **21.7143** | 71.6034 | 24.604 | 0.00436956 | 0.0184699 | 0.414937 | 0.06628 | 0.0442362 | 0.00901804 | 0.0262396 | 0.0145143 | 0.0178638 | 0.0334946 | 0.350577 |
| **24.4571** | 65.3746 | 21.9295 | 0.00448275 | 0.0179714 | 0.409371 | 0.0636018 | 0.0405193 | 0.0082218 | 0.0256497 | 0.014993 | 0.0184529 | 0.0345991 | 0.362138 |
| **26.7429** | 59.4676 | 13.8032 | 0.00458266 | 0.0175203 | 0.404085 | 0.0612376 | 0.0374174 | 0.0075606 | 0.0251097 | 0.0154218 | 0.0189807 | 0.0355887 | 0.372496 |
| **29.0286** | 57.6043 | 5.98773 | 0.00467043 | 0.0171154 | 0.399146 | 0.0591614 | 0.0348279 | 0.00701112 | 0.0246203 | 0.0158038 | 0.0194508 | 0.0364703 | 0.381722 |
| **31.7714** | 36.1757 | 5.31439 | 0.00473138 | 0.0168294 | 0.39555 | 0.0577202 | 0.0331027 | 0.00664635 | 0.0242719 | 0.0160722 | 0.0197812 | 0.0370897 | 0.388205 |

## 11.2 Unplanned shut-in — cooldown / no-touch time
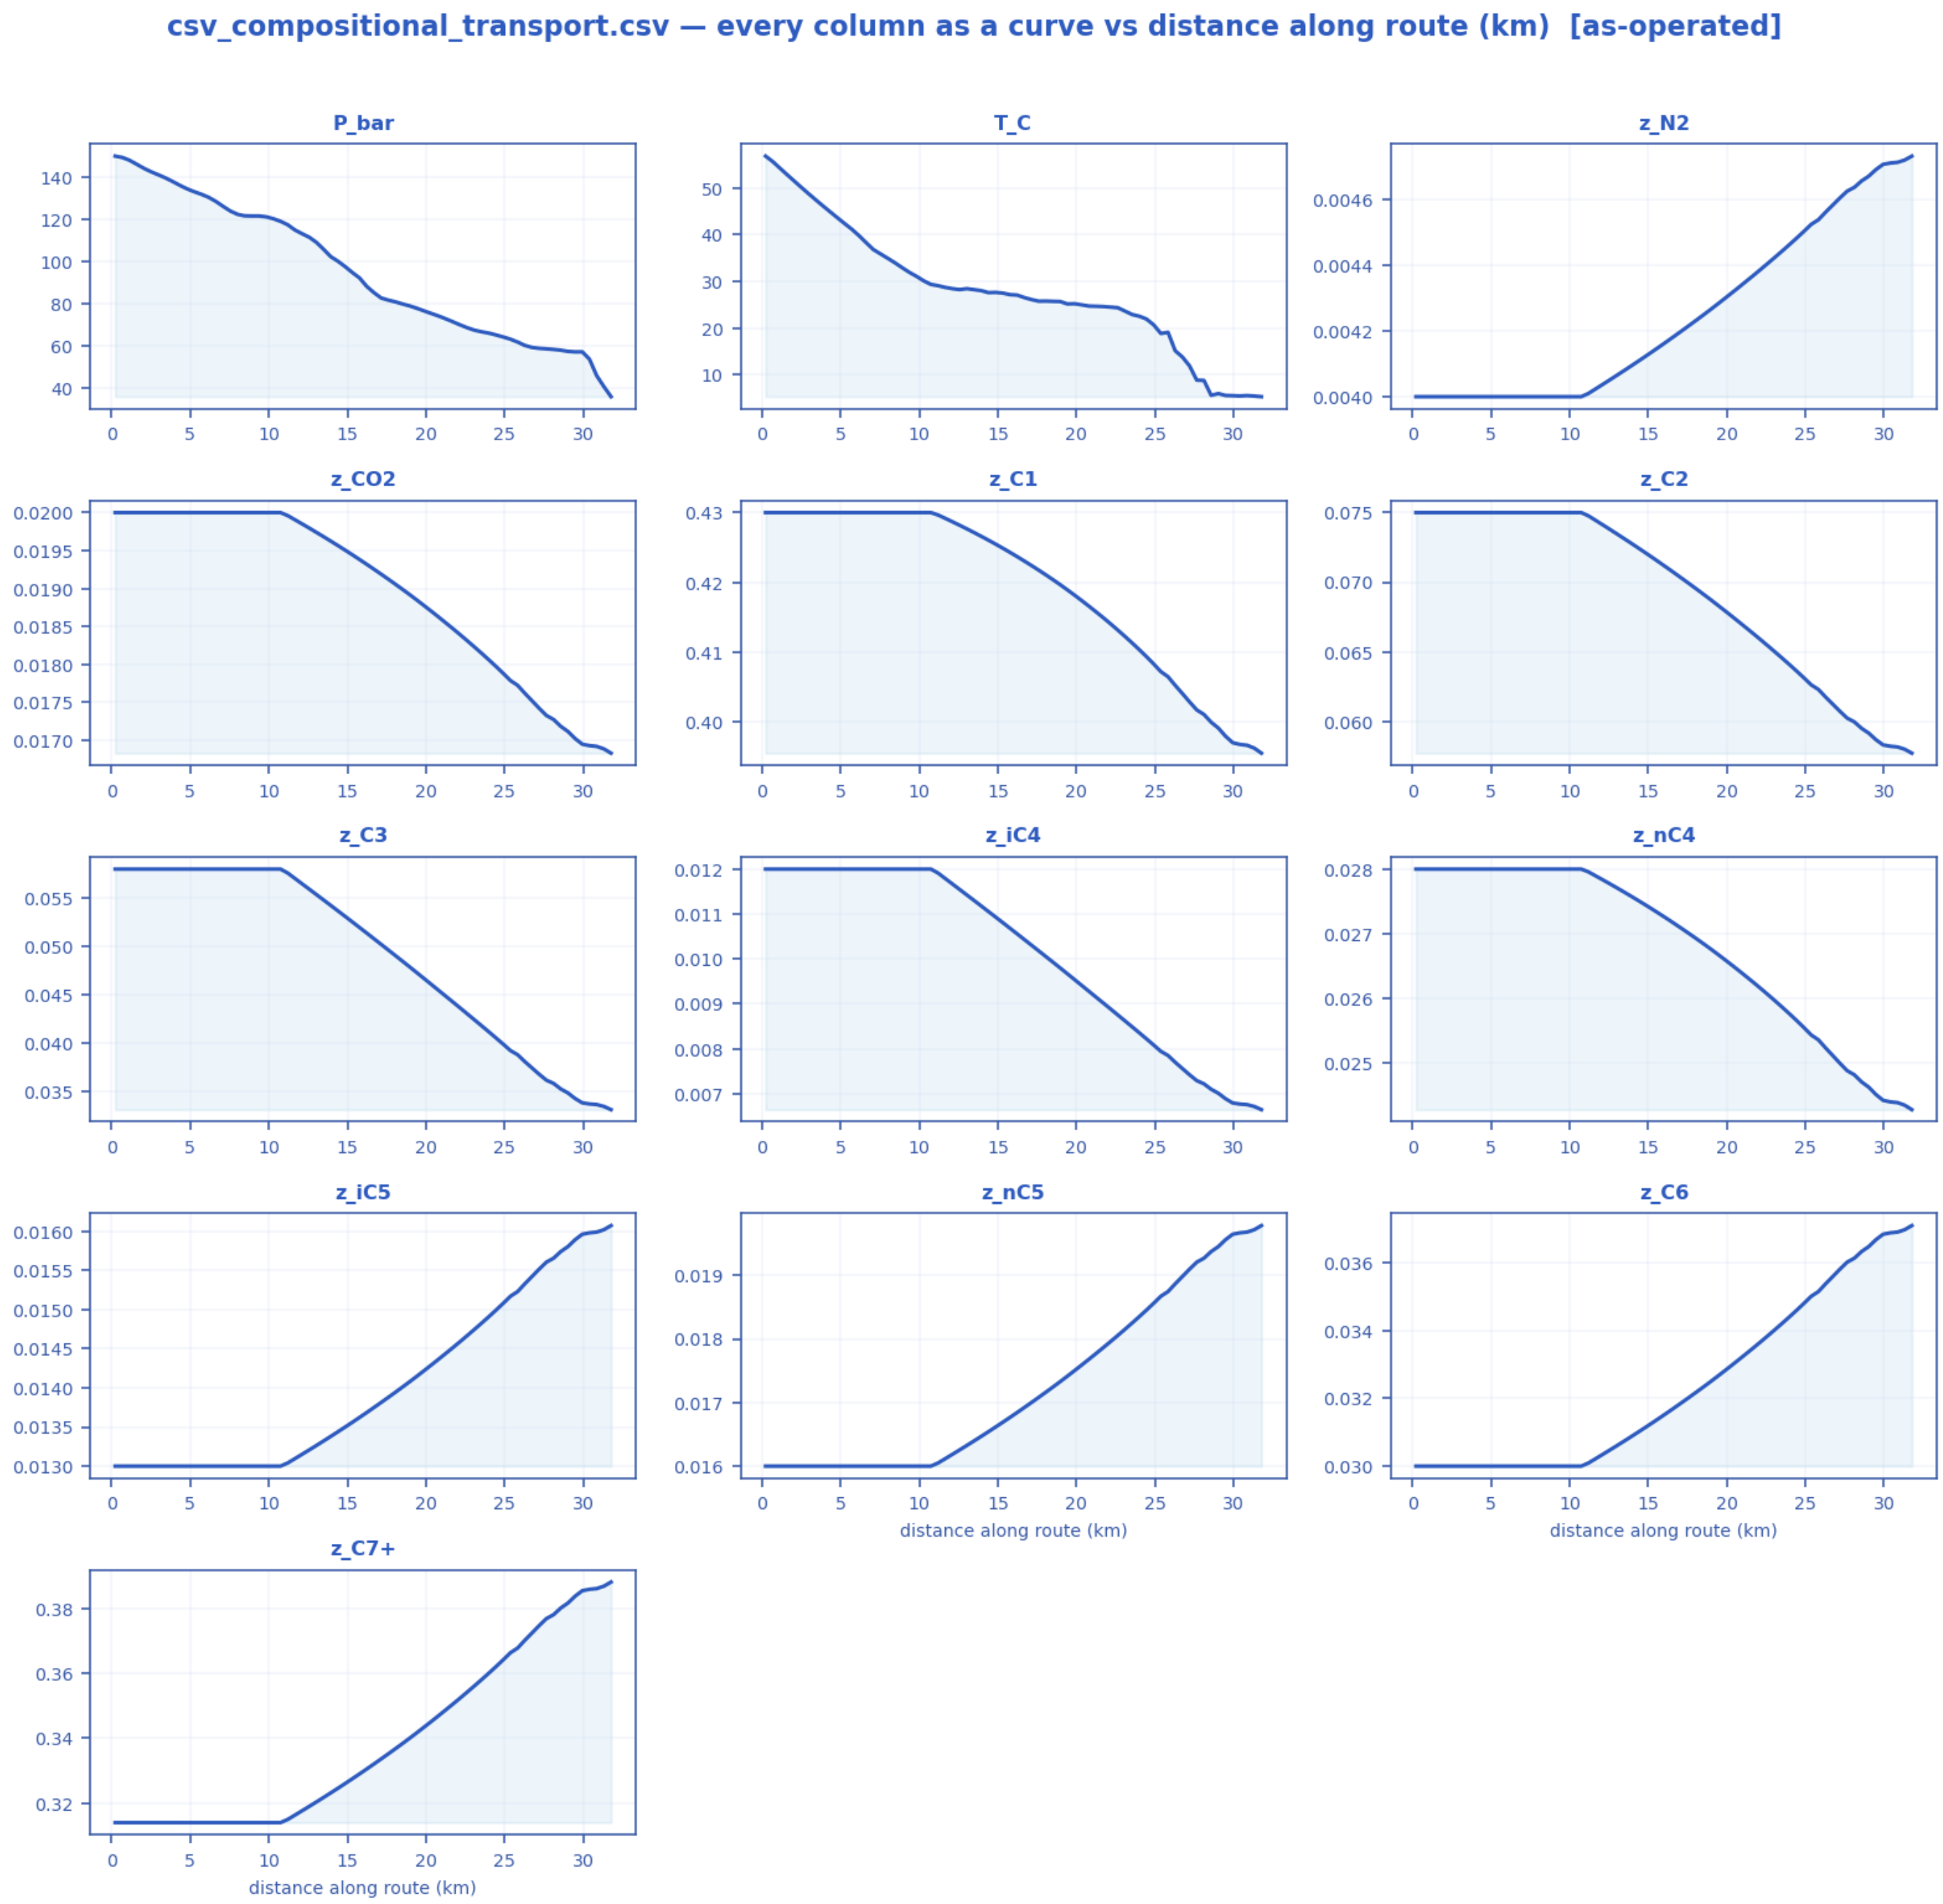
### 11.2.1 Headline prediction metrics

| Metric | Value | Units |
|---|---|---|
| **Total ΔP** | 50.93 | bar |
| **Peak velocity** | 5 | m/s |
| **Erosional limit (API 14E)** | 5.069 | m/s |
| **Max slug length** | 5000 | m |
| **Mean slug length** | 4714 | m |
| **Slug/intermittent fraction** | 0.04603 | – |
| **Slug-catcher surge (P90)** | 0.3841 | $m^3$ |
| **Max subcooling** | 28.62 | °C |
| **Design subcooling (P90)** | 28.9 | °C |
| **Max Φ_SH (coupling)** | 6101 | – |
| **Coupling hot-spot** | 28.57 | km |
| **Plug probability** | 0.9167 | frac |
| **Time-to-plug P50** | 2.77 | h |
| **Time-to-plug P10** | 2.11 | h |
| **Time-to-plug P90** | 3.337 | h |
| **Peak wall deposit** | 117.1 | mm |
| **MEG required** | 60 | wt% |
| **MEG rate** | 9.573e+04 | L/h |
| **Under-inhibited length** | 25.14 | km |
| **No-touch time** | 1.51e-14 | h |
| **Effective U** | 22 | $W/m^2K$ |
| **Slurry rel. viscosity** | 52.38 | – |
| **Hydrate mass formed** | 1.516e+06 | kg |
| **Min mixture sound speed** | 153.3 | m/s |
| **Wax onset** | 8.457 | km |
| **Max scaling index** | 0.4725 | – |
| **Liquid mass error** | 8.601e-07 | frac |
| **Gas mass error** | 6.585e-13 | frac |
| **Solver fallbacks** | 0 | # |

### 11.2.2 Charts, curves, contours and maps (9 figures)




*Final-state P50 profiles: seabed elevation, liquid holdup, pressure & temperature vs hydrate T_eq, and subcooling along the whole route. [shut-in]*




*Slug-formation prediction: terrain, intermittent (slug/churn) bands, slug frequency and slug-unit length, and liquid holdup.  [shut-in]*

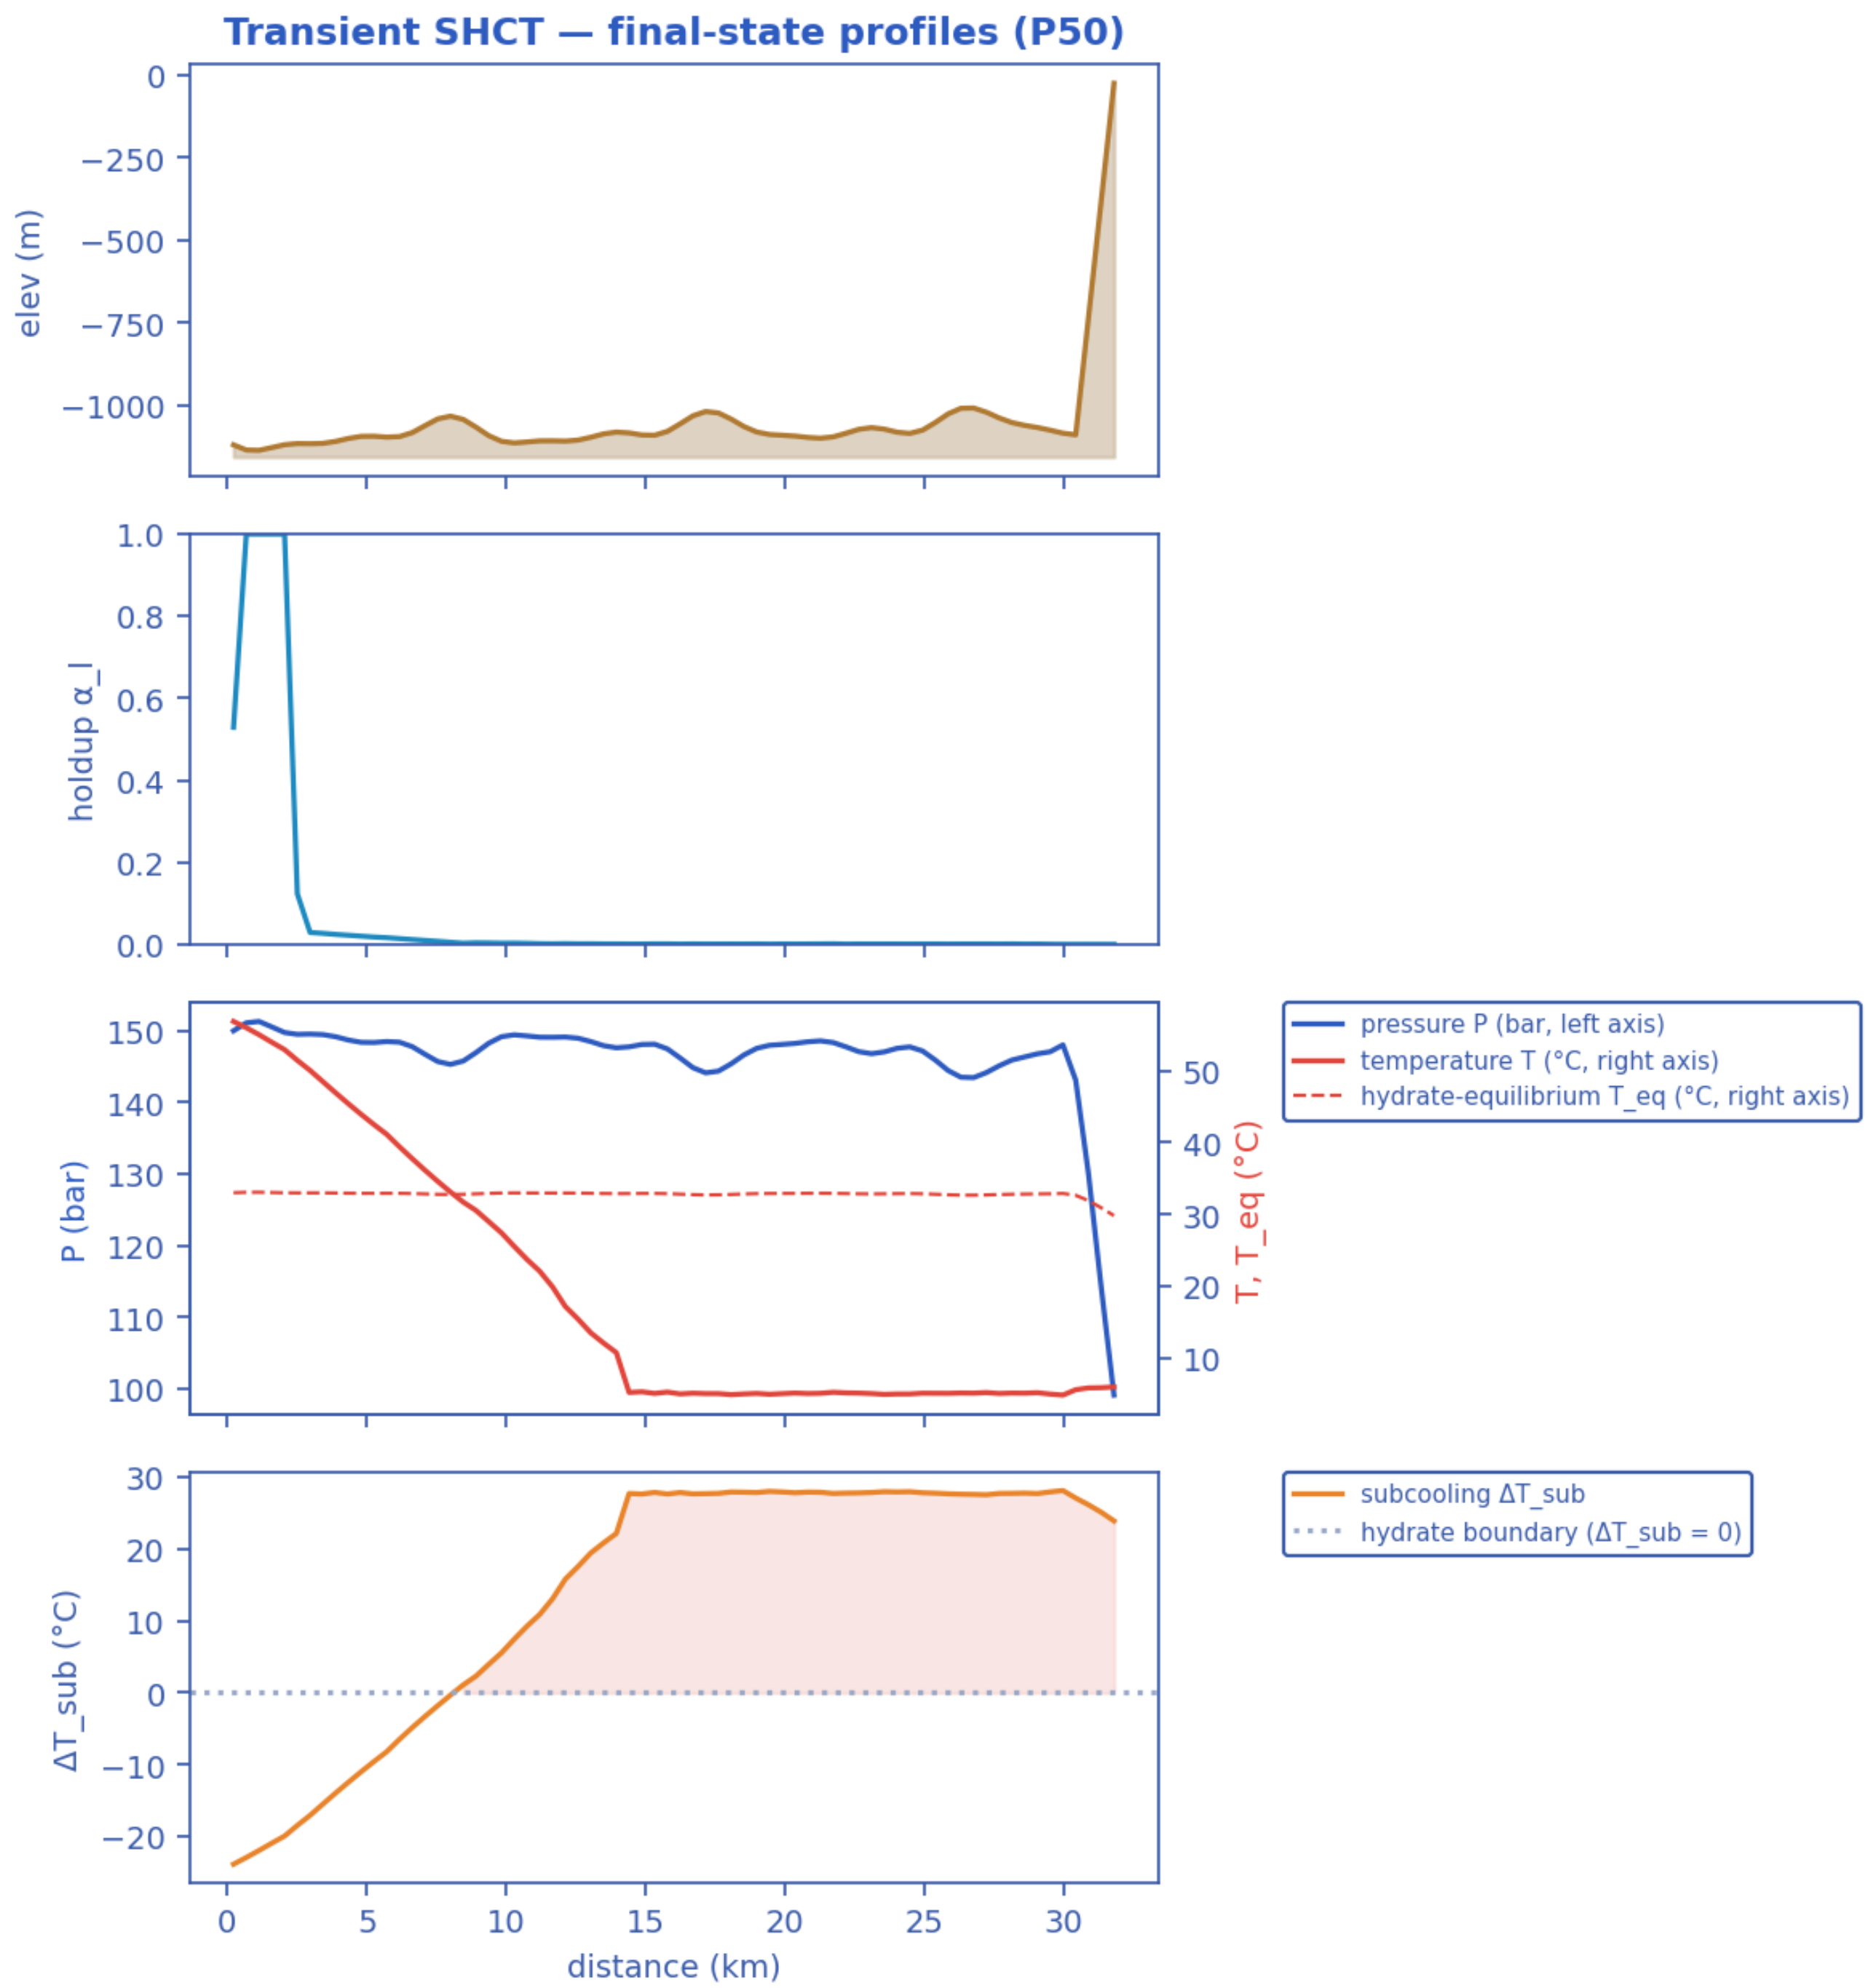


*Liquid-holdup field α_l(x,t) — the bands are slug activity migrating along the line in time (space-time contour map). [shut-in]*

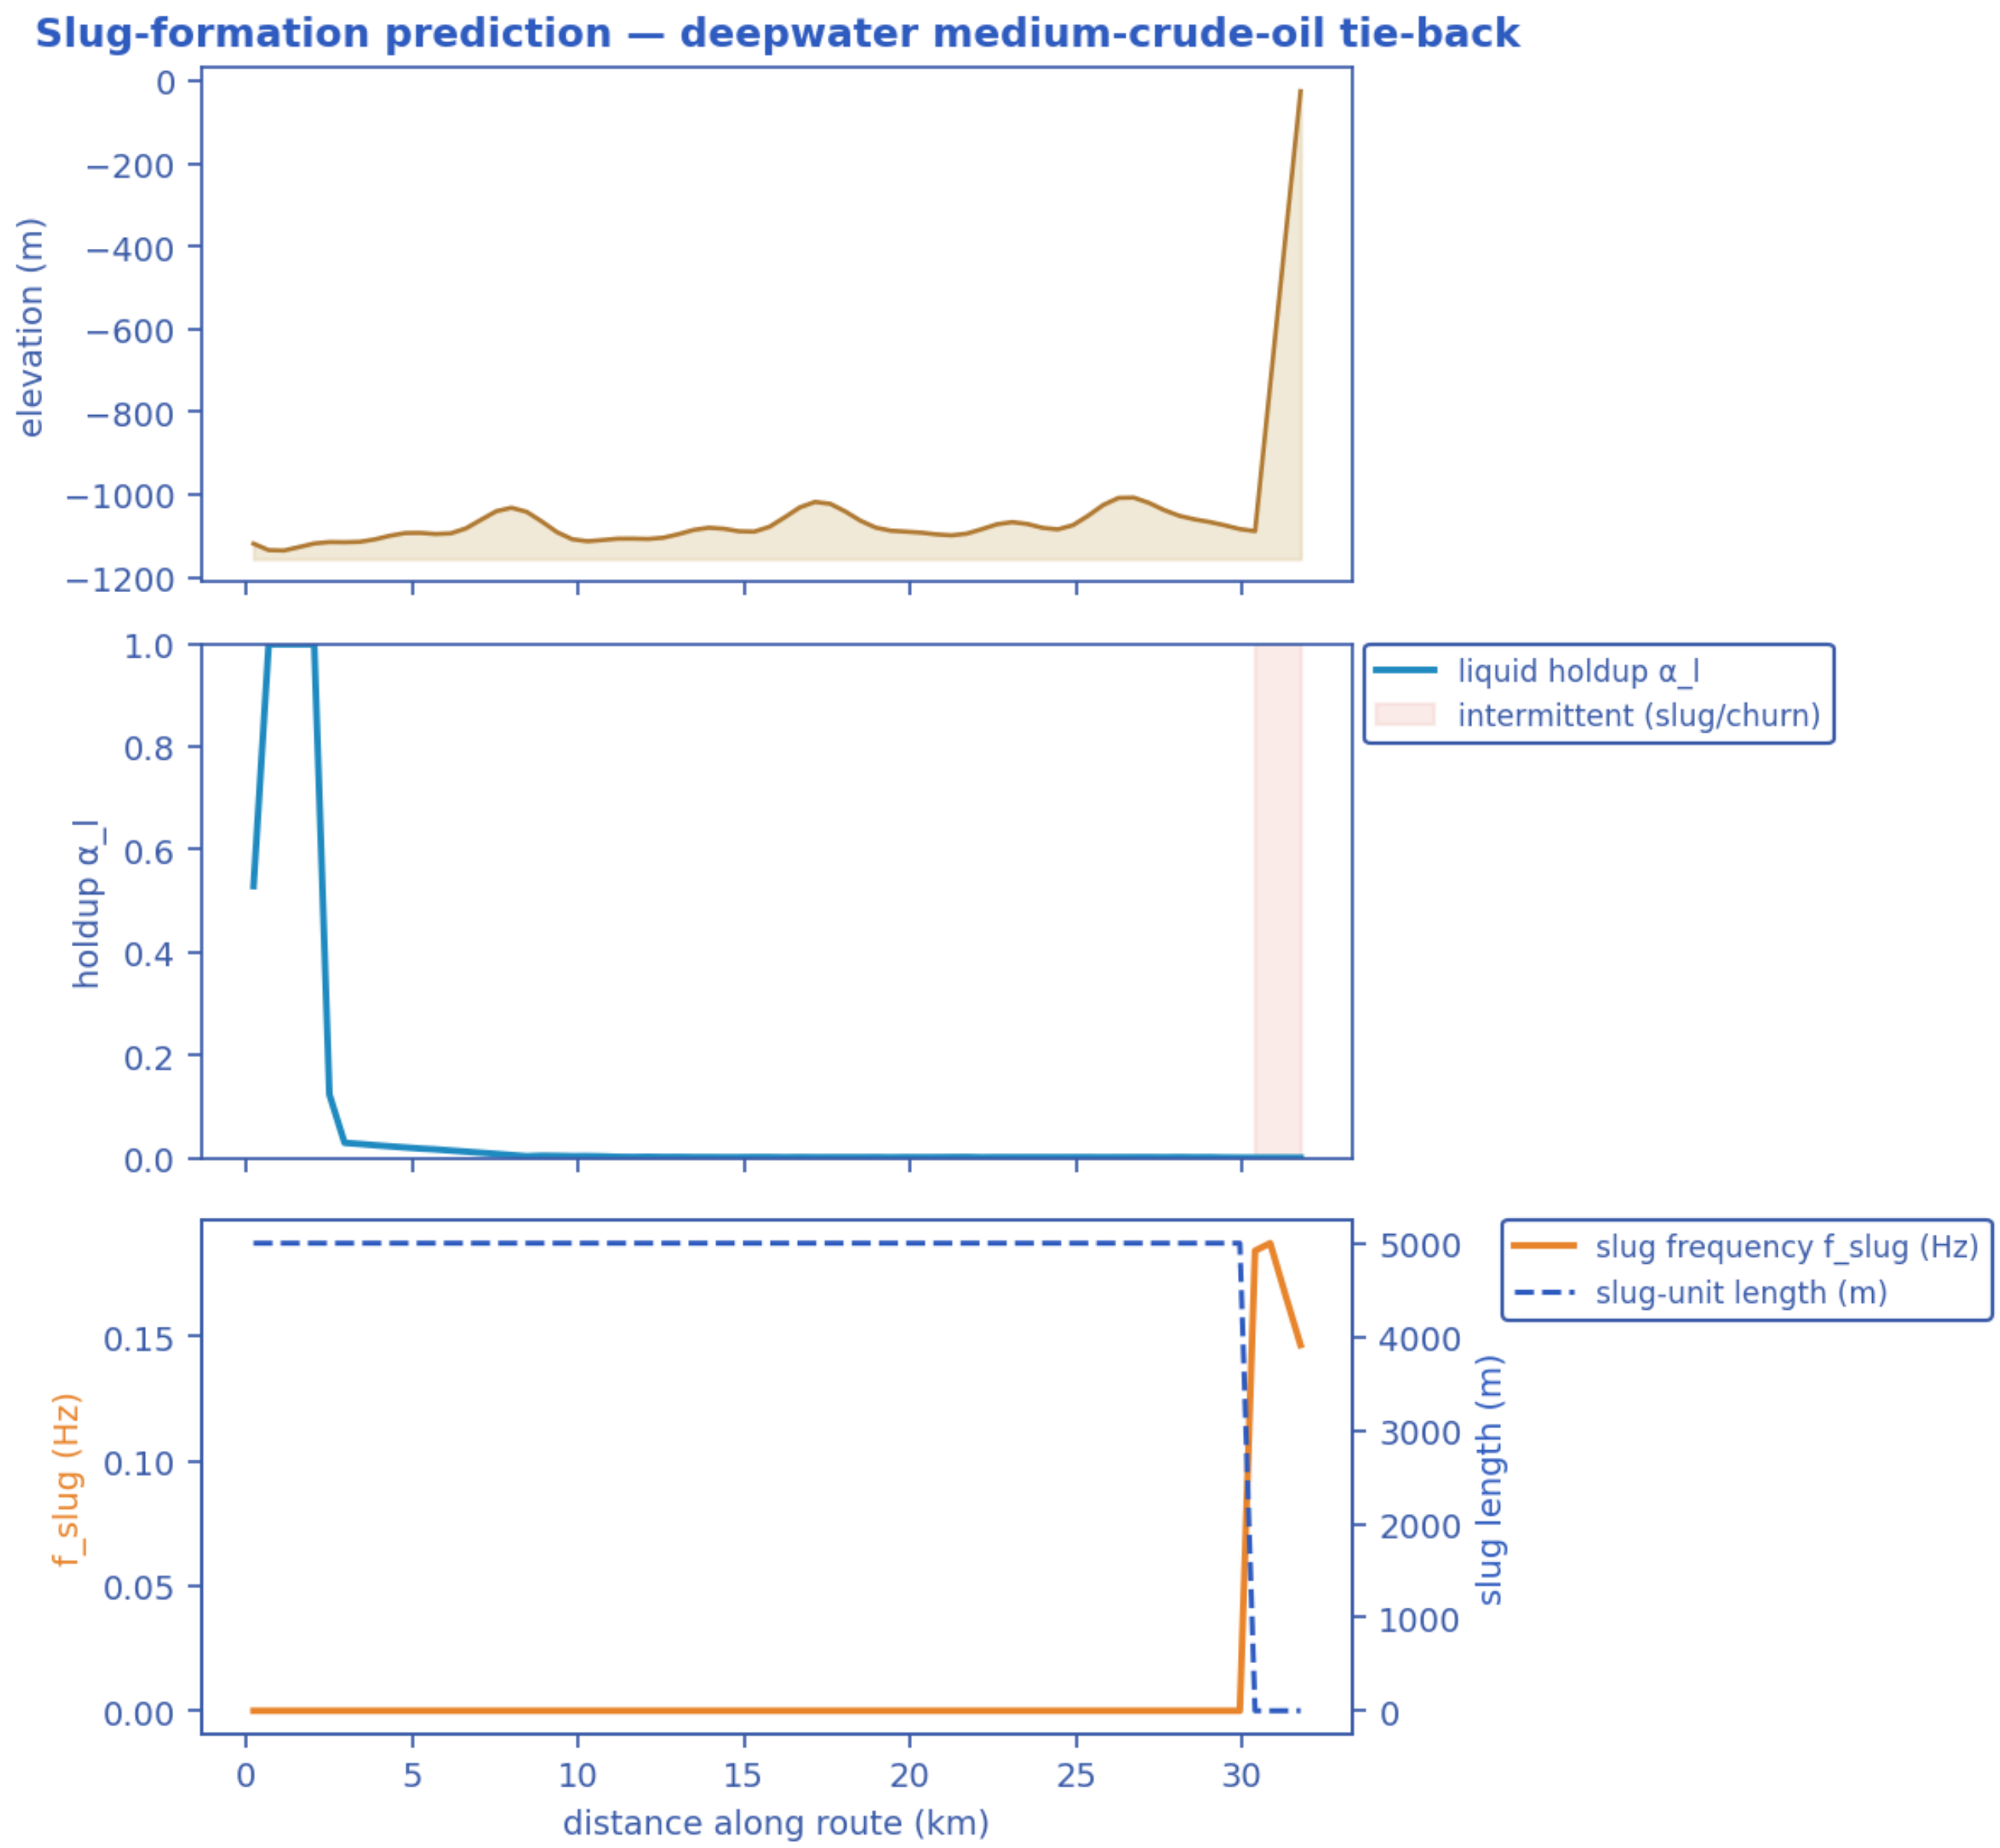


*Production P–T trajectory against the hydrate-stability envelope (curve).  [shut-in]*

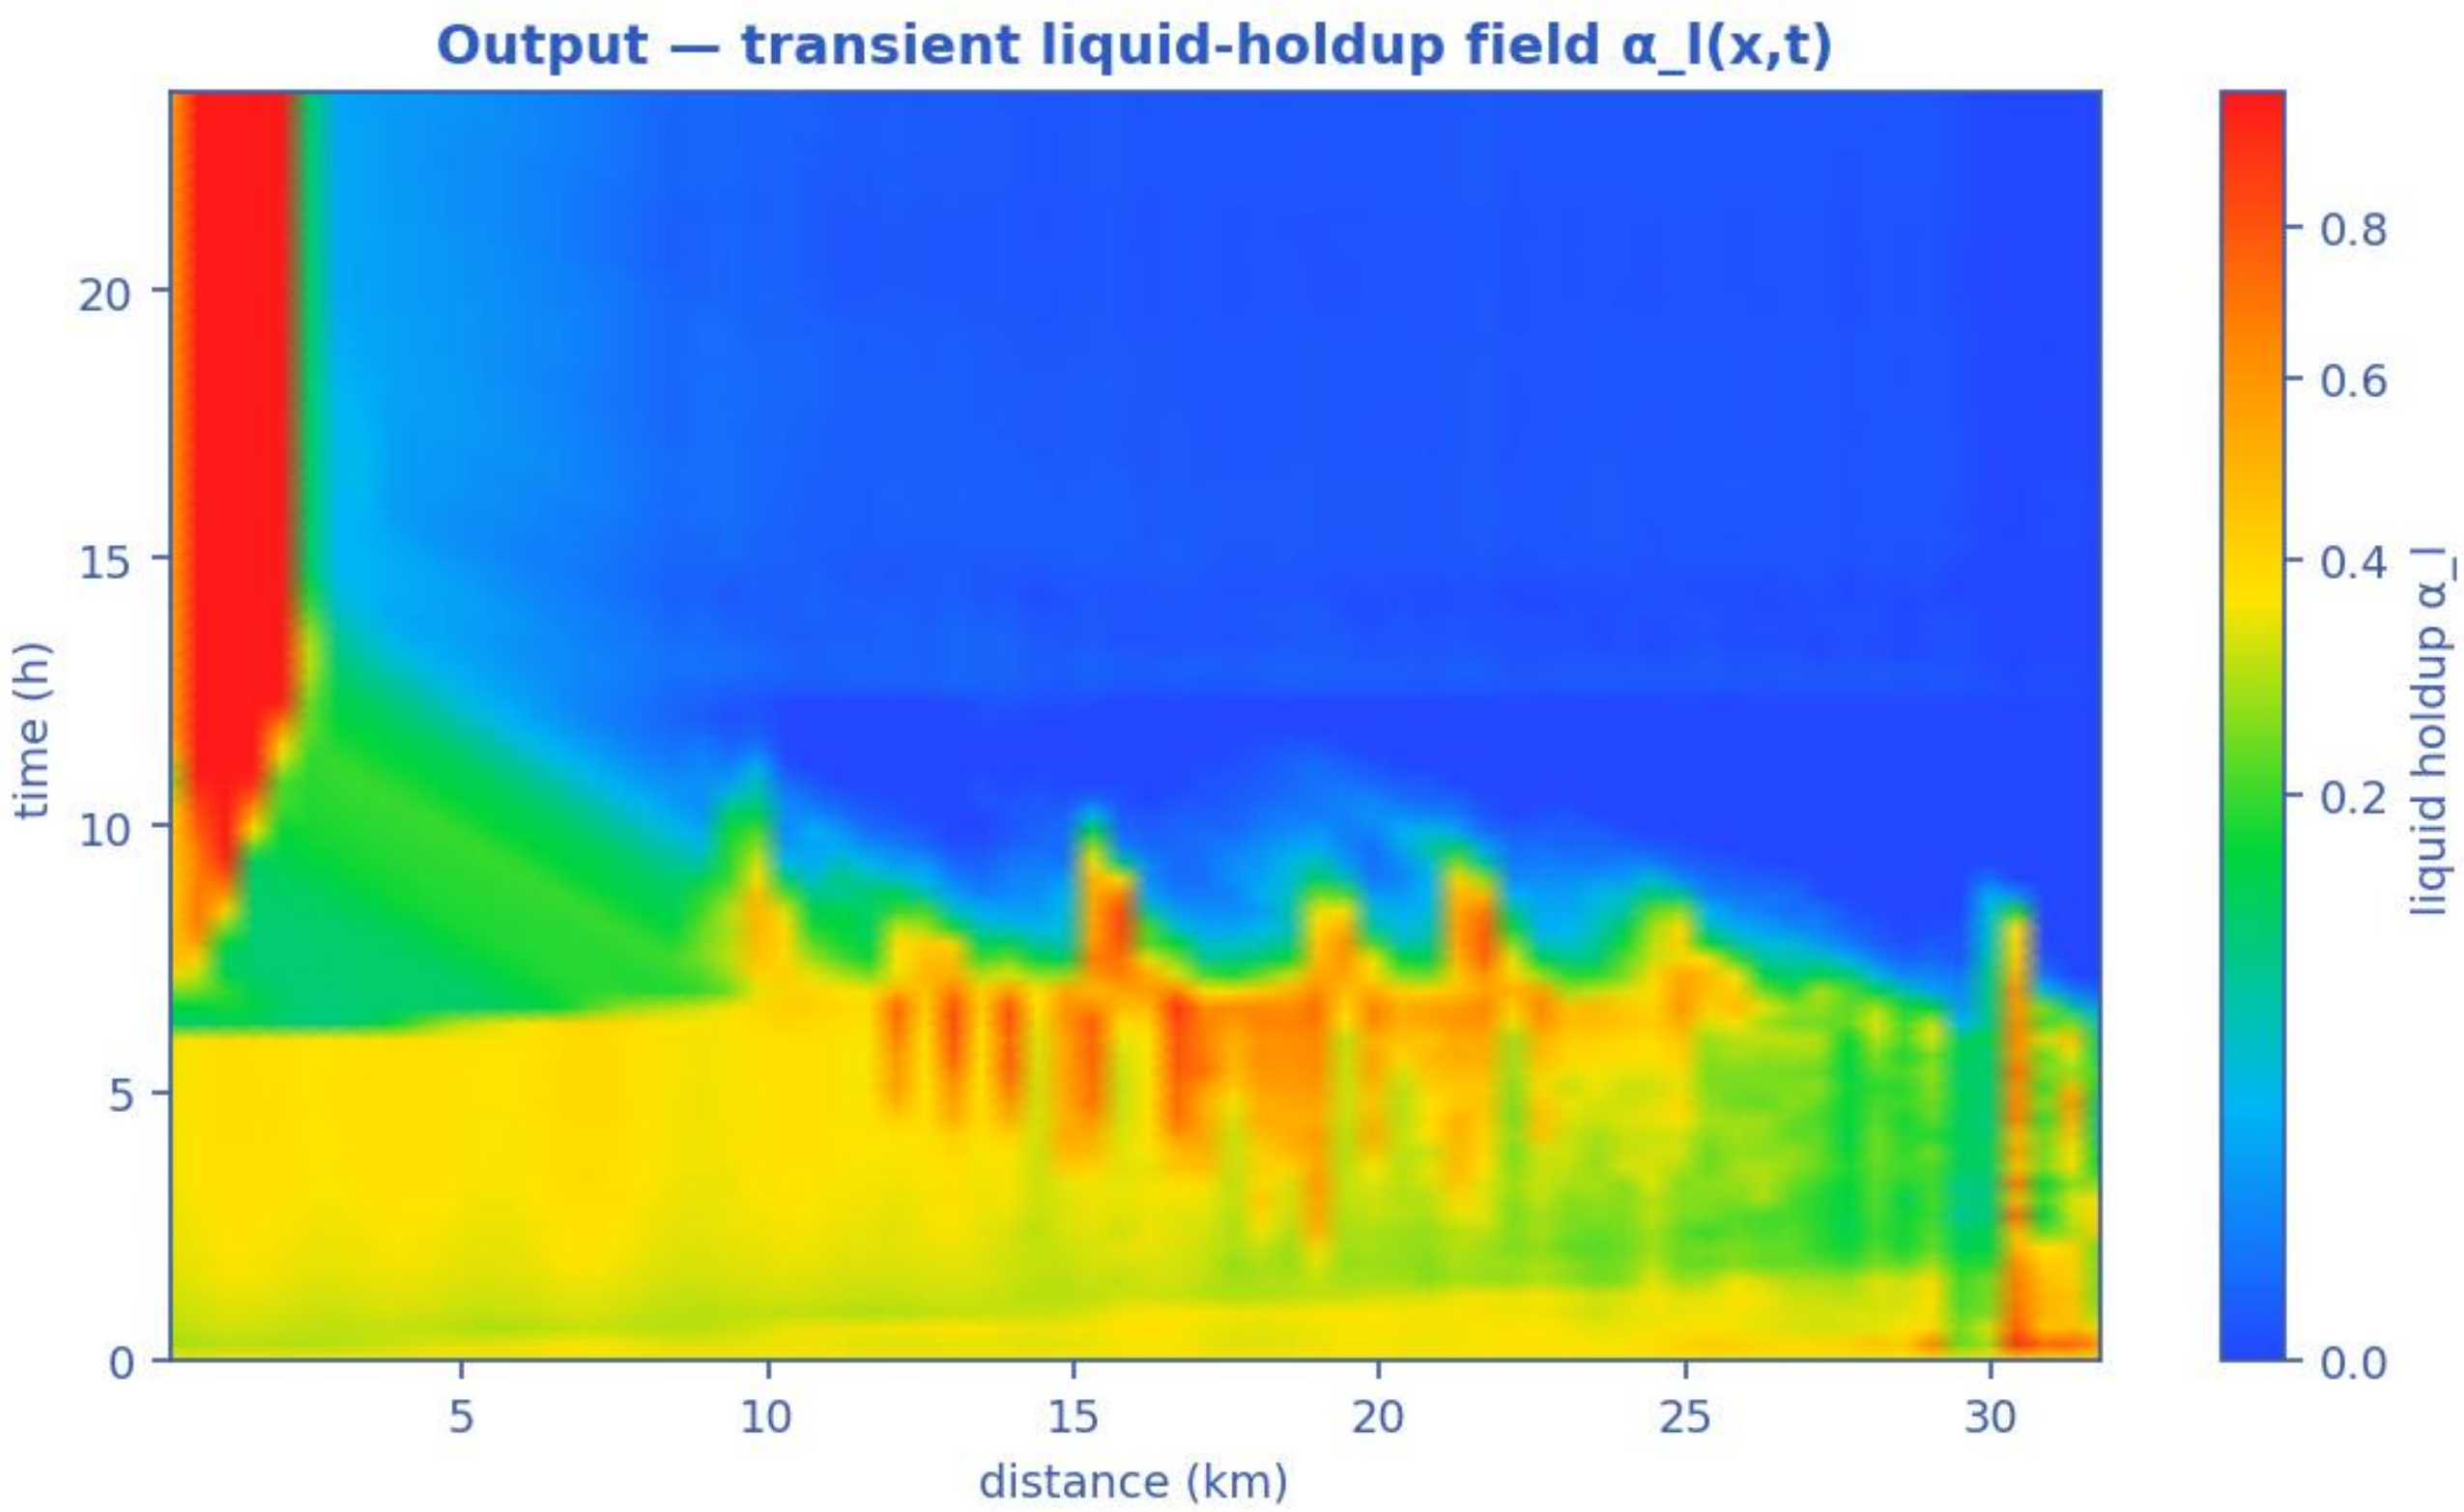


*Slug–Hydrate coupling-criticality map Φ_SH(x,t); the Φ_SH = 1 contour separates slug-scoured from plugging-critical (space-time map). [shut-in]*

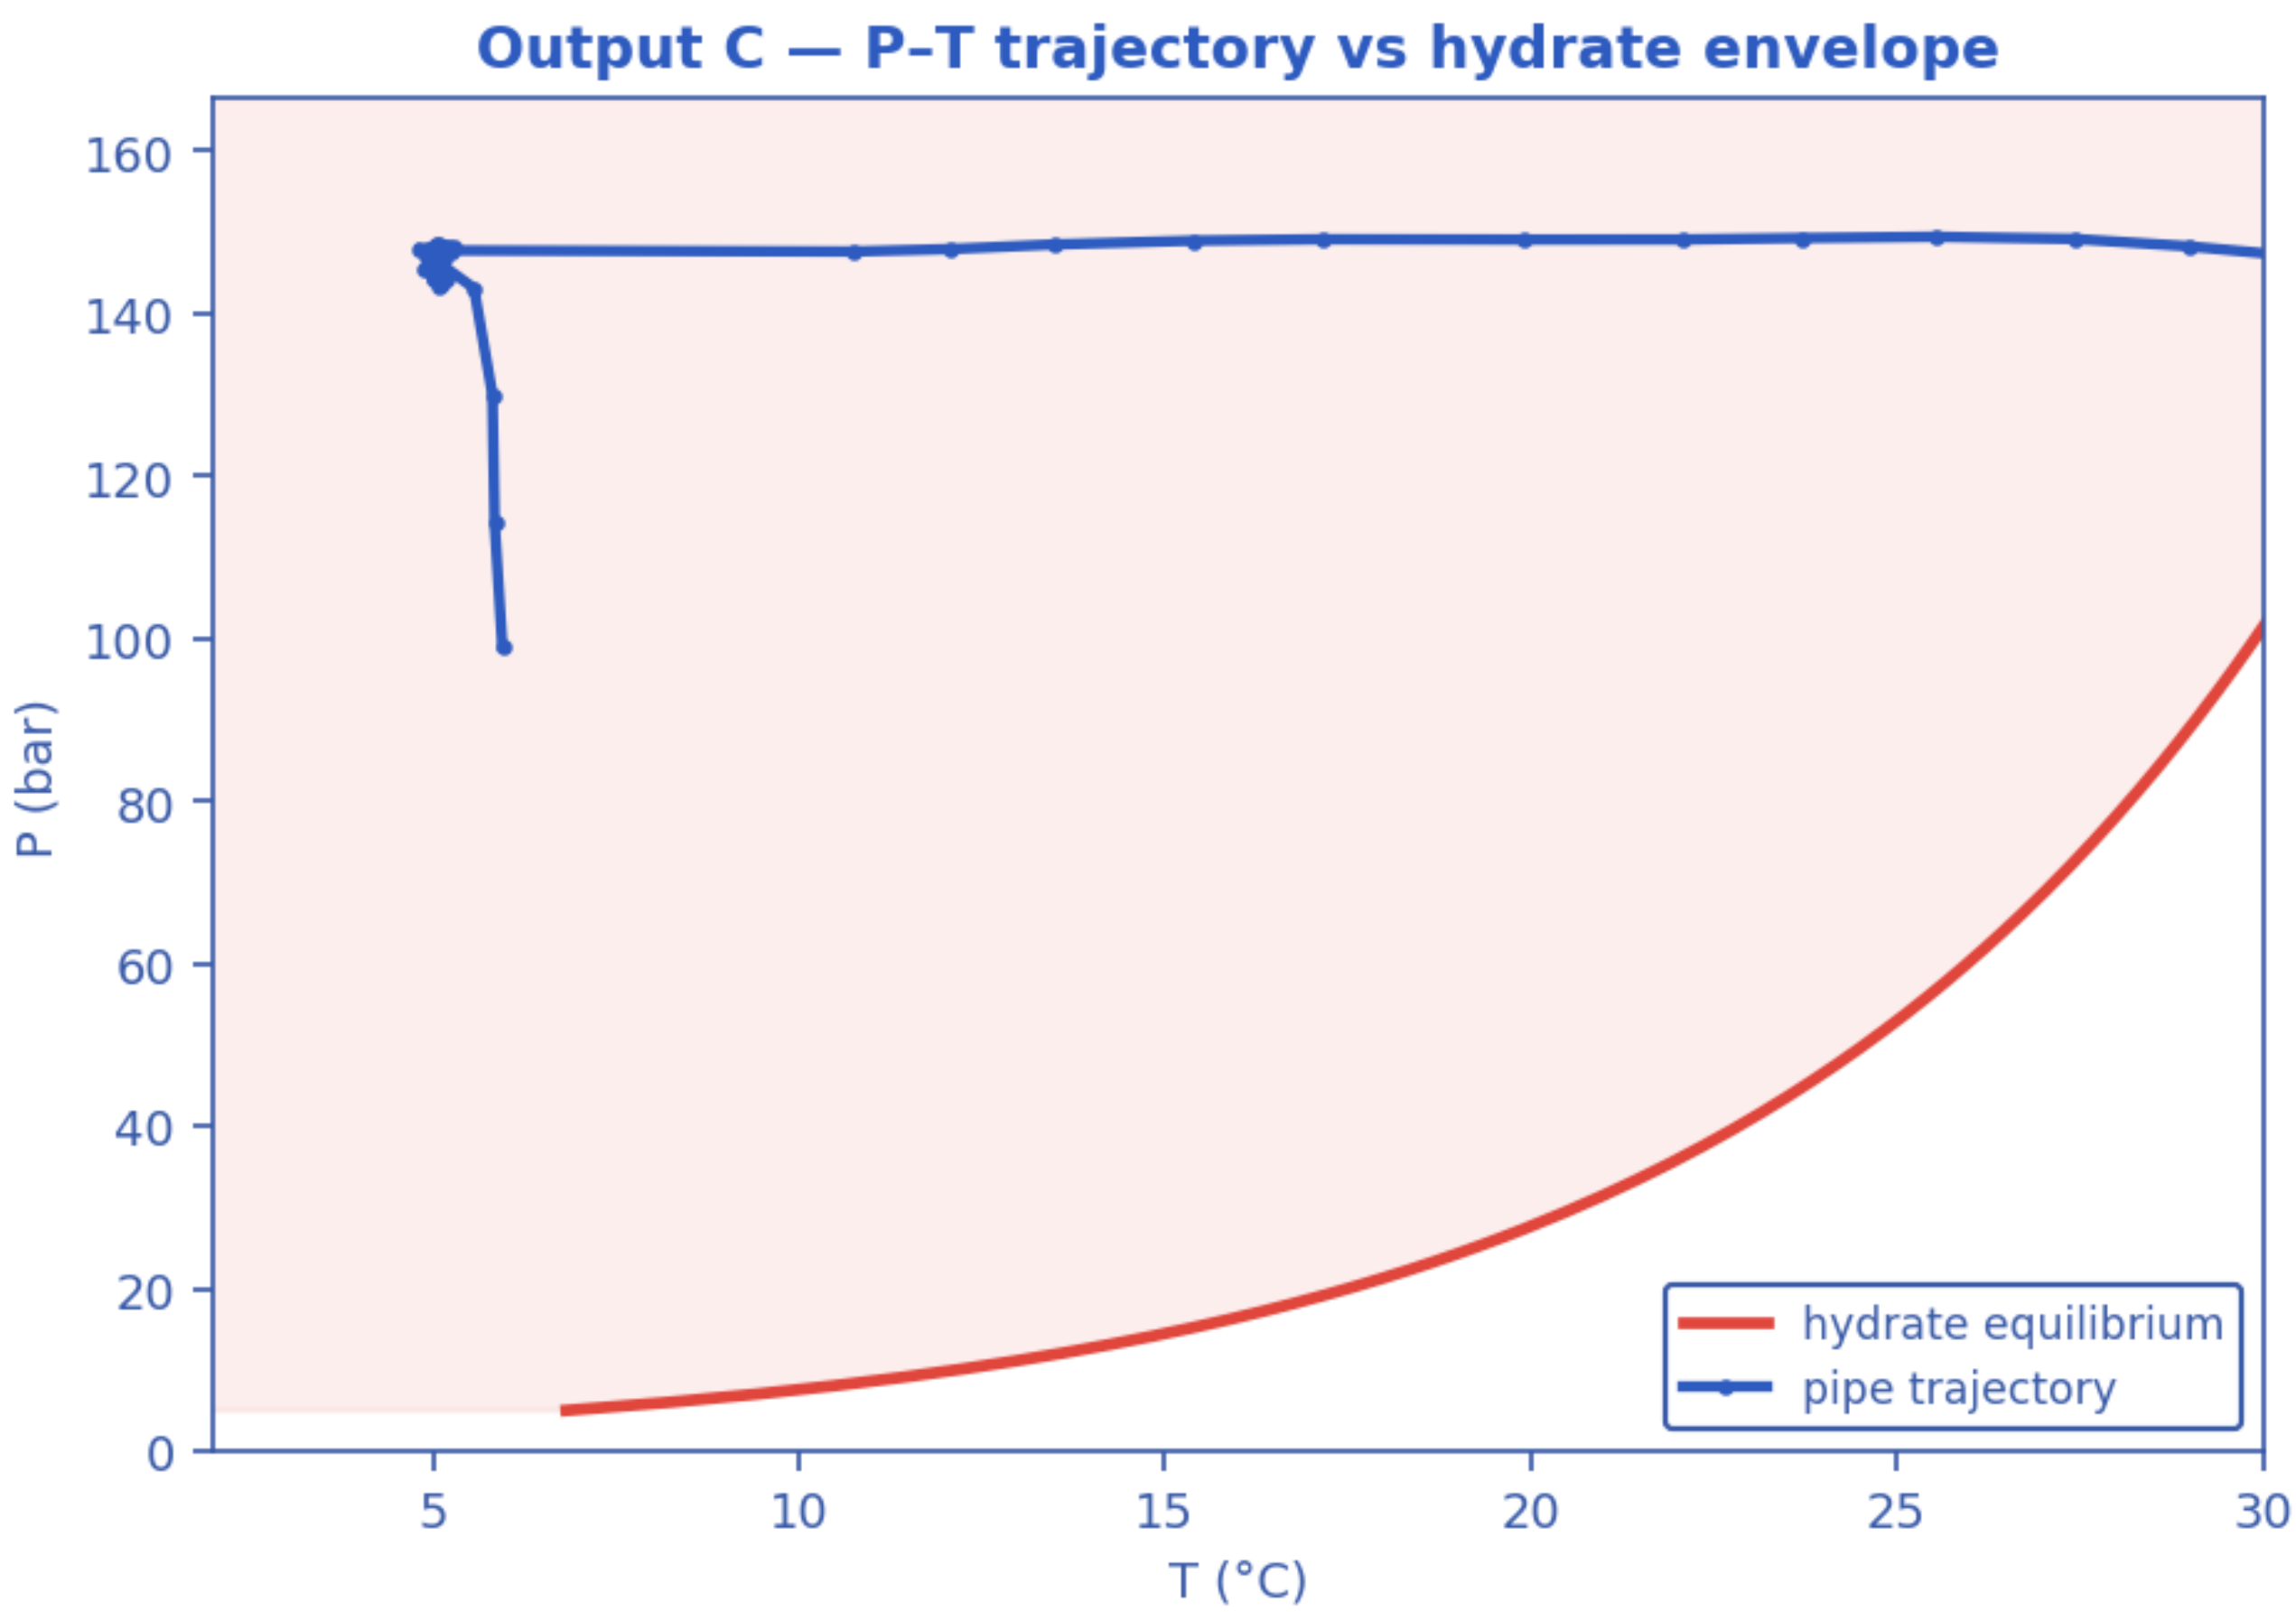


*Monitored-station transient response vs time (curves). [shut-in]*

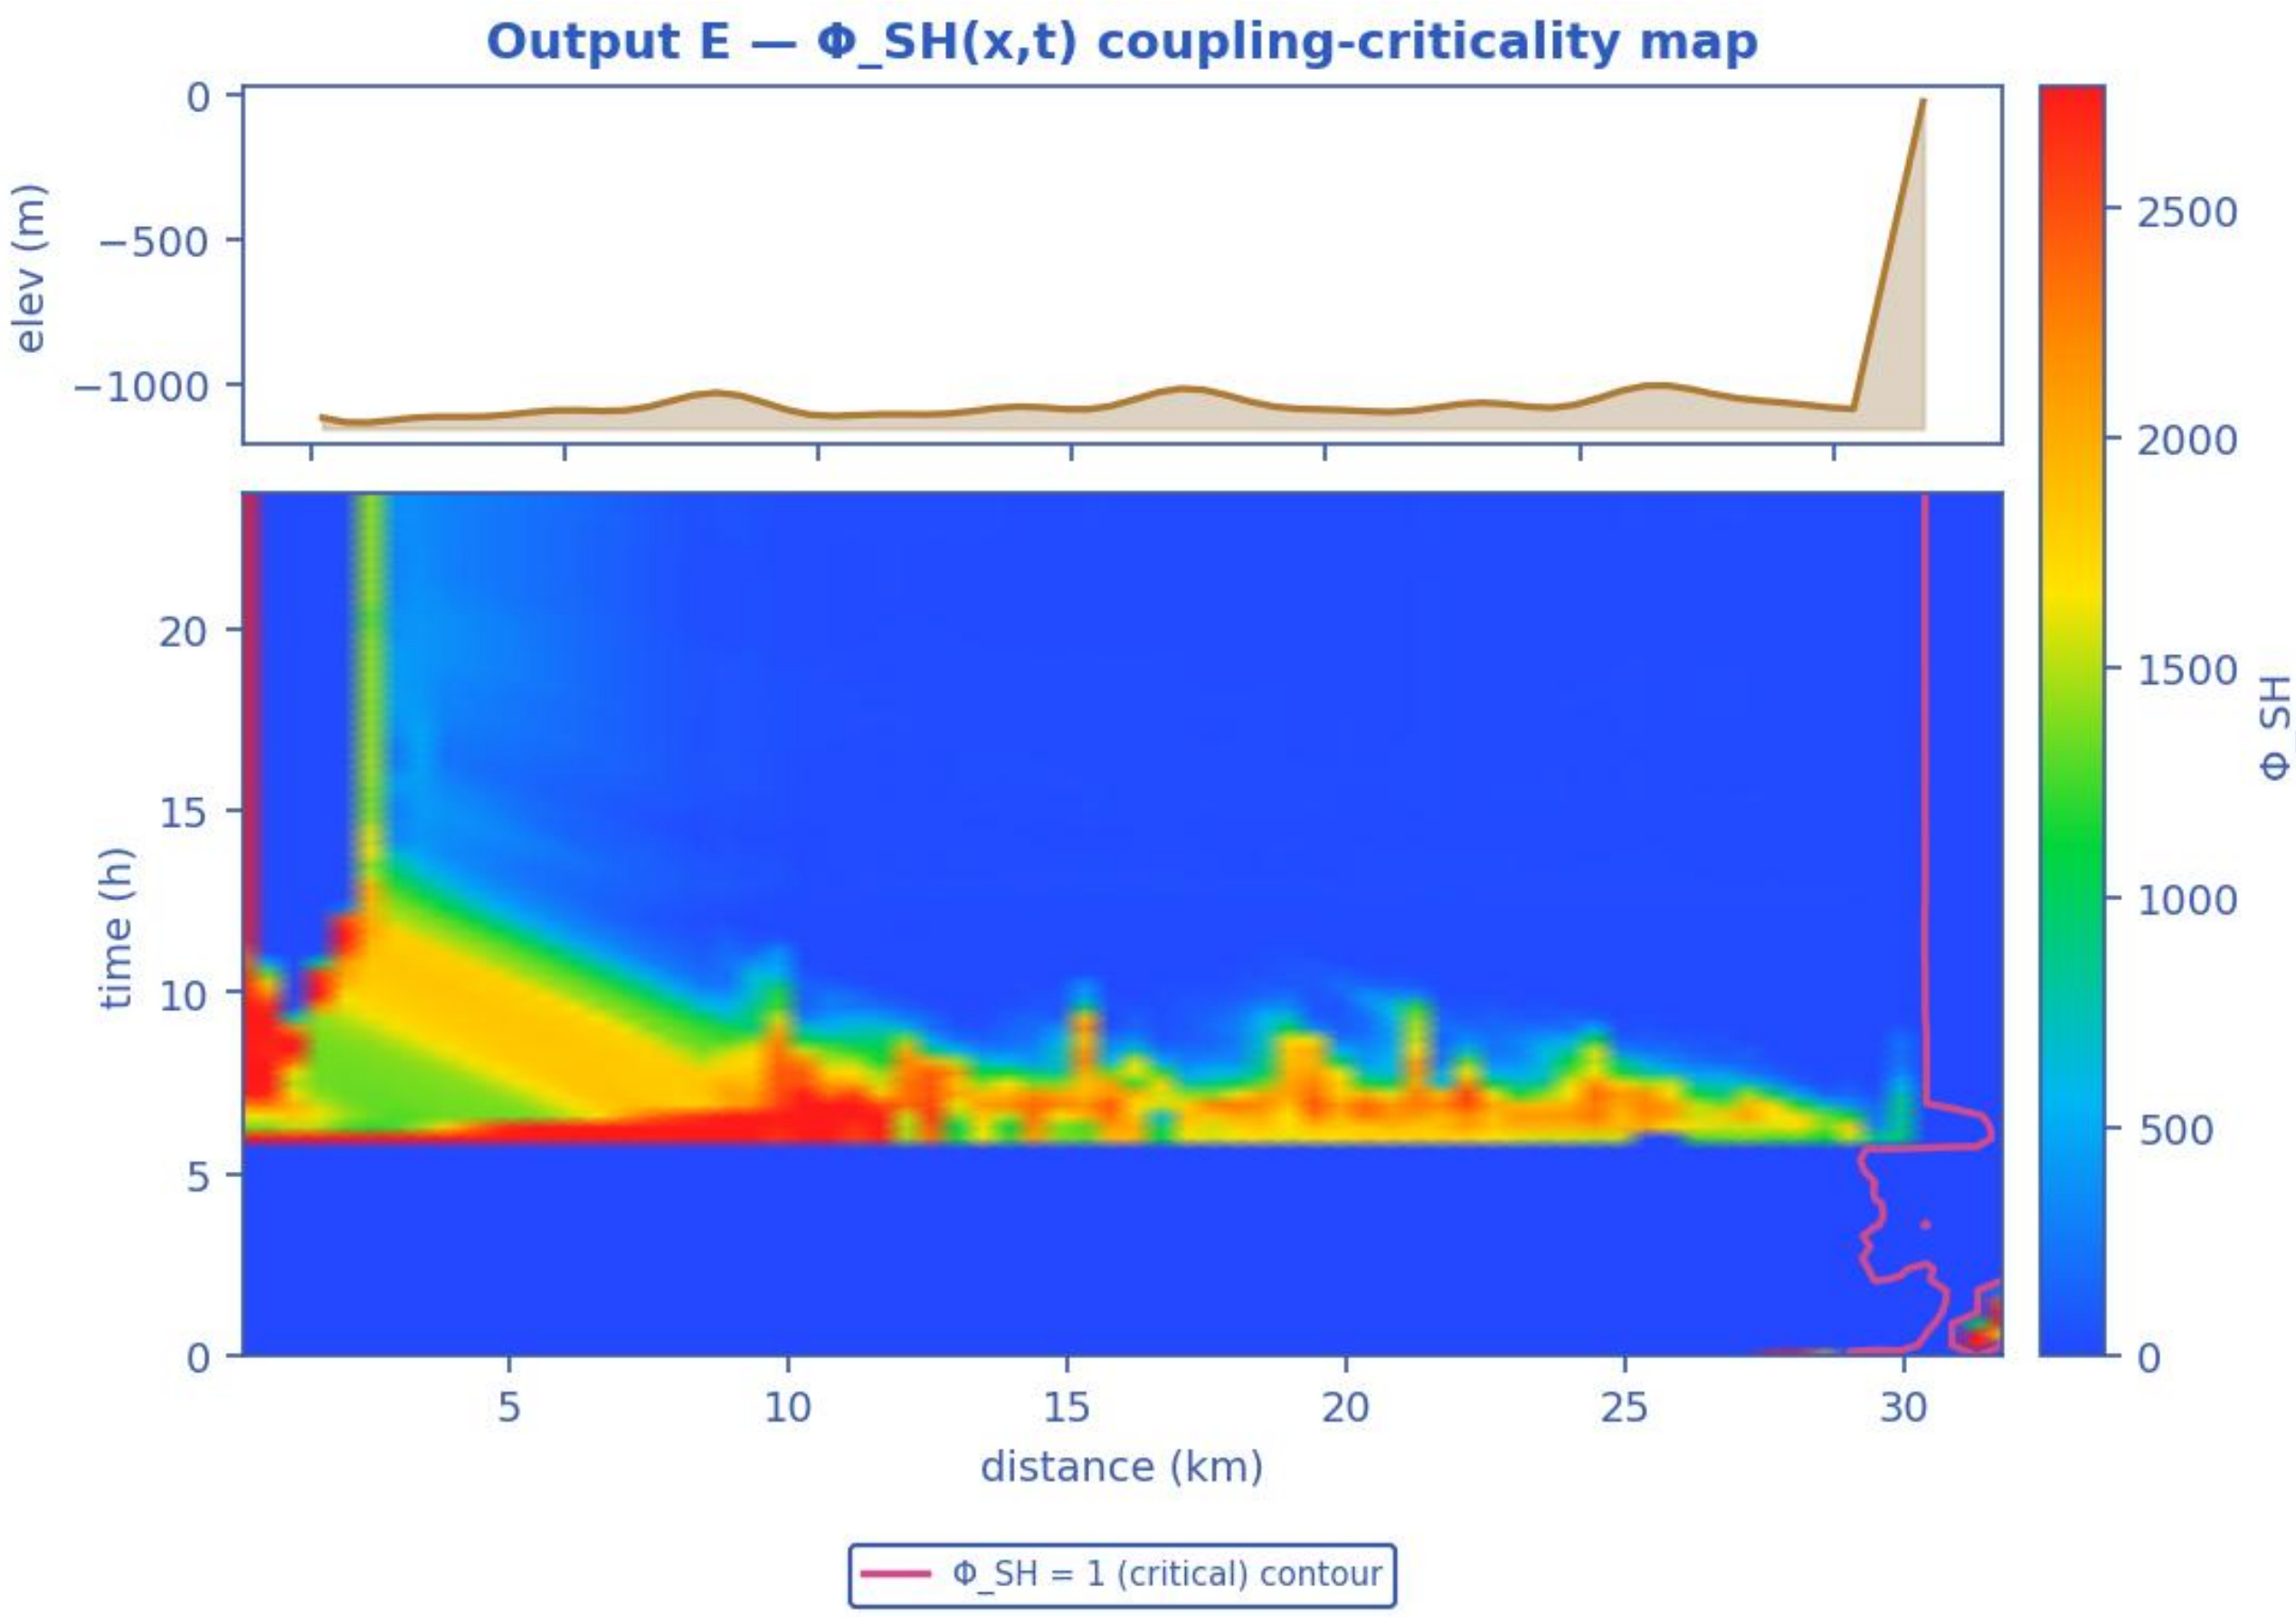


*Wall-deposit growth at the monitor station vs time (curve). [shut-in]*

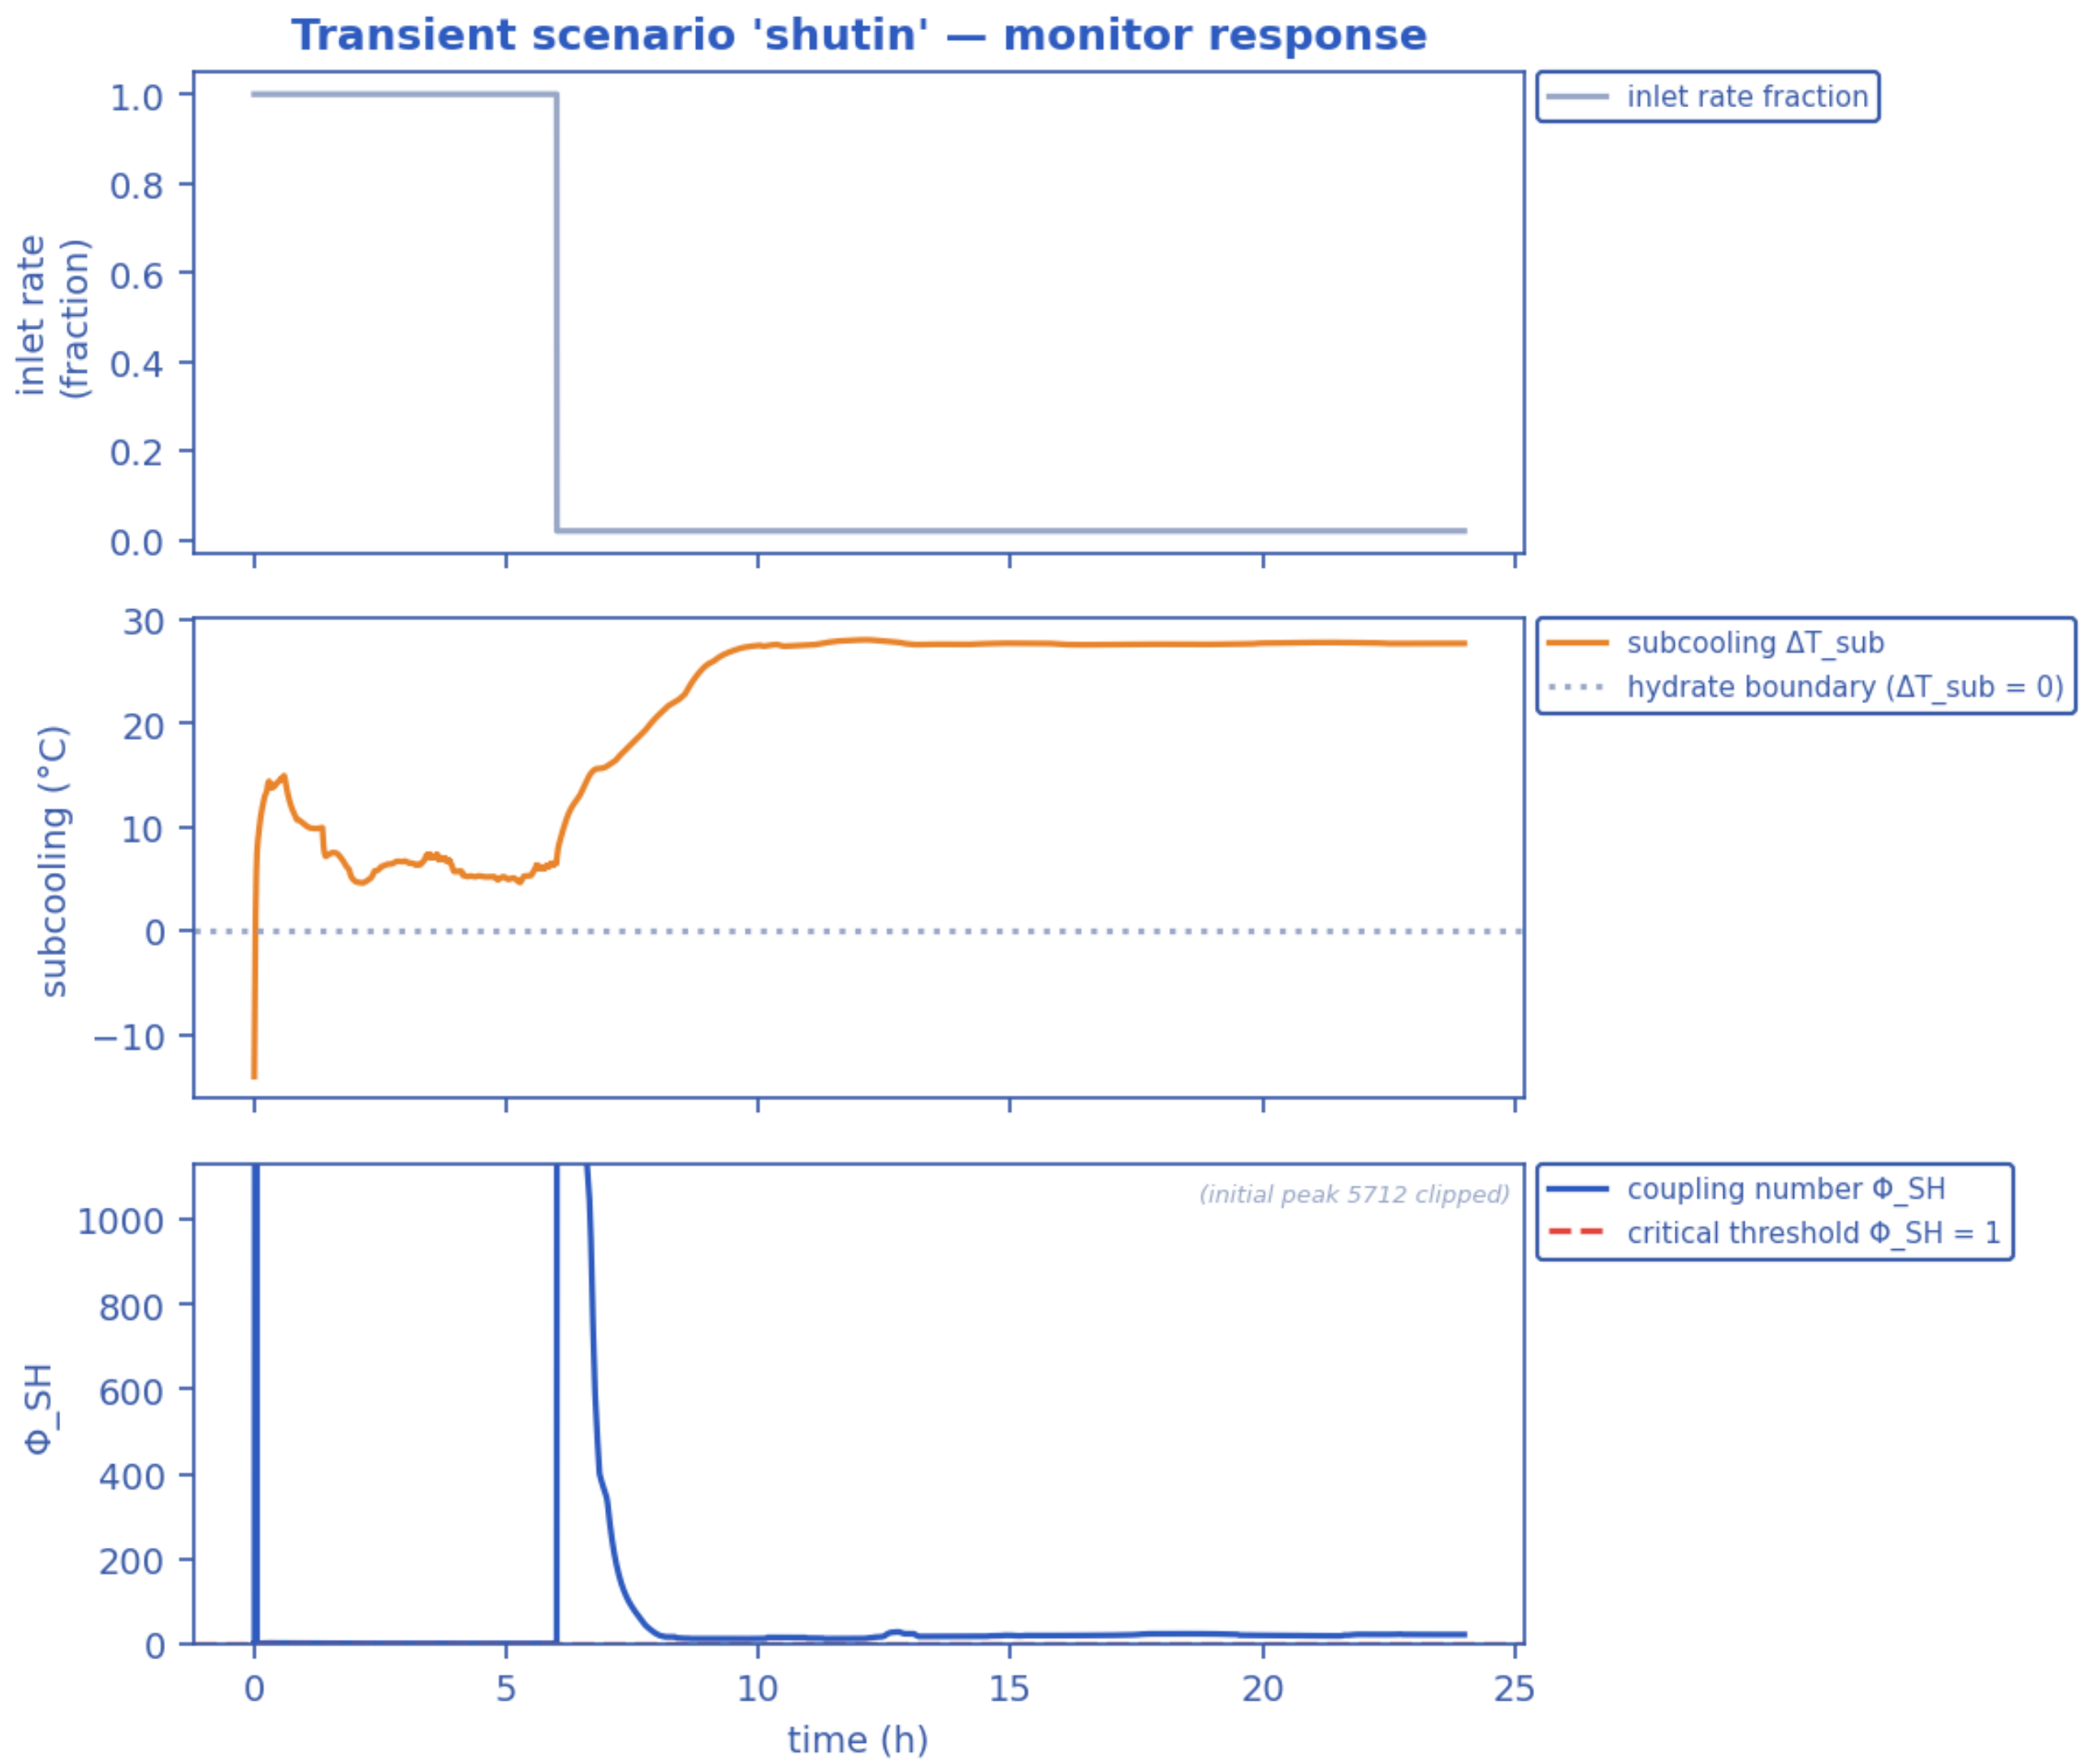


*Probabilistic time-to-plug CDF and the max-Φ_SH P10–P90 uncertainty band (Monte-Carlo ensemble). [shut-in]*

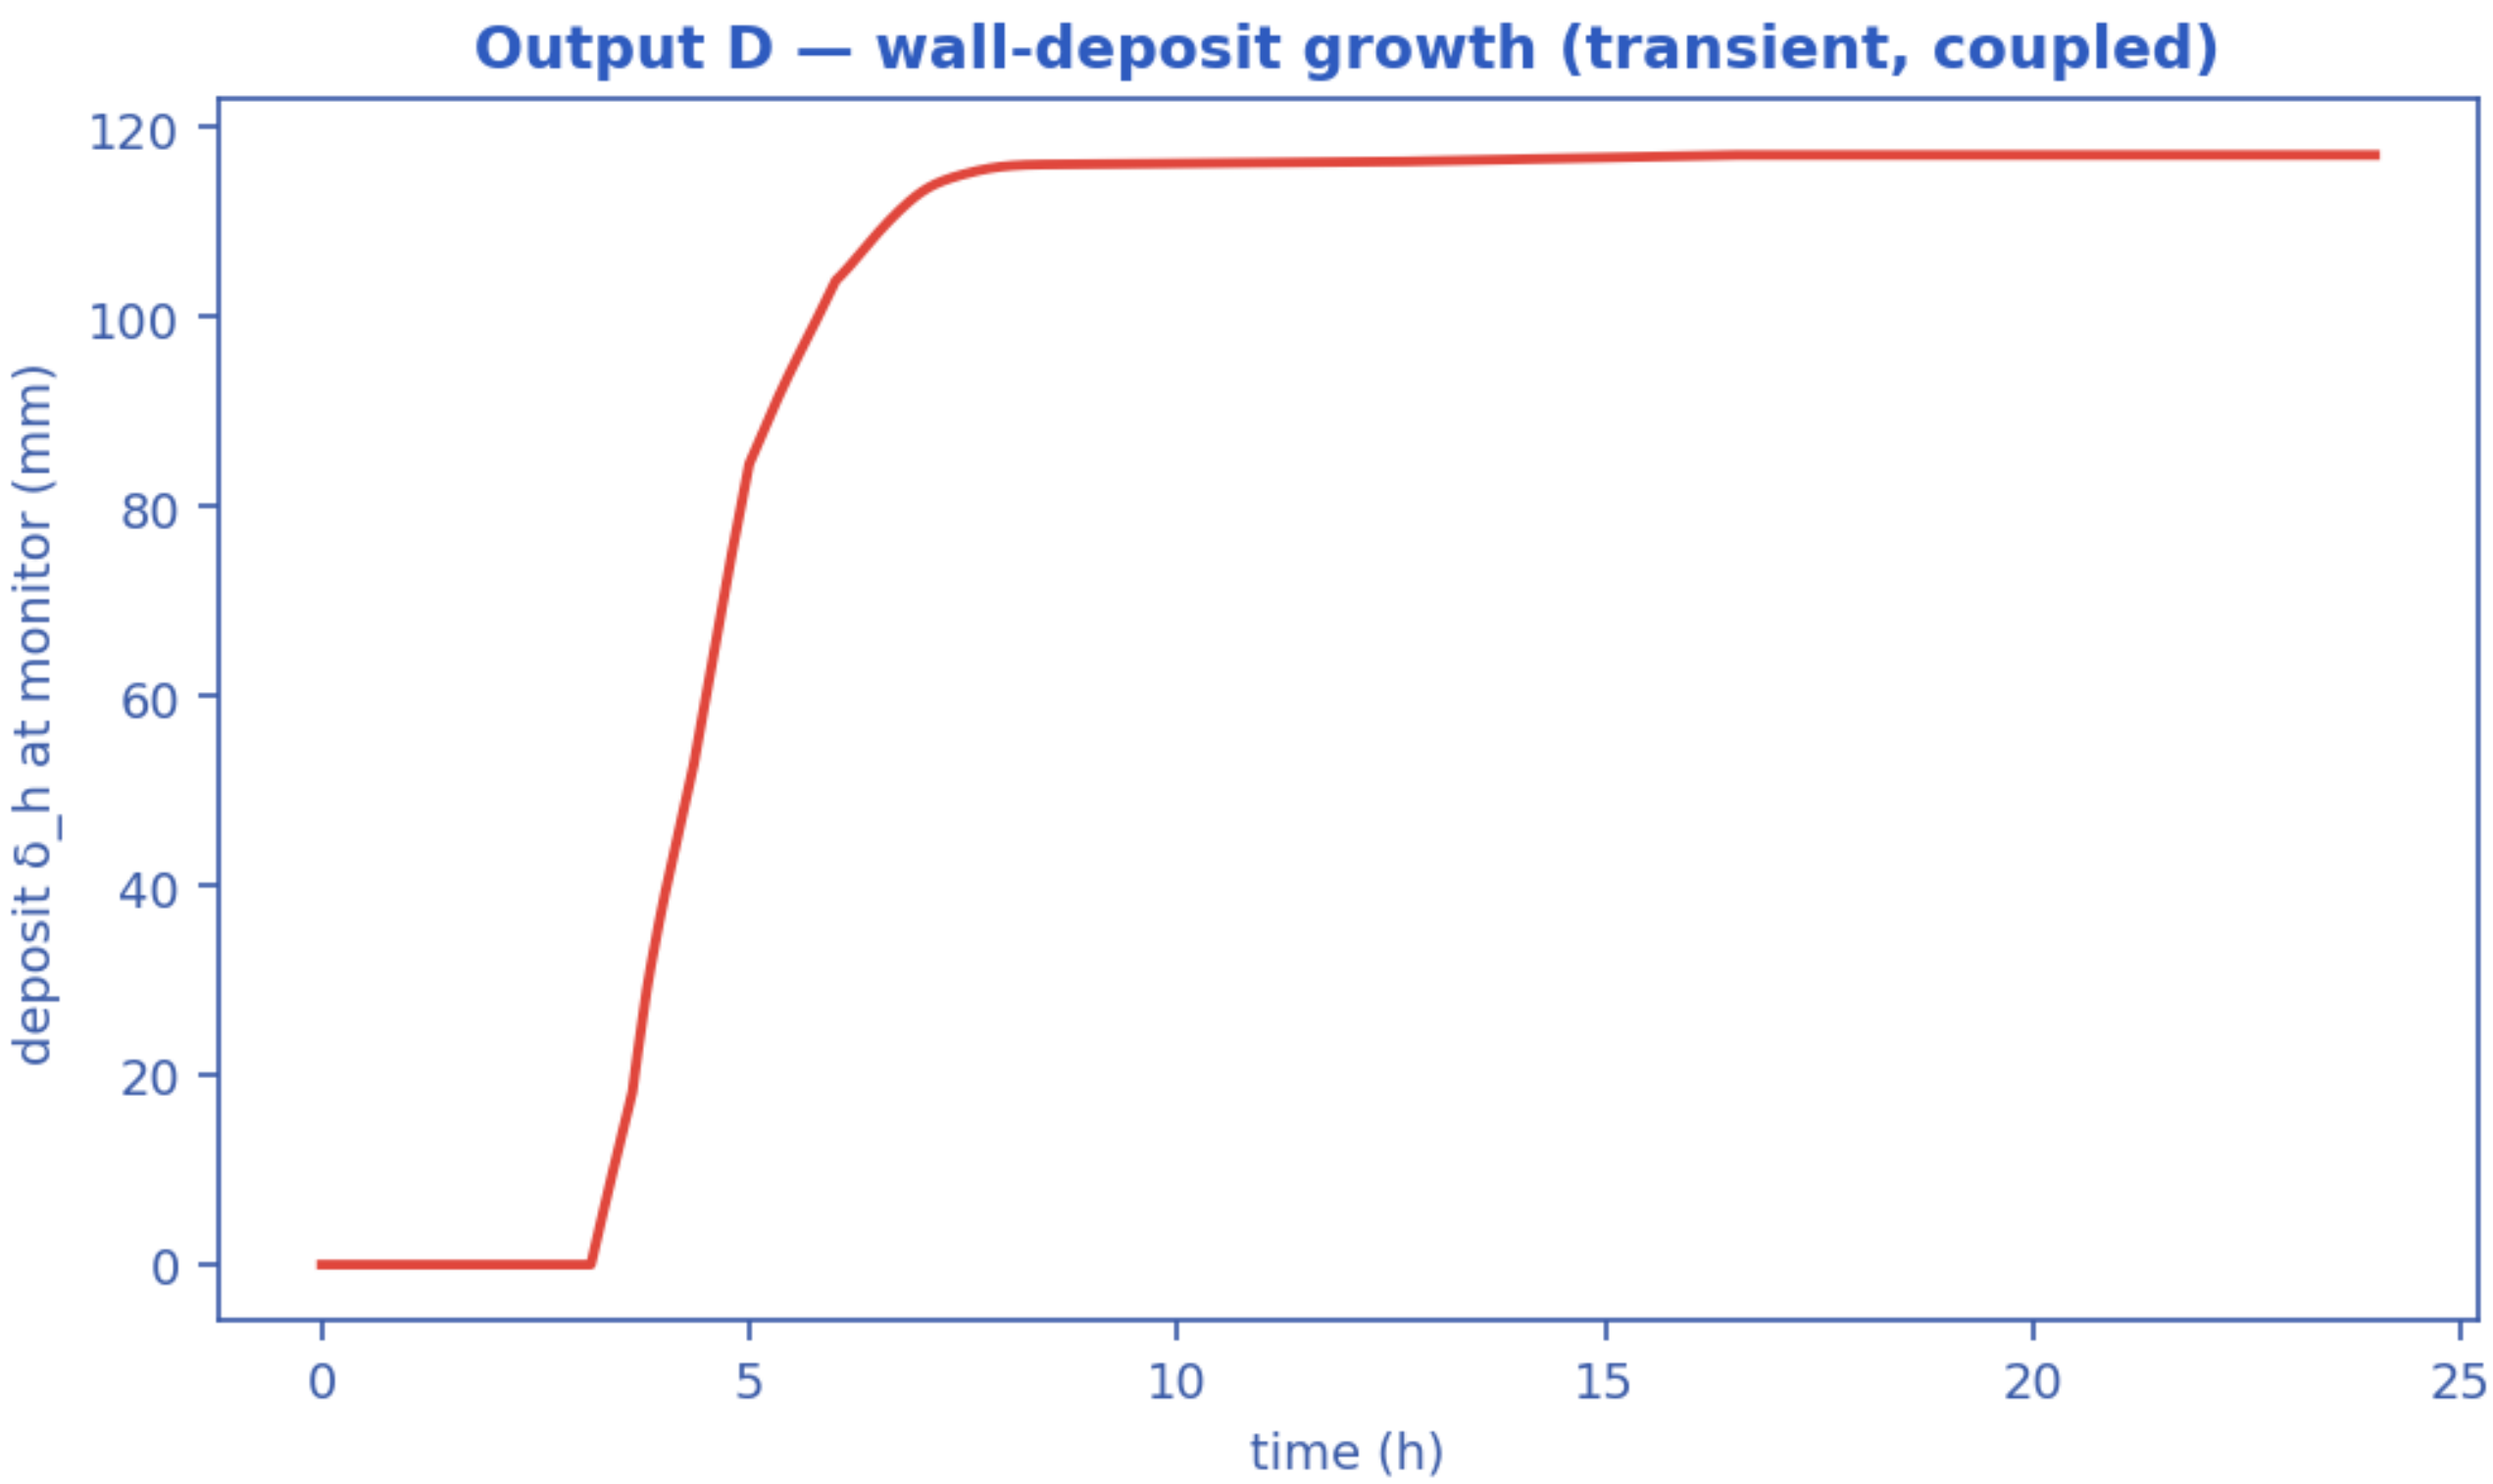


*Solver diagnostics: liquid & gas mass balances, clip activity, slug length and numerical consistency. [shut-in]*

## 11.2.3 Engineering deliverables (engineering_deliverables.csv)

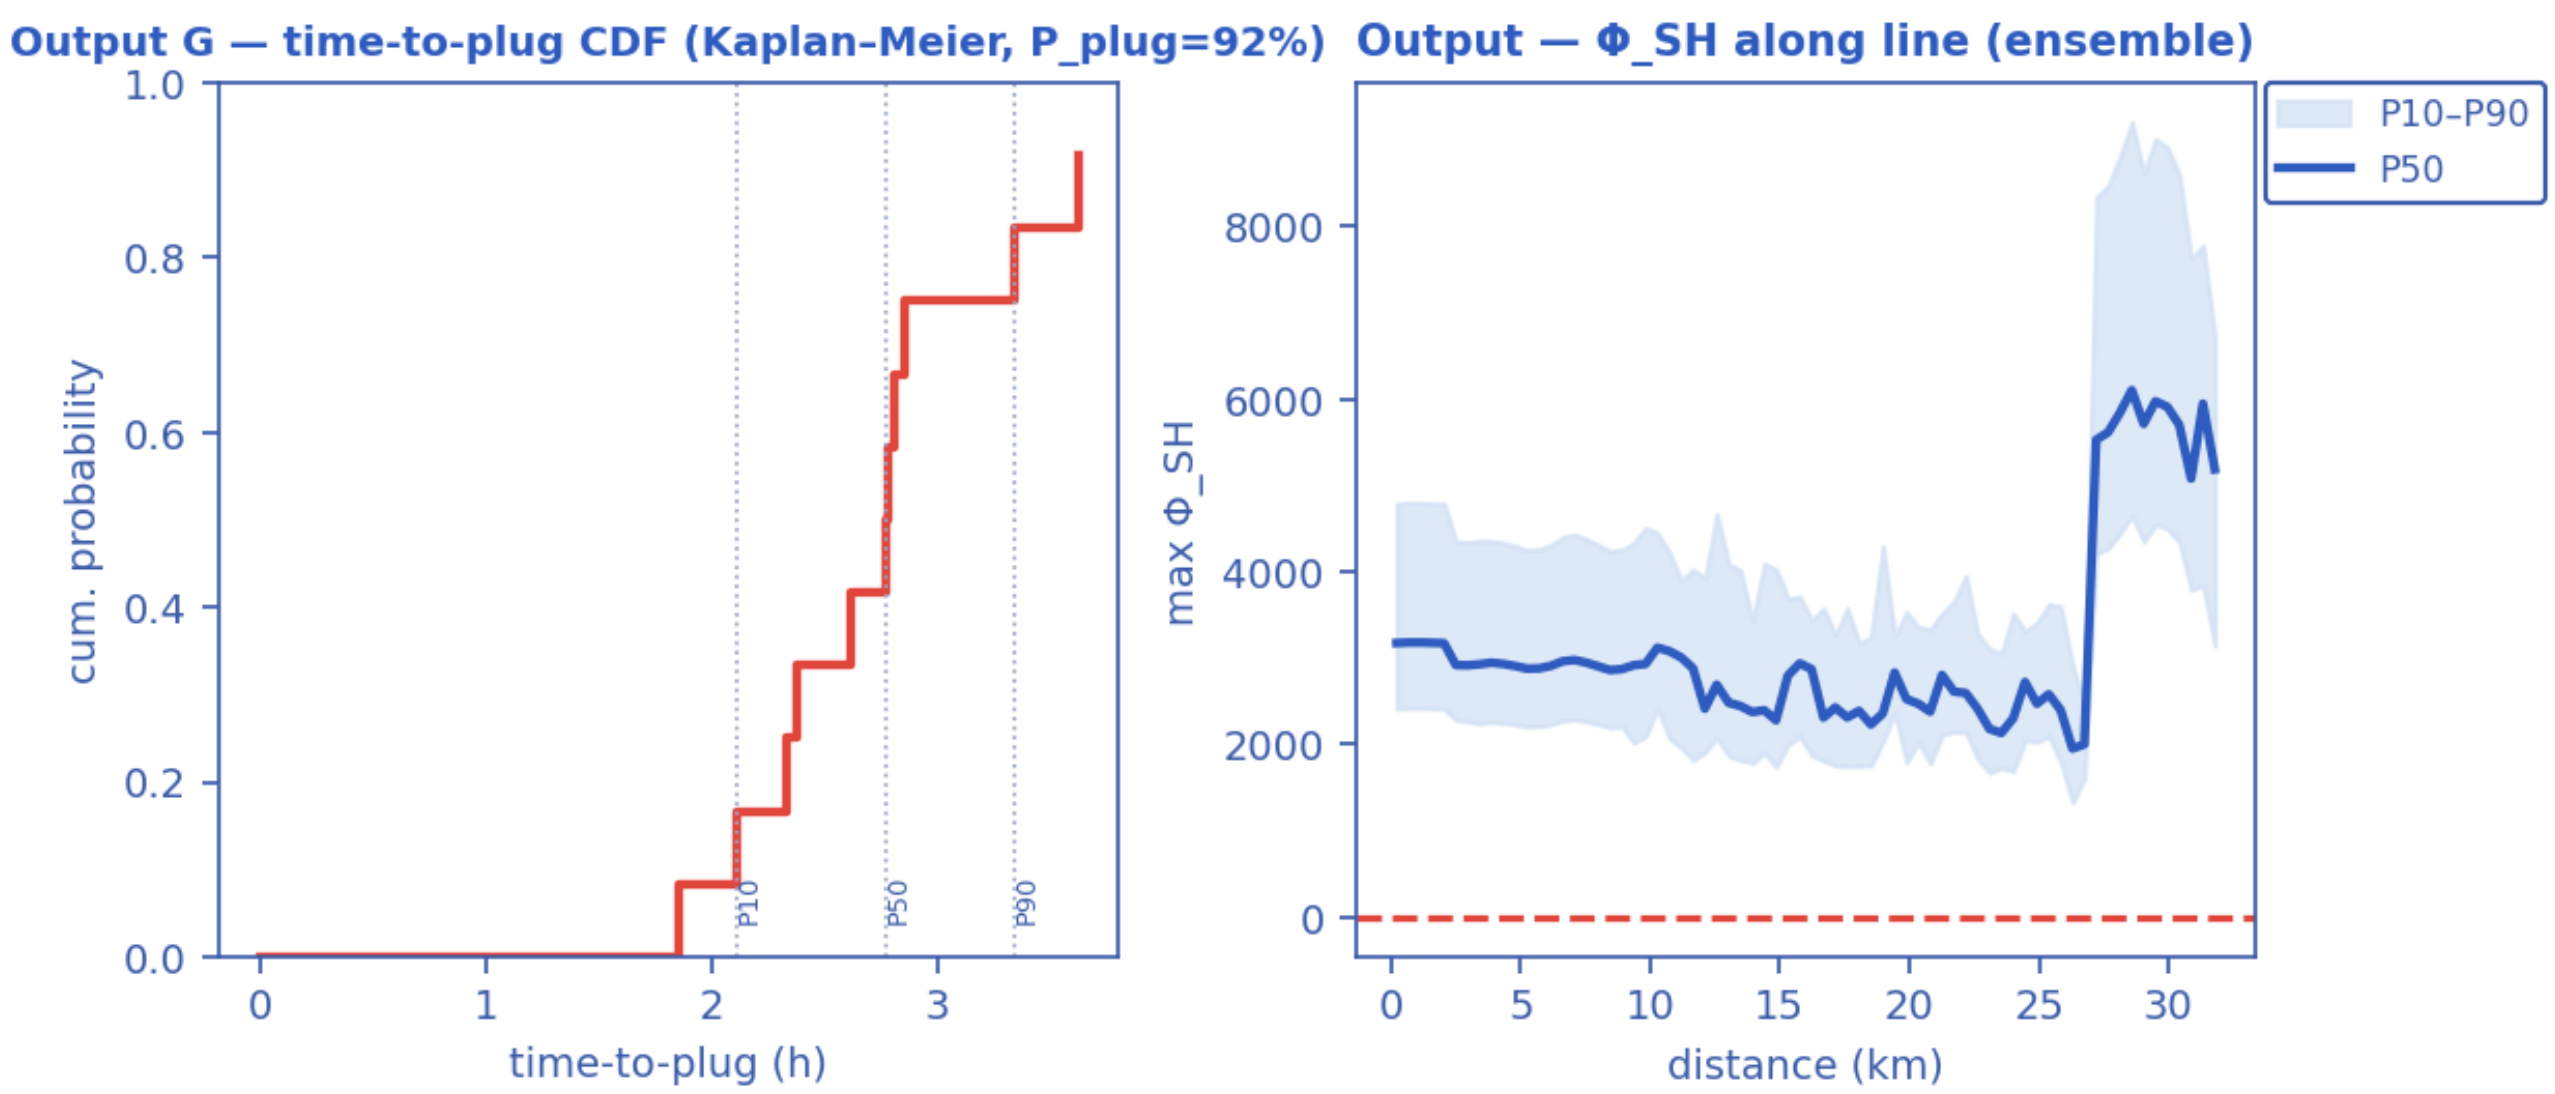


*Numeric engineering deliverables as a magnitude chart [shut-in].*
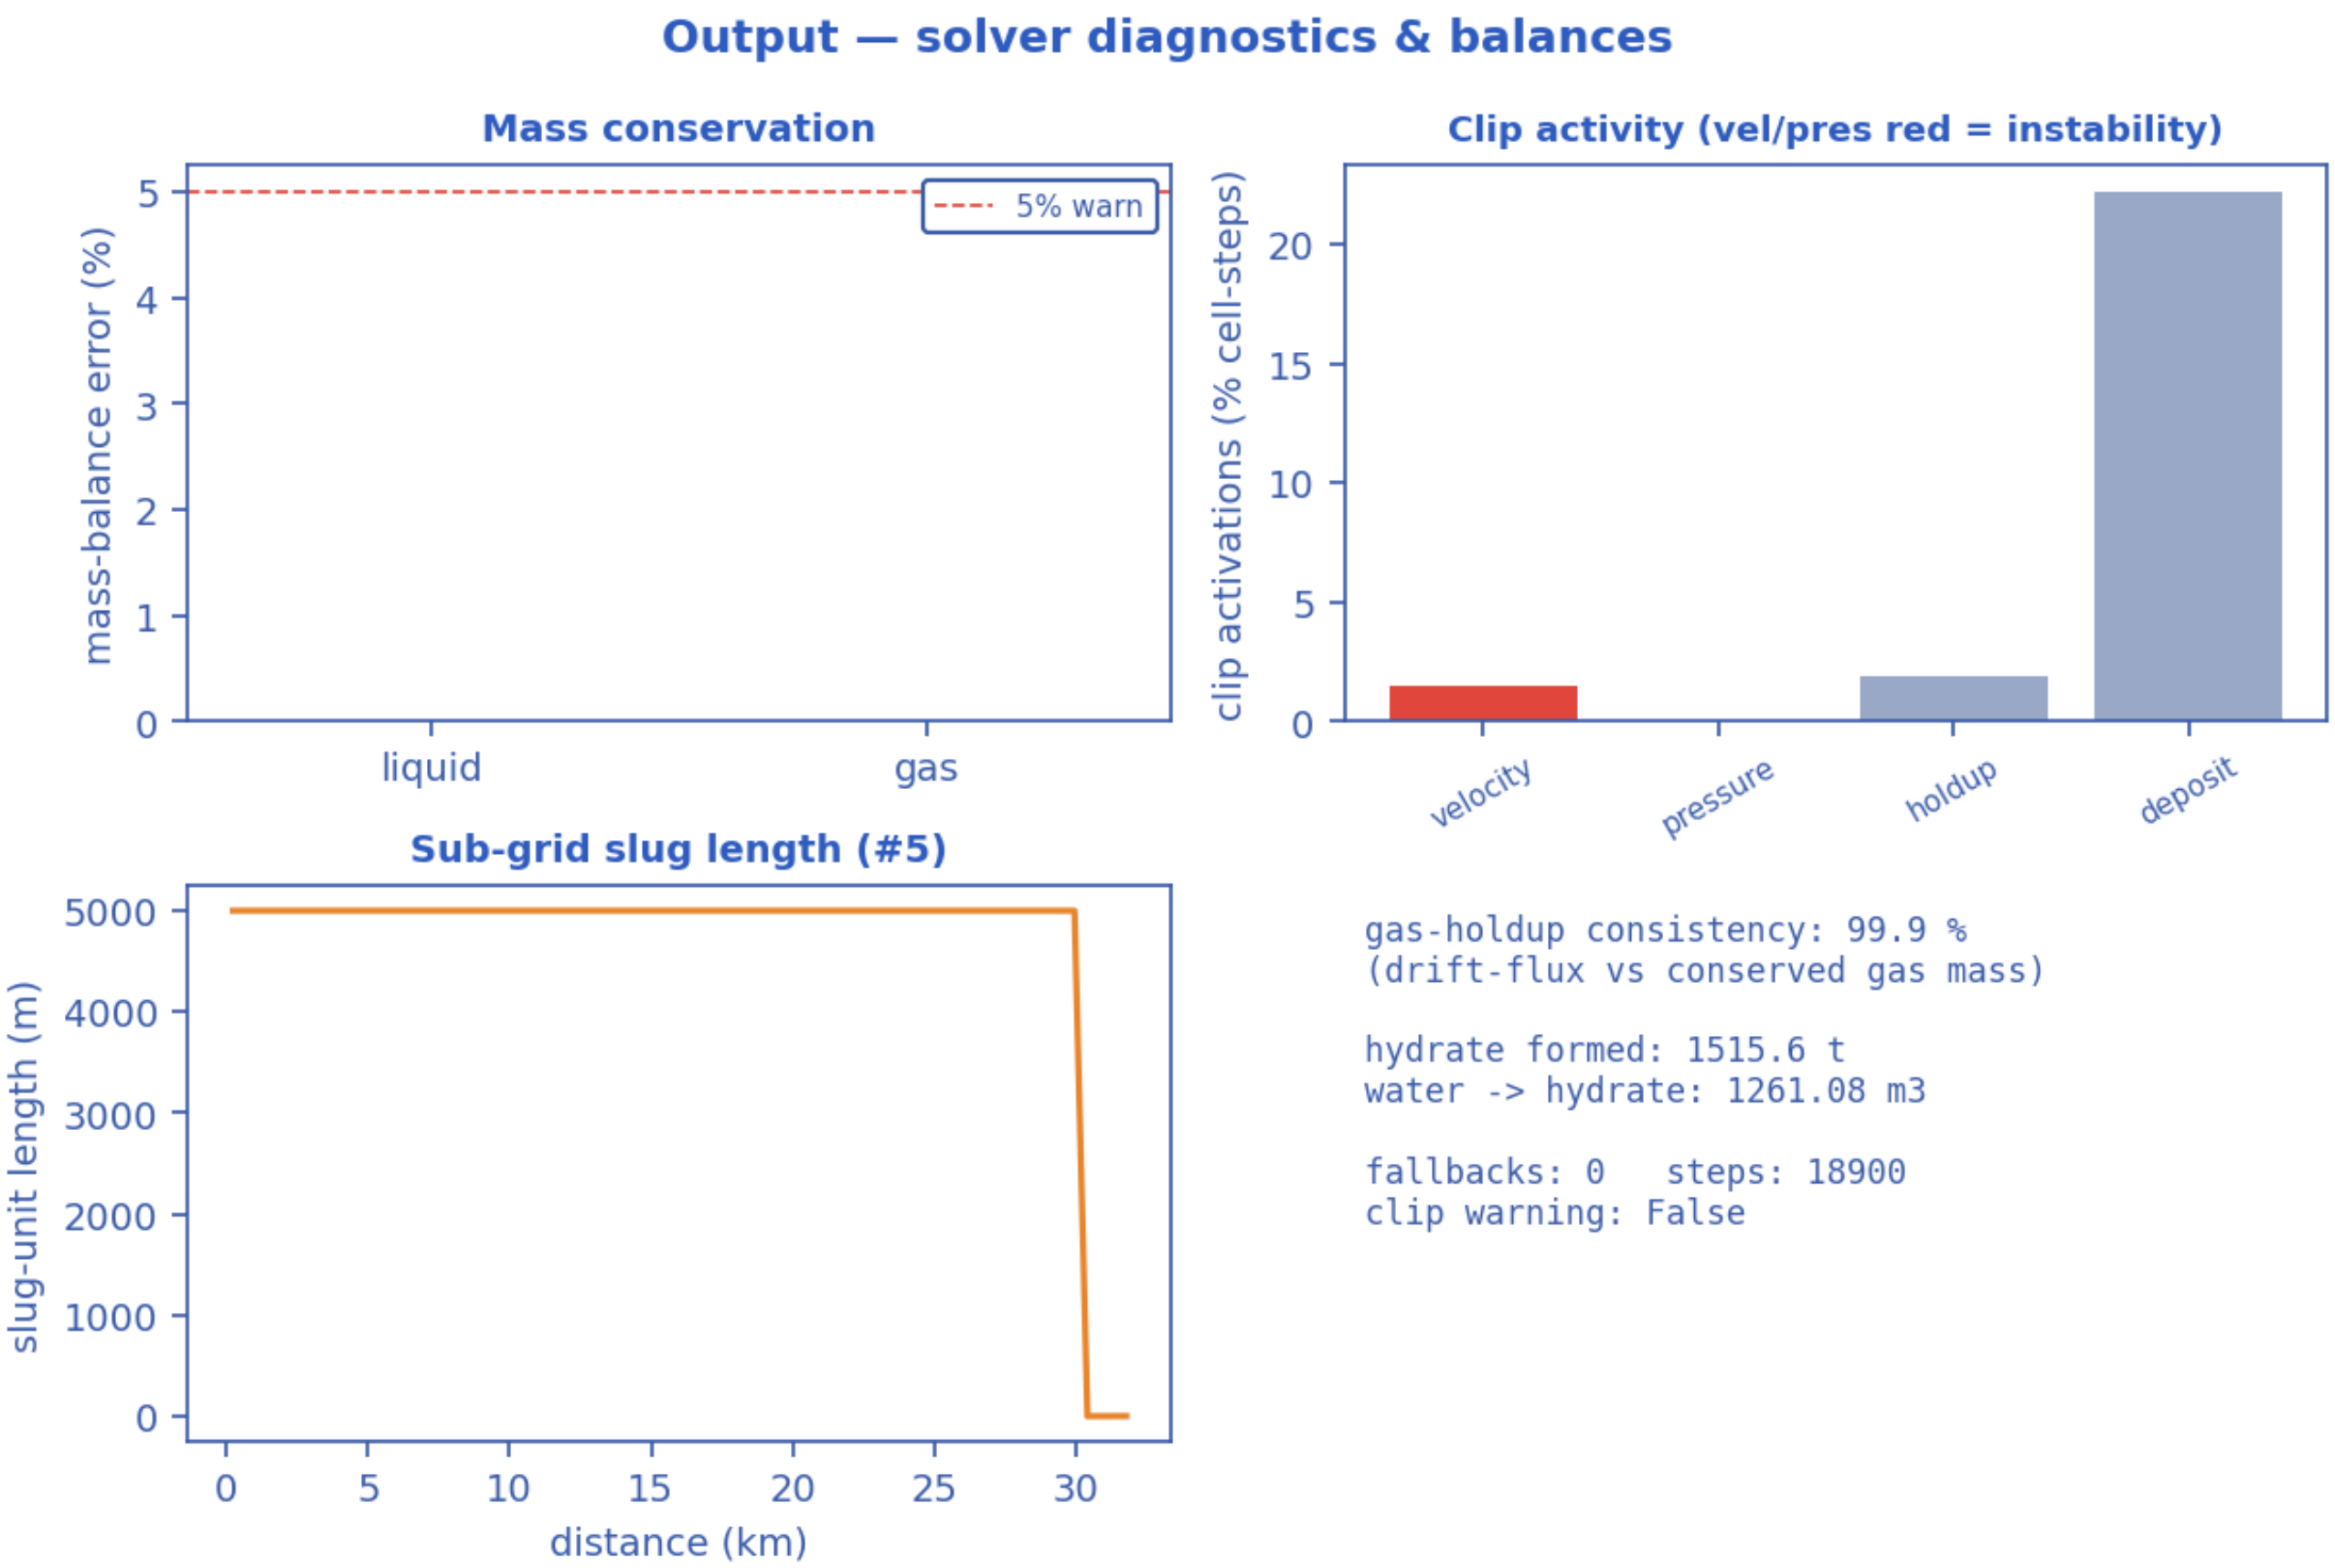
| deliverable | value | units |
|---|---|---|
| **Slug-catcher surge volume (P90)** | 0.38 | m3 |
| **Design subcooling (P90)** | 28.90 | C |
| **Required MEG concentration** | 60.0 | wt% |
| **MEG injection rate** | 95731.1 | L/h |
| **MEG injected at inlet** | 0.0 | wt% |
| **Under-inhibited length** | 25.14 | km |
| **Effective heat-transfer U** | 22.00 | W/m2K |
| **Cooldown to hydrate (no-touch time)** | 0.00 | h |
| **Slurry relative viscosity** | 52.38 | - |
| **Slurry transportable?** | False | - |
| **Peak mixture velocity** | 5.00 | m/s |
| **Erosional velocity limit (API 14E)** | 5.07 | m/s |
| **Total line pressure drop** | 50.9 | bar |
| **Probability of plugging (run)** | 92 | % |

| | | |
|---|---|---|
| **Time-to-plug (P50)** | 2.8 | h |
| **Coupled hot-spot location** | 28.57 | km |
| **Max coupling number Phi_SH** | 6101 | - |
| **Phi_SH reported at plot cap (saturated)?** | False | - |
| **Monitor location** | 29.03 | km |
| **Monitor temperature** | 5.1 | C |
| **Bulk superficial liquid velocity** | 1.08 | m/s |
| **Line-median mixture velocity** | 0.00 | m/s |
| **Peak wall deposit** | 117.1 | mm |
| **Wall deposit at full bore?** | True | - |
| **Deposit (hydrate-mass equivalent)** | 27.8 | mm |
| **No-touch time source** | transient | - |
| **Mass-conservation error** | 0.00 | % |
| **Mass-balance reliability warning** | False | - |

### 11.2.4 Probabilistic summary (probabilistic_summary.csv)

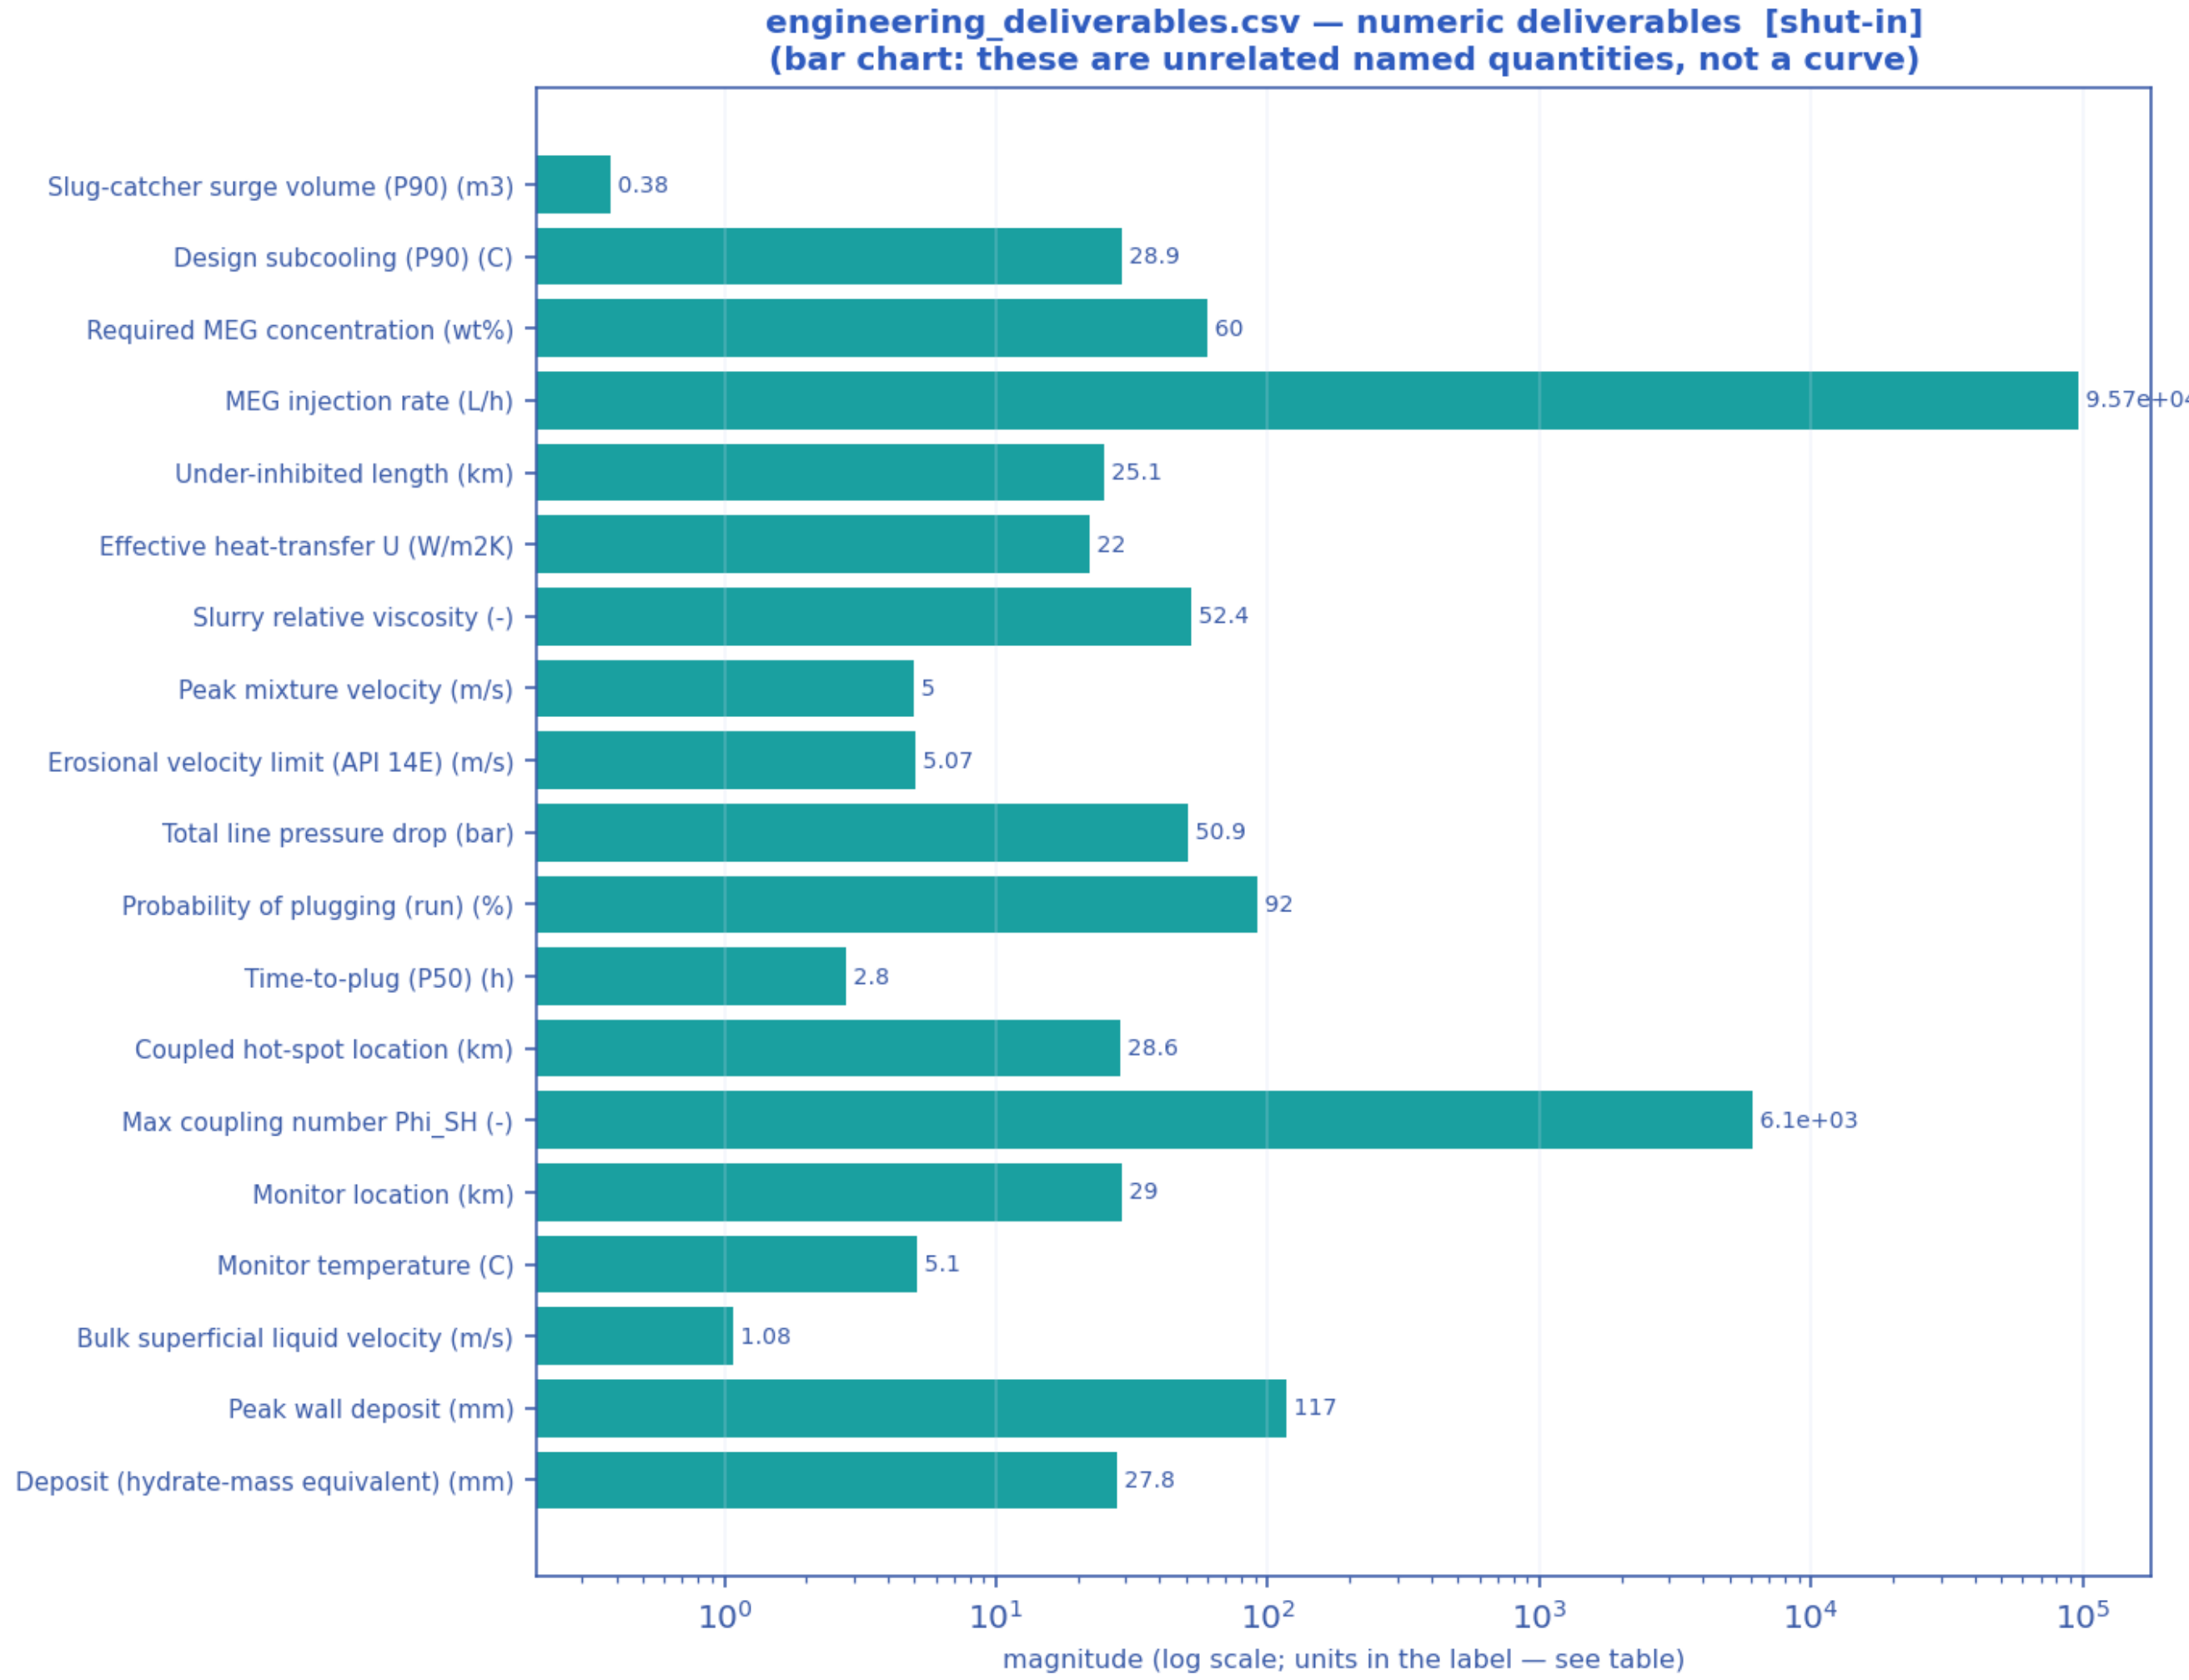


*P10 → P90 uncertainty range with the P50 marker per metric [shut-in].*

| metric | P10 | P50 | P90 |
|---|---|---|---|
| **max_subcooling_C** | 28.4 | 28.8 | 28.9 |
| **max_Phi_SH** | 4.65e+03 | 6.1e+03 | 9.22e+03 |
| **peak_wall_deposit_mm** | 117 | 117 | 117 |
| **peak_deposit_from_phi_mm** | 35 | 35 | 35 |
| **peak_bulk_hydrate_frac** | 0.55 | 0.55 | 0.55 |
| **time_to_plug_h** | 2.11 | 2.77 | 3.34 |

## 11.2.5 fields_profile.csv — steady-state spatial profile of every field along the route

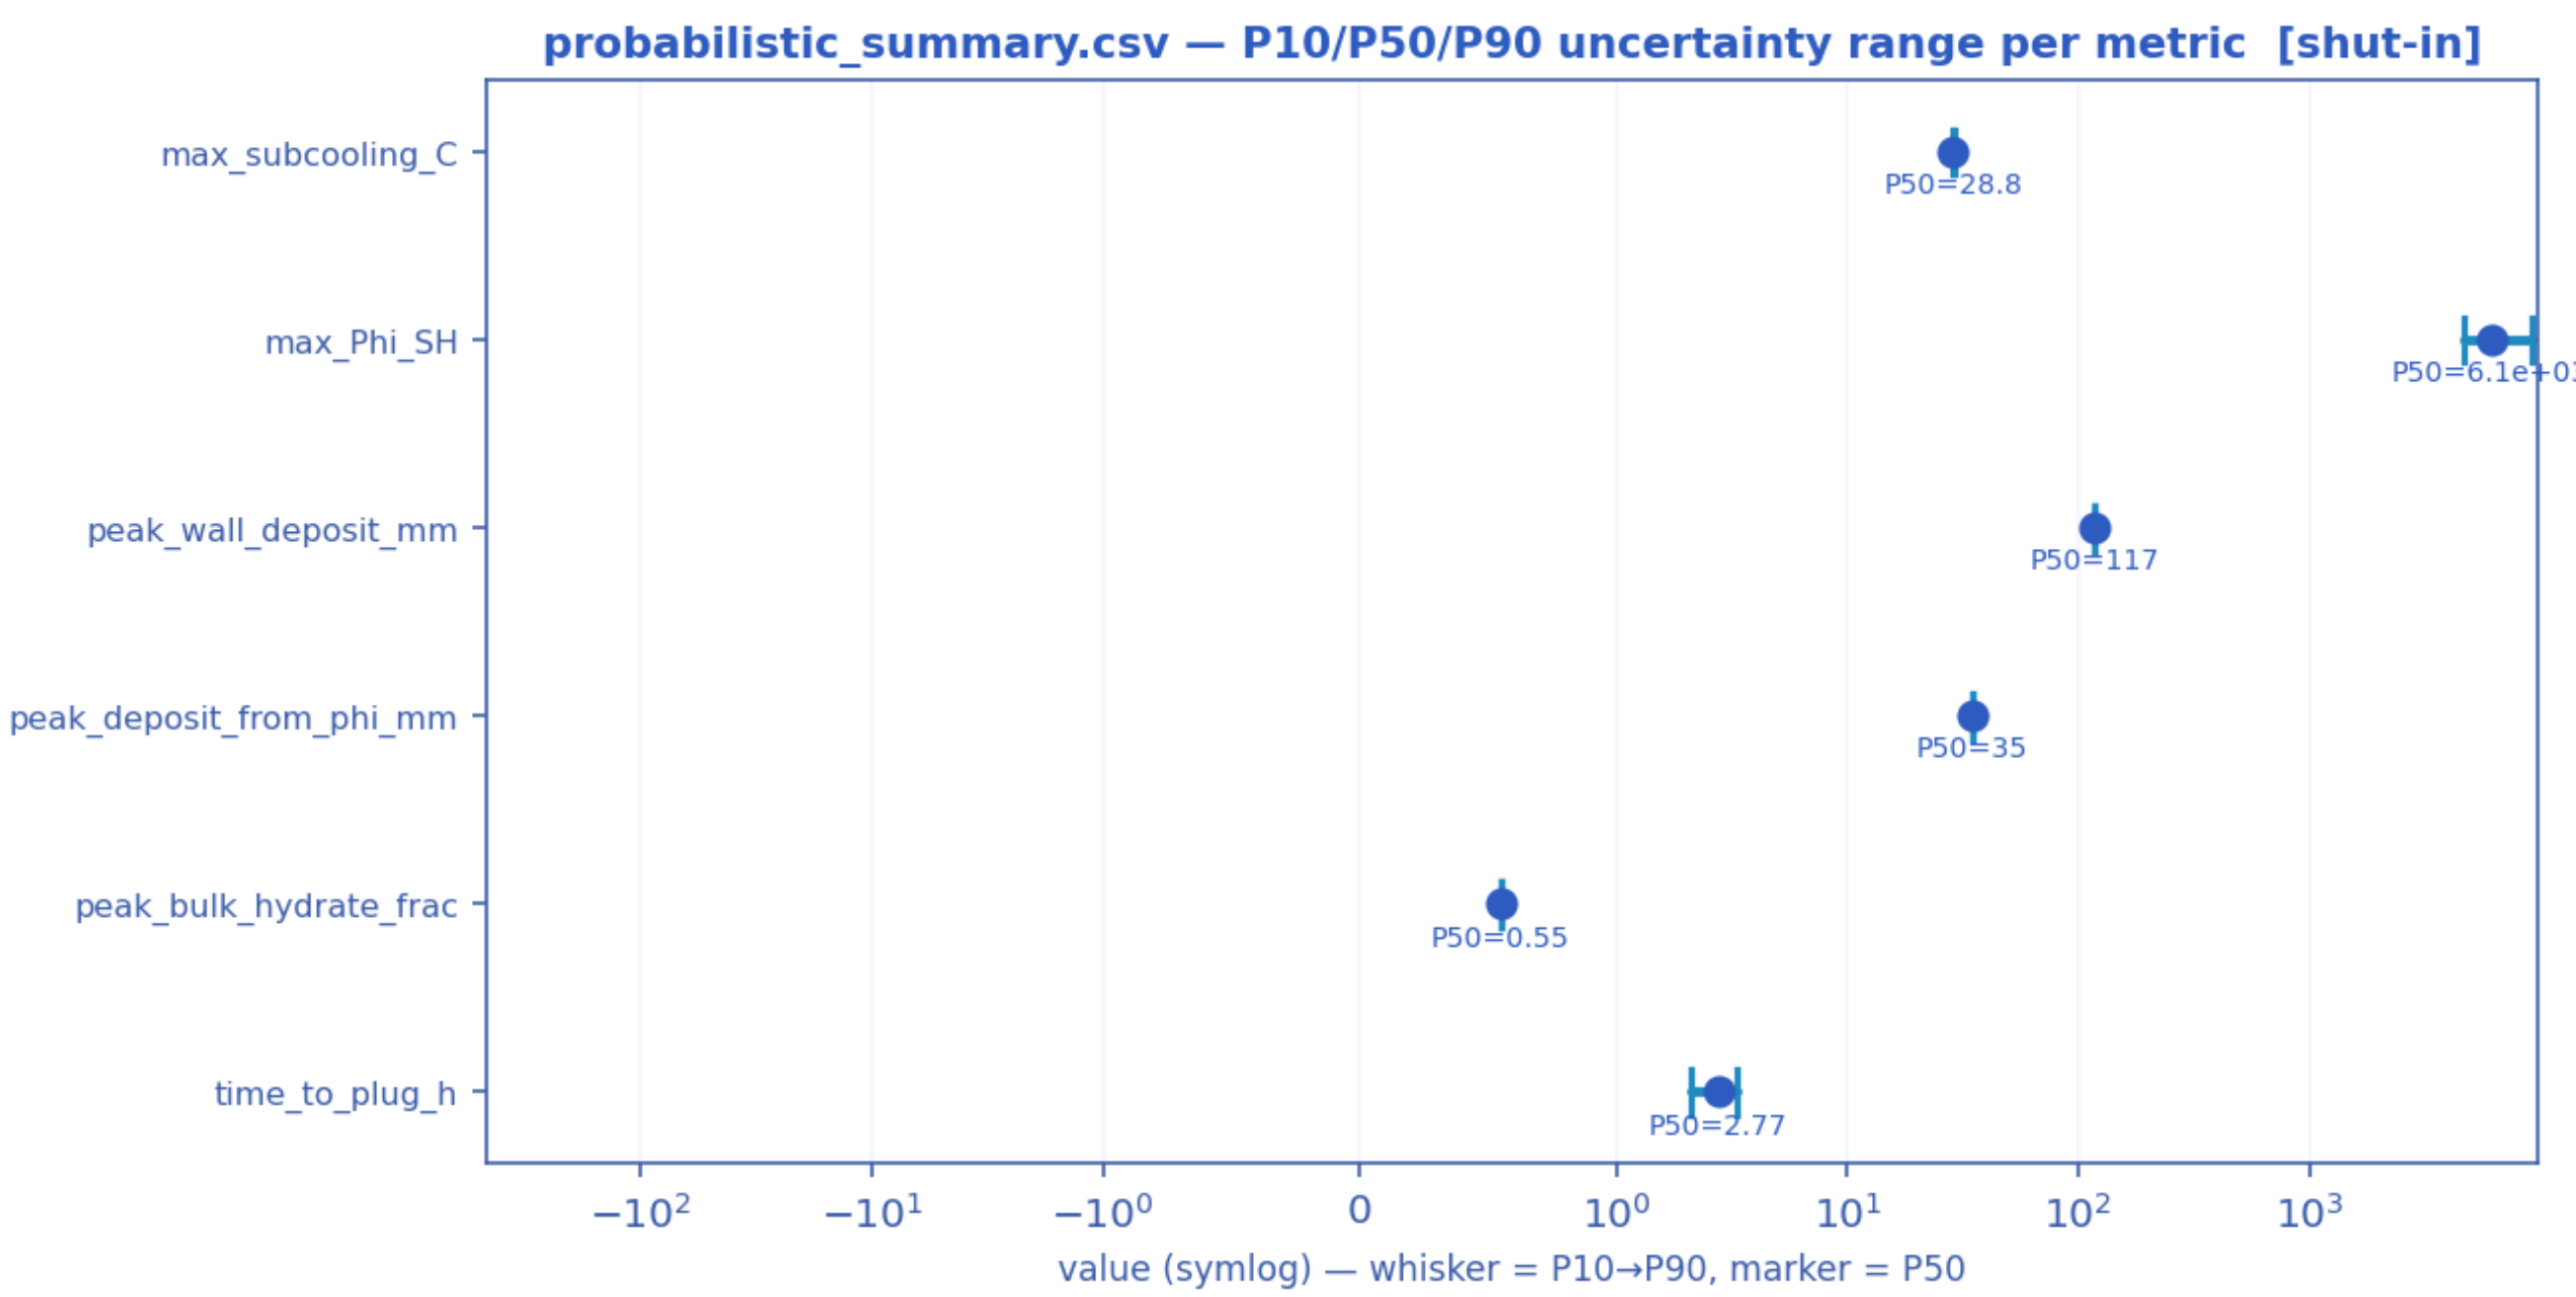


*Every column of fields_profile.csv drawn as a curve  [shut-in].*

| x_km | elevation_m | incl_deg | P_bar | T_C | Teq_C | subcooling_C | holdup | v_m_mps | regime | a_i_1perm | f_slug_Hz | phi_hydrate | deposit_mm | Phi_SH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **0.22857** | -1118.4 | -1.9608 | 150 | 56.875 | 33.012 | -23.862 | 0.5289 | 5 | stratified-smooth | 11.748 | 0.0001 | 0 | 0 | 3174.6 |
| **2.5143** | -1114.5 | 0.18865 | 149.5 | 51.452 | 32.987 | -18.466 | 0.12387 | 4 | stratified-smoot | 5.1172 | 0.0001 | 0.23484 | 0 | 2919.9 |

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | h | | | | | |
| **4.8** | -1092.7 | 0.42362 | 148.39 | 43.932 | 32.929 | -11.004 | 0.020803 | 4 | stratified-smooth | 0.96049 | 0.0001 | 0.18841 | 0 | 2908.4 |
| **7.0857** | -1060.5 | 2.601 | 146.72 | 36.153 | 32.842 | -3.3116 | 0.010437 | 3 | stratified-smooth | 0.48696 | 0.0001 | 0.11657 | 0 | 2978.2 |
| **9.8286** | -1107.7 | -1.3732 | 149.17 | 27.417 | 32.97 | 5.5497 | 0.0038384 | 2 | stratified-smooth | 0.18076 | 0.0001 | 0.15836 | 3.3529 | 2932.3 |
| **12.114** | -1107 | 0.13701 | 149.13 | 17.166 | 32.968 | 15.799 | 0.0026397 | 1 | stratified-smooth | 0.1246 | 0.0001 | 0.07551 | 91.22 | 2414.2 |
| **14.4** | -1082.3 | -0.54271 | 147.76 | 5.1811 | 32.896 | 27.713 | 0.0017723 | 0 | stratified-smooth | 0.083927 | 0.0001 | 0.066528 | 49.294 | 2396.9 |
| **17.143** | -1017.6 | 0.54352 | 144.12 | 5.0222 | 32.705 | 27.69 | 0.0017389 | 0 | stratified-smooth | 0.082322 | 0.0001 | 0.054904 | 115.26 | 2429.1 |
| **19.429** | -1087.1 | -0.61307 | 147.97 | 4.9256 | 32.908 | 28.008 | 0.0015586 | 0 | stratified-smooth | 0.073805 | 0.0001 | 0.045924 | 54.18 | 2833.2 |
| **21.714** | -1094.2 | 0.93887 | 148.36 | 5.2067 | 32.928 | 27.72 | 0.0022444 | 0 | stratified-smooth | 0.10615 | 0.0001 | 0.036706 | 117.07 | 2612.1 |
| **24.457** | -1083.8 | 0.40028 | 147.75 | 4.9692 | 32.896 | 27.963 | 0.0017601 | 0 | stratified-smooth | 0.083289 | 0.0001 | 0.027784 | 117.07 | 2723.3 |
| **26.743** | -1007 | -0.74006 | 143.45 | 5.0865 | 32.669 | 27.589 | 0.0018376 | 0 | stratified-smooth | 0.086948 | 0.0001 | 0.020525 | 117.07 | 2002.2 |
| **29.029** | -1066 | -0.91009 | 146.78 | 5.1452 | 32.845 | 27.706 | 0.0017742 | 0 | stratified-smooth | 0.08399 | 0.0001 | 0.012314 | 117.07 | 5712 |
| **31.771** | -25 | 37.781 | 99.071 | 5.9499 | 29.818 | 23.902 | 0.001 | 0 | slug | 0.10991 | 0.1464 | 0.0020612 | 2.4214e-08 | 5186.5 |

## 11.2.6 timeseries_monitor.csv — transient response at the monitored station

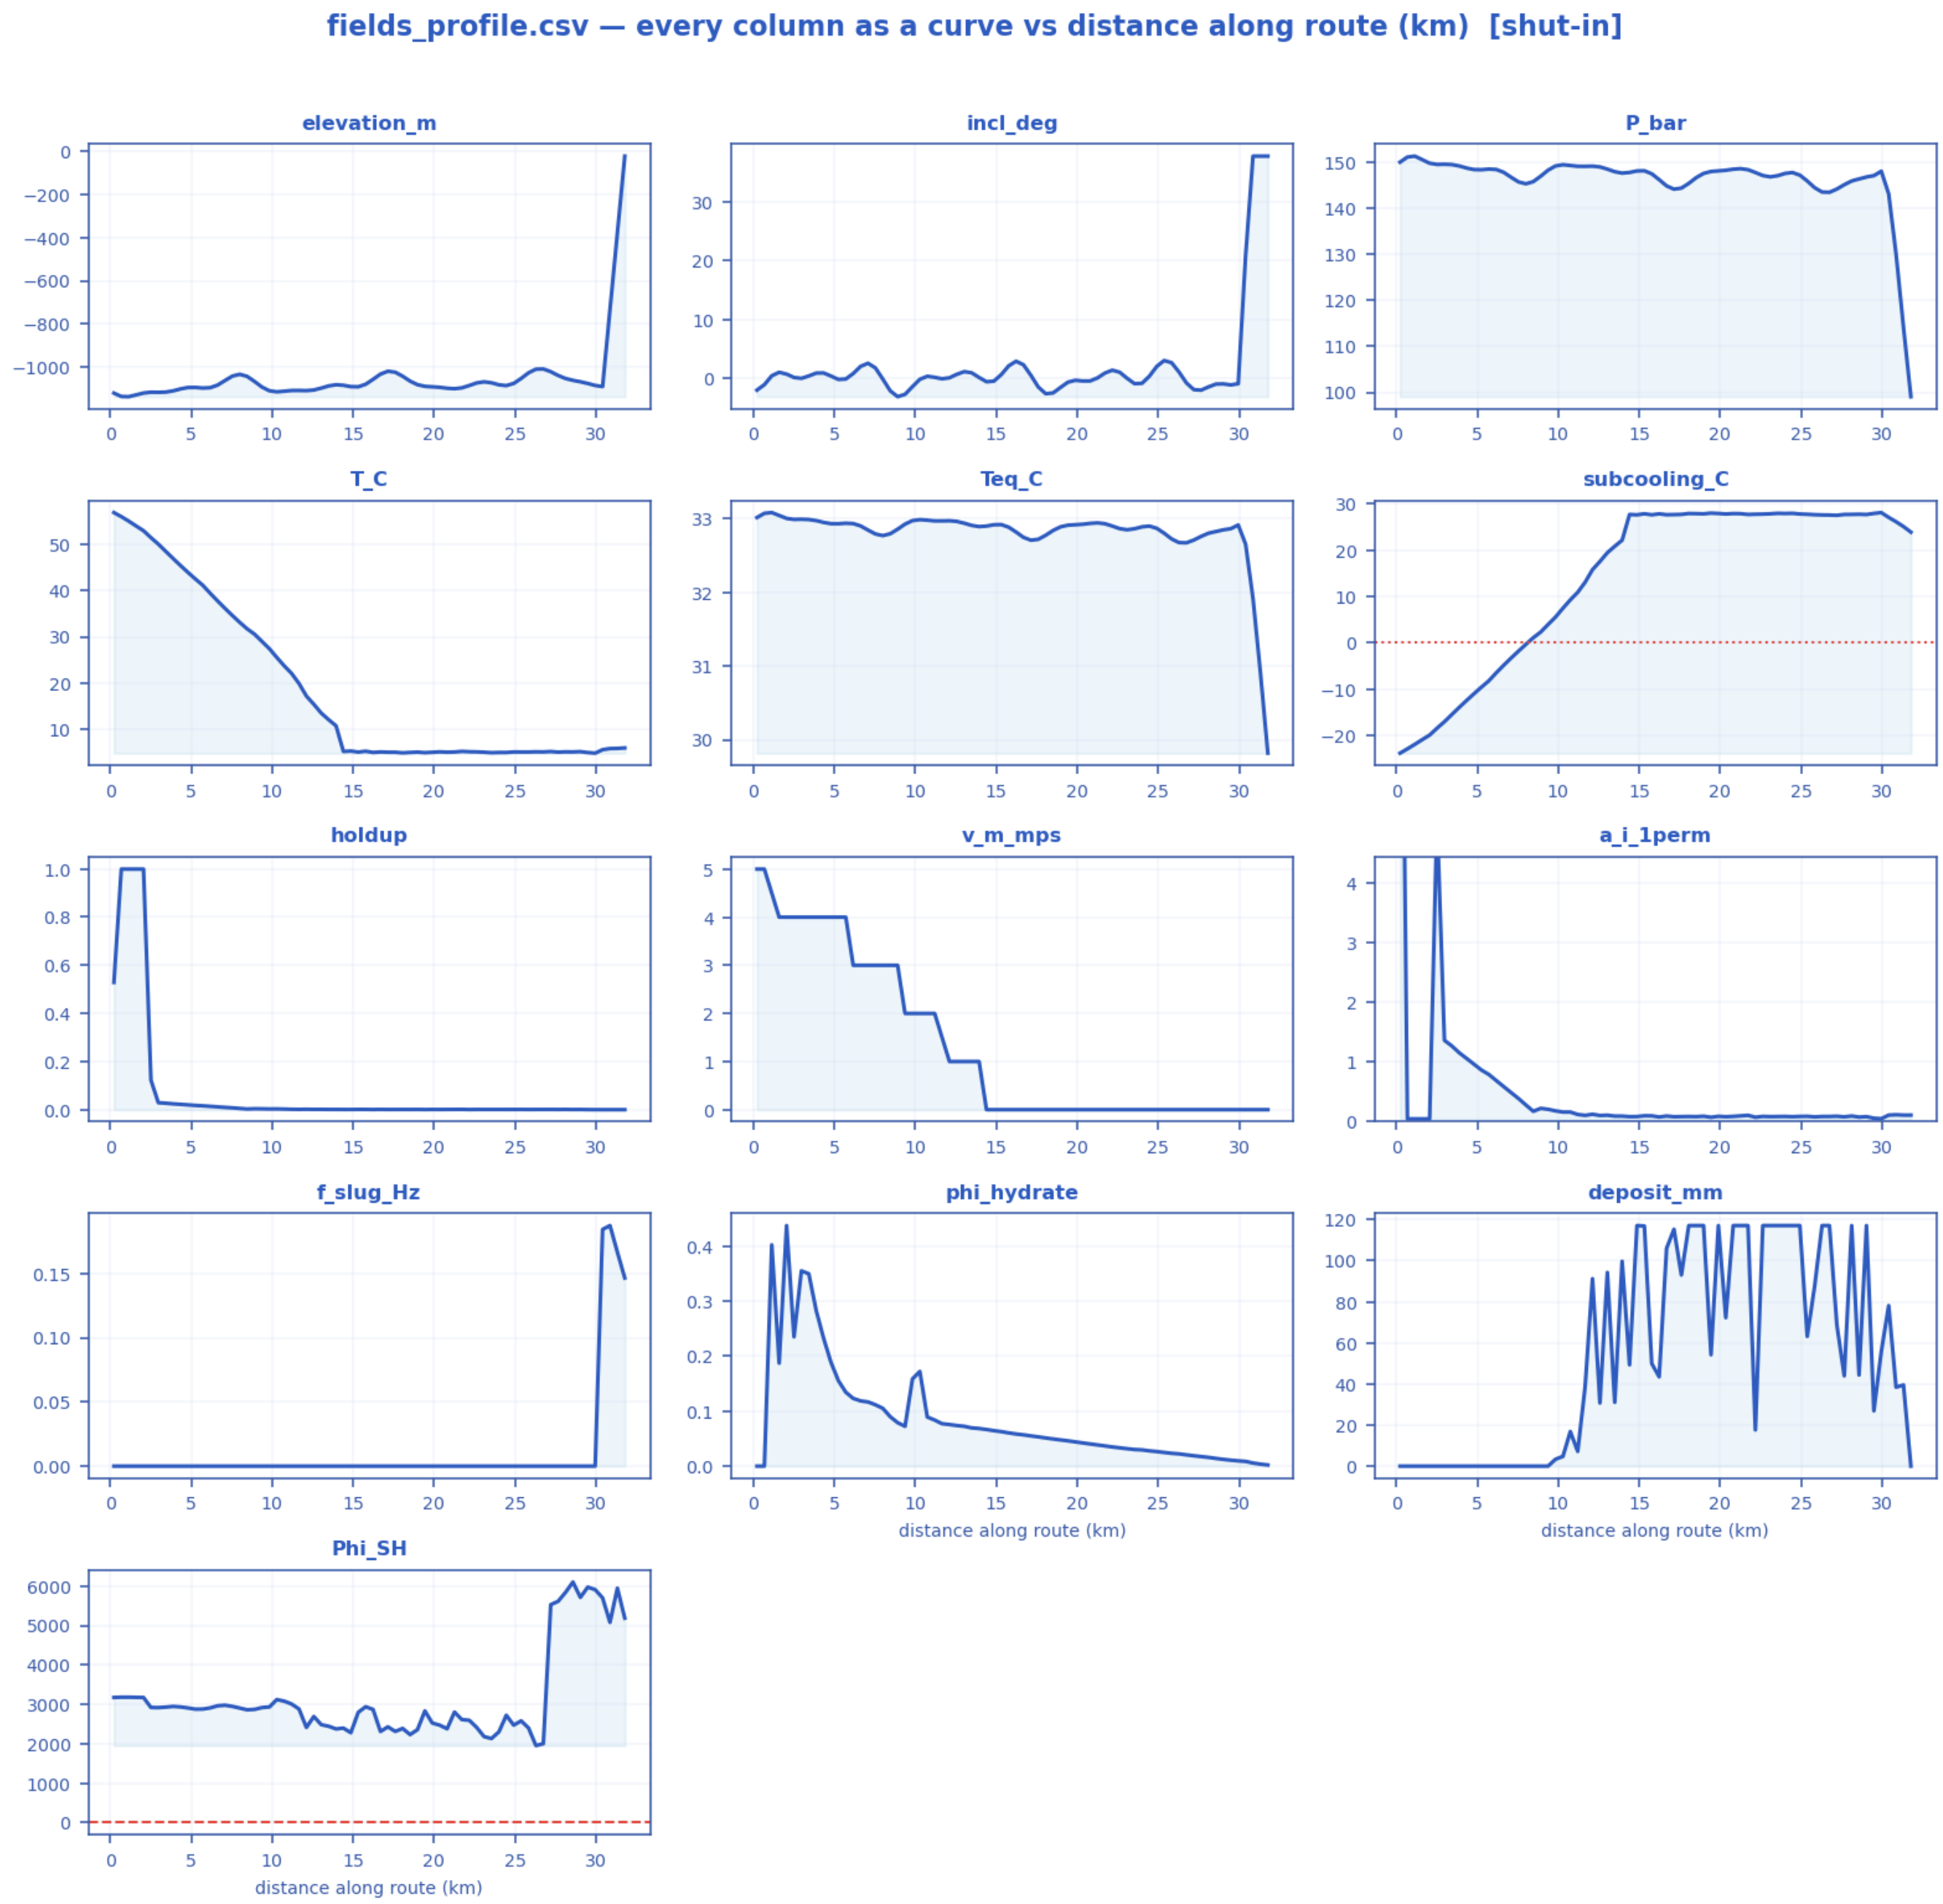


*Every column of timeseries_monitor.csv drawn as a curve [shut-in].*

| time_h | bc_rate_frac | P_bar | T_C | subcooling_C | holdup | v_m_mps | f_slug_Hz | phi_hydrate | deposit_mm | Phi_SH |
|---|---|---|---|---|---|---|---|---|---|---|
| **0** | 1 | 2.0927 | 14.162 | -14.057 | 0.35833 | 1 | 0.0001 | 0 | 0 | 0 |
| **1.8451** | 1 | 73.234 | 21.229 | 6.1055 | 0.26399 | 1.5 | 0.22382 | 0.092032 | 0 | 1.6522 |
| **3.6914** | 1 | 68.336 | 20.202 | 6.9258 | 0.19874 | 1.5 | 0.22964 | 0.36979 | 22.17 | 1.4068 |
| **5.5378** | 1 | 60.739 | 20.209 | 5.6927 | 0.31283 | 2 | 0.24165 | 0.27995 | 95.301 | 1.3078 |
| **7.3841** | 0.02 | 145.32 | 15.207 | 17.548 | 0.0080909 | 1 | 0.0001 | 0.082985 | 114.73 | 111 |
| **9.2292** | 0.02 | 146.94 | 6.4281 | 26.399 | 0.001 | 0 | 0.0001 | 0.021586 | 116.13 | 12.782 |
| **11.076** | 0.02 | 146.75 | 5.2903 | 27.554 | 0.001 | 0 | 0.0001 | 0.013945 | 116.25 | 14.021 |
| **12.922** | 0.02 | 146.82 | 5.1914 | 27.675 | 0.001803 | 0 | 0.0001 | 0.011789 | 116.44 | 24.252 |
| **14.768** | 0.02 | 146.79 | 5.1828 | 27.708 | 0.0015559 | 0 | 0.0001 | 0.014371 | 116.77 | 19.23 |
| **16.613** | 0.02 | 146.78 | 5.2681 | 27.573 | 0.0017724 | 0 | 0.0001 | 0.012516 | 117.07 | 20.429 |
| **18.46** | 0.02 | 146.78 | 5.2369 | 27.636 | 0.0018081 | 0 | 0.0001 | 0.013176 | 117.07 | 24.061 |
| **20.306** | 0.02 | 146.78 | 5.1024 | 27.742 | 0.0016029 | 0 | 0.0001 | 0.012681 | 117.07 | 20.142 |
| **22.152** | 0.02 | 146.78 | 5.0791 | 27.765 | 0.0018078 | 0 | 0.0001 | 0.012538 | 117.07 | 22.676 |

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| **23.999** | 0.02 | 146.78 | 5.1452 | 27.706 | 0.0017742 | 0 | 0.0001 | 0.012314 | 117.07 | 22.261 |

## 11.3 Engineered mitigation — restored insulation + continuous MEG
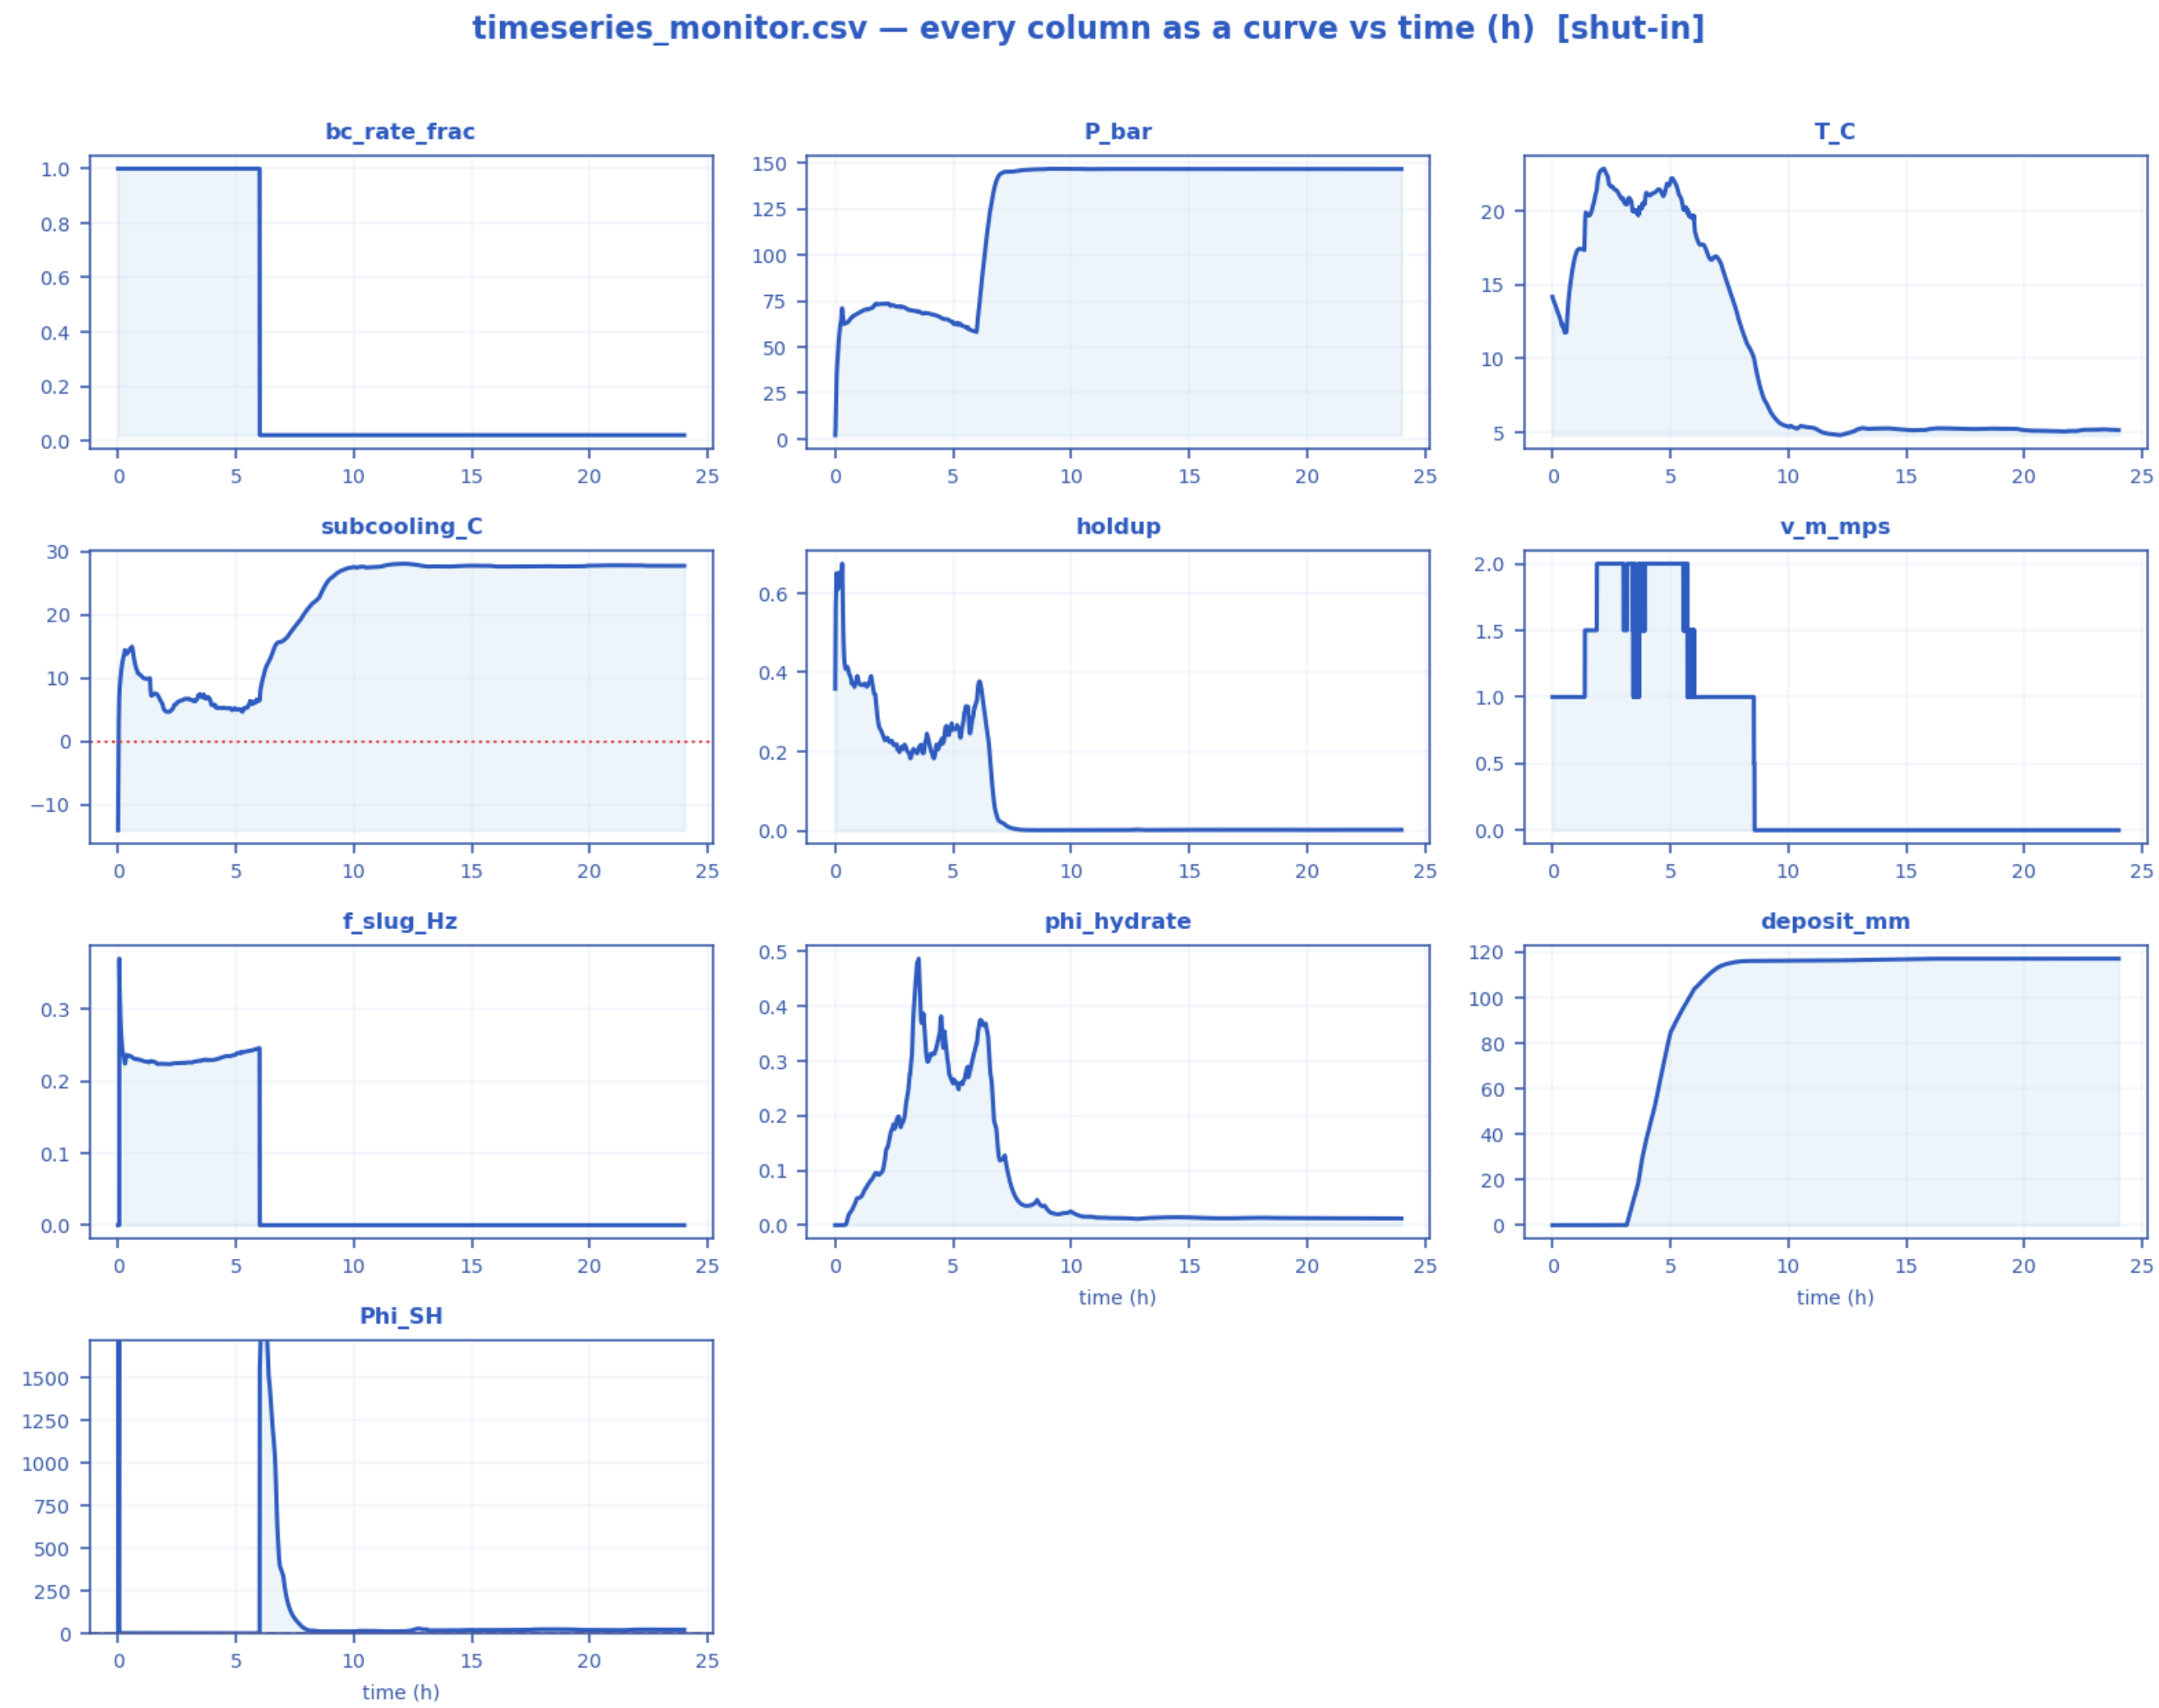
### 11.3.1 Headline prediction metrics

| Metric | Value | Units |
|---|---|---|
| **Total ΔP** | 120.8 | bar |
| **Peak velocity** | 5 | m/s |
| **Erosional limit (API 14E)** | 5.697 | m/s |
| **Max slug length** | 5000 | m |
| **Mean slug length** | 98.4 | m |
| **Slug/intermittent fraction** | 0.797 | – |
| **Slug-catcher surge (P90)** | 0.391 | $m^3$ |
| **Max subcooling** | 6.605 | °C |
| **Design subcooling (P90)** | 6.641 | °C |
| **Max Φ_SH (coupling)** | 3815 | – |
| **Coupling hot-spot** | 31.31 | km |
| **Plug probability** | 0.25 | frac |
| **Time-to-plug P50** | 3.926 | h |
| **Time-to-plug P10** | 3.02 | h |
| **Time-to-plug P90** | 5.602 | h |
| **Peak wall deposit** | 0 | mm |
| **MEG required** | 30.52 | wt% |
| **MEG rate** | 2.804e+04 | L/h |
| **Under-inhibited length** | 5.486 | km |
| **No-touch time** | 17.3 | h |
| **Effective U** | 2.383 | $W/m^2K$ |
| **Slurry rel. viscosity** | 1 | – |
| **Hydrate mass formed** | 5.676e+04 | kg |
| **Min mixture sound speed** | 138.7 | m/s |
| **Wax onset** | nan | km |
| **Max scaling index** | 0.7522 | – |
| **Liquid mass error** | 1.326e-13 | frac |
| **Gas mass error** | 3.69e-17 | frac |
| **Solver fallbacks** | 0 | # |

### 11.3.2 Charts, curves, contours and maps (9 figures)




*Final-state P50 profiles: seabed elevation, liquid holdup, pressure & temperature vs hydrate T_eq, and subcooling along the whole route. [mitigated]*




*Slug-formation prediction: terrain, intermittent (slug/churn) bands, slug frequency and slug-unit length, and liquid holdup. [mitigated]*

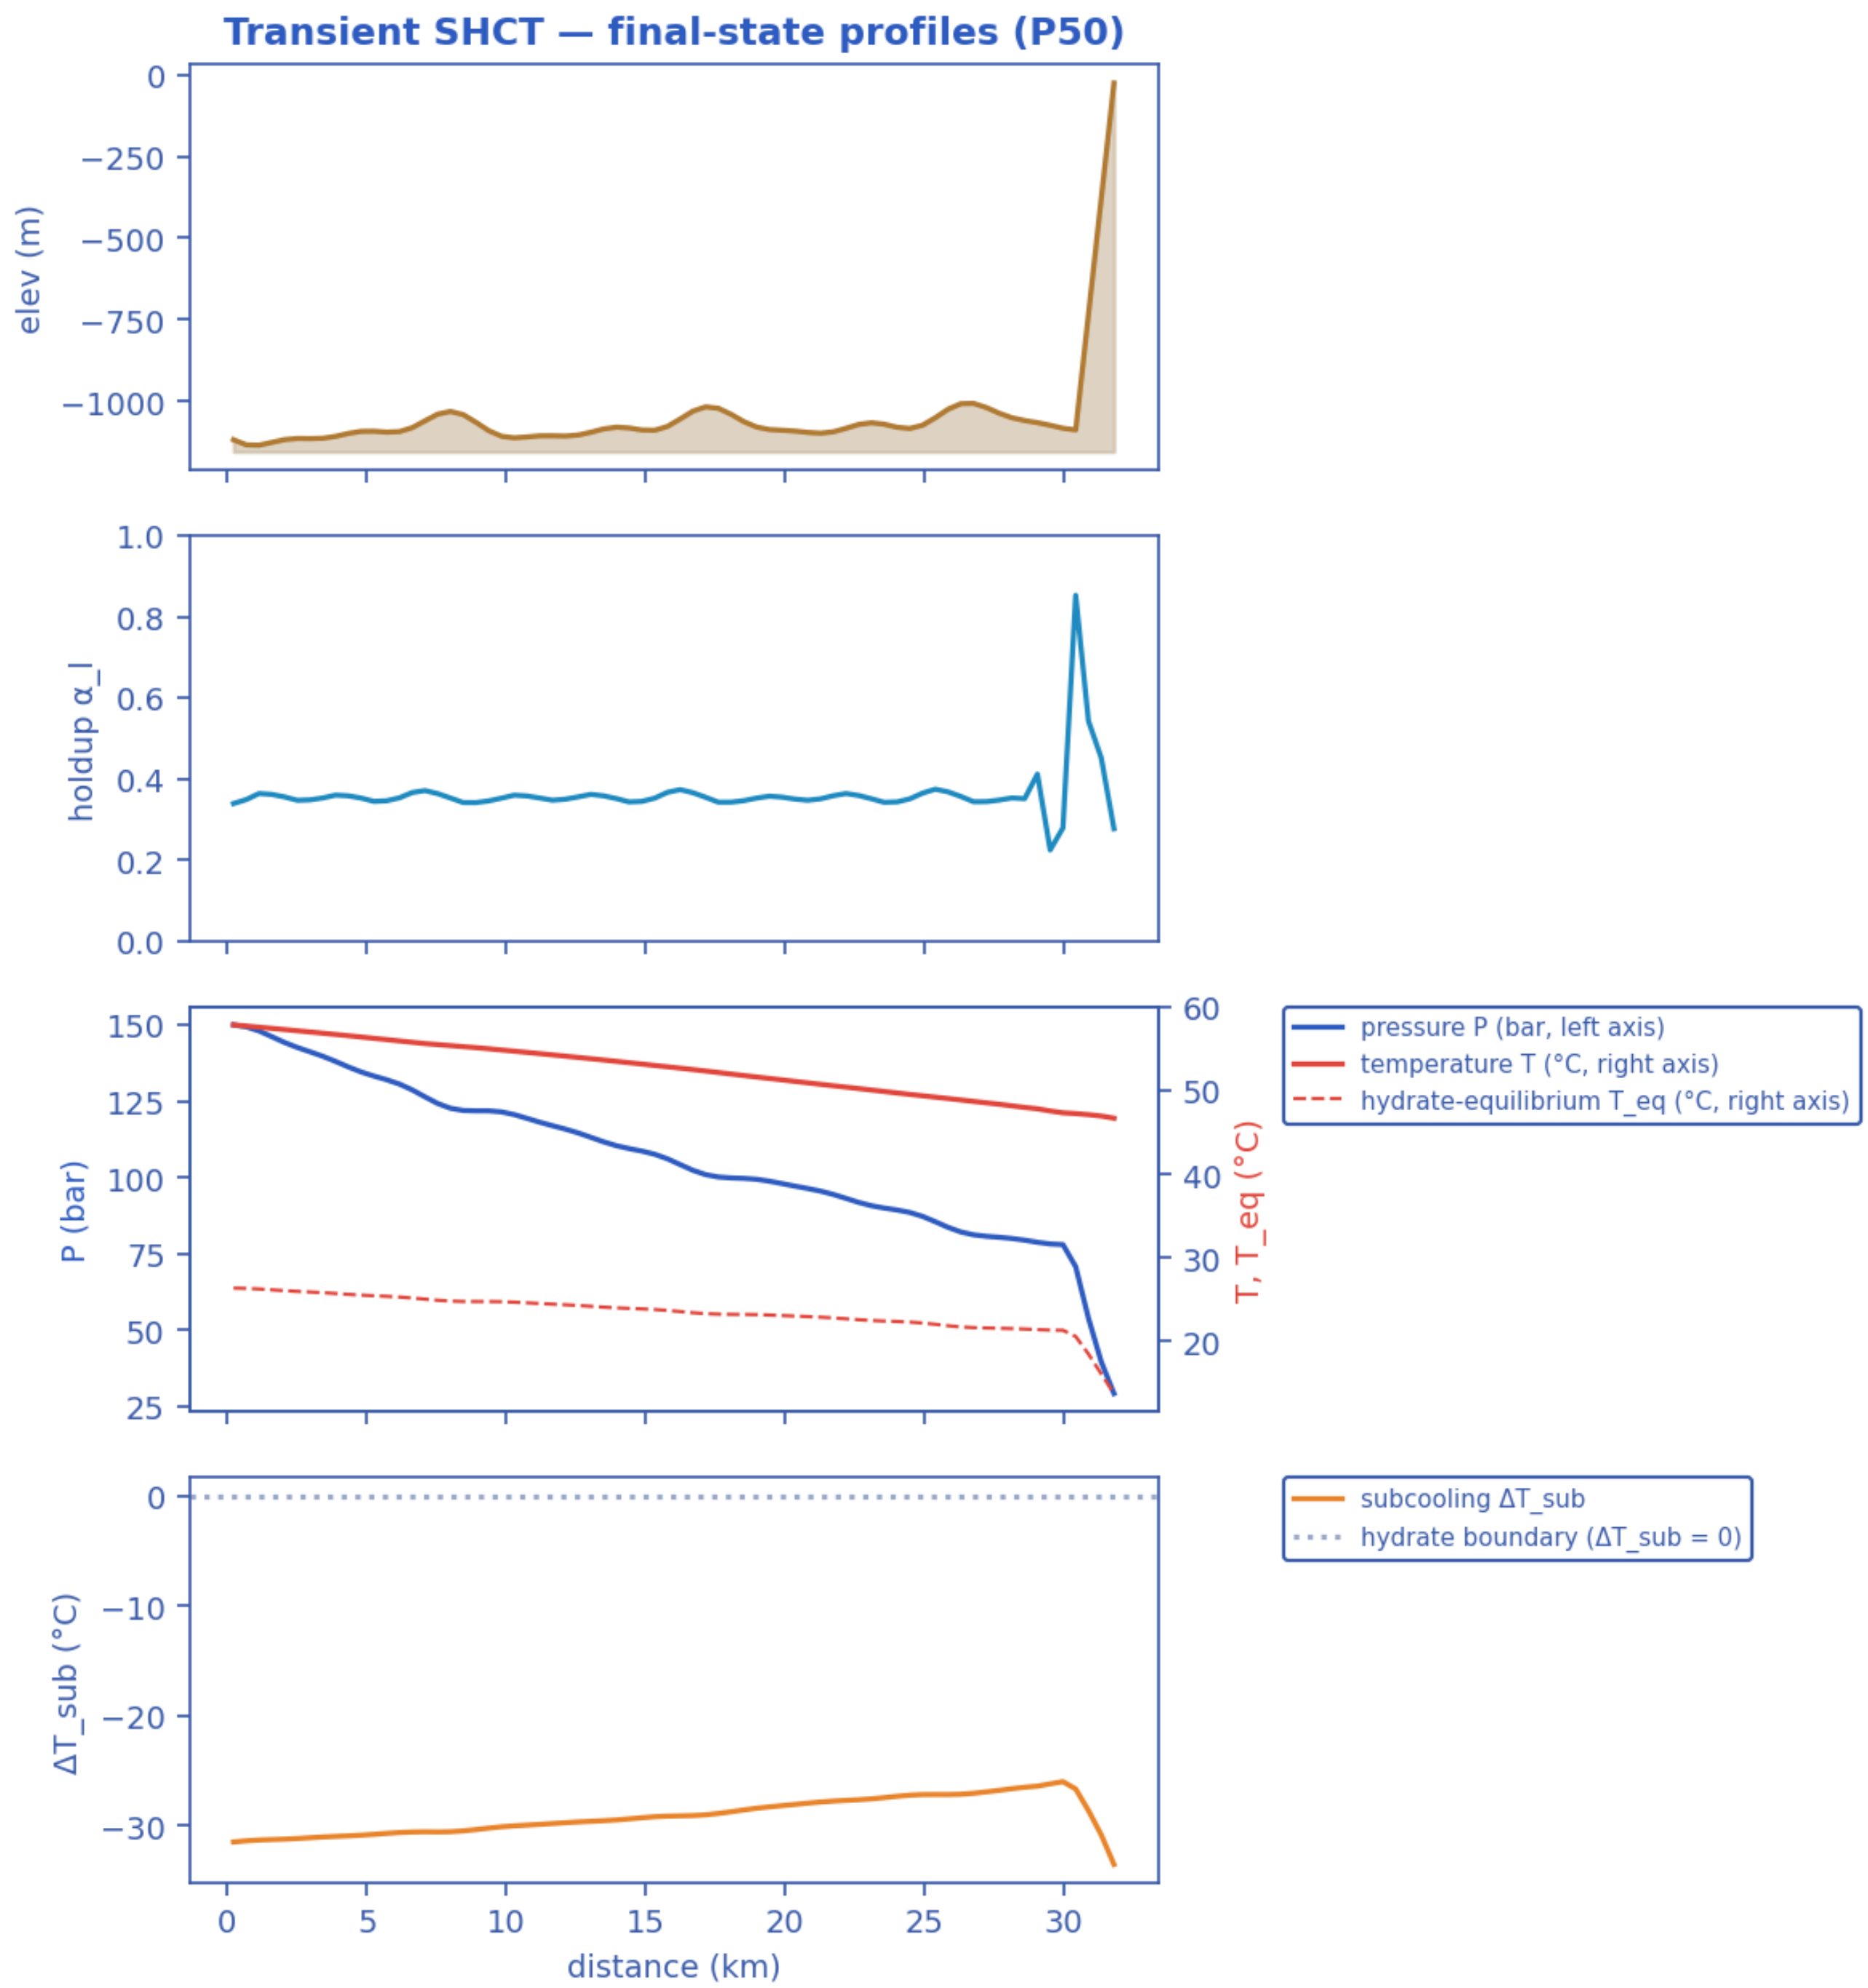


*Liquid-holdup field α_l(x,t) — the bands are slug activity migrating along the line in time (space-time contour map). [mitigated]*

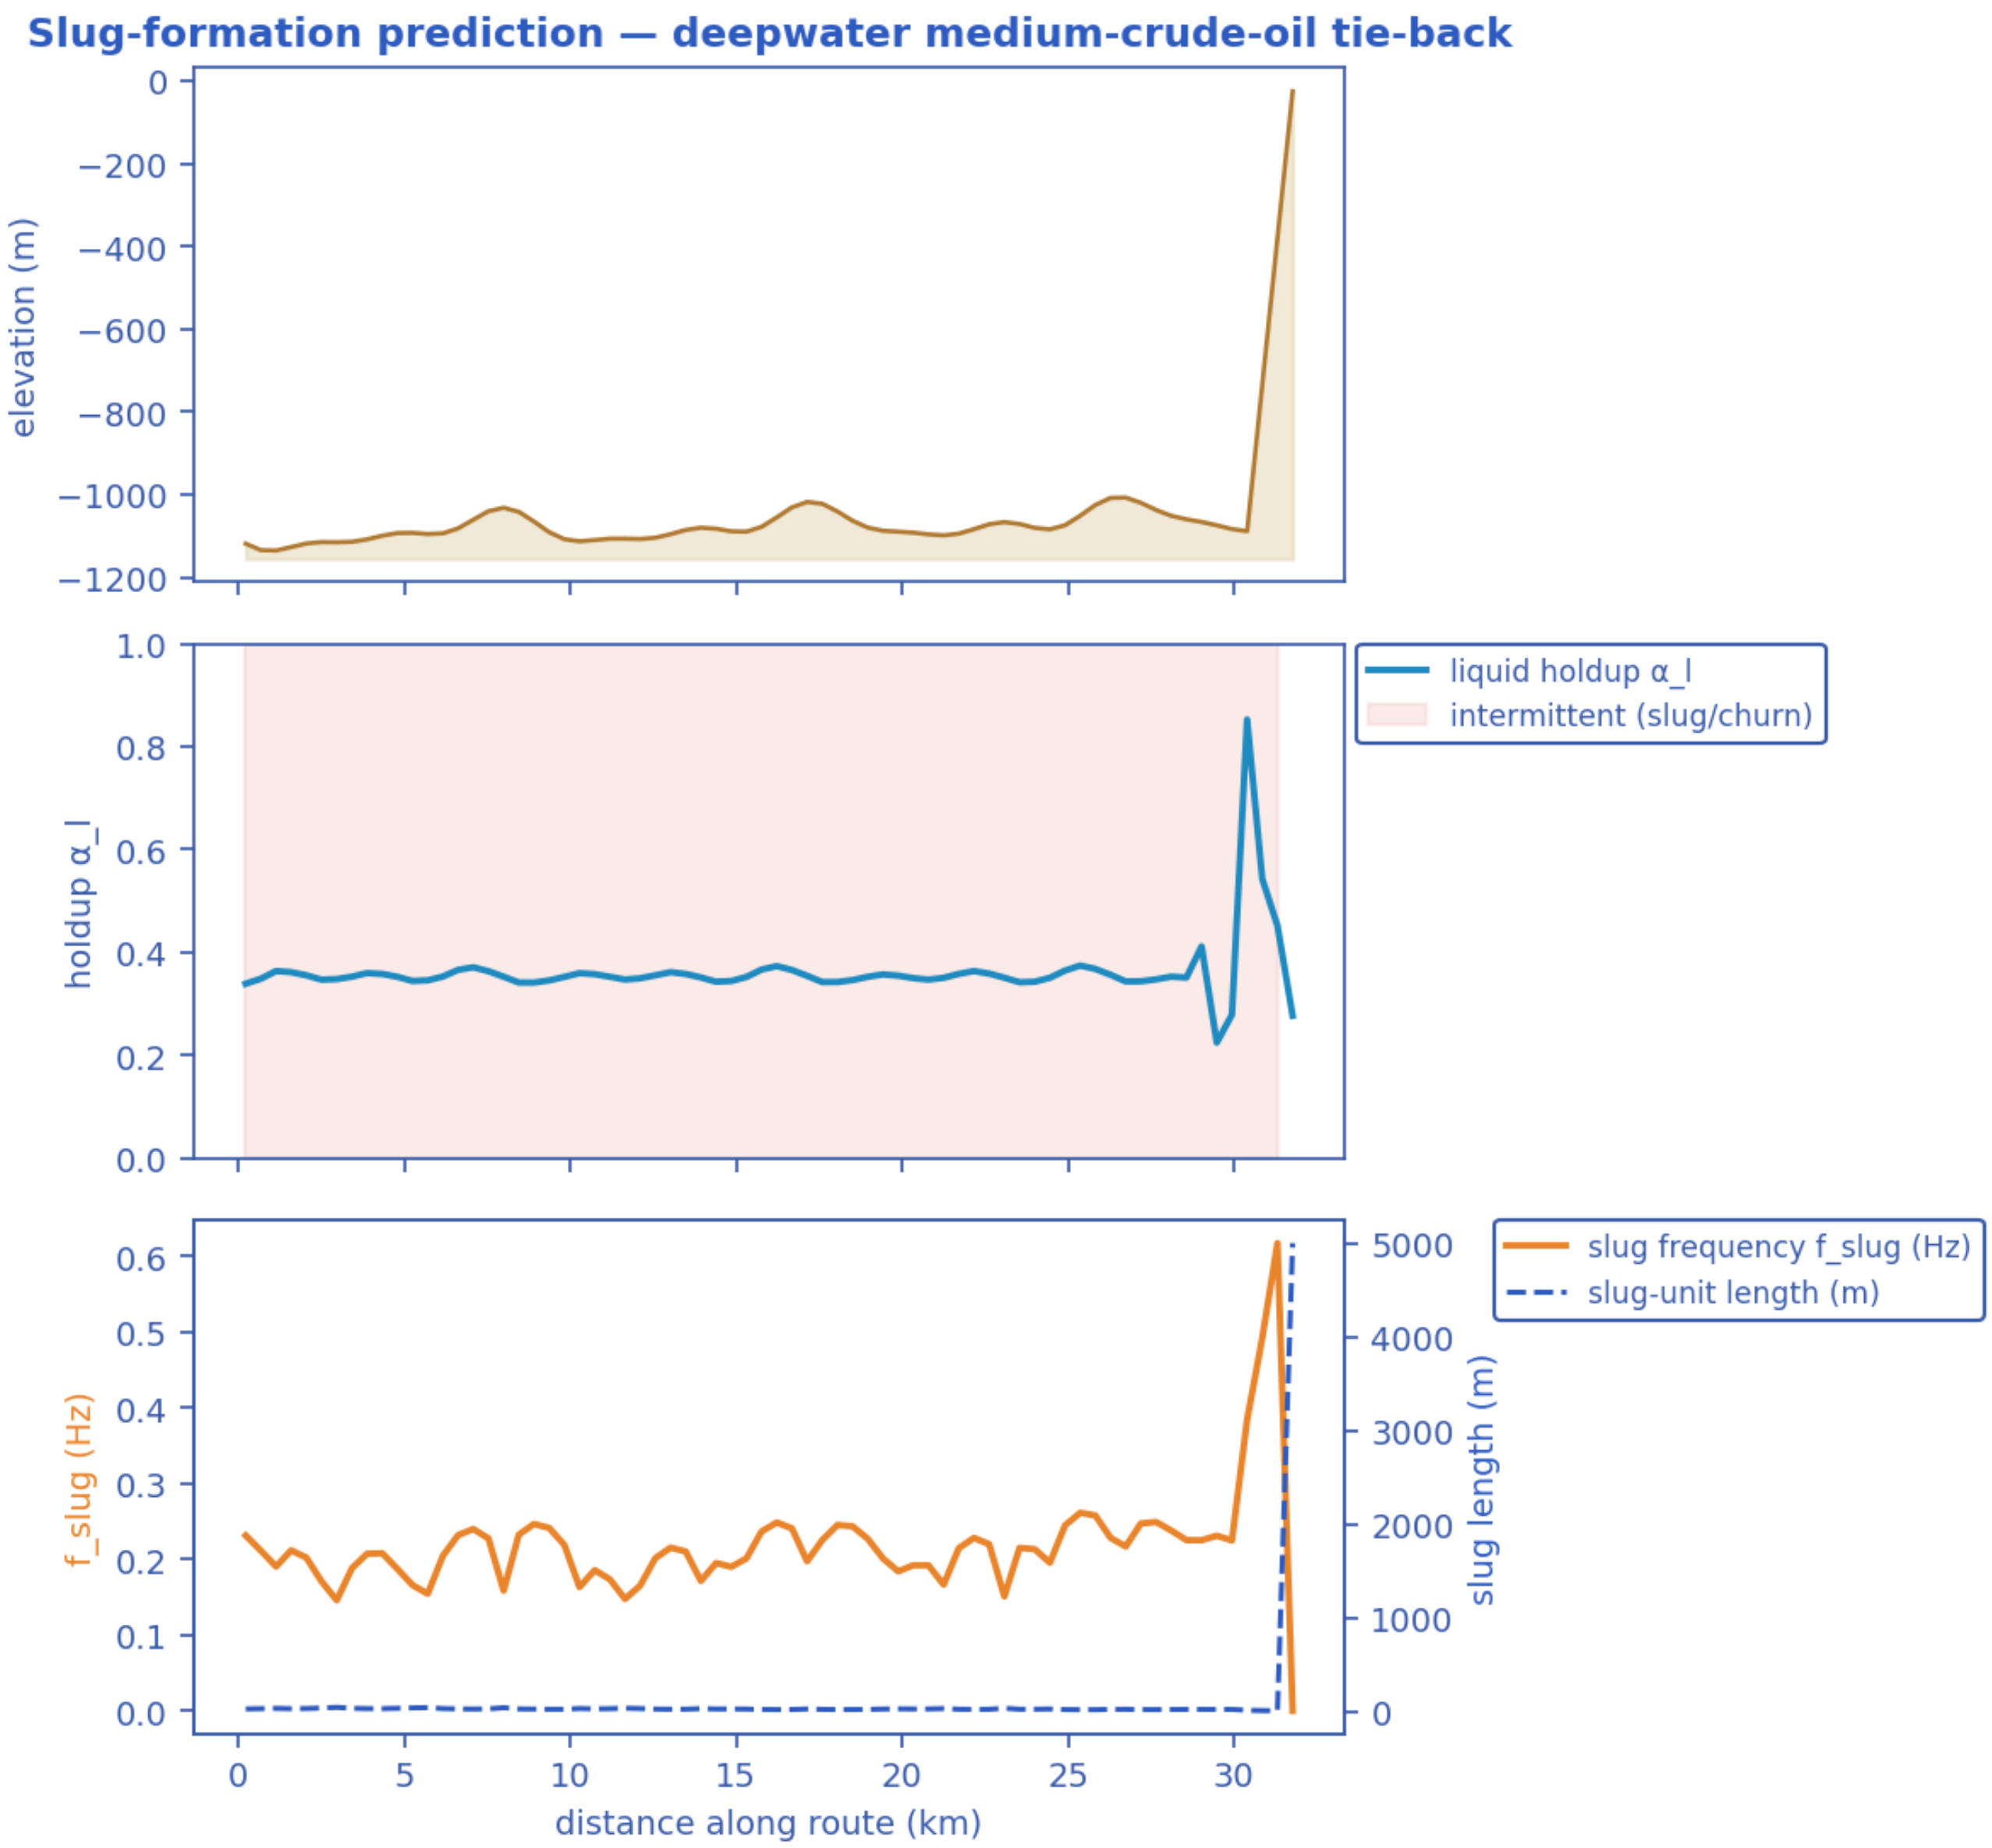


*Production P–T trajectory against the hydrate-stability envelope (curve). [mitigated]*

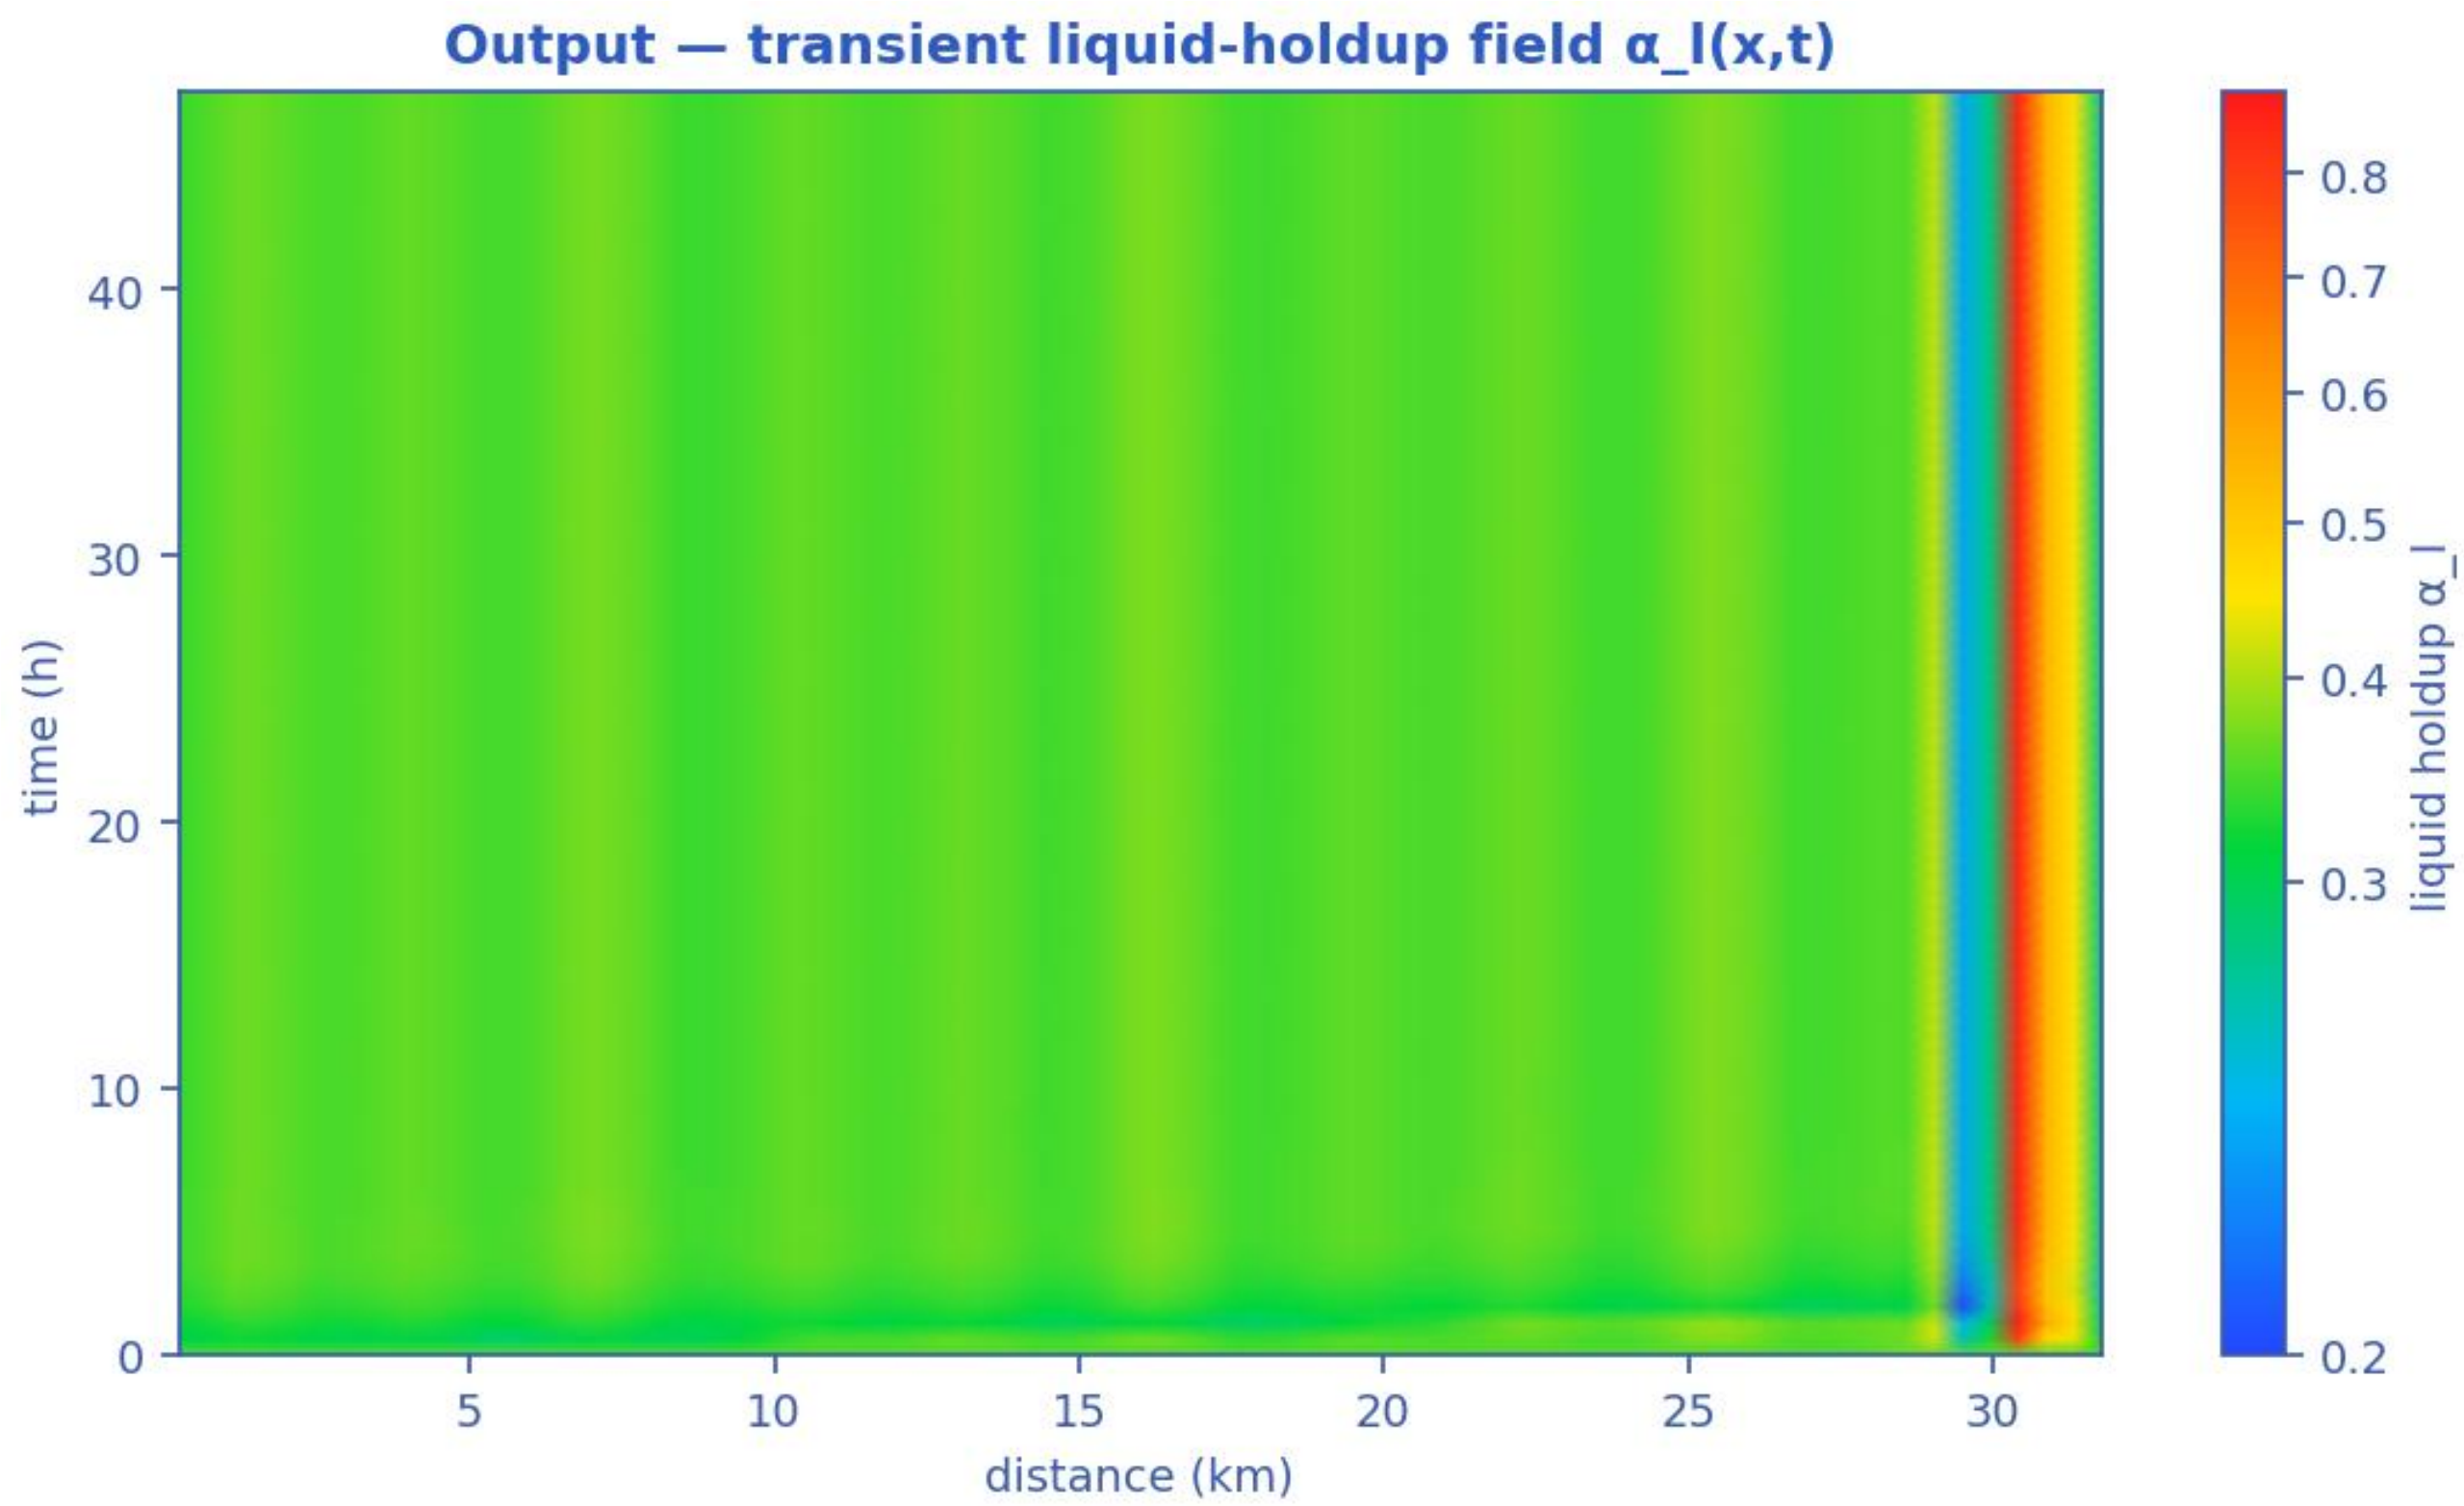


*Slug–Hydrate coupling-criticality map Φ_SH(x,t); the Φ_SH = 1 contour separates slug-scoured from plugging-critical (space-time map). [mitigated]*

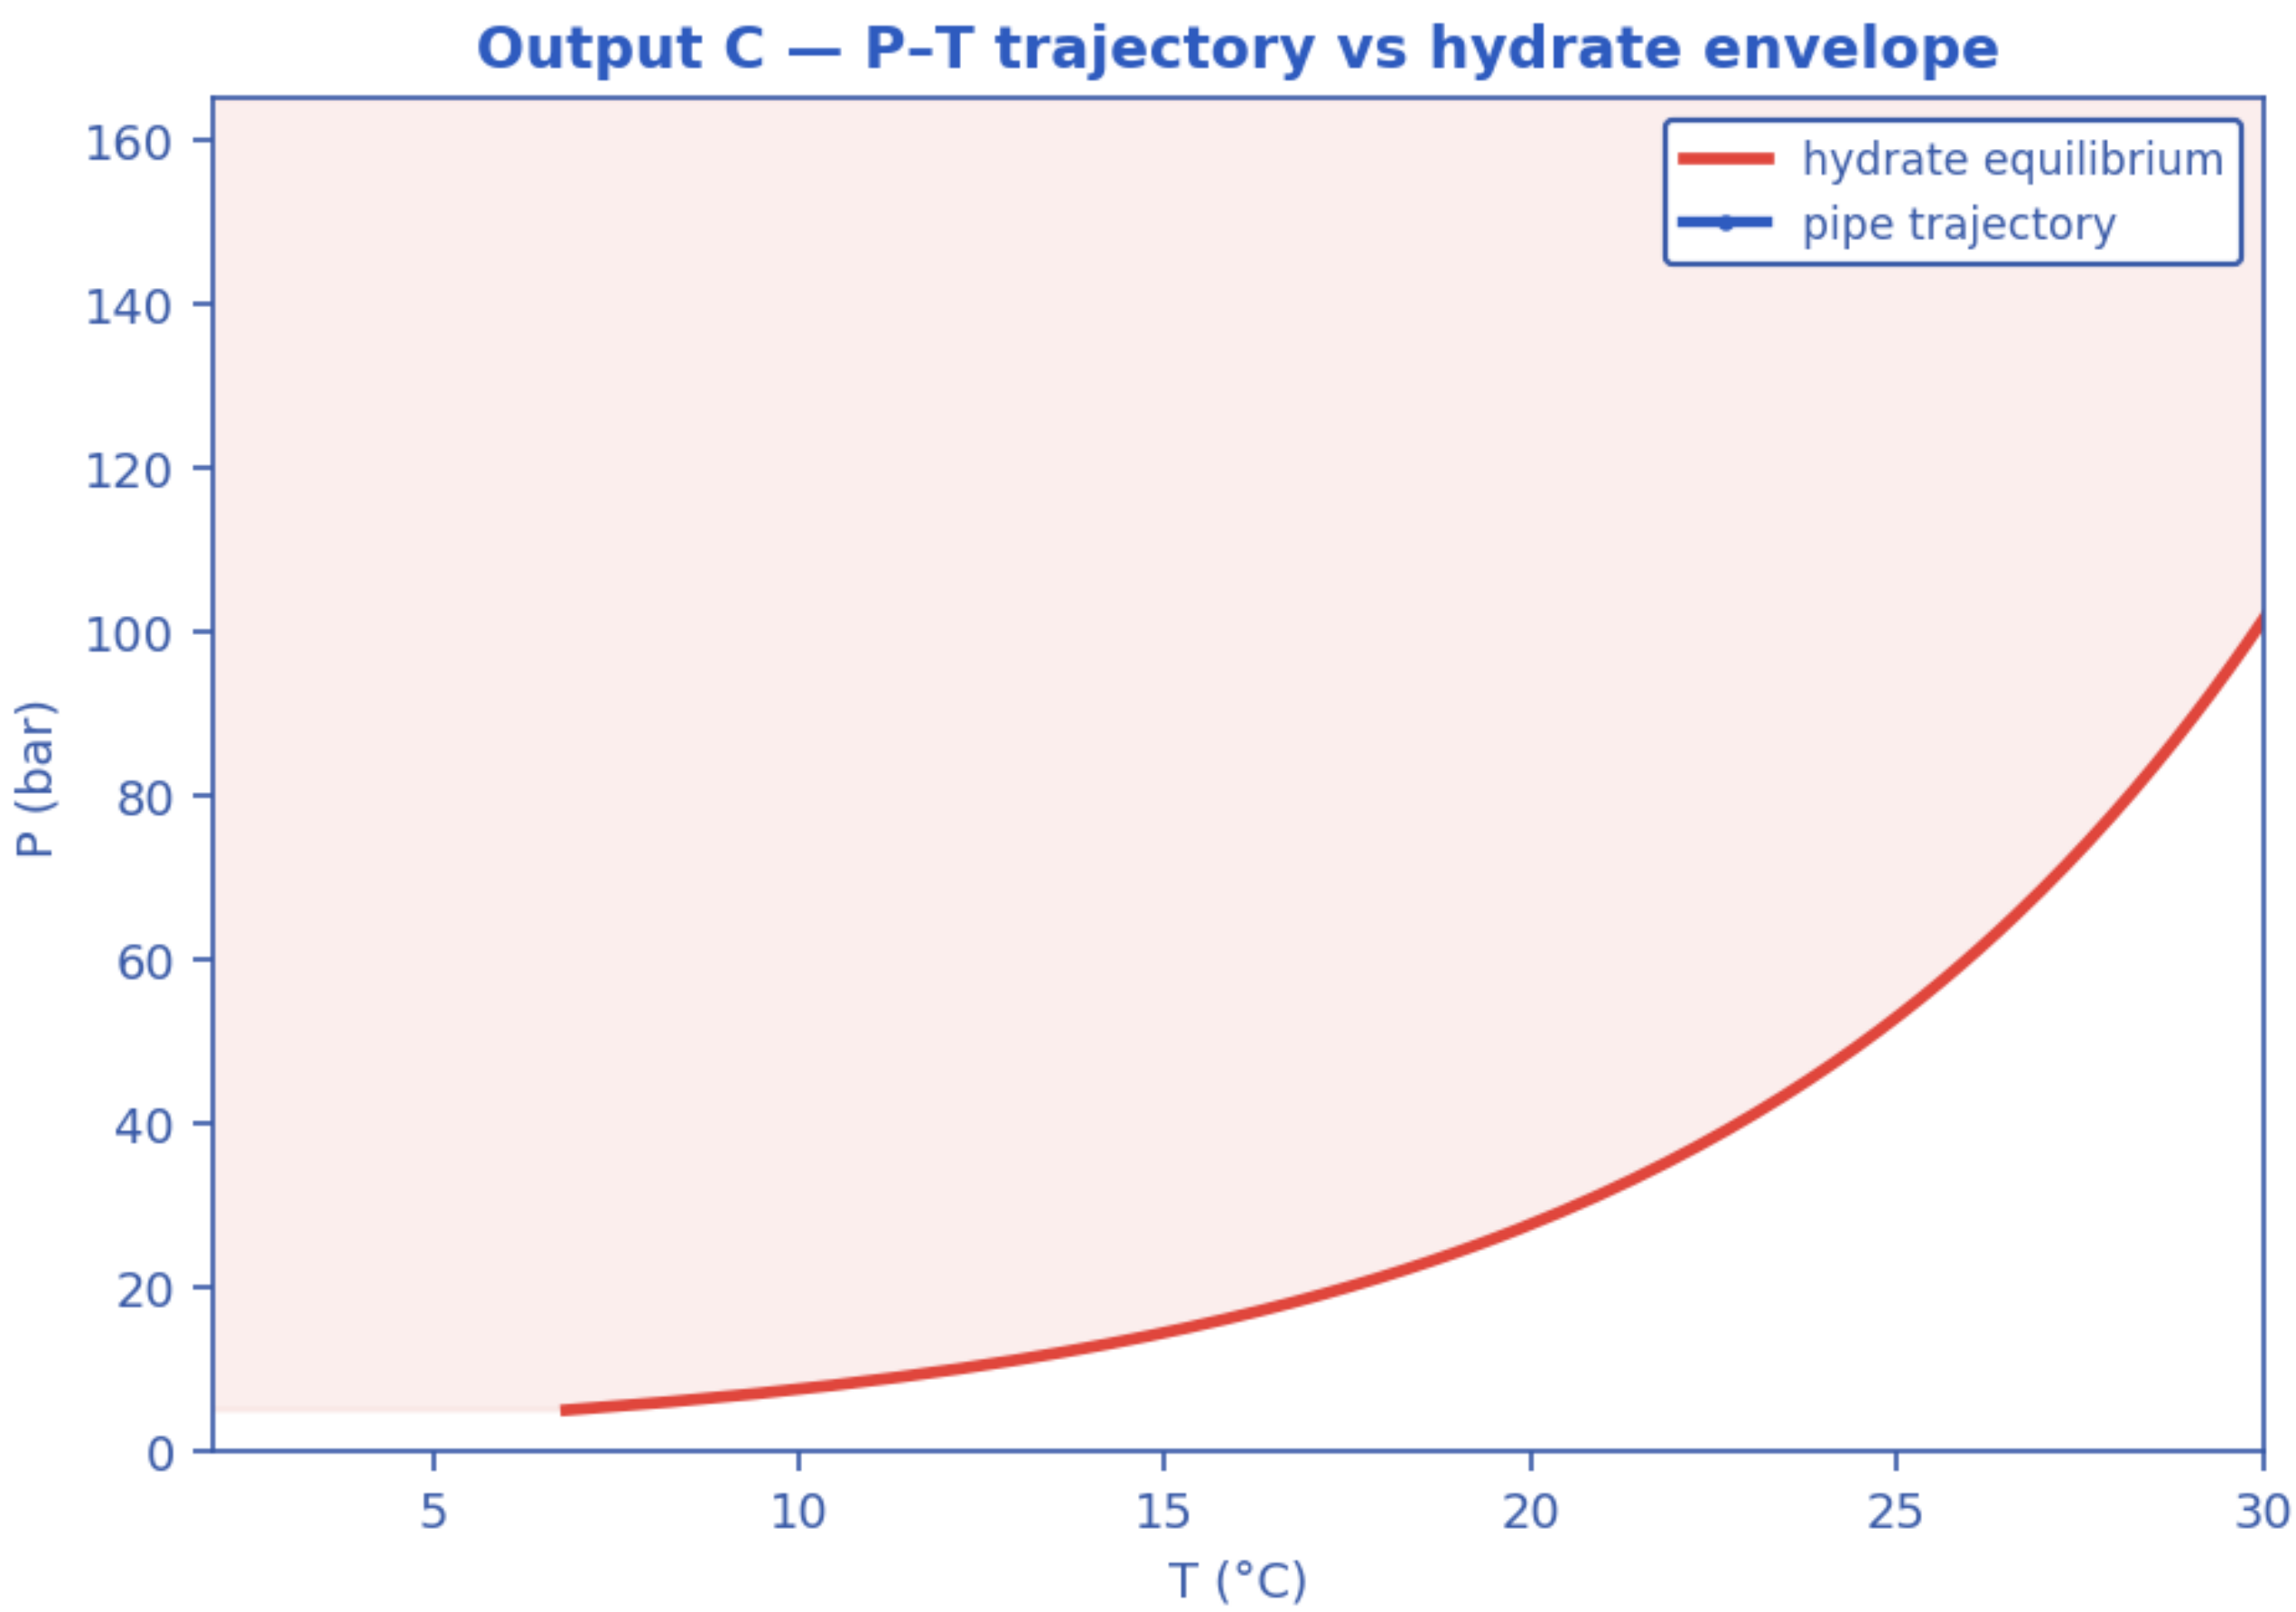


*Monitored-station transient response vs time (curves). [mitigated]*

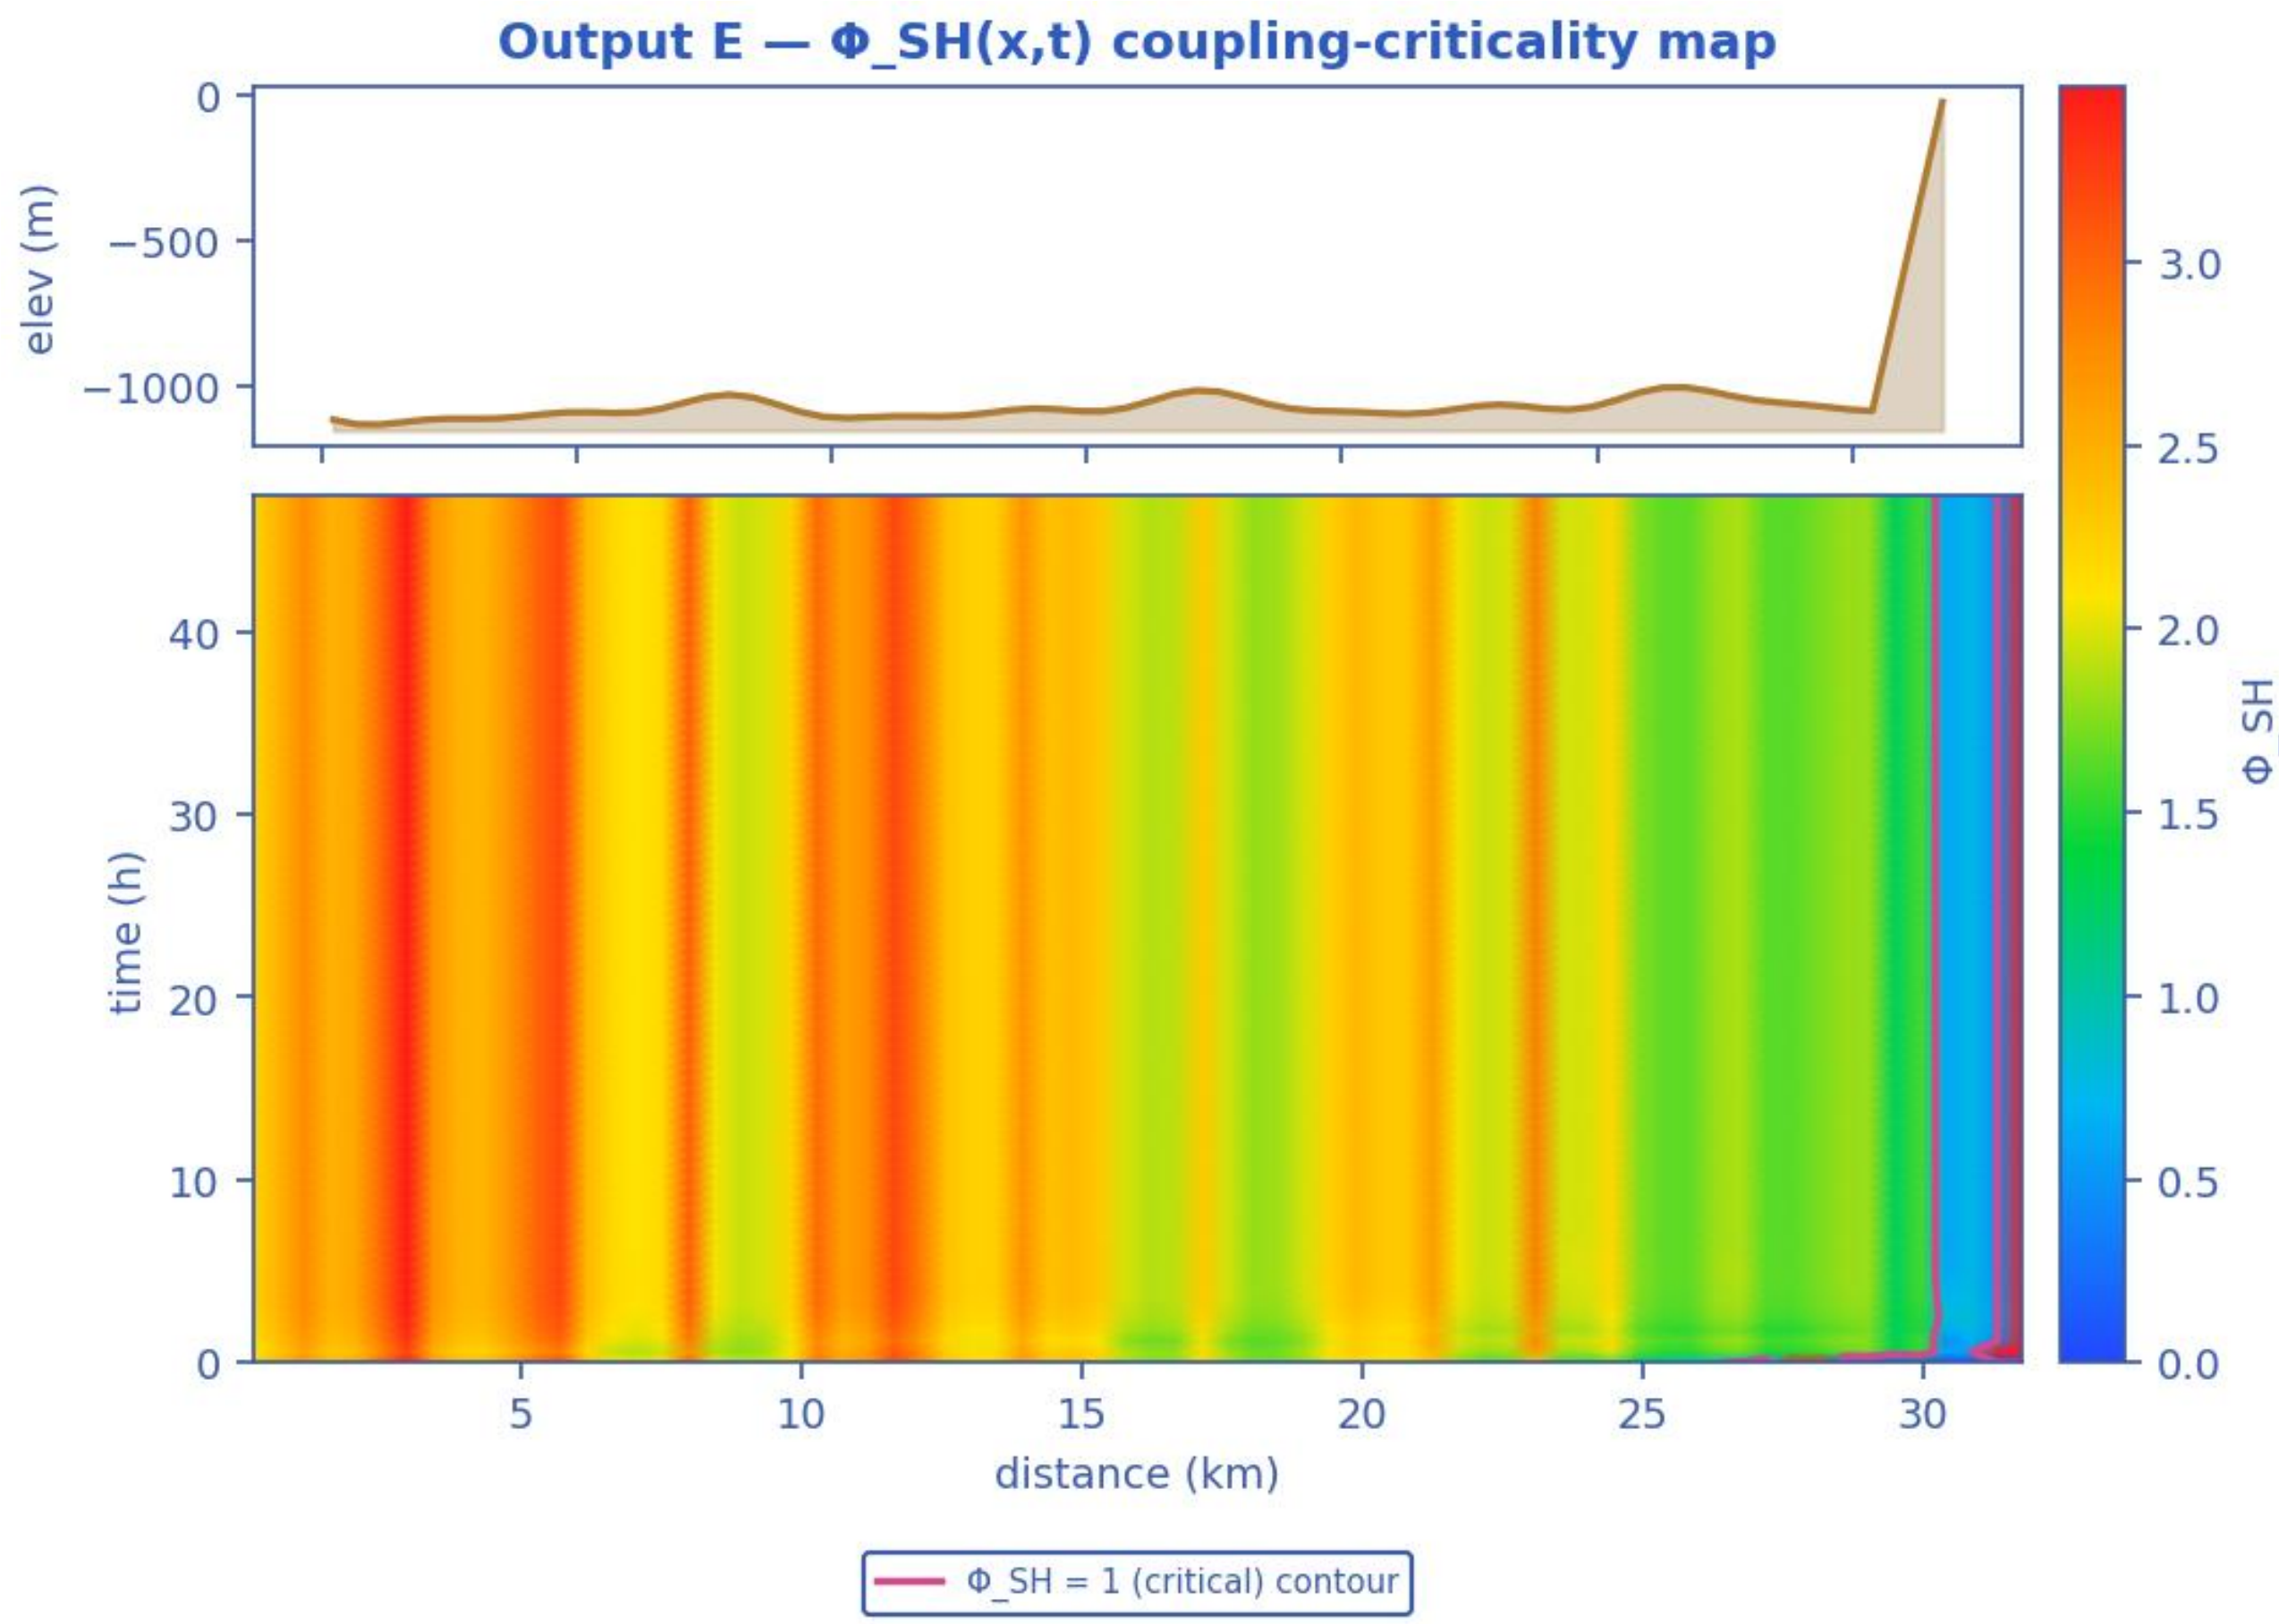


*Wall-deposit growth at the monitor station vs time (curve). [mitigated]*

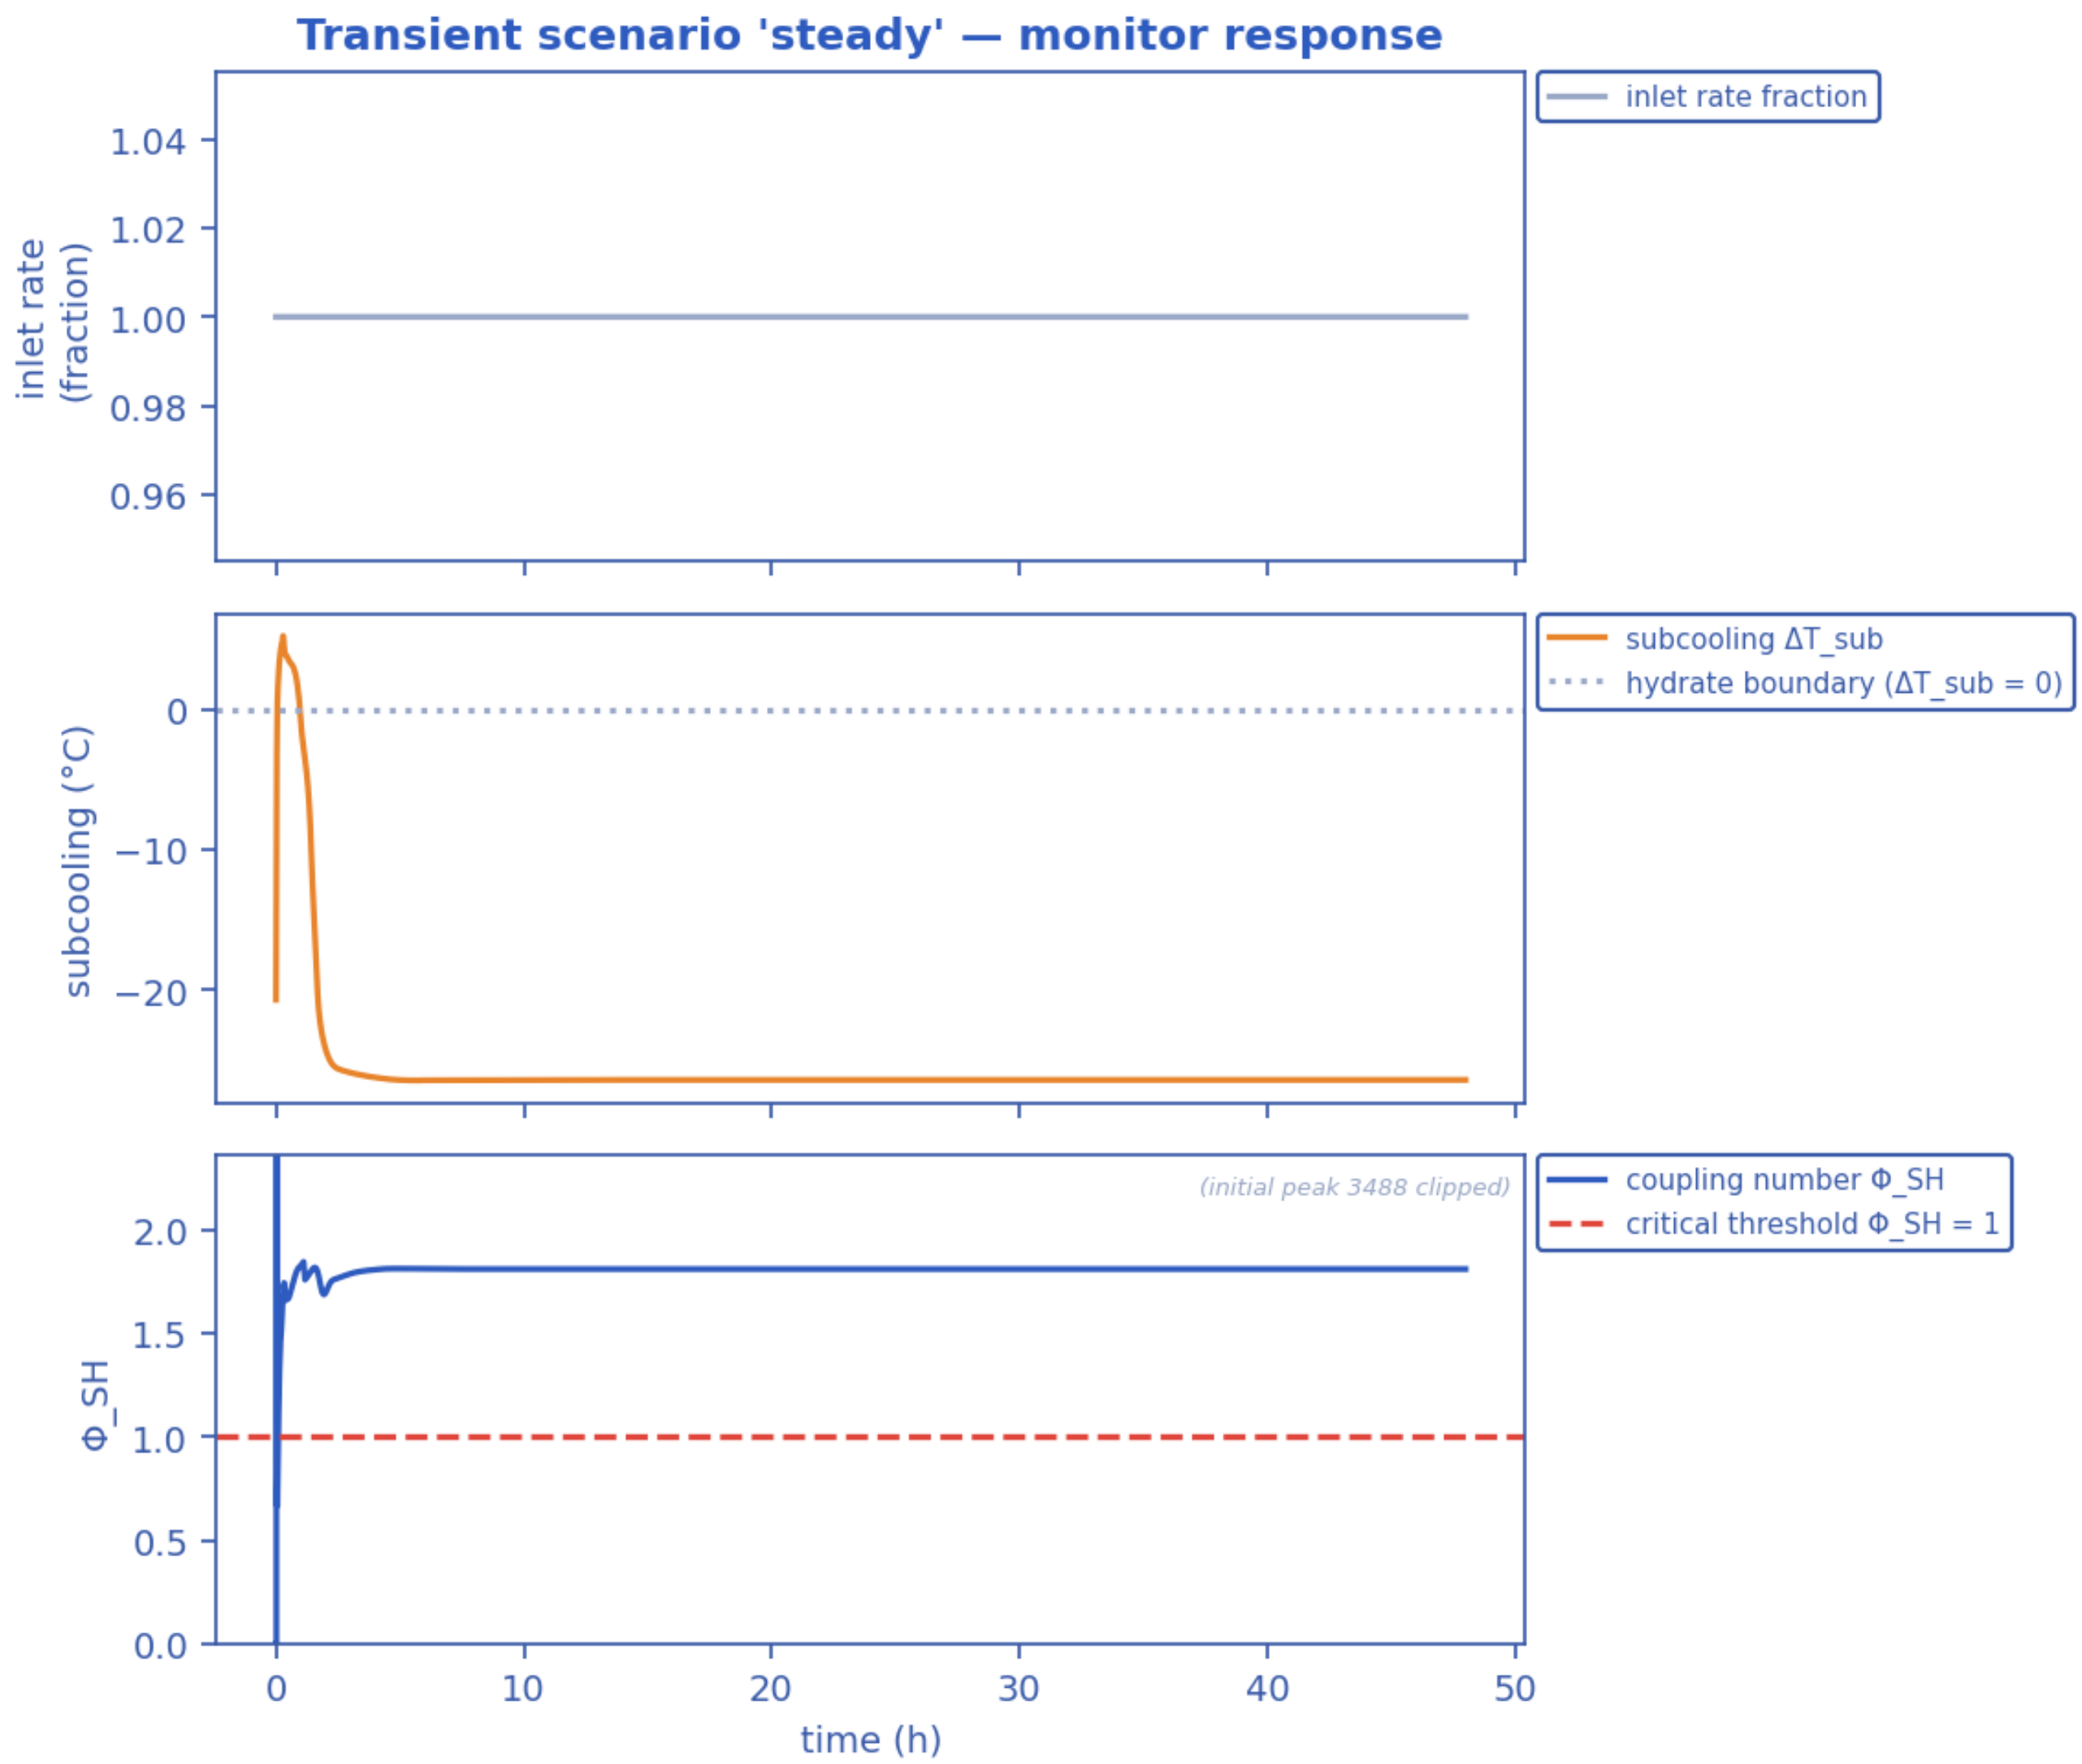


*Probabilistic time-to-plug CDF and the max-Φ_SH P10–P90 uncertainty band (Monte-Carlo ensemble). [mitigated]*

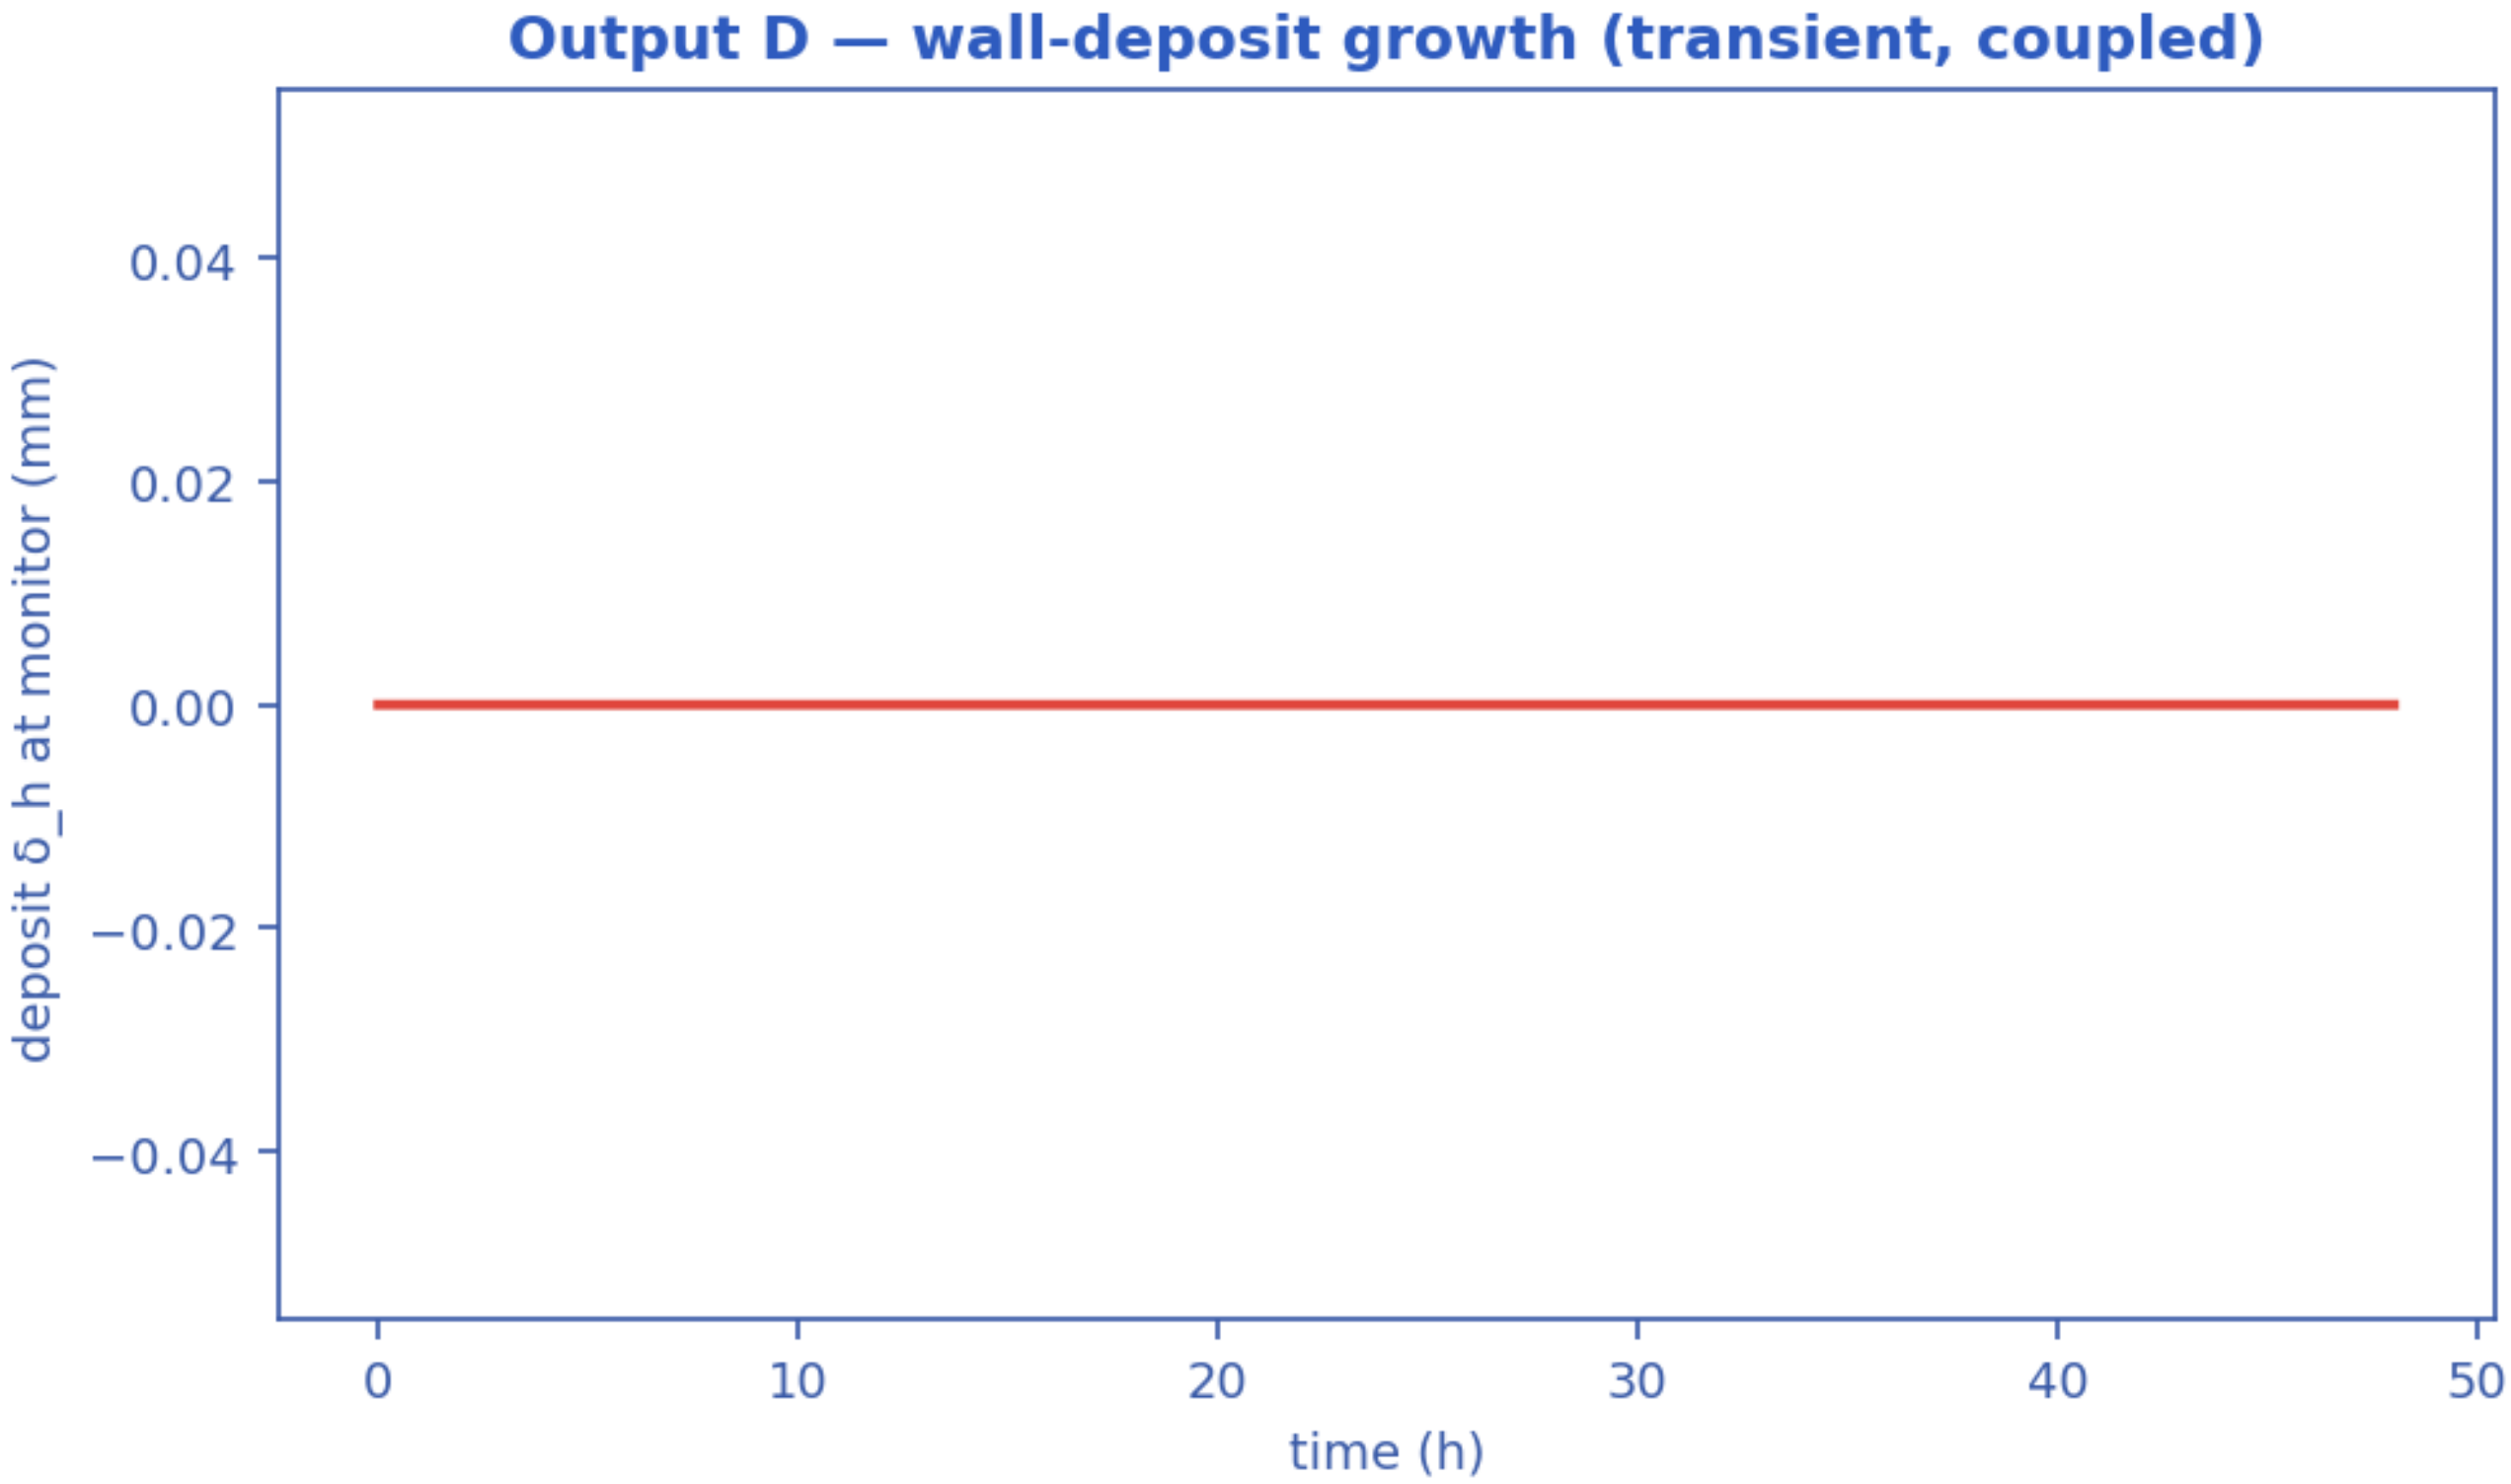


*Solver diagnostics: liquid & gas mass balances, clip activity, slug length and numerical consistency. [mitigated]*

### 11.3.3 Engineering deliverables (engineering_deliverables.csv)

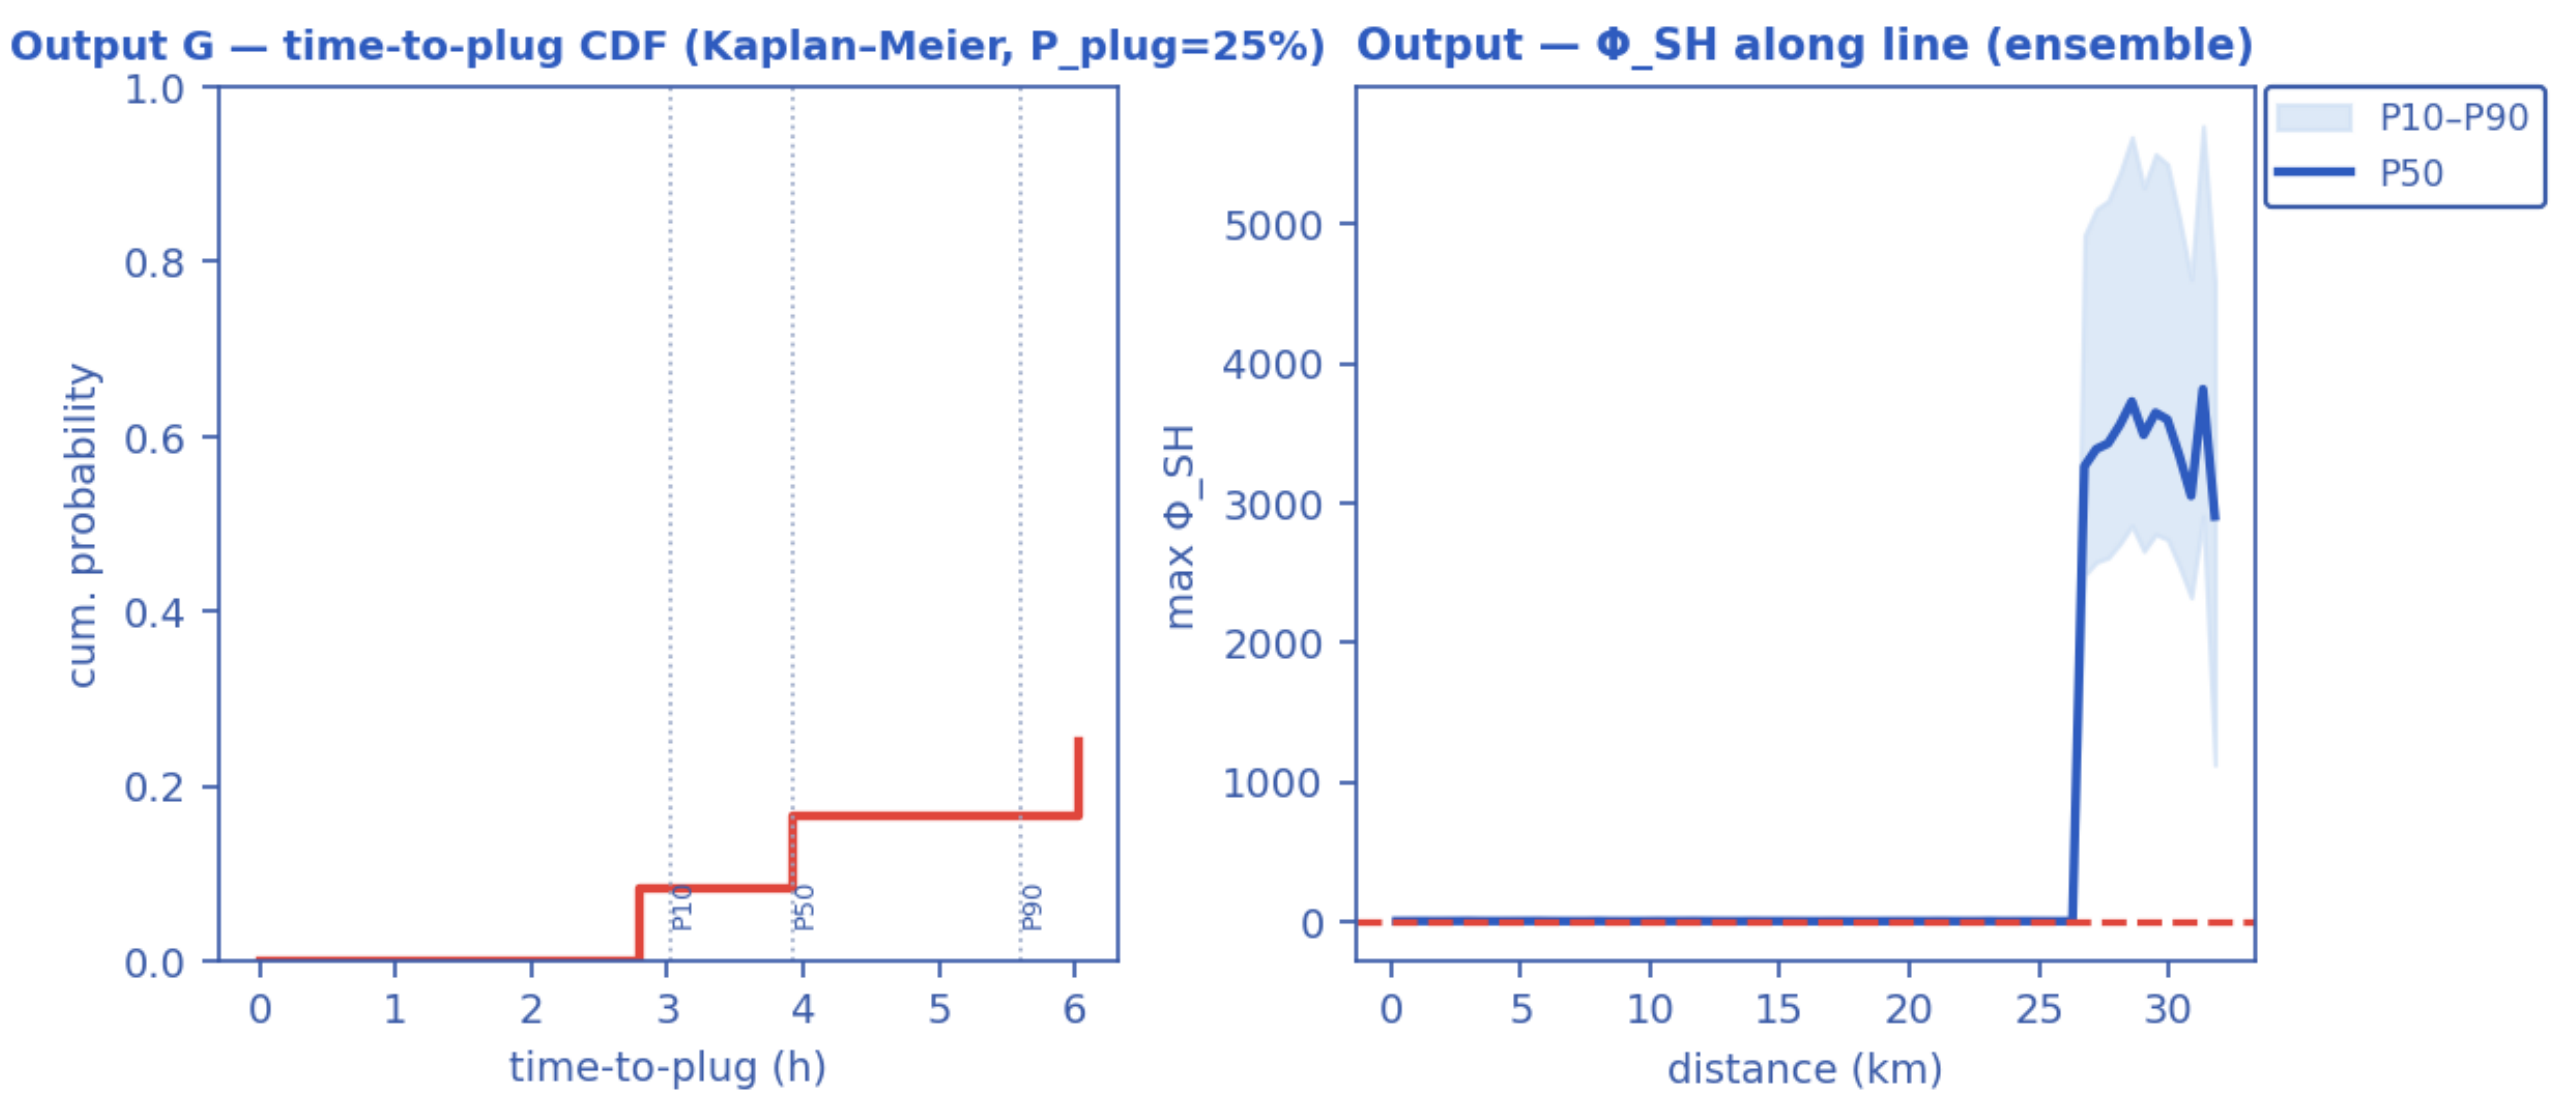


*Numeric engineering deliverables as a magnitude chart [mitigated].*
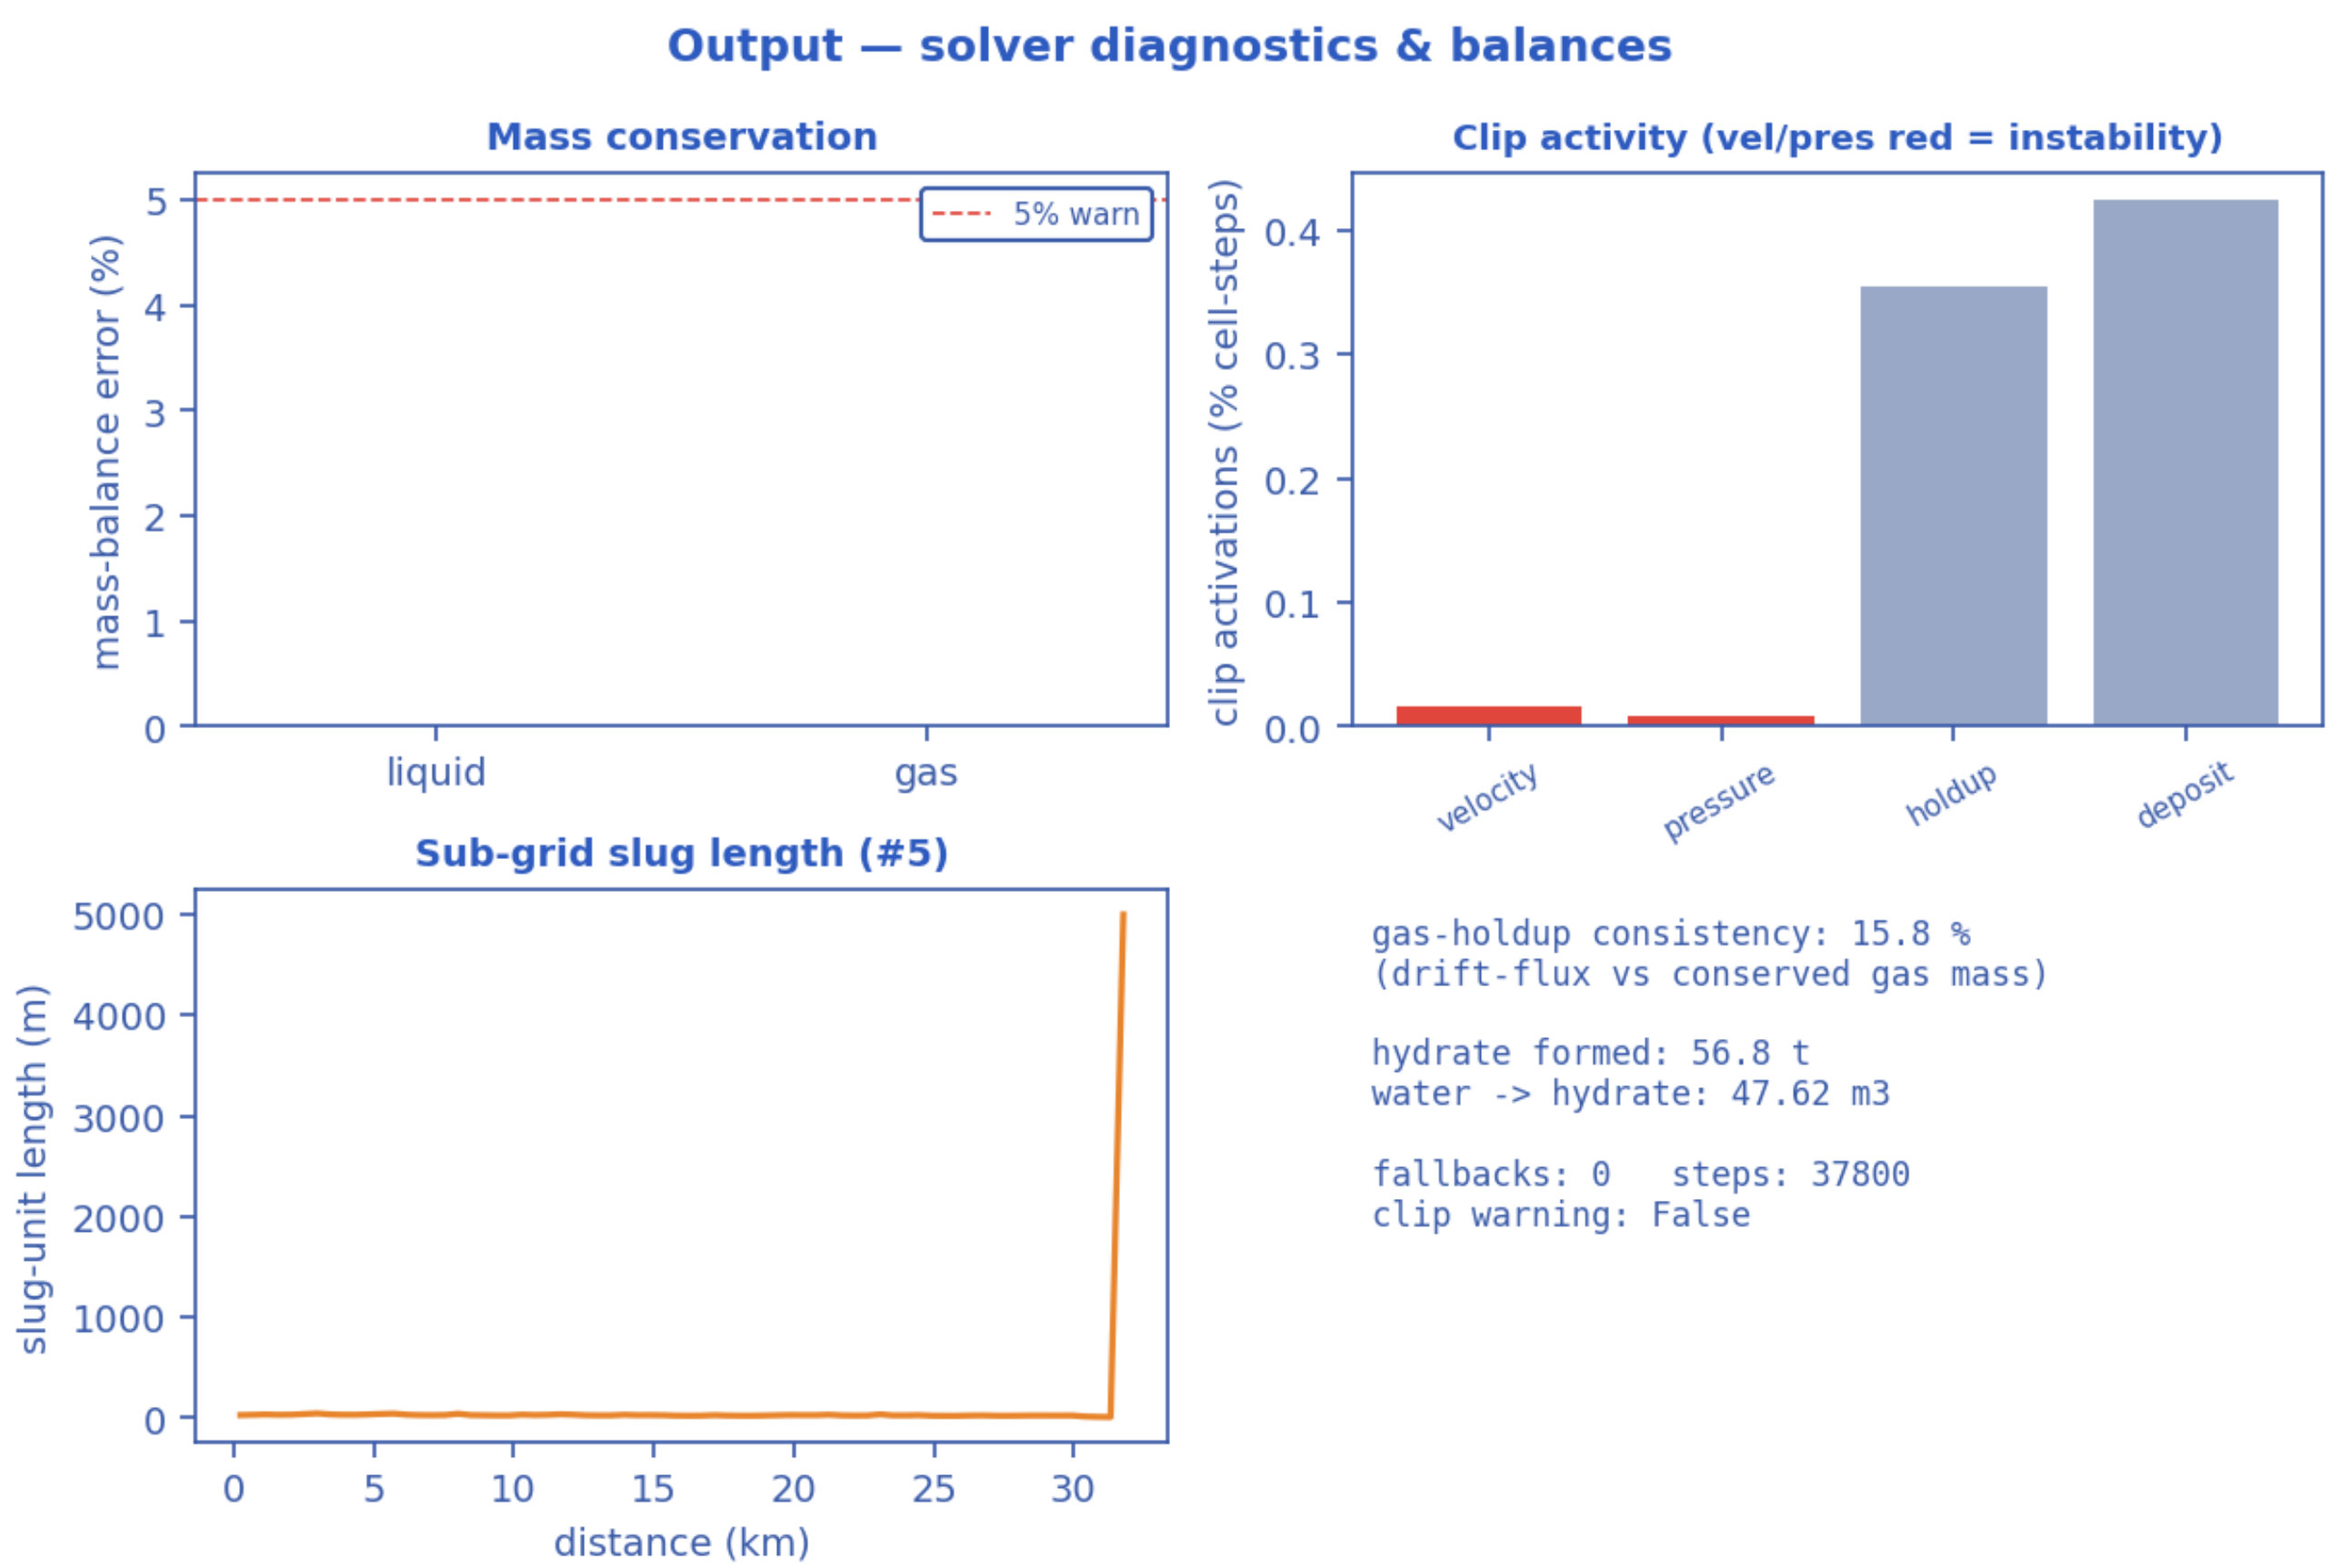
| deliverable | value | units |
|---|---|---|
| **Slug-catcher surge volume (P90)** | 0.39 | m3 |
| **Design subcooling (P90)** | 6.64 | C |
| **Required MEG concentration** | 30.5 | wt% |
| **MEG injection rate** | 28038.0 | L/h |
| **MEG injected at inlet** | 25.0 | wt% |
| **Under-inhibited length** | 5.49 | km |
| **Effective heat-transfer U** | 2.38 | W/m2K |
| **Cooldown to hydrate (no-touch time)** | 17.30 | h |
| **Slurry relative viscosity** | 1.00 | - |
| **Slurry transportable?** | True | - |
| **Peak mixture velocity** | 5.00 | m/s |
| **Erosional velocity limit (API 14E)** | 5.70 | m/s |
| **Total line pressure drop** | 120.8 | bar |

| | | |
|---|---|---|
| **Probability of plugging (run)** | 25 | % |
| **Time-to-plug (P50)** | 3.9 | h |
| **Coupled hot-spot location** | 31.31 | km |
| **Max coupling number Phi_SH** | 3815 | - |
| **Phi_SH reported at plot cap (saturated)?** | False | - |
| **Monitor location** | 29.03 | km |
| **Monitor temperature** | 47.8 | C |
| **Bulk superficial liquid velocity** | 1.08 | m/s |
| **Line-median mixture velocity** | 4.00 | m/s |
| **Peak wall deposit** | 0.0 | mm |
| **Wall deposit at full bore?** | False | - |
| **Deposit (hydrate-mass equivalent)** | 0.0 | mm |
| **No-touch time source** | lumped | - |
| **Mass-conservation error** | 0.00 | % |
| **Mass-balance reliability warning** | False | - |

### 11.3.4 Probabilistic summary (probabilistic_summary.csv)

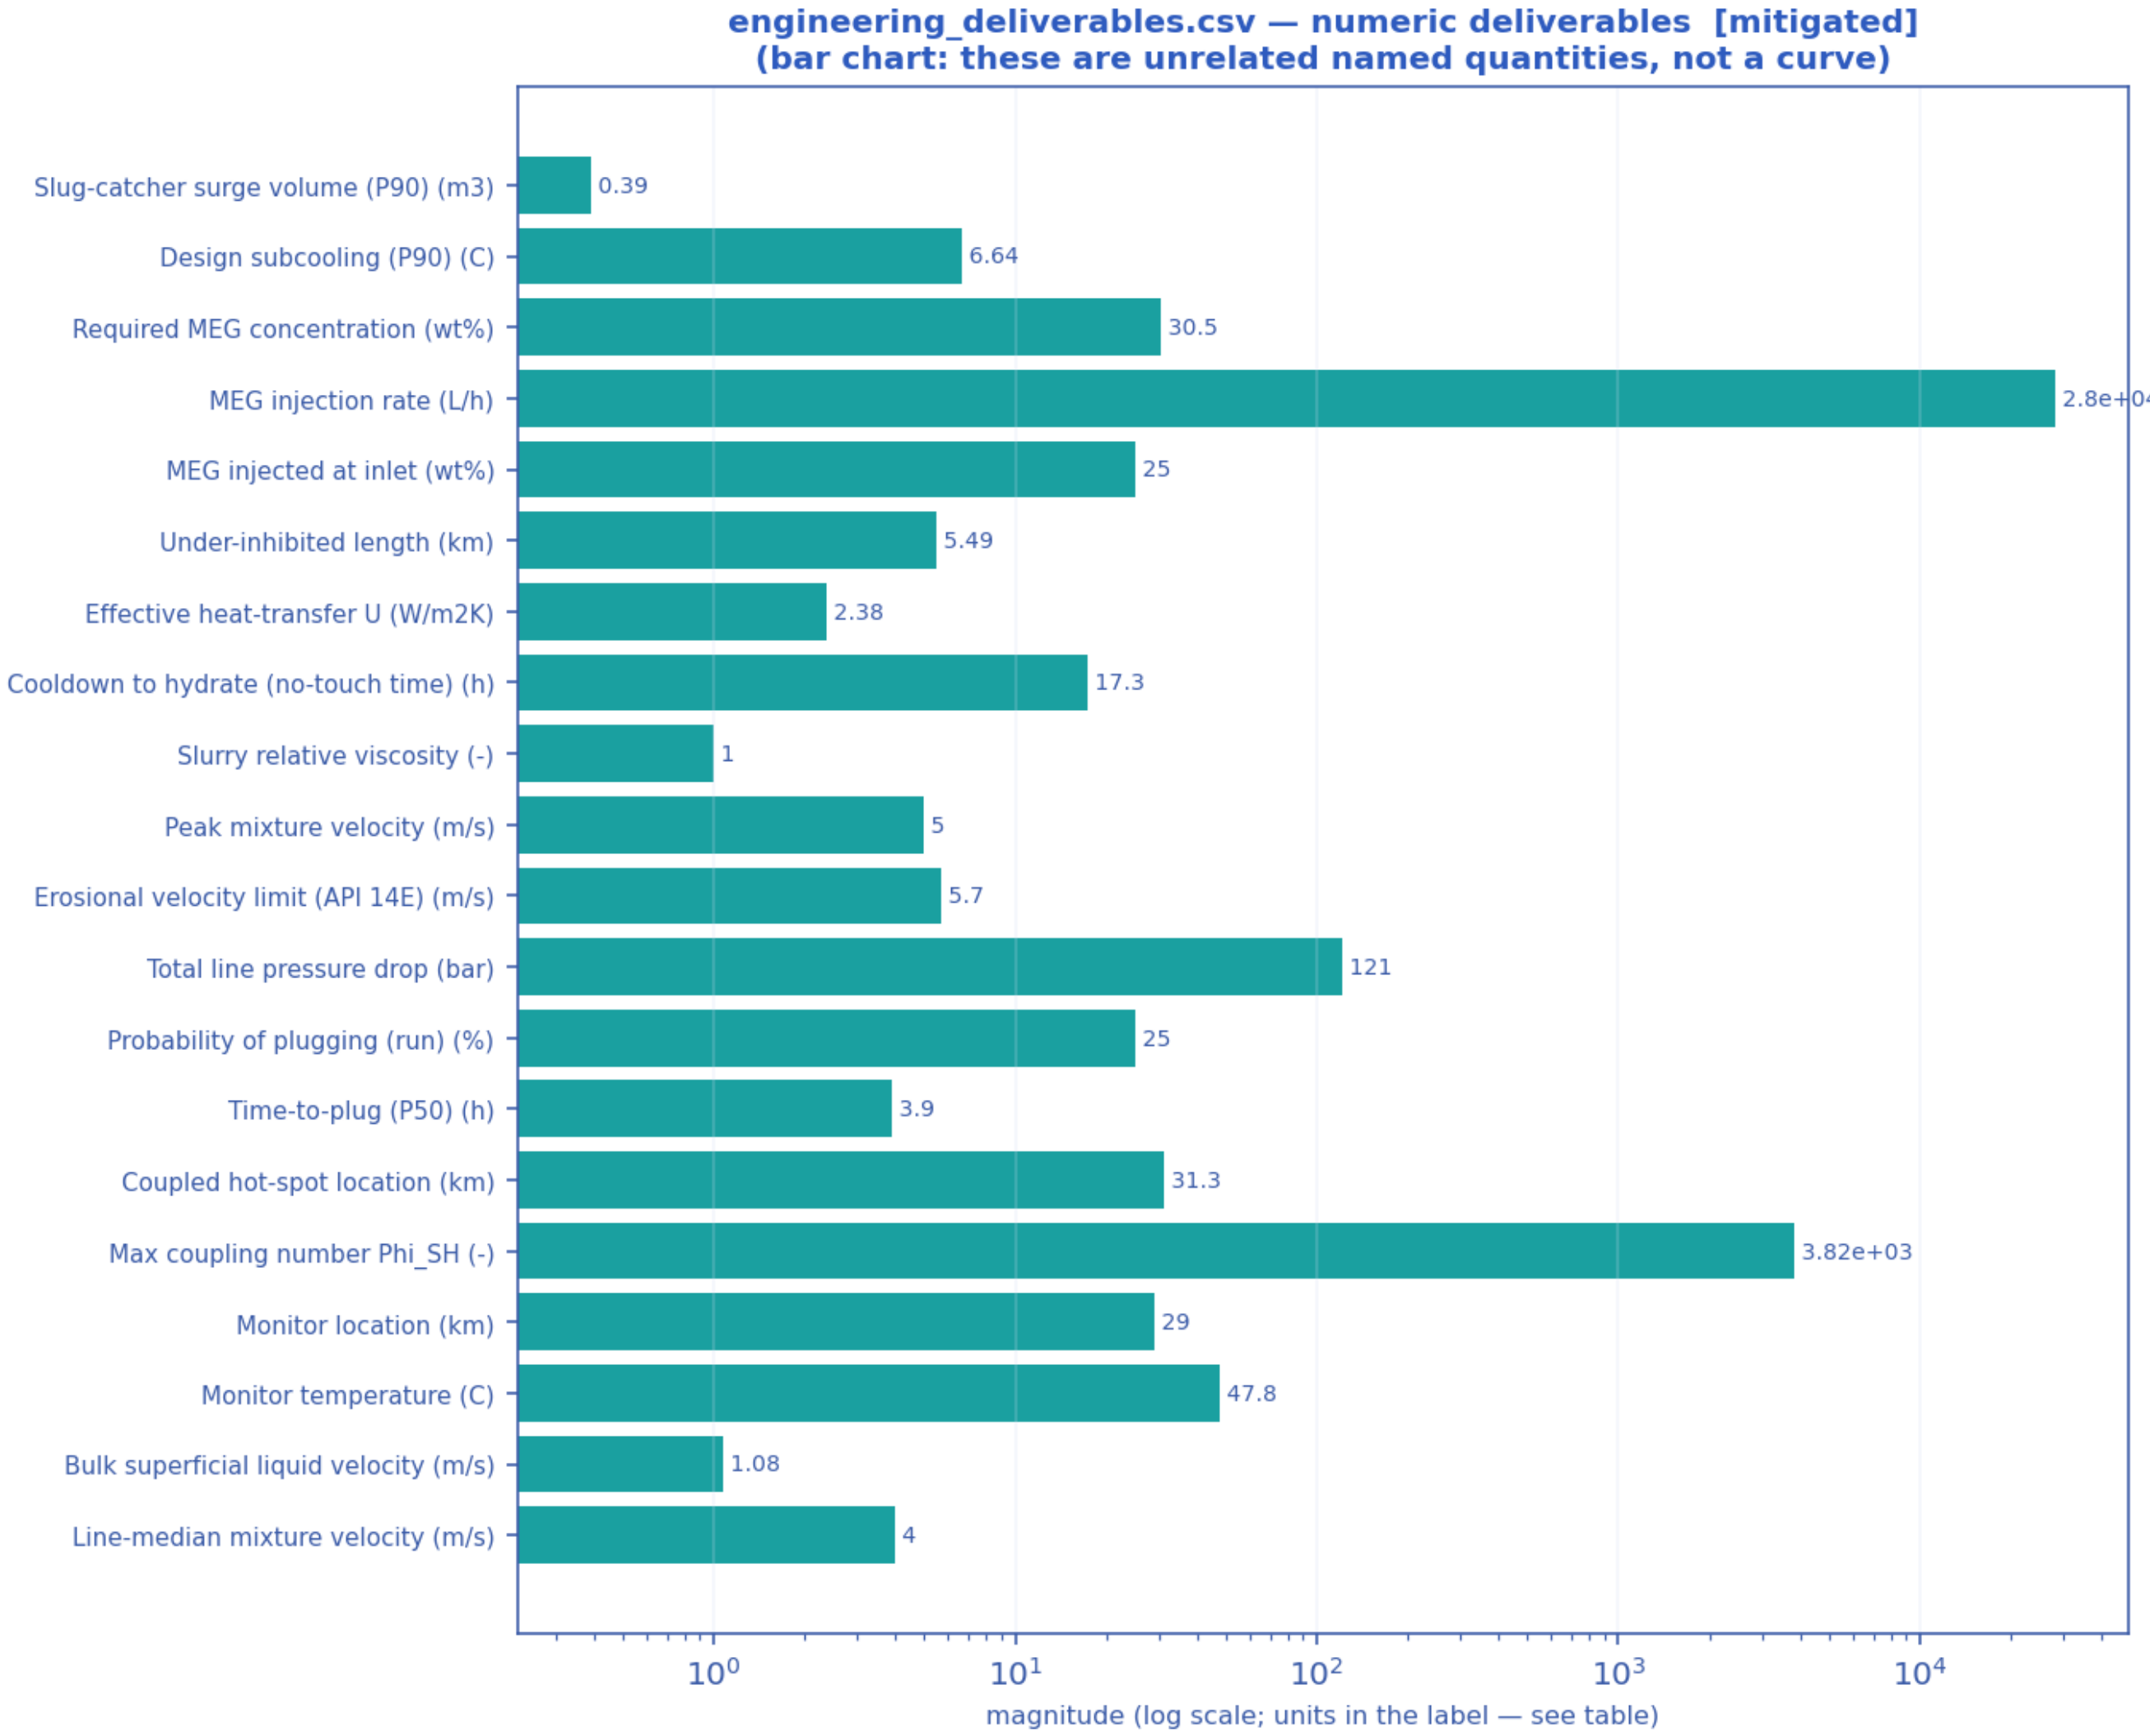


*P10 → P90 uncertainty range with the P50 marker per metric [mitigated].*

| metric | P10 | P50 | P90 |
|---|---|---|---|
| **max_subcooling_C** | 6.57 | 6.6 | 6.64 |
| **max_Phi_SH** | 2.9e+03 | 3.81e+03 | 5.74e+03 |
| **peak_wall_deposit_mm** | 0 | 0 | 117 |
| **peak_deposit_from_phi_mm** | 0 | 0 | 0 |
| **peak_bulk_hydrate_frac** | 0 | 0 | 0 |
| **time_to_plug_h** | 3.02 | 3.93 | 5.6 |

## 11.3.5 fields_profile.csv — steady-state spatial profile of every field along the route

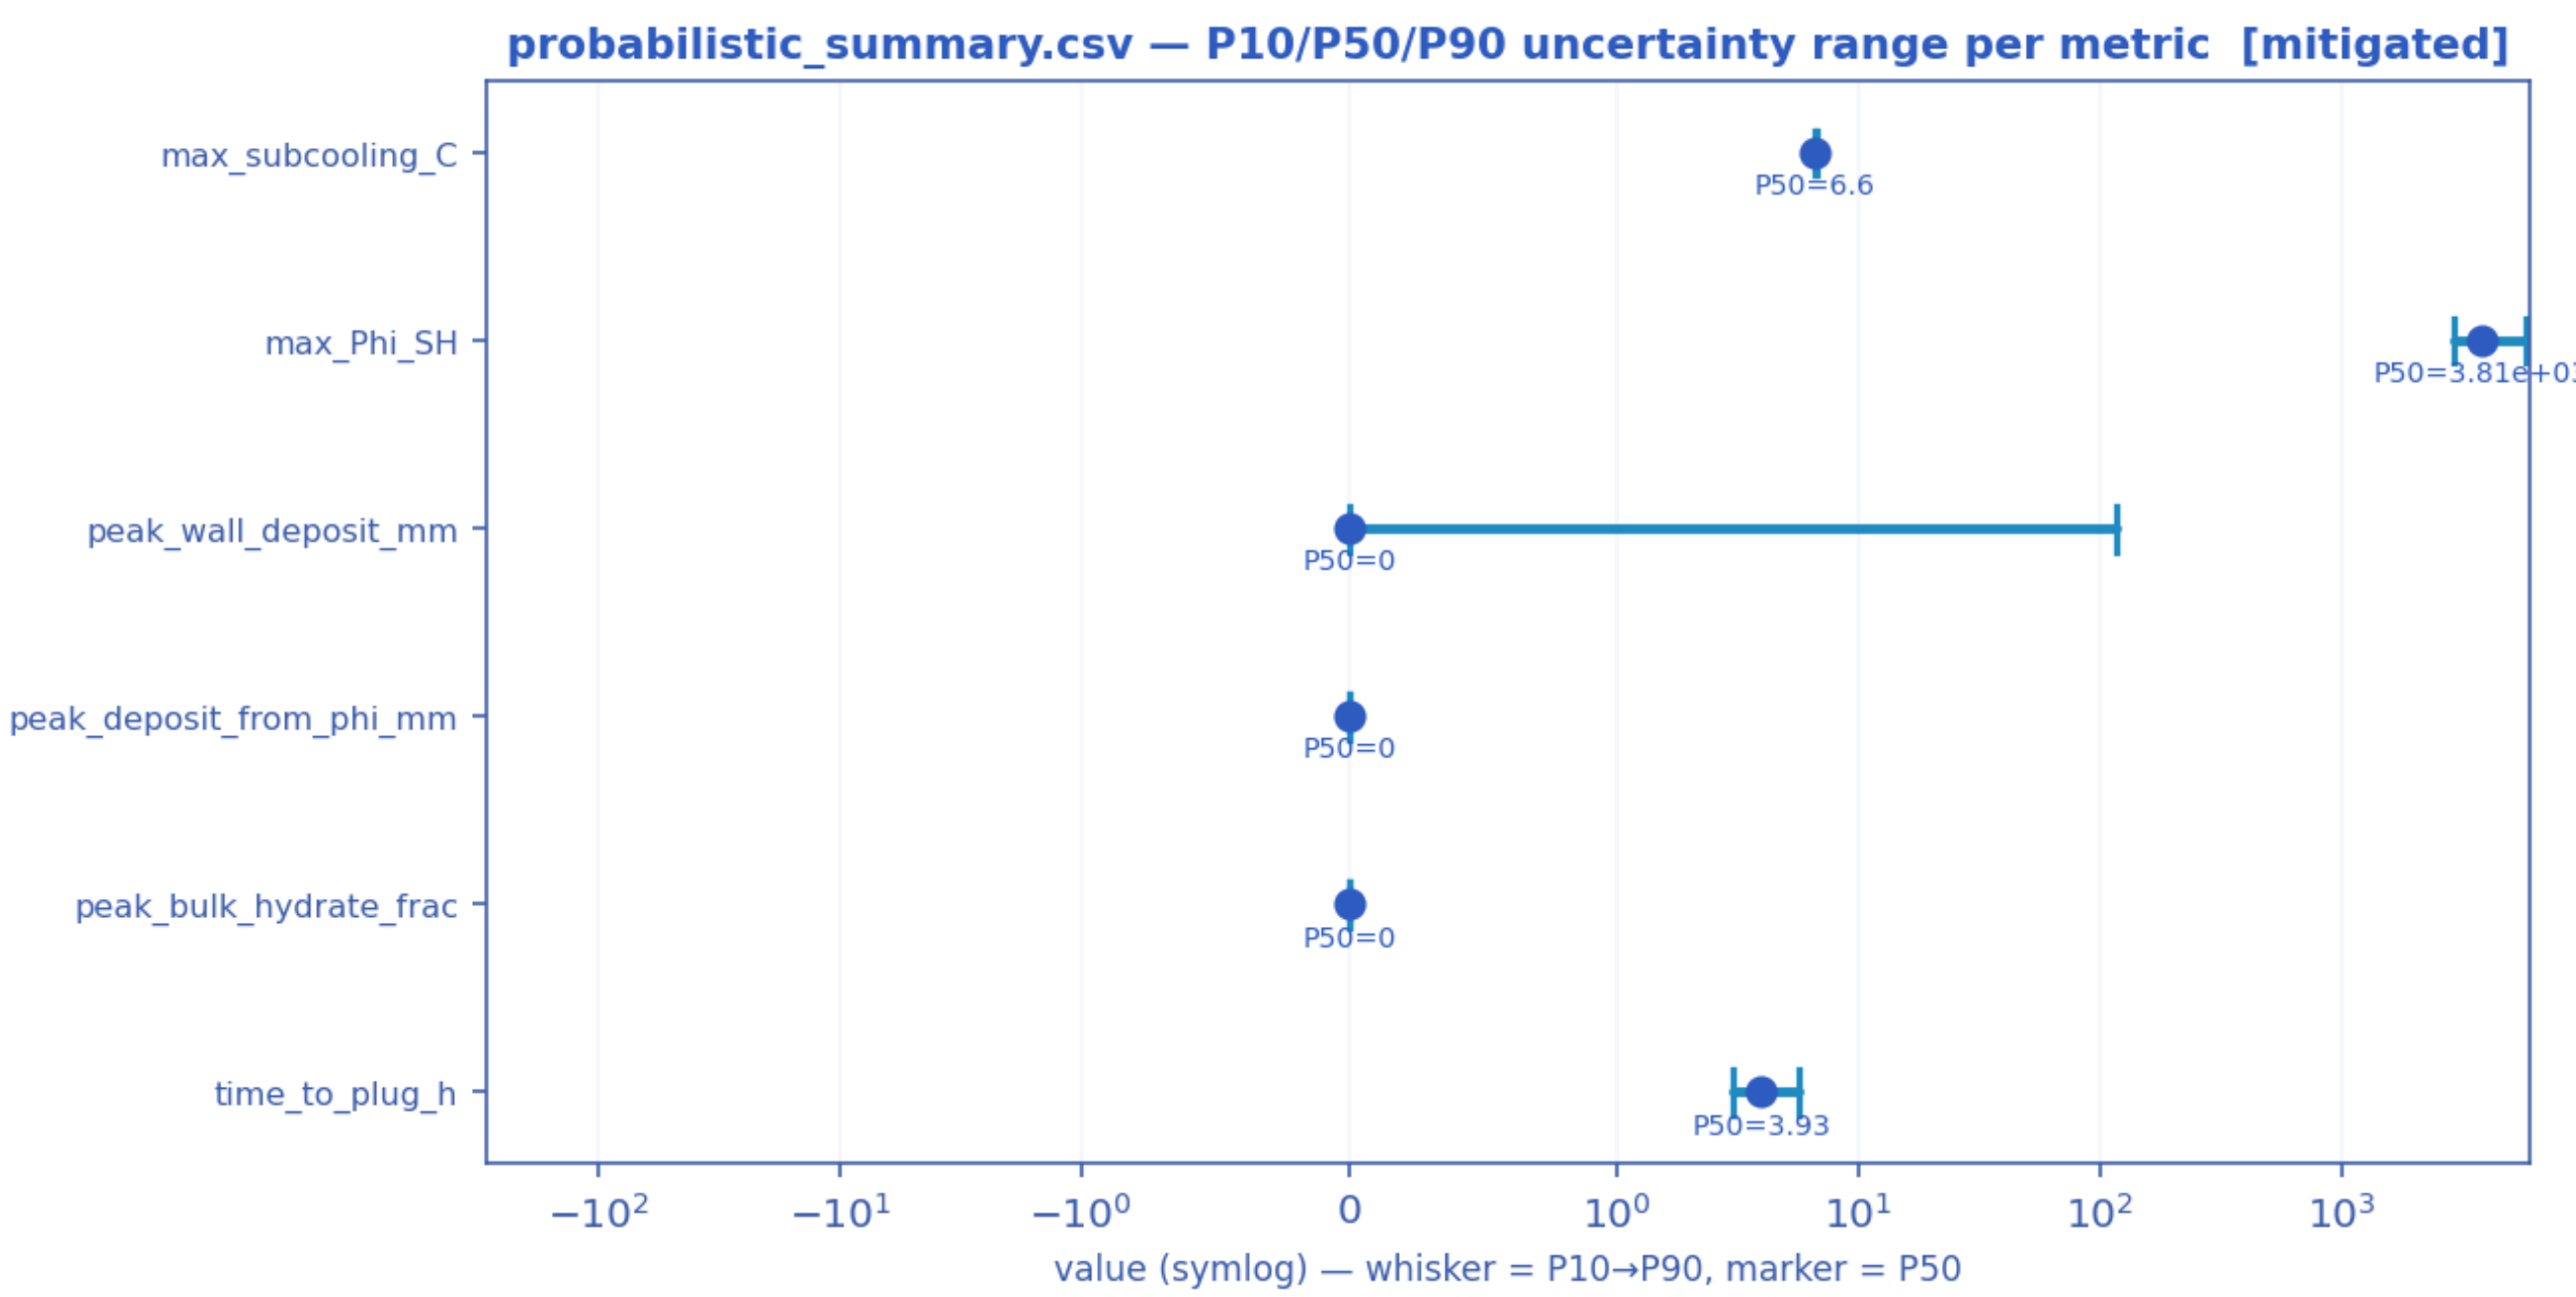


*Every column of fields_profile.csv drawn as a curve [mitigated].*

| x_km | elevation_m | incl_deg | P_bar | T_C | Teq_C | subcooling_C | holdup | v_m_mps | regime | a_i_1perm | f_slug_Hz | phi_hydrate | deposit_mm | Phi_SH |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **0.22857** | -1118.4 | -1.9608 | 150 | 57.861 | 26.363 | -31.498 | 0.33905 | 5 | slug | 24.655 | 0.23127 | 0 | 0 | 2.2477 |
| **2.514** | -1114.5 | 0.188 | 142. | 57.1 | 25.9 | -31.183 | 0.347 | 5 | slug | 24.93 | 0.1706 | 0 | 0 | 2.99 |

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **3** | | 65 | 59 | 56 | 73 | | 02 | | | | 5 | | | 16 |
| **4.8** | -1092.7 | 0.42362 | 134.56 | 56.409 | 25.527 | -30.882 | 0.35252 | 5 | slug | 25.112 | 0.18712 | 0 | 0 | 2.6869 |
| **7.0857** | -1060.5 | 2.601 | 126.41 | 55.62 | 25.046 | -30.574 | 0.37103 | 5 | slug | 25.675 | 0.23988 | 0 | 0 | 2.0951 |
| **9.8286** | -1107.7 | -1.3732 | 121.47 | 54.856 | 24.739 | -30.117 | 0.35232 | 4 | slug | 25.105 | 0.21884 | 0 | 0 | 2.2133 |
| **12.114** | -1107 | 0.13701 | 115.84 | 54.117 | 24.373 | -29.744 | 0.34971 | 4 | slug | 25.02 | 0.16526 | 0 | 0 | 2.8696 |
| **14.4** | -1082.3 | -0.54271 | 109.45 | 53.334 | 23.936 | -29.398 | 0.34301 | 4 | slug | 24.794 | 0.19493 | 0 | 0 | 2.3592 |
| **17.143** | -1017.6 | 0.54352 | 100.91 | 52.339 | 23.311 | -29.028 | 0.35441 | 4 | slug | 25.173 | 0.19731 | 0 | 0 | 2.2921 |
| **19.429** | -1087.1 | -0.61307 | 98.763 | 51.449 | 23.145 | -28.304 | 0.35717 | 4 | slug | 25.261 | 0.20108 | 0 | 0 | 2.2375 |
| **21.714** | -1094.2 | 0.93887 | 94.429 | 50.578 | 22.8 | -27.778 | 0.35827 | 4 | slug | 25.295 | 0.21462 | 0 | 0 | 2.0611 |
| **24.457** | -1083.8 | 0.40028 | 88.51 | 49.542 | 22.302 | -27.24 | 0.35063 | 4 | slug | 25.05 | 0.19539 | 0 | 0 | 2.1823 |
| **26.743** | -1007 | -0.74006 | 81.181 | 48.705 | 21.636 | -27.069 | 0.34352 | 4 | churn | 24.811 | 0.2168 | 0 | 0 | 3261.1 |
| **29.029** | -1066 | -0.91009 | 78.743 | 47.821 | 21.401 | -26.42 | 0.41166 | 4 | churn | 26.646 | 0.22506 | 0 | 0 | 3487.9 |
| **31.771** | -25 | 37.781 | 29.168 | 46.693 | 13.754 | -33.543 | 0.27695 | 4 | annular | 31.473 | 0.0001 | 0 | 0 | 2904.1 |

### 11.3.6 timeseries_monitor.csv — transient response at the monitored station

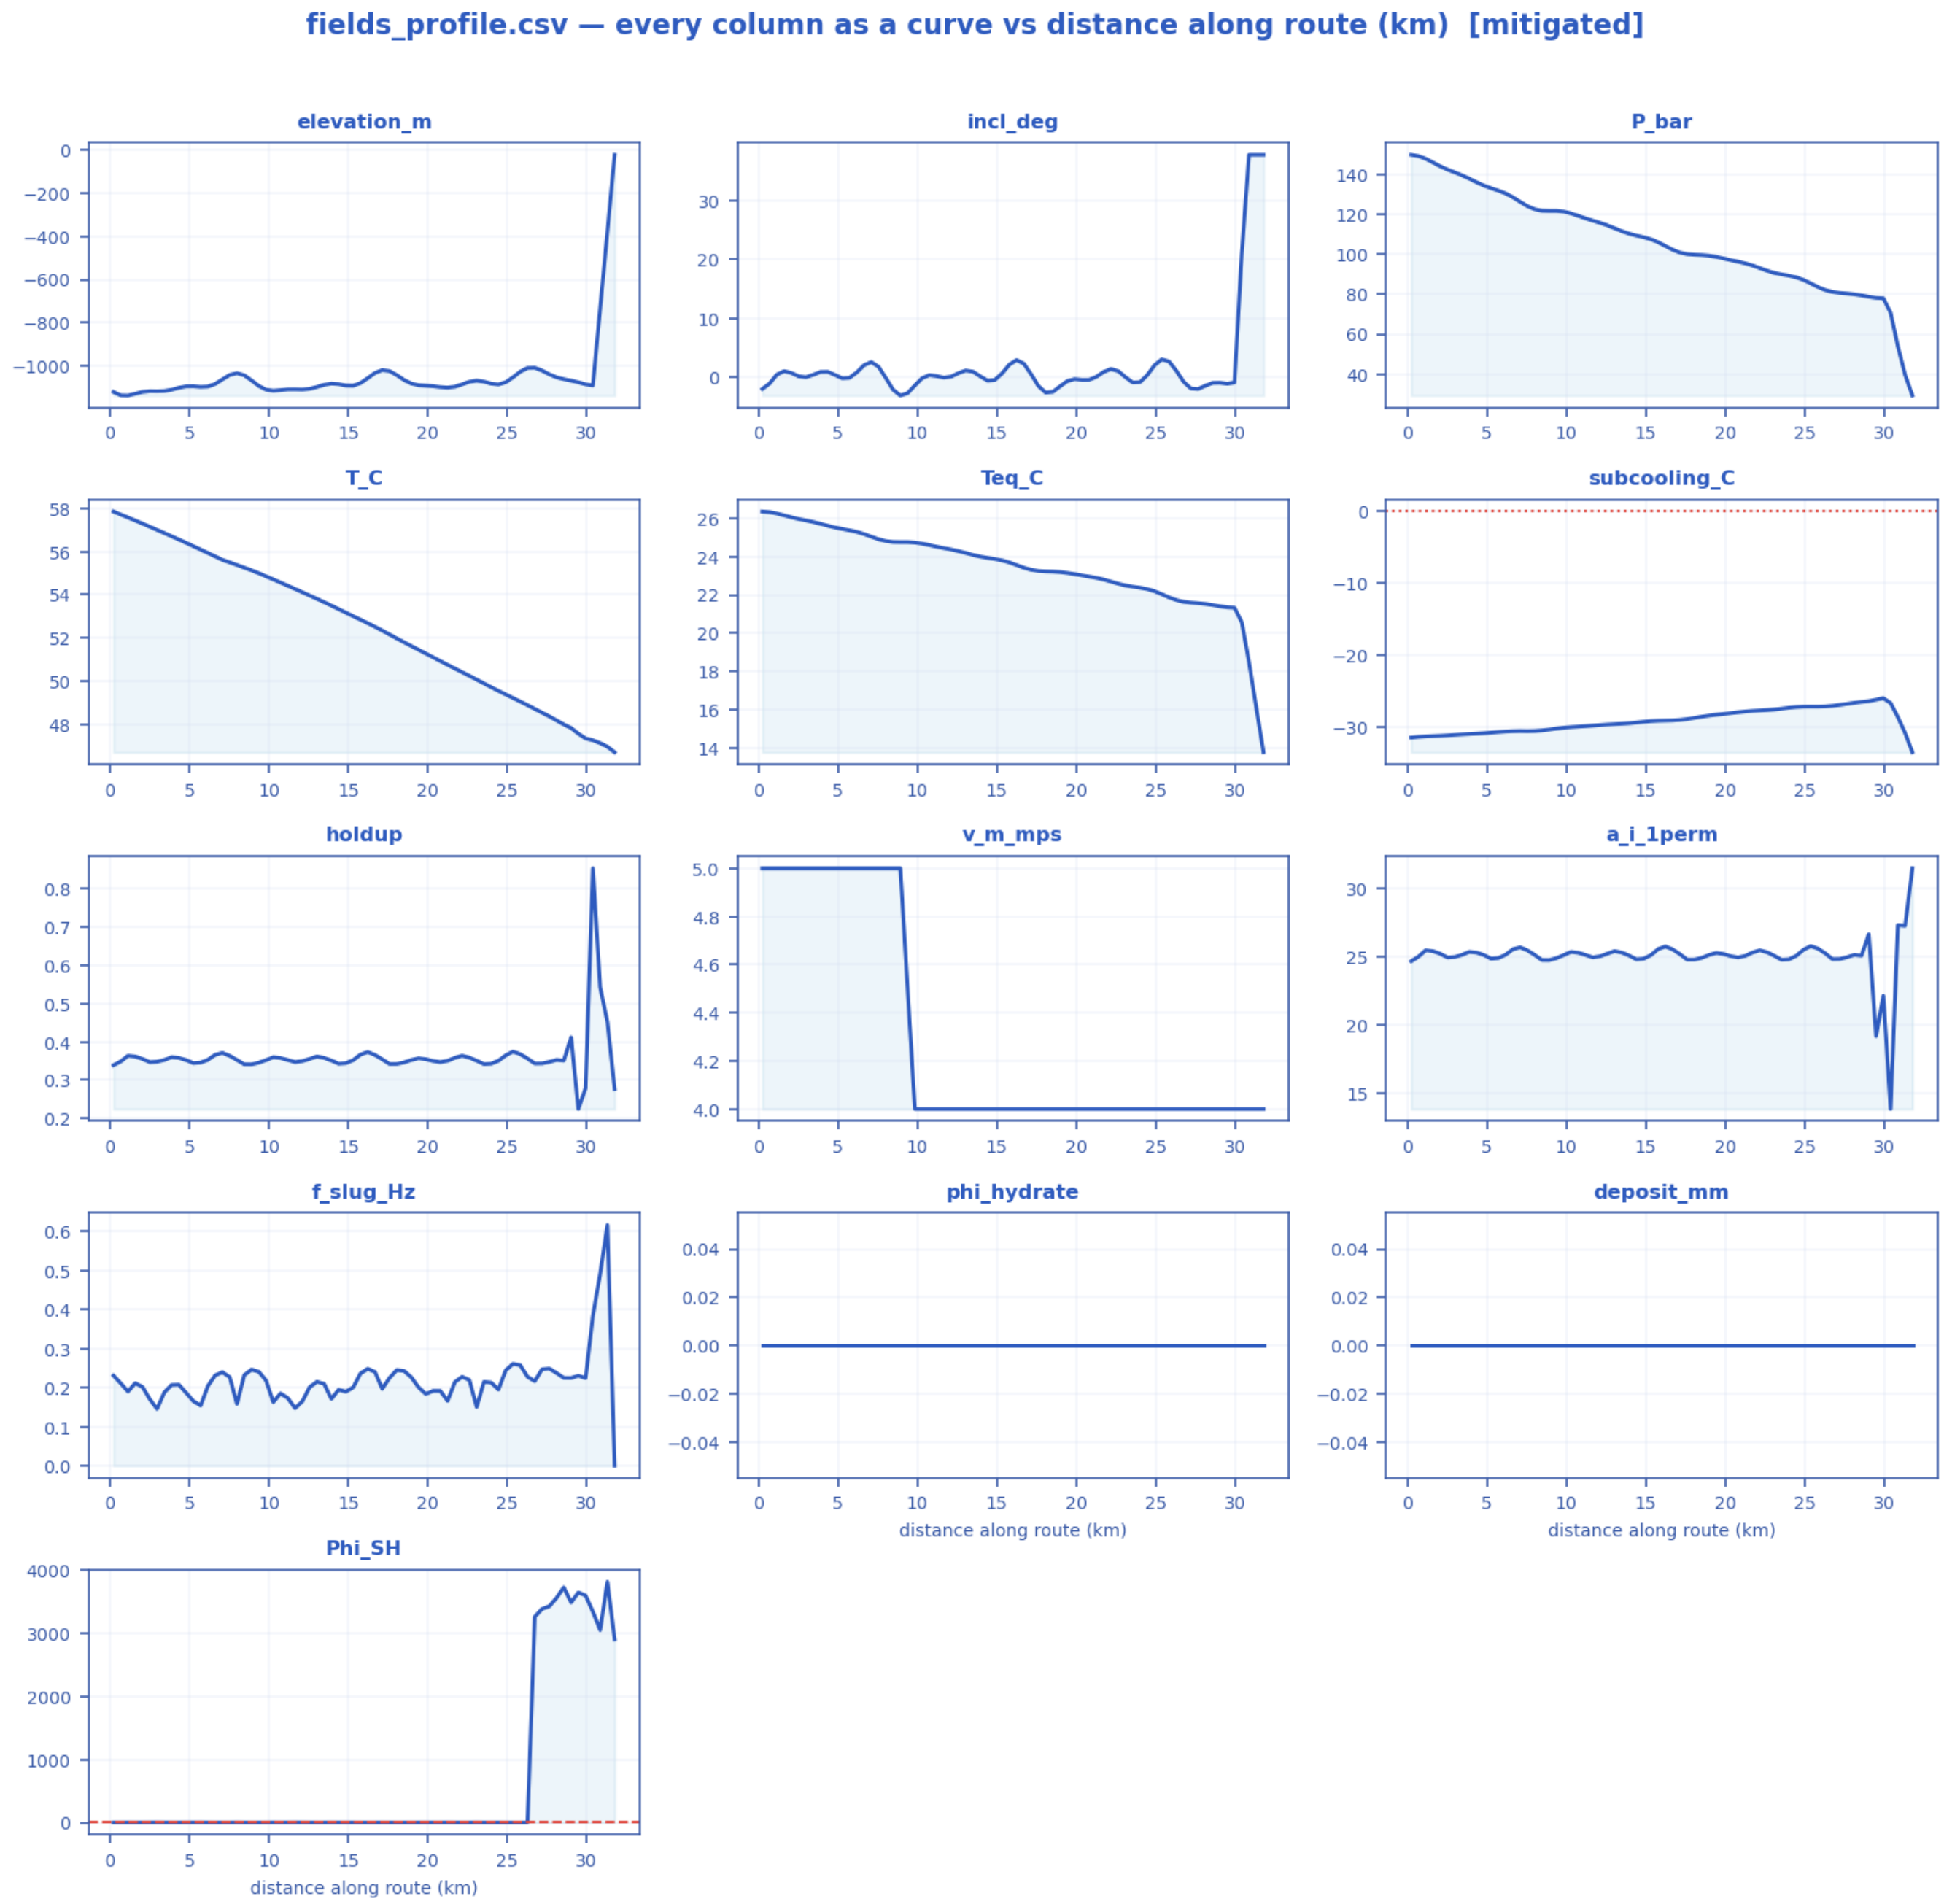


*Every column of timeseries_monitor.csv drawn as a curve [mitigated].*

| time_h | bc_rate_frac | P_bar | T_C | subcooling_C | holdup | v_m_mps | f_slug_Hz | phi_hydrate | deposit_mm | Phi_SH |
|---|---|---|---|---|---|---|---|---|---|---|
| **0** | 1 | 2.0927 | 14.179 | -20.706 | 0.35833 | 1 | 0.0001 | 0 | 0 | 0 |
| **3.6914** | 1 | 79.532 | 47.639 | -26.161 | 0.40134 | 4 | 0.22423 | 0 | 0 | 1.8032 |
| **7.3841** | 1 | 78.715 | 47.829 | -26.431 | 0.41204 | 4 | 0.22509 | 0 | 0 | 1.8098 |
| **11.076** | 1 | 78.744 | 47.821 | -26.42 | 0.41165 | 4 | 0.22506 | 0 | 0 | 1.8097 |
| **14.768** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |
| **18.461** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |
| **22.152** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |
| **25.845** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |
| **29.537** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |
| **33.229** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |
| **36.922** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |
| **40.613** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |
| **44.306** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| **47.999** | 1 | 78.743 | 47.821 | -26.42 | 0.41166 | 4 | 0.22506 | 0 | 0 | 1.8097 |

## 12. Cross-scenario summary and conclusions
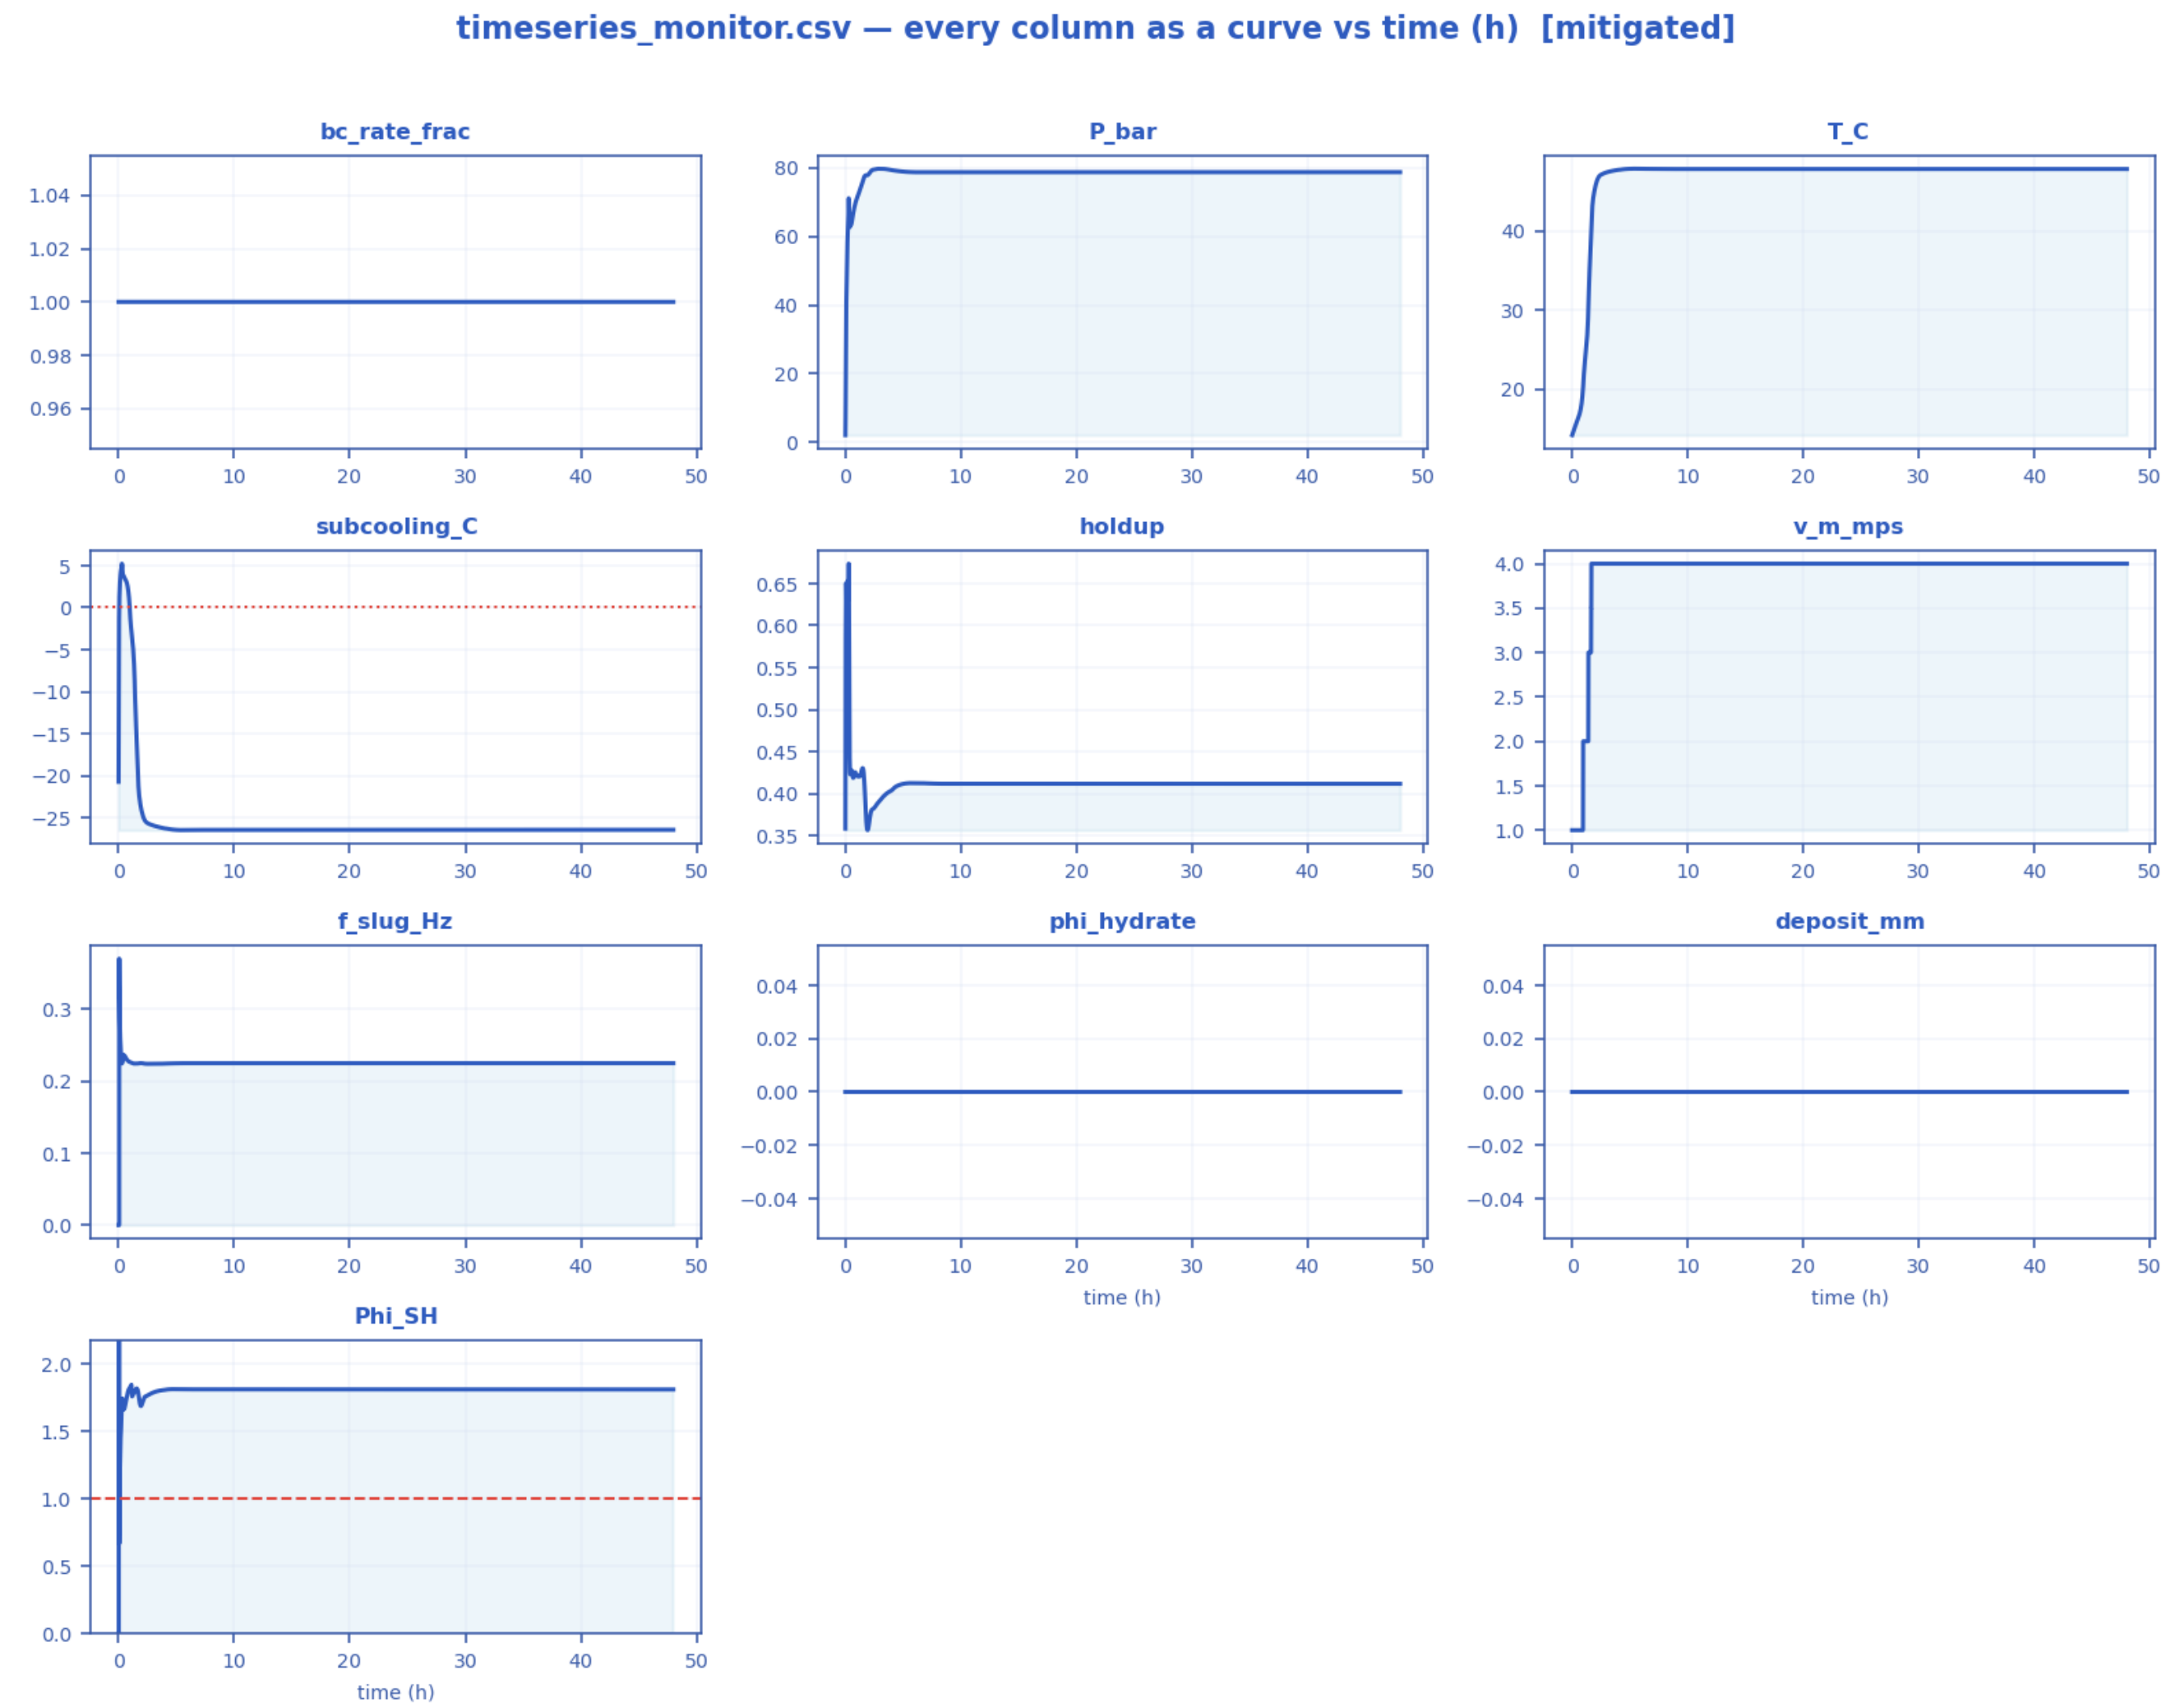
### 12.1 As-operated vs engineered fix

| Metric | As-operated | Mitigated |
|---|---|---|
| **Max subcooling (°C)** | 20.9 | 6.6 |
| **Peak deposit (mm)** | 117 | 0 |
| **Plug probability (frac)** | 1 | 0.25 |
| **Time-to-plug P50 (h)** | 2.77 | 3.93 |
| **MEG required (wt%)** | 59.7 | 30.5 |
| **Under-inhibited (km)** | 24.2 | 5.49 |
| **No-touch time (h)** | 1.51e-14 | 17.3 |
| **Effective U (W/m²K)** | 22 | 2.38 |

Shut-in no-touch time ≈ 1.509903313490213e-14 h (source: transient).

### 12.2 Engineering conclusions

- As-operated the line is slug- AND hydrate-critical: $\Phi\_SH$ = 6101.49, 100% plug probability, P50 time-to-plug 2.8 h, peak deposit 117 mm.
- Inhibitor demand to clear it: MEG ≈ 60 wt% (94470 L/h); under-inhibited length 24.2 km.
- Shut-in gives effectively no safe window (no-touch ≈ 0.00 h).
- The engineered fix (U_eff 2.38 W/m²K + MEG) removes the subcooling, zeroes the plug probability and restores 17 h of no-touch time.
- Predictions are mass-consistent and stable (liquid mass error 1.51e-03, 0 fallbacks).

## 13. References (validation and calibration sources)


- Deaton, W.M. & Frost, E.M. (1946). Gas Hydrates and Their Relation to the Operation of Natural-Gas Pipe Lines. U.S. Bureau of Mines, Monograph 8. [hydrate equilibrium data — PRIMARY]
- Sloan, E.D. & Koh, C.A. (2008). Clathrate Hydrates of Natural Gases, 3rd ed. CRC Press. [hydrate data compilation / corroboration]
- Colebrook, C.F. (1939). Turbulent flow in pipes. J. Inst. Civ. Eng. 11:133–156. [friction reference — PRIMARY]
- Moody, L.F. (1944). Friction factors for pipe flow. Trans. ASME 66:671–684. [Moody chart — corroborating]
- Haaland, S.E. (1983). Simple and explicit formulas for the friction factor. J. Fluids Eng. 105(1):89–90. [friction closure under test]
- Dumitrescu, D.T. (1943). Strömung an einer Luftblase im senkrechten Rohr. ZAMM 23:139–149. [vertical Taylor-bubble drift — PRIMARY]
- Nicklin, D.J., Wilkes, J.O. & Davidson, J.F. (1962). Two-phase flow in vertical tubes. Trans. IChemE 40:61–68. [vertical distribution coefficient]
- Benjamin, T.B. (1968). Gravity currents and related phenomena. J. Fluid Mech. 31:209–248. [horizontal nose Froude — PRIMARY]
- Bendiksen, K.H. (1984). An experimental investigation of the motion of long bubbles in inclined tubes. Int. J. Multiphase Flow 10(4):467–483. [drift-flux slip closure]
- Gregory, G.A. & Scott, D.S. (1969). Correlation of liquid slug velocity and frequency. AIChE J. 15:933–935. [slug-frequency base term — PRIMARY]
- Zabaras, G.J. (2000). Prediction of slug frequency for gas/liquid flows. SPE J. 5(3):252–258. [slug-frequency inclination factor / implemented form]
- Taitel, Y. & Dukler, A.E. (1976). A model for predicting flow-regime transitions. AIChE J. 22(1):47–55. [flow-regime map / interfacial geometry]
- Peng, D.-Y. & Robinson, D.B. (1976). A new two-constant equation of state. Ind. Eng. Chem. Fundam. 15(1):59–64. [compositional PVT]
- Lee, A.L., Gonzalez, M.H. & Eakin, B.E. (1966). The viscosity of natural gases. J. Pet. Technol. 18(8):997–1000. [gas viscosity]
- Lohrenz, J., Bray, B.G. & Clark, C.R. (1964). Calculating viscosities of reservoir fluids. J. Pet. Technol. 16(10):1171–1176. [liquid viscosity]
- Nielsen, R.B. & Bucklin, R.W. (1983). Why not use methanol for hydrate control? Hydrocarbon Processing 62(4):71–78. [MEG/methanol hydrate suppression]
- API RP 14E. Recommended Practice for Design and Installation of Offshore Production Platform Piping Systems. [erosional-velocity limit]
- Schmidt, Z., Brill, J.P. & Beggs, H.D. (1980). Experimental study of severe slugging in a two-phase flow pipeline-riser system. SPE J. 20(5):407–414. [severe-slugging basis]


*Provenance note: the case is a representative industrial ARCHETYPE; geometry, fluid and operating values are realistic open-literature values, not proprietary operator data. The physics and predictions are produced by the real solver; the closures and hydrate thermodynamics are validated against the published data above.*