



WESTERN KENTUCKY UNIVERSITY

BOWLING GREEN, KENTUCKY 42101

Student Activities and Organizations

First Reading _____
Second Reading _____
Pass _____
Fail _____
Tabled _____

Resolution 90-05-S
Creating a new parking permit
Introduced 1-23-90

PURPOSE: For Western Kentucky University to create a new permit for Freshman students living south of Regents Avenue to help alleviate the parking problem

STATUS:

WHEREAS, It has been stated by the administration and students that there is a parking problem on campus, and

WHEREAS, Many universities have the same problem, and

WHEREAS, They solve this by not allowing Freshmen to have vehicles on the campus, or

WHEREAS, Others assign them to a different lot farther away, and

WHEREAS If Western Freshmen, who live south of Regents Avenue, were required through a separate permit to park in the Egypt, Russelville, or Gravel Lot, then

WHEREAS, This would allow more spaces available around the residence halls, and

WHEREAS, This could be implemented at a small cost at the beginning of the 1990 Fall Semester when new permits were ordered

THEREFORE, We the members of Associated Student Government of Western Kentucky University so hereby strongly recommend that the University create a new permit for Freshman Students living south of Regents Avenue

FURTHERMORE, There are only 620 restricted green parking spaced and there were 1568 green permits issued.


Sponsor: Legislative Research
Committee

Authors: Greg Willoughby Janie Price
Daniel Duffy Heather Falmlen
Joe Rains Kristin Fryrear
Jason Stevens Roxana Crowe

PFT LOT

Number of spaces: 240 spaces (from the Dept. of Public Safety.)
Average aisle size: 21 ft.
Size of stalls:
Normal: 9 x 19
Compact: 8 x 16


Note: The below drawing is not to scale. This is a representation of the actual parking lot. All numbers are measured in feet.

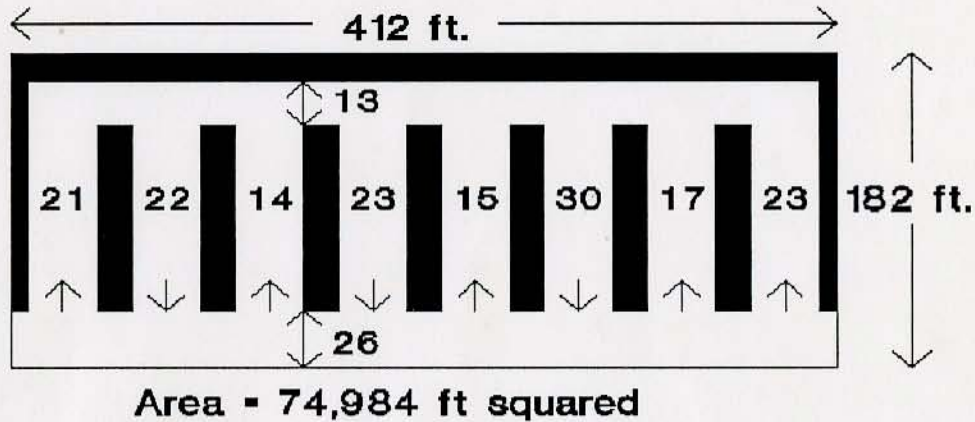

BEMIS LOT

Number of spaces: 188 spaces (from the Dept. of Public Safety.)
Average aisle size: 13 ft.
Size of stalls:
Normal: 9 x 19
Compact: 8 x 16

Note: The below drawing is not to scale. This is a representation of the actual parking lot. All numbers are measured in feet.

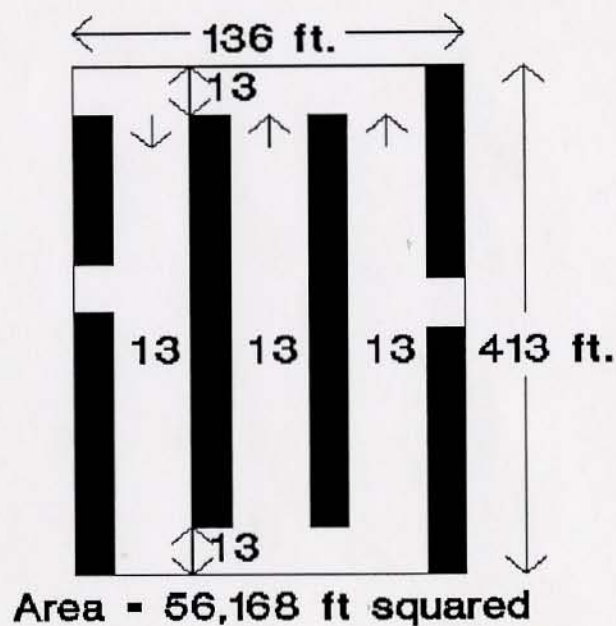

AUG 2

534664
001

1
1
7
3
5

MP/ 534664 001

NA 2540.5 .D4

DE CHIARA, JOSEPH, 1929
SITE PLANNING STANDARDS

De Chiara, Joseph, 1929-

NA
2540.5
.D4

Site planning standards /

534664
001

c1978.



UNIVERSITY LIBRARY

WESTERN KENTUCKY UNIVERSITY
BOWLING GREEN, KENTUCKY 42101

SYSTEM 88 10/09/78

02838

The diagram illustrates the optical system. The top part is a cross-sectional view of a lens with points labeled a , b , c , d , e , f , and f' . The bottom part shows a perspective view of the lens and its focal points.

* Two-way circulation.

† For attendant parking only. Two-way traffic in aisles possible, but not desirable.






Figure 5-69

The series of quick-reference tables presented here simplifies the design of parking layouts. These tables (Figures 5-69, 5-70, 5-71, 5-72, and 5-73) will immediately answer the two questions that most commonly arise when a parking layout is being planned: (1) What parking pattern can be most advantageously fitted to this particular site? (2) If a certain parking angle has been specified, how many parking stalls at this angle can be imposed upon this site, or, alternatively, how big a site will be needed to accommodate a given number of cars parked at a specified angle?


In each table figures are given for five different stall widths from the utmost (and, we believe, shortsighted) economy of 8 feet to the new luxury standard of 10 feet. To fit the site without waste and the maximum number of stalls, a different parking angle may be used in one or both boundary rows. A table in each group shows the effect of these adjustments on the overall width.

Finally, for those who already know what they want and how to arrive at it, the tables can save a great deal of tiresome figuring. We have found them particularly useful for testing a number of alternative proposals in the early discussion stages of design.

The parking pattern is always considered to be viewed (as it normally will be by the designer) when looking along the length of the parking aisles, which should point toward the direction in which most parkers want to go when they leave their cars.

The large gray arrows on each page of tables refer to length and width as shown in the drawing on this page. Figures in the width tables always include the necessary aisles. The length tables do not include the circulation road along the row ends. The minimum width of this road might be taken as 24 feet.

SOURCE: From Geoffrey Baker and Bruno Funaro, *Parking*, © by Litton Educational Publishing, reprinted by permission of Van Nostrand Reinhold Company.

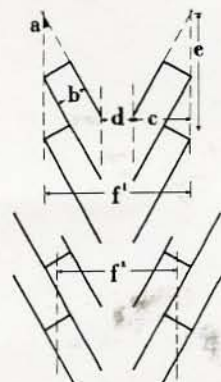

a	b	c	d	e	f	f'
parking angle	stall width	stall to curb width [19' long stall]	aisle width	curb length per car	center-to-center width of two-row bin with access road between curb-to-curb	overlap c-c
30°	8'0"	16.5	11.0	16.0	44.0	37.1
	8'6"	16.9	11.0	17.0	44.8	37.4
	9'0"	17.3	11.0	18.0	45.6	37.8
	9'6"	17.8	11.0	19.0	46.6	38.4
	10'0"	18.2	11.0	20.0	47.4	38.7

ALTERNATE END ROWS FOR 30° Change in overall width of parking:					
With one end row of:	WIDTH OF STALL (same in end row as in rest of parking)				
	8'0"	8'6"	9'0"	9'6"	10'0"
0°	— 7'6"	— 7'6"	— 7'6"	— 7'6"	— 7'0"
45°	+ 5'6"	+ 5'0"	+ 4'6"	+ 4'6"	+ 4'6"
60°	+12'0"	+11'6"	+11'0"	+10'6"	+10'6"
90°	+17'6"	+16'0"	+14'6"	+14'0"	+14'0"

All dimensions in feet and inches are to nearest 6 inches

TOTAL LENGTH

NO. OF STALLS	SINGLE ROW					OVERLAP				
	WIDTH OF STALL:									
	8'0"	8'6"	9'0"	9'6"	10'0"	8'0"	8'6"	9'0"	9'6"	10'0"
1	20'6"	20'6"	21'0"	21'0"	21'6"					
2	36'6"	37'6"	39'0"	40'0"	41'6"	20'0"	21'6"	22'6"	24'0"	25'0"
3	52'6"	54'6"	57'0"	59'0"	61'6"	36'6"	38'0"	39'0"	40'6"	41'6"
4	68'6"	71'6"	75'0"	78'0"	81'6"	52'6"	55'0"	57'0"	59'6"	61'6"
5	84'6"	88'6"	93'0"	97'0"	101'6"	68'6"	72'0"	75'0"	78'6"	81'6"
6	100'6"	105'6"	111'0"	116'0"	121'6"	84'6"	89'6"	94'6"	100'0"	105'0"
7	116'6"	122'6"	129'0"	135'0"	141'6"	100'6"	106'0"	111'0"	116'6"	121'6"
8	132'6"	139'6"	147'0"	154'0"	161'6"	116'6"	123'0"	129'0"	135'6"	141'6"
9	148'6"	156'6"	165'0"	173'0"	181'6"	132'6"	140'0"	147'0"	154'6"	161'6"
10	164'6"	173'6"	183'0"	192'0"	201'6"	148'6"	157'0"	165'0"	173'6"	181'6"
11	180'6"	190'6"	201'0"	211'0"	221'6"	164'6"	174'0"	183'0"	192'6"	201'6"
12	196'6"	207'6"	219'0"	230'0"	241'6"	180'6"	191'0"	201'0"	211'6"	221'6"
13	212'6"	224'6"	237'0"	249'0"	261'6"	196'6"	208'6"	221'0"	232'6"	244'6"
14	228'6"	241'6"	255'0"	268'0"	281'6"	212'6"	226'6"	240'0"	254'6"	268'6"
15	244'6"	258'6"	273'0"	287'0"	301'6"	228'6"	243'6"	258'0"	273'6"	288'6"
16	260'6"	275'6"	291'0"	306'0"	321'6"	244'6"	260'6"	276'0"	292'6"	308'6"
17	276'6"	292'6"	309'0"	325'0"	341'6"	260'6"	277'6"	294'0"	311'6"	328'6"
18	292'6"	309'6"	327'0"	344'0"	361'6"	276'6"	294'6"	312'0"	330'6"	348'6"
19	308'6"	326'6"	345'0"	363'0"	381'6"	292'6"	311'6"	330'0"	349'6"	368'6"
20	324'6"	343'6"	363'0"	382'0"	401'6"	308'6"	328'6"	348'0"	368'6"	388'6"

TOTAL WIDTH (including access roads)																					
STALL WIDTH	AISLE WIDTH	NUMBER OF ROWS																			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
8'0"	11'0"	27'6"	44'0"	64'6"	81'0"	101'6"	118'0"	139'0"	155'6"	176'0"	192'6"	213'0"	229'6"	250'0"	266'6"	287'0"	303'6"	324'0"	341'0"	361'6"	378'0"
8'6"	11'0"	28'0"	45'0"	65'6"	82'0"	102'6"	119'6"	140'0"	157'0"	177'6"	194'6"	215'0"	232'0"	252'6"	269'0"	290'0"	306'6"	327'0"	344'0"	364'6"	381'6"
9'0"	11'0"	28'6"	45'6"	66'0"	83'6"	104'0"	121'0"	142'0"	159'0"	179'6"	197'0"	217'6"	234'6"	255'0"	272'6"	293'0"	310'6"	330'0"	348'0"	368'6"	385'0"
9'6"	11'0"	29'0"	46'6"	67'0"	85'0"	105'6"	123'6"	144'0"	162'0"	182'6"	200'0"	221'0"	238'6"	259'0"	277'0"	297'6"	315'6"	336'0"	354'0"	374'6"	392'0"
10'0"	11'0"	29'0"	47'6"	68'0"	86'0"	106'6"	125'0"	145'6"	163'6"	184'0"	202'0"	223'0"	241'0"	261'6"	279'6"	300'0"	318'6"	339'0"	357'0"	377'6"	395'6"


Width of aisle and width of stall are interrelated. With self-parking particularly, a narrower stall will often require a wider aisle if the drivers are to turn into a stall in a single sweep without damage or delay. For this reason, as the tables

show, a narrow stall may actually take more space per unit than one more generously proportioned. Stall width has a comparatively slight effect on the overall area.

Complete tables are given for 30-, 45-, 60-,

Figure 5-70 Tables for 30-degree parking.

SOURCE: From Geoffrey Baker and Bruno Funaro, *Parking*, © by Litton Educational Publishing, reprinted by permission of Van Nostrand Reinhold Company.



a	b	c	d	e	f ¹	f ²
parking angle	stall width	stall to curb width [19' long stall]	aisle width	curb length per car	center-to-center width of two-row bin with access road between curb-to-curb	overlap c-c
45°	8'0"	19.1	14.0	11.3	52.2	46.5
	8'6"	19.4	13.5	12.0	52.3	46.3
	9'0"	19.8	13.0	12.7	52.6	46.2
	9'6"	20.1	13.0	13.4	53.2	46.5
	10'0"	20.5	13.0	14.1	54.0	46.9

ALTERNATE END ROWS FOR 45°.

Change in overall width of parking:

With one end row of:	WIDTH OF STALL (same in end row as in rest of parking)				
	8'0"	8'6"	9'0"	9'6"	10'0"
0°	-11'0"	-11'0"	-11'0"	-10'6"	-10'6"
30°	-2'6"	-2'6"	-2'6"	-2'6"	-2'6"
60°	-6'6"	+6'6"	+6'0"	+6'0"	+6'0"
90°	-12'0"	+11'0"	+10'0"	+10'0"	+9'6"

All dimensions in feet and inches are to nearest 6 inches



HERRINGBONE for odd number of stalls = same as overlap table, opposite page

	WIDTH OF STALL:				
	8'0"	8'6"	9'0"	9'6"	10'0"
for even number of stalls add to overlap table:	-7'6"	+7'6"	+7'0"	+6'6"	+6'0"

TOTAL LENGTH

NO. OF STALLS	SINGLE ROW					OVERLAP				
	8'0"	8'6"	9'0"	9'6"	10'0"	8'0"	8'6"	9'0"	9'6"	10'0"
1	19'0"	19'6"	19'6"	20'0"	20'6"					
2	30'6"	31'6"	32'6"	33'6"	34'6"	17'0"	18'0"	19'0"	20'0"	21'0"
3	41'6"	43'6"	45'0"	47'0"	48'6"	30'6"	31'6"	32'6"	33'6"	34'6"
4	53'0"	55'6"	58'0"	60'6"	62'6"	28'6"	30'0"	32'0"	33'6"	35'6"
5	64'0"	67'6"	70'6"	73'6"	77'0"	41'6"	43'6"	45'0"	47'6"	48'6"
6	75'6"	79'6"	83'0"	87'0"	91'0"	39'6"	42'0"	44'6"	47'6"	49'6"
7	87'0"	91'6"	96'0"	100'6"	105'0"	53'0"	55'6"	58'0"	60'6"	63'0"
8	98'0"	103'6"	108'6"	114'0"	119'0"	51'0"	54'0"	57'0"	60'6"	63'6"
9	109'6"	115'6"	121'6"	127'6"	133'0"	64'6"	67'6"	70'6"	73'6"	77'0"
10	120'6"	127'6"	134'0"	140'6"	147'6"	62'0"	66'0"	70'0"	73'6"	77'6"
11	132'0"	139'6"	146'6"	154'0"	161'6"	75'6"	79'6"	83'6"	87'6"	91'0"
12	143'6"	151'6"	159'6"	167'6"	175'6"	73'6"	78'0"	82'6"	87'6"	91'6"
13	154'6"	163'6"	172'0"	181'0"	189'6"	87'0"	91'6"	96'0"	100'6"	105'0"
14	166'0"	175'6"	185'0"	194'6"	203'6"	85'0"	90'0"	95'6"	100'6"	106'0"
15	177'0"	187'6"	197'6"	207'6"	218'0"	98'0"	103'6"	108'6"	114'6"	119'0"
16	188'6"	199'6"	210'0"	221'0"	232'0"	96'0"	102'0"	108'0"	114'6"	120'0"
17	200'0"	211'6"	223'0"	234'6"	246'0"	109'6"	115'6"	121'6"	127'6"	133'6"
18	211'0"	223'6"	235'6"	248'0"	260'0"	107'6"	114'0"	120'6"	127'6"	134'0"
19	222'6"	235'6"	248'6"	261'6"	274'0"	121'0"	127'6"	134'0"	140'6"	147'6"
20	233'6"	247'6"	261'0"	274'6"	288'6"	118'6"	126'0"	133'6"	140'6"	148'0"

50

360 EST


TOTAL WIDTH (including access roads)																			
STALL WIDTH	AISLE WIDTH	NUMBER OF ROWS																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
8'0"	14'0"	33'0"	52'0"	79'6"	95'6"	126'0"	145'0"	172'6"	191'6"	219'0"	238'0"	265'6"	284'6"	312'0"	331'0"	358'6"	377'6"	405'0"	424'0"
8'6"	13'6"	33'0"	52'6"	79'0"	95'6"	125'6"	145'0"	172'0"	191'0"	218'0"	237'6"	264'6"	284'0"	310'6"	330'0"	357'0"	376'6"	403'6"	422'6"
9'0"	13'0"	33'0"	52'6"	79'0"	95'6"	125'0"	145'0"	171'6"	191'0"	217'6"	237'6"	264'0"	283'6"	310'0"	330'0"	356'0"	376'0"	402'6"	422'0"
9'6"	13'0"	33'0"	53'0"	79'6"	95'6"	126'0"	146'0"	172'6"	192'6"	219'0"	239'0"	265'6"	285'6"	312'0"	332'0"	358'6"	378'6"	405'0"	425'0"
10'0"	13'0"	33'6"	54'0"	80'6"	101'6"	127'6"	148'0"	174'0"	194'6"	221'0"	241'6"	268'0"	288'6"	315'0"	335'6"	362'0"	382'6"	408'6"	429'0"

Figure 5-71 Tables for 45-degree parking.

and 90-degree parking. For those who wish to investigate the subject more extensively, basic dimensions for every 10 degrees appear in Figure 5-69. One subtlety that cannot be shown in

a table is an advantageous way of improving the 0-degree (parallel) parking pattern by pairing the stalls, as shown in the small drawing on this page. The allowance per car, 23 feet in

SOURCE: From Geoffrey Baker and Bruno Funaro, *Parking*, © by Litton Educational Publishing, reprinted by permission of Van Nostrand Reinhold Company.



a	b	c	d	e	f¹	f²
parking angle	stall width	stall to curb [19' long stall]	aisle width	curb length per car	center-to-center width of two-row bin with access road between curb-to-curb	overlap c-c
60°	8'0"	20.4	19.0	9.2	59.8	55.8
	8'6"	20.7	18.5	9.8	59.9	55.6
	9'0"	21.0	18.0	10.4	60.0	55.5
	9'6"	21.2	18.0	11.0	60.4	55.6
	10'0"	21.5	18.0	11.5	61.0	56.0

ALTERNATE END ROWS FOR 60°.					
Change in overall width of parking:					
With one end row of:	WIDTH OF STALL (same in end row as in rest of parking)				
	8'0"	8'6"	9'0"	9'6"	10'0"
0°	-12'6"	-12'0"	-12'0"	-11'6"	-11'6"
30°	-4'0"	-4'0"	-3'6"	-3'6"	-3'6"
45°	-1'6"	-1'6"	-1'0"	-1'0"	-1'0"
90°	+5'6"	+5'6"	+4'0"	+4'0"	+3'6"

All dimensions in feet and inches are to nearest 6 inches

TOTAL LENGTH

NO. OF STALLS	SINGLE ROW					OVERLAP				
	WIDTH OF STALL:					8'0"	8'6"	9'0"	9'6"	10'0"
1	16'6"	17'0"	17'6"	17'6"	18'0"					
2	25'6"	26'6"	27'6"	28'6"	29'6"	16'0"	17'0"	18'0"	19'0"	20'0"
3	35'0"	36'6"	38'0"	39'6"	41'0"	25'6"	26'6"	27'6"	28'6"	29'6"
4	44'0"	46'6"	48'6"	50'6"	52'6"	25'6"	27'0"	28'6"	30'0"	31'6"
5	53'0"	56'0"	59'0"	61'6"	64'0"	35'0"	36'6"	38'0"	39'6"	41'0"
6	62'6"	66'0"	69'6"	72'6"	75'6"	34'6"	37'0"	39'0"	41'0"	43'0"
7	71'6"	75'6"	79'6"	83'6"	87'0"	44'0"	46'6"	48'6"	50'6"	52'6"
8	81'0"	85'6"	90'0"	94'6"	98'6"	43'6"	46'6"	49'6"	52'0"	54'6"
9	90'0"	95'6"	100'6"	105'6"	110'0"	53'6"	56'0"	59'0"	61'6"	64'0"
10	99'0"	105'0"	111'0"	116'6"	121'6"	53'0"	56'6"	60'0"	63'0"	66'0"
11	108'6"	115'0"	121'6"	127'6"	133'0"	62'6"	66'0"	69'6"	72'6"	75'6"
12	117'6"	124'6"	131'6"	138'6"	144'6"	62'0"	66'0"	70'0"	74'0"	77'6"
13	127'0"	134'6"	142'0"	149'6"	156'0"	71'6"	75'6"	79'6"	83'6"	87'0"
14	136'0"	144'6"	152'6"	160'6"	167'6"	71'6"	76'0"	80'6"	85'0"	89'0"
15	145'0"	154'0"	163'0"	171'6"	179'0"	81'0"	85'6"	90'0"	94'6"	98'6"
16	154'6"	164'0"	173'6"	182'6"	190'6"	80'6"	86'0"	91'0"	96'0"	100'6"
17	163'6"	173'6"	183'6"	193'6"	202'0"	90'0"	95'6"	100'6"	105'6"	110'0"
18	173'0"	183'6"	194'0"	204'6"	213'6"	89'6"	95'6"	101'6"	107'0"	112'0"
19	182'0"	193'6"	204'6"	215'6"	225'0"	99'0"	105'0"	111'0"	116'6"	121'6"
20	191'0"	203'0"	215'0"	226'6"	236'6"	99'0"	105'6"	112'0"	118'0"	123'6"

TOTAL WIDTH (including access roads)																					
STALL WIDTH	AISLE WIDTH	NUMBER OF ROWS																			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
8'0"	19'0"	39'6"	60'0"	95'0"	115'6"	151'0"	171'6"	207'0"	227'0"	262'6"	283'0"	318'6"	339'0"	374'0"	394'6"	430'0"	450'6"	486'0"	506'0"	541'6"	562'0"
8'6"	18'6"	39'0"	60'0"	95'0"	115'6"	150'6"	171'6"	206'6"	227'0"	262'0"	282'6"	317'6"	338'6"	373'6"	394'0"	429'0"	450'0"	485'0"	505'6"	540'6"	561'0"
9'0"	18'0"	39'0"	60'0"	94'6"	115'6"	150'0"	171'0"	205'6"	226'6"	261'0"	282'0"	316'6"	337'6"	372'0"	393'0"	427'6"	448'6"	483'0"	504'0"	538'6"	559'6"
9'6"	18'0"	39'0"	60'6"	95'0"	116'0"	150'6"	172'0"	206'6"	227'6"	262'0"	283'0"	317'6"	339'0"	373'6"	394'6"	429'0"	450'6"	485'0"	506'0"	540'6"	561'6"
10'0"	18'0"	39'6"	61'0"	95'6"	117'0"	151'6"	173'0"	207'6"	229'0"	263'6"	285'0"	319'6"	341'0"	375'6"	397'0"	431'6"	453'0"	487'6"	509'0"	543'6"	565'0"


Figure 5-72 Tables for 60-degree parking.

length, remains the same, but cars can park and unpark more quickly, and with less traffic delay on the street; and pedestrians can pass through the line of parked cars.

Figure 5-70 shows tables for 30-degree parking.

Figure 5-71 shows tables for 45-degree parking.

SOURCE: From Geoffrey Baker and Bruno Funaro, *Parking*, © by Litton Educational Publishing, reprinted by permission of Van Nostrand Reinhold Company.




a	b	c	d	e	f	f'
parking angle	stall width	stall to curb width [19' long stall]	aisle width	curb length per car	center-to-center width of two-row bin with access road between	curb-to-curb overlap c-c
90°	8'0"	19.0	26.0*	8.0	64.0	—
	8'6"	19.0	25.0*	8.5	63.0	—
	9'0"	19.0	24.0*	9.0	62.0	—
	9'6"	19.0	24.0*	9.5	62.0	—
	10'0"	19.0	24.0*	10.0	62.0	—

ALTERNATE END ROWS FOR 90°.					
Change in overall width of parking:					
With one end row of:	WIDTH OF STALL (same in end row as in rest of parking)				
	8'0"	8'6"	9'0"	9'6"	10'0"
0°	—11'0"	—10'6"	—10'0"	—9'6"	—9'0"
30°	—2'6"	—2'0"	—1'6"	—1'0"	—1'0"
45°	Fewer cars in more width, so not worth consideration.				
60°					

90° BACK IN*
Total length is same as ordinary

TOTAL LENGTH



NO. OF STALLS	WIDTH OF STALL:				
	8'0"	8'6"	9'0"	9'6"	10'0"
1	8'0"	8'6"	9'0"	9'6"	10'0"
2	16'0"	17'0"	18'0"	19'0"	20'0"
3	24'0"	25'6"	27'0"	28'6"	30'0"
4	32'0"	34'0"	36'0"	38'0"	40'0"
5	40'0"	42'6"	45'0"	47'6"	50'0"
6	48'0"	51'0"	54'0"	57'0"	60'0"
7	56'0"	59'6"	63'0"	66'6"	70'0"
8	64'0"	68'0"	72'0"	76'0"	80'0"
9	72'0"	76'6"	81'0"	85'6"	90'0"
10	80'0"	85'0"	90'0"	95'0"	100'0"
11	88'0"	93'6"	99'0"	104'6"	110'0"
12	96'0"	102'0"	108'0"	114'0"	120'0"
13	104'0"	110'6"	117'0"	123'6"	130'0"
14	112'0"	119'0"	126'0"	133'0"	140'0"
15	120'0"	127'6"	135'0"	142'6"	150'0"
16	128'0"	136'0"	144'0"	152'0"	160'0"
17	136'0"	144'6"	153'0"	161'6"	170'0"
18	144'0"	153'0"	162'0"	171'0"	180'0"
19	152'0"	161'6"	171'0"	180'6"	190'0"
20	160'0"	170'0"	180'0"	190'0"	200'0"

All dimensions in feet and inches are to nearest 6 inches

TOTAL WIDTH (including access roads)																						
STALL WIDTH	AISLE WIDTH	NUMBER OF ROWS																				
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
8'0"	26'0"	45'0"	64'0"	109'0"	128'0"	173'0"	192'0"	237'0"	256'0"	301'0"	320'0"	365'0"	384'0"	429'0"	448'0"	493'0"	512'0"	557'0"	576'0"	621'0"	640'0"	
8'6"	25'0"	44'0"	63'0"	107'0"	126'0"	170'0"	189'0"	233'0"	252'0"	296'0"	315'0"	359'0"	378'0"	422'0"	441'0"	485'0"	504'0"	548'0"	567'0"	611'0"	630'0"	
9'0"	24'0"	43'0"	62'0"	105'0"	124'0"	167'0"	186'0"	229'0"	248'0"	291'0"	310'0"	353'0"	372'0"	415'0"	434'0"	477'0"	496'0"	539'0"	558'0"	601'0"	620'0"	
9'6"	24'0"	43'0"	62'0"	105'0"	124'0"	167'0"	186'0"	229'0"	248'0"	291'0"	310'0"	353'0"	372'0"	415'0"	434'0"	477'0"	496'0"	539'0"	558'0"	601'0"	620'0"	
10'0"	24'0"	43'0"	62'0"	105'0"	124'0"	167'0"	186'0"	229'0"	248'0"	291'0"	310'0"	353'0"	372'0"	415'0"	434'0"	477'0"	496'0"	539'0"	558'0"	601'0"	620'0"	
90° BACK IN*	8'0"	22'0"	40'6"	59'0"	99'6"	118'0"	158'6"	177'0"	217'6"	236'0"	276'6"	295'0"	335'6"	354'0"	394'6"	413'0"	453'6"	472'0"	512'6"	531'0"	571'6"	590'0"
	8'6"	21'0"	39'6"	58'0"	97'6"	116'0"	155'6"	174'0"	213'6"	232'0"	271'6"	290'0"	329'6"	348'0"	387'6"	406'0"	445'6"	464'0"	503'6"	522'0"	561'6"	580'0"
	9'0"	20'0"	38'6"	57'0"	95'6"	114'0"	152'6"	171'0"	209'6"	228'0"	266'6"	285'0"	323'6"	342'0"	380'6"	399'0"	437'6"	456'0"	494'6"	513'0"	551'6"	570'0"

* For attendant parking only

Figure 5-73 Tables for 90-degree parking.

Figure 5-72 shows tables for 60-degree parking.

Figure 5-73 shows tables for 90-degree parking.

SOURCE: From Geoffrey Baker and Bruno Furno, *Parking*, © by Litton Educational Publishing, reprinted by permission of Van Nostrand Reinhold Company.