


# EAO – Your Expert Partner for Human Machine Interfaces

## 51-253.022 - Stop switch complete

### 51-253.022 - Stop switch complete

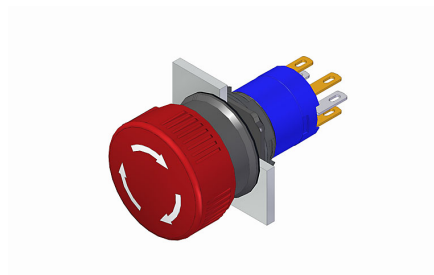

*Attention: The preview is based on a sample product. This can differ from your current configuration.*

#### Mounting

Mounting cut-out	Ø 16 mm
Design	raised

#### Front

Front dimension	Ø 24.5 mm
Front shape	round

#### Other Attributes

Weight	0.011 kg
--------	----------

#### Operating-/Indication part

Lens material	Plastic
Lens colour	red
Lens profile	Mushroom
Lens optics	opaque

#### IP-Rating

Front protection	IP 65
------------------	-------

#### Connection Method

Terminal	Solder 2.8 x 0.5 mm
----------	---------------------

#### Actuator

Switching action	Maintained
------------------	------------

#### Switching element

Switching system	Snap-action switching element
Contacts	1 NC + 1 NO
Switching current	5 A
Contact material	Gold
Switching voltage	250 V AC


#### Function

Stop switch
-------------

# EAO – Your Expert Partner for Human Machine Interfaces


## 51-253.022 - Stop switch complete

### Dimensions




H = Universal terminal 2.0 x 0.5 mm

### Mounting cut-outs



### Wiring diagram



### Additional information

Marking arrows

If the anti-twist ring is not used the panel thickness increases to 4 mm

### Legend

Contacts: NC = Normally closed, NO = Normally open

Switching action: C = Maintained