

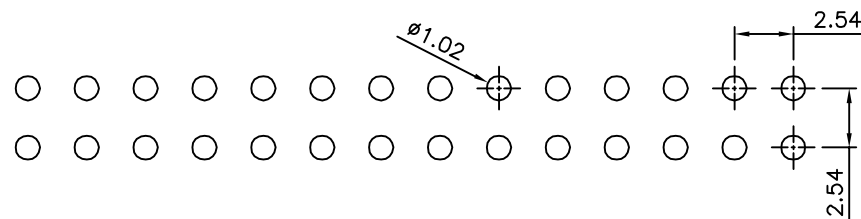


# △△ SPECIFICATION


Current Rating:3.0 Amp  
Withstand Voltage:1000V AC/DC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Contact:Brass,Gold Plated Over Nickel  
Insulator:PA9T+30%G.F.(UL94V-0),Black  
RoHS Compliant

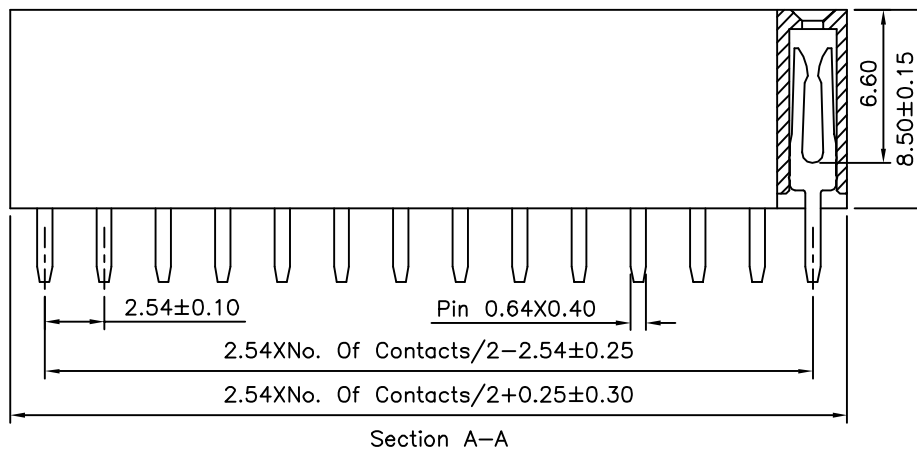

Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance±0.05)

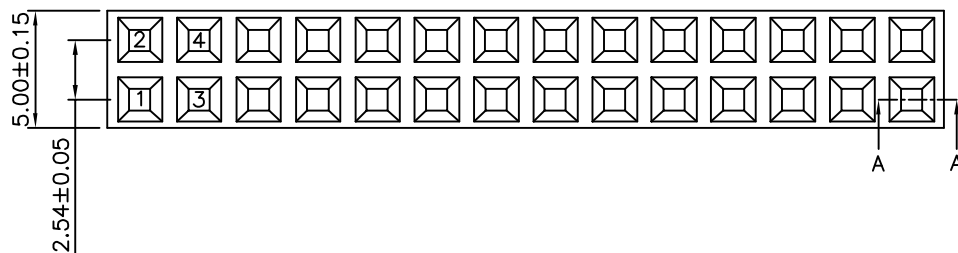

Section A-A



**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

00612

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO




REV.

A2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.40  
.XX ±0.25  
.XXX ±0.15  
ANG. ±3°

UNIT  
mm



	A2	Modify Data	HZF	10/08/2012
	A1	Modify Data	HZF	11/14/2009
	A0	NEW RELEASE	HZF	09/14/2008
NO	REV	REVISIONS	CHK	DATE