

MODUDECK / THREE REMOVABLE TRAYS


USB power and USB CDC serial through the original Pico micro-USB connector

PICO + SOCKET ASSEMBLY

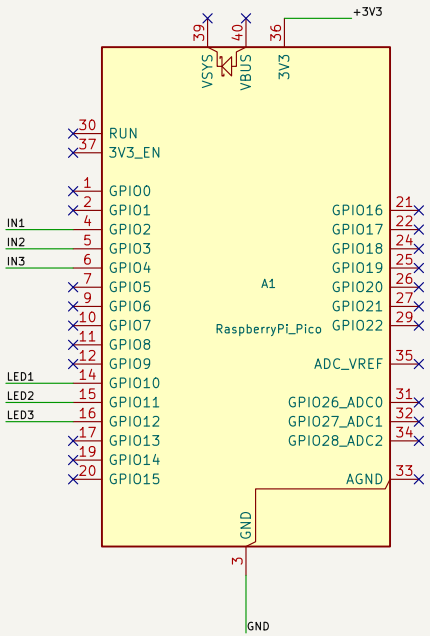




INPUTS: 10k PULL-UP + 1k SERIES

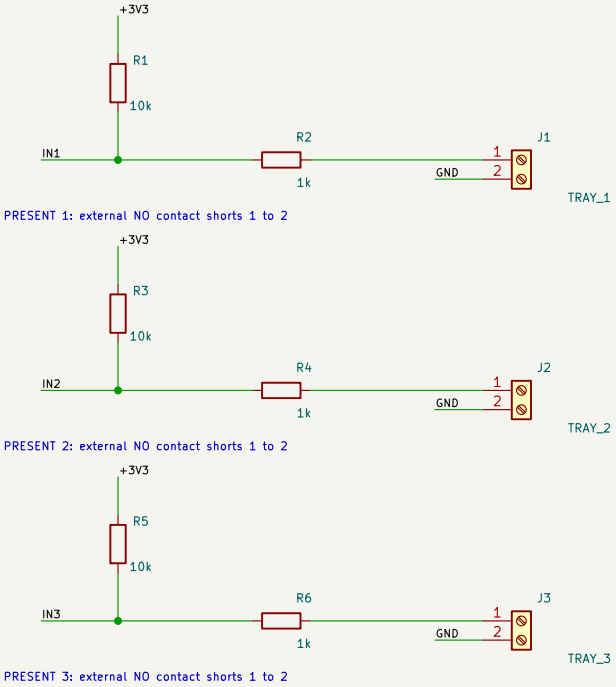

RED STATUS LEDs

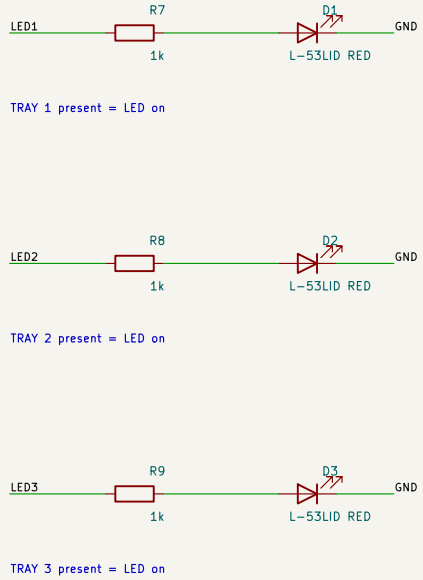

VBUS (40), VSYS (39), ADC_VREF (35), RUN (30) and 3V3_EN (37): no carrier connection.
USB supplies Pico internally. No external power source, battery charging or PC power output.
Closed input: about 0.30 V; red LED: about 1.3 mA at Vf=2.0 V.
A1 footprint contains both 20-pin sockets; sockets and Pico male headers listed separately in purchasing BOM.

Software checks only. Hardware and enclosure fit pending.
Original RP2040 Pico; removable in two 1x20 female sockets
ModuDeck

Sheet: /
File: ModuDeck-Module-Monitor.kicad_sch

Title: ModuDeck Module Monitor — USB presence monitor

Size: A4	Date: 2026-10-12	**Rev: 1.0**
KiCad E.D.A. 10.0.7		Id: 1/1