



Certified Parts Corporation (608) 884-0770
 405 E. Fulton Street (800) 356-0777
 Edgerton, WI 53534 (608) 884-0775 Fax
 www.CometClutches.com


160975A REV. 041717
 PRINTED U.S.A.

DISC CALIPER BRAKE

- The Comet "DC" Series 1-Disc Caliper, is a direct replacement for comparable brakes of this size.
- This caliper has a total of (8) different lever positions in either direction of pull. (Clockwise/Counter-Clockwise) for a total of 16 positions.
- Integrated in the unique actuator design is a positive stop so that a Return Spring can be used without causing braking in the opposite direction of pull.
- The Brake also has a very simple means of fine adjustment via the large Hex Adjusting Barrel controlled by a friction procedure that resists turning.
- The Brake can be floated by using spacers and longer assembly bolts or by using the two convenient slots.
- When this Caliper is used with our Comet Brake Discs you can be assured of quick stopping from the first actuation . . . due to a unique surface process on our discs. The Brake Puck has 1.9 square inches of automotive brake material and is replaceable.
- This Brake is used, or can be used on RV's, Snowmobiles, Go-Karts, Mini-Bikes, Garden Tractors, Three and Four Wheelers and numerous Industrial applications.

"DC" SERIES 1 - DISC CALIPER BRAKE ASSY 218070A COMET
 "DC" SERIES 1 - DISC CALIPER BRAKE ASSY 218271A MURRAY

REFERENCE FOR PARTS ONLY

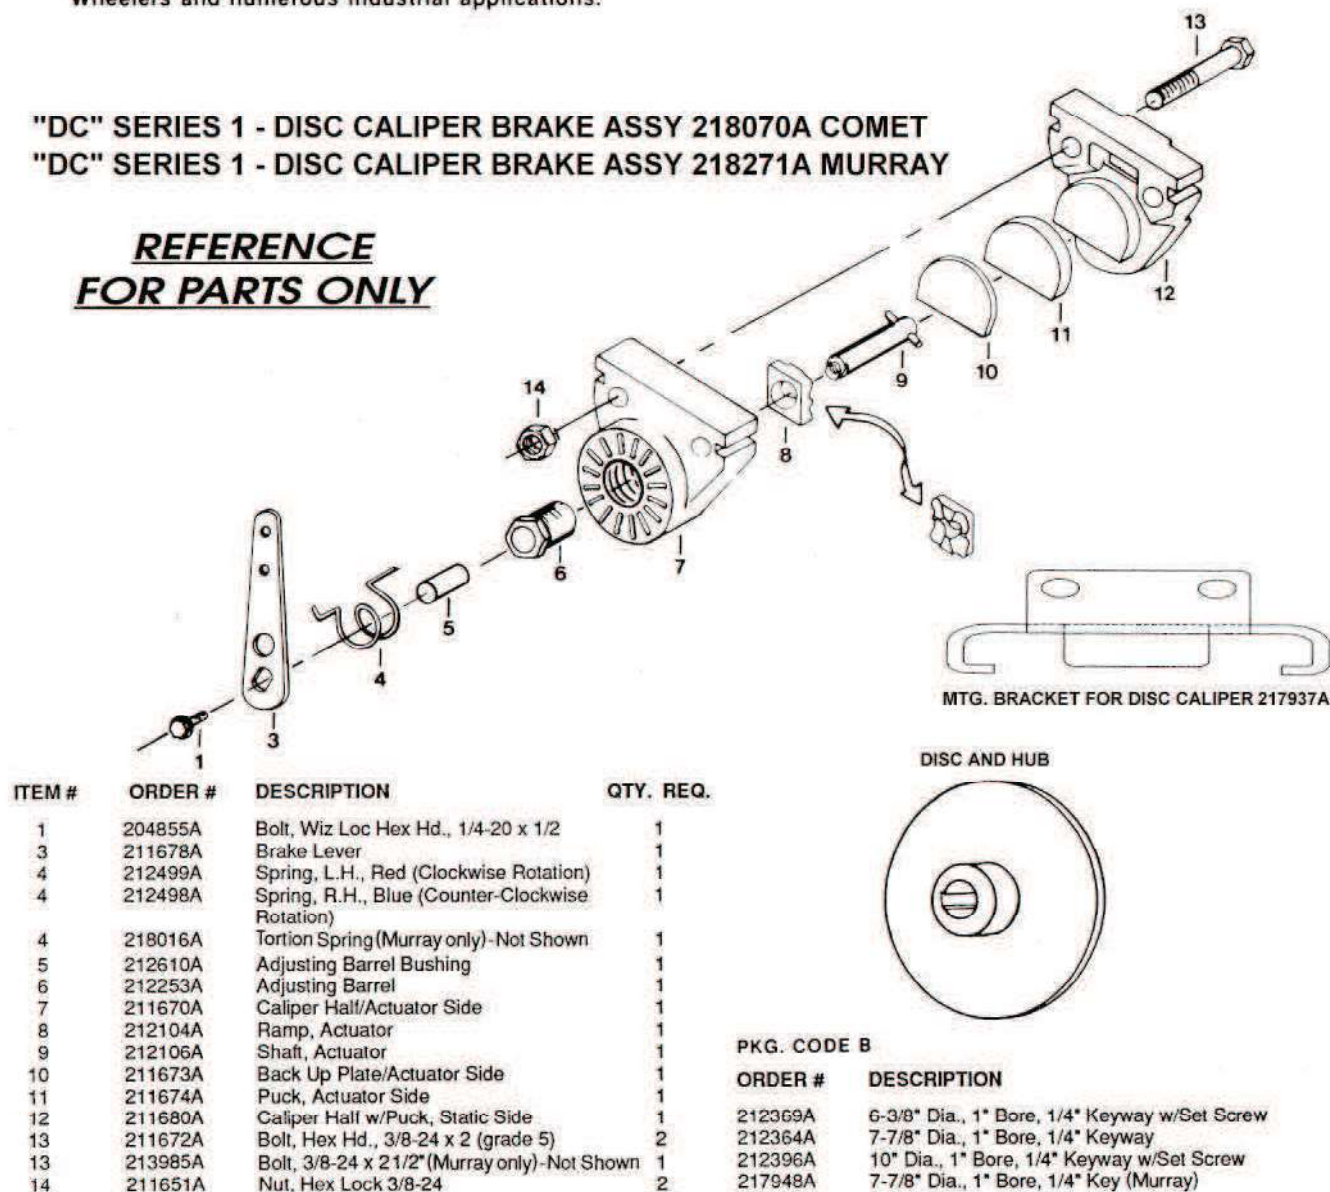

ITEM #	ORDER #	DESCRIPTION	QTY. REQ.
1	204855A	Bolt, Wiz Loc Hex Hd., 1/4-20 x 1/2	1
3	211678A	Brake Lever	1
4	212499A	Spring, L.H., Red (Clockwise Rotation)	1
4	212498A	Spring, R.H., Blue (Counter-Clockwise Rotation)	1
4	218016A	Torsion Spring (Murray only)-Not Shown	1
5	212610A	Adjusting Barrel Bushing	1
6	212253A	Adjusting Barrel	1
7	211670A	Caliper Half/Actuator Side	1
8	212104A	Ramp, Actuator	1
9	212106A	Shaft, Actuator	1
10	211673A	Back Up Plate/Actuator Side	1
11	211674A	Puck, Actuator Side	1
12	211680A	Caliper Half w/Puck, Static Side	1
13	211672A	Bolt, Hex Hd., 3/8-24 x 2 (grade 5)	2
13	213985A	Bolt, 3/8-24 x 2 1/2" (Murray only)-Not Shown	1
14	211651A	Nut, Hex Lock 3/8-24	2

PKG. CODE B

ORDER #	DESCRIPTION
212369A	6-3/8" Dia., 1" Bore, 1/4" Keyway w/Set Screw
212364A	7-7/8" Dia., 1" Bore, 1/4" Keyway
212396A	10" Dia., 1" Bore, 1/4" Keyway w/Set Screw
217948A	7-7/8" Dia., 1" Bore, 1/4" Key (Murray)

**SET YOUR COMET CALIPER ANY OF
16 DIFFERENT POSITIONS AS FOLLOWS:**

- STEP #1:** Remove (2) 3/8-24 x 2" Bolts and Nuts
- STEP #2:** Remove 1/4-20 x 1/2 Bolt, Brake Lever, and Return Spring.
- STEP #3:** **FIGURE 1-RAMP BLOCK/BRAKE LEVER POSITION**
You can now set your Ramp Block in one of two positions depending on whether you want a 3 or 9 o'clock or a 12 or 6 o'clock Brake Lever Position. Using the indentation for a reference mark, set the Ramp Block as shown for the desired lever position.
- STEP #4:** **FIGURE 2-LEVER ROTATION**
For desired lever rotation (clockwise/counter-clockwise) set Actuator Shaft and Pin as shown in figure 2.
- STEP #5:** **FIGURE 3-REASSEMBLY OF BRAKE LEVER**
Looking at the Lever you will notice a "D" hole which fits over the end of the Actuator Shaft. The Lever can now be positioned in any one of 4 different locations as shown in figure 3. Shown are clockwise positions - 12 and 6 o'clock.
- STEP #6:** After selecting lever position remove lever and install Return Spring. Reinstall lever in selected position. Install 1/2-20 x 1/2 Retaining Bolt and Washer.
- STEP #7:** Install Actuator Side Backup Plate and Puck. Assemble Caliper Half w/Puck-Static Side, using (2) 3/8-24 x 2 Hex Hd. Bolts and Nuts and tighten.
Brake is now ready for installation.
- STEP #8:** **ADJUSTING BRAKE**
With Brake in full "Off" position, screw Adjusting Barrel in until brake lock-up. Unscrew just enough for free vehicle movement without drag.

FIGURE 1


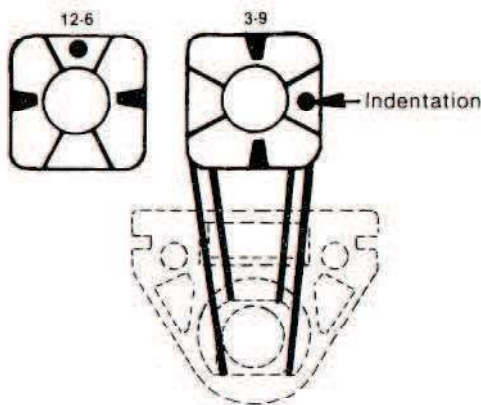


FIGURE 2



NOTE DIMENSIONS AND RATIOS ARE IN ACCORDANCE WITH ENGINEERING'S DRAWING CURRENT WITH THE DATE SHOWN ON THIS ITEM SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

FIGURE 3

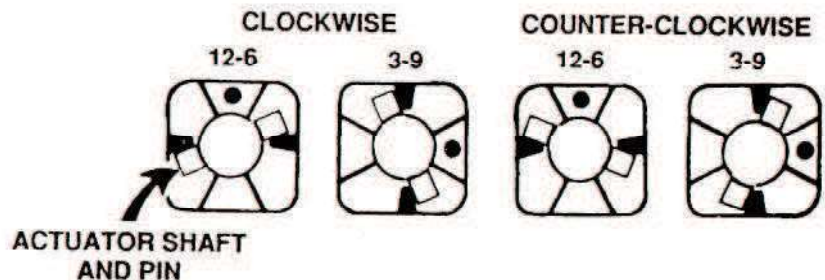