



EXPERIMENT 10


Customize Switch with Network Modules using Cisco Packet Tracer

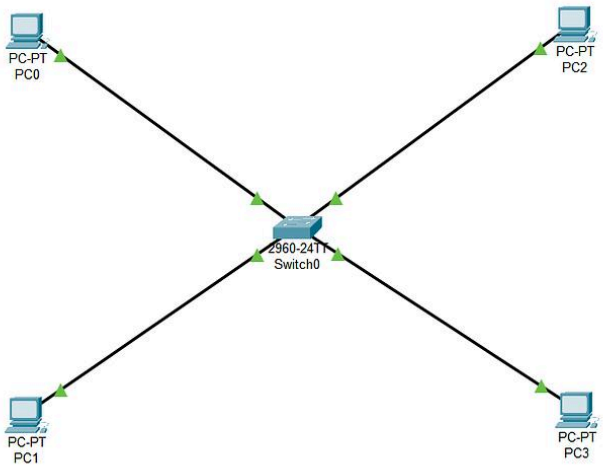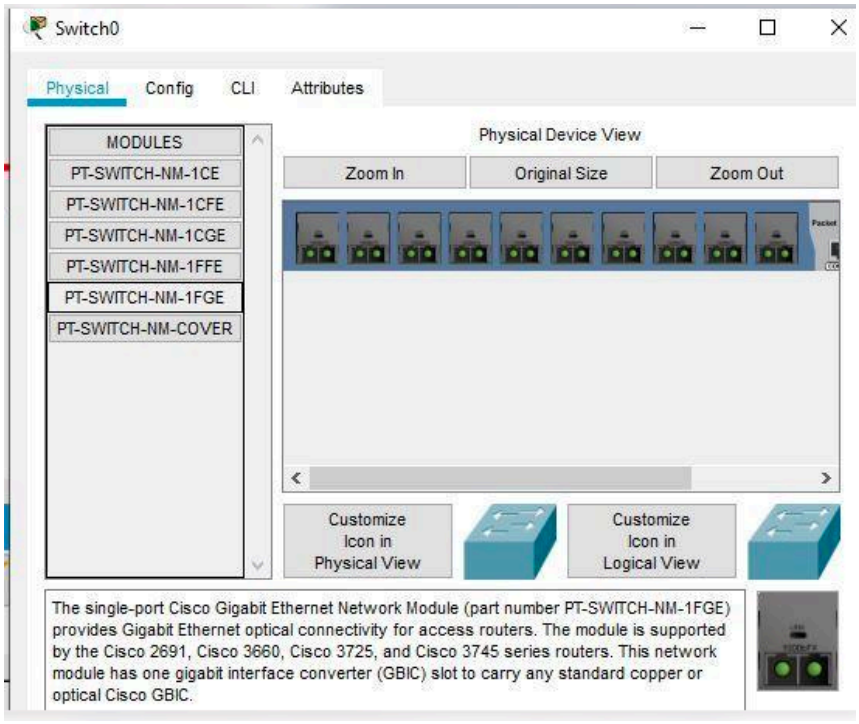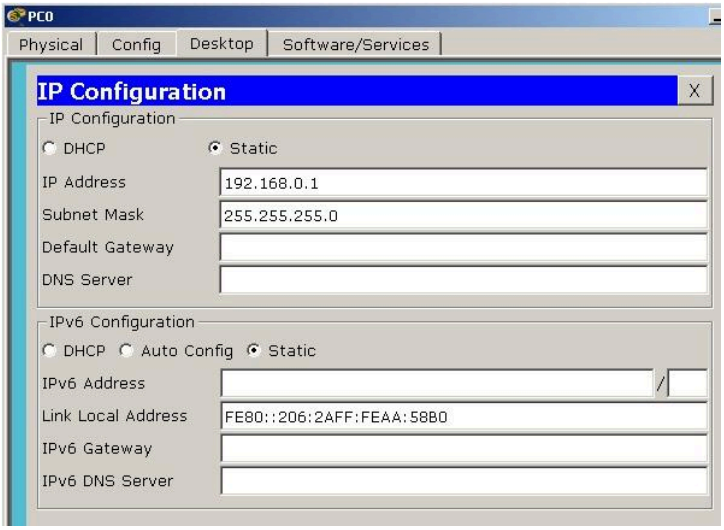

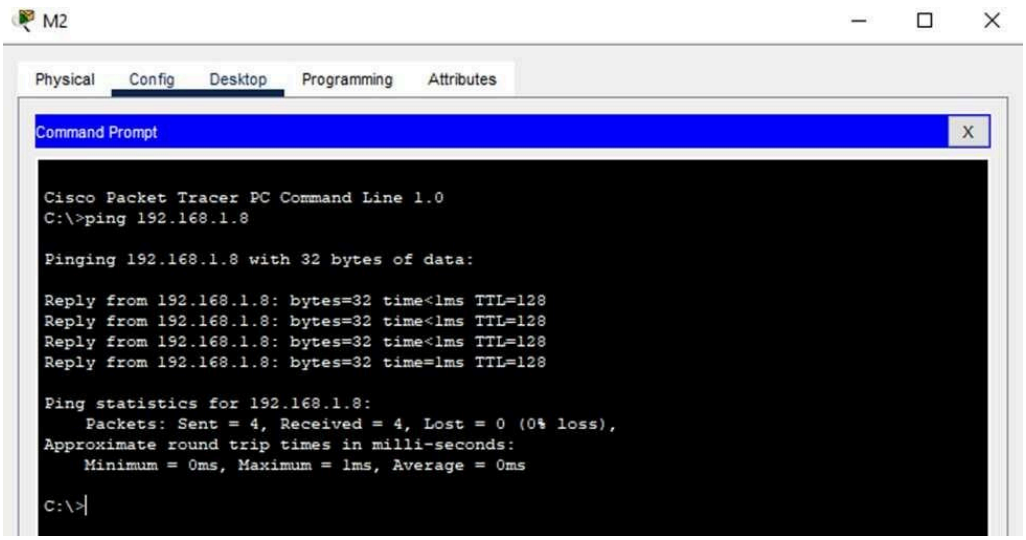


PC0
Physical
Config
Desktop
Software/Services
IP Configuration
X
IP Configuration
DHCP
Static
IP Address
192.168.0.1
Subnet Mask
255.255.255.0
Default Gateway
DNS Server
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
Link Local Address
FE80::206:2AFF:FEAA:58B0
IPv6 Gateway
IPv6 DNS Server


M2
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.8
Pinging 192.168.1.8 with 32 bytes of data:
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time=1ms TTL=128
Ping statistics for 192.168.1.8:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\>

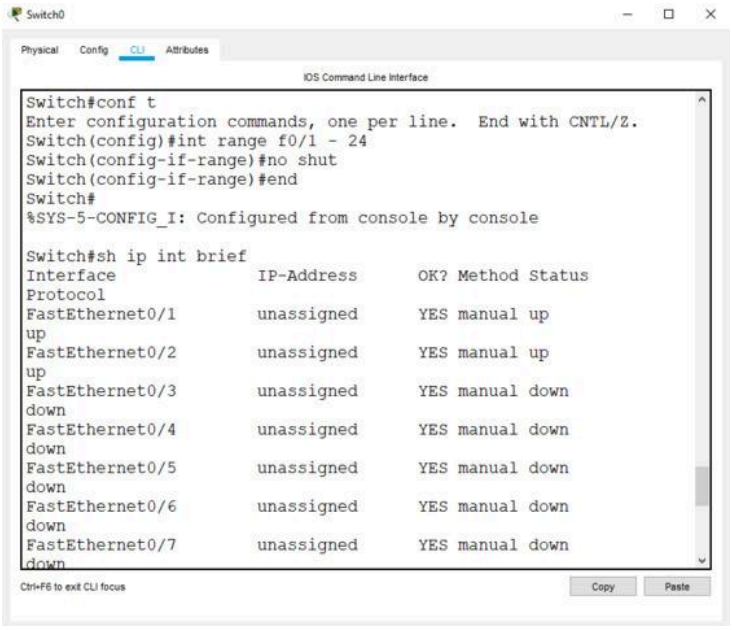
Switch0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int range f0/1 - 24
Switch(config-if-range)#no shut
Switch(config-if-range)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#sh ip int brief
Interface IP-Address OK? Method Status
Protocol
FastEthernet0/1 unassigned YES manual up
up
FastEthernet0/2 unassigned YES manual up
up
FastEthernet0/3 unassigned YES manual down
down
FastEthernet0/4 unassigned YES manual down
down
FastEthernet0/5 unassigned YES manual down
down
FastEthernet0/6 unassigned YES manual down
down
FastEthernet0/7 unassigned YES manual down
down
Ctrl+F6 to exit CLI focus
Copy
Paste