



EXPERIMENT 11
Network Address Translation

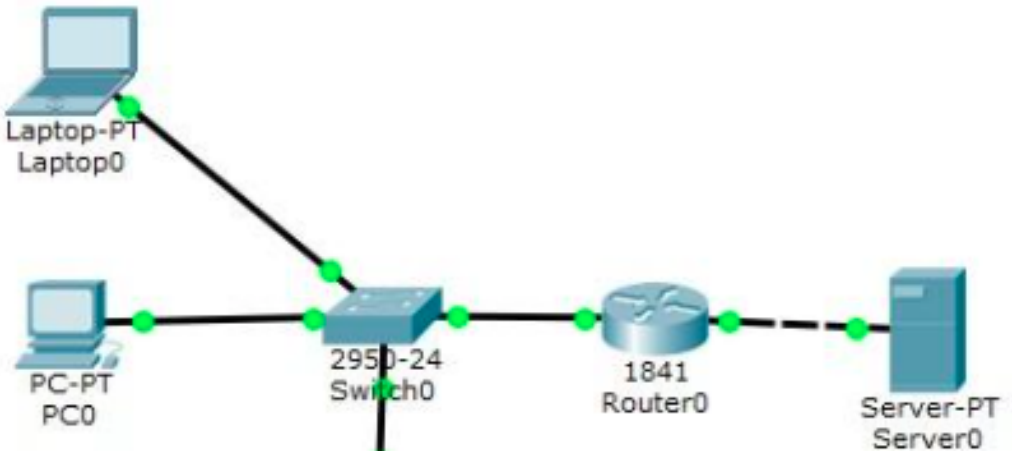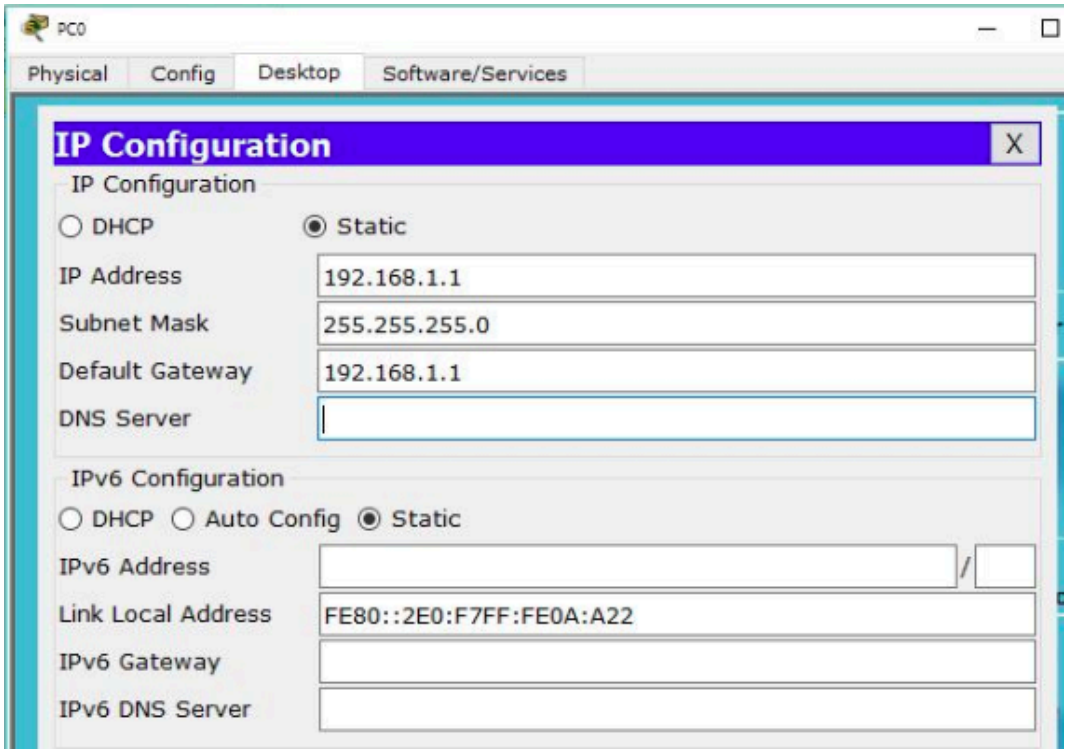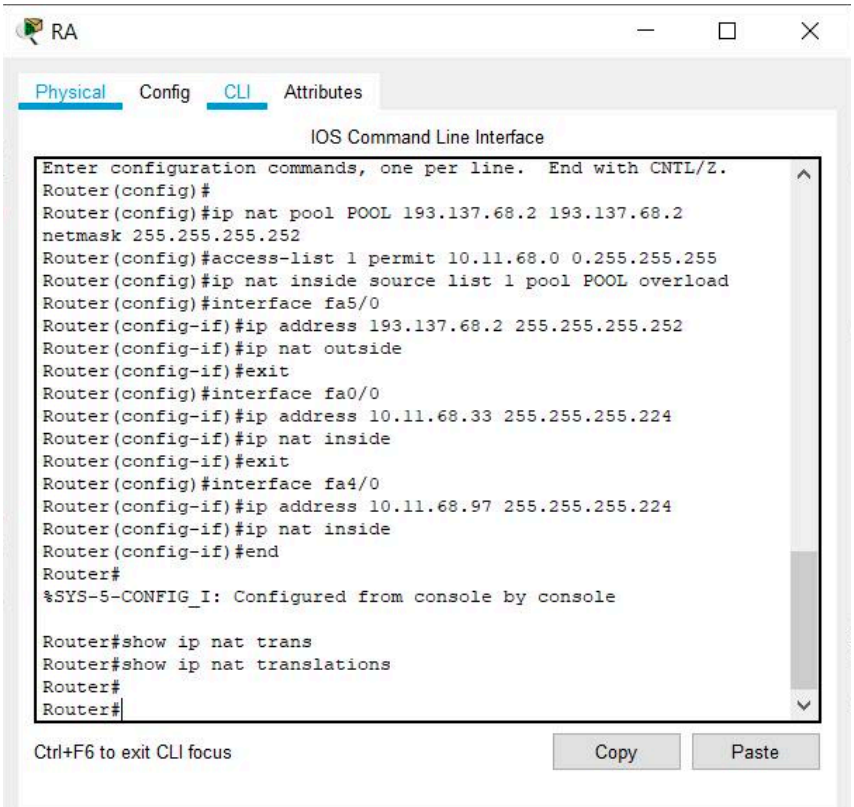

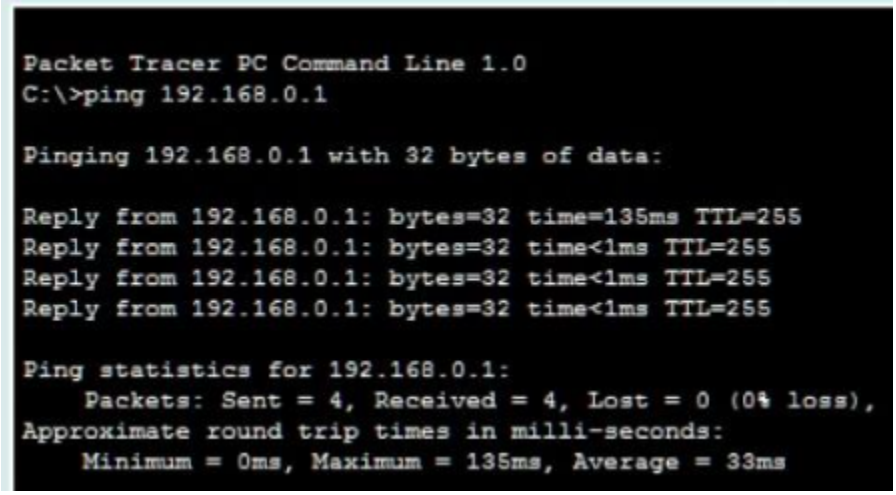


RA
Physical
Config
CLI
Attributes
IOS Command Line Interface
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#ip nat pool POOL 193.137.68.2 193.137.68.2
netmask 255.255.255.252
Router(config)#access-list 1 permit 10.11.68.0 0.255.255.255
Router(config)#ip nat inside source list 1 pool POOL overload
Router(config)#interface fa5/0
Router(config-if)#ip address 193.137.68.2 255.255.255.252
Router(config-if)#ip nat outside
Router(config-if)#exit
Router(config)#interface fa0/0
Router(config-if)#ip address 10.11.68.33 255.255.255.224
Router(config-if)#ip nat inside
Router(config-if)#exit
Router(config)#interface fa4/0
Router(config-if)#ip address 10.11.68.97 255.255.255.224
Router(config-if)#ip nat inside
Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#show ip nat trans
Router#show ip nat translations
Router#
Router#
Ctrl+F6 to exit CLI focus
Copy
Paste


Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.1
Pinging 192.168.0.1 with 32 bytes of data:
Reply from 192.168.0.1: bytes=32 time=135ms TTL=255
Reply from 192.168.0.1: bytes=32 time<1ms TTL=255
Reply from 192.168.0.1: bytes=32 time<1ms TTL=255
Reply from 192.168.0.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 135ms, Average = 33ms