



EXPERIMENT 2


Cisco Packet Tracer and Design a Simple Network

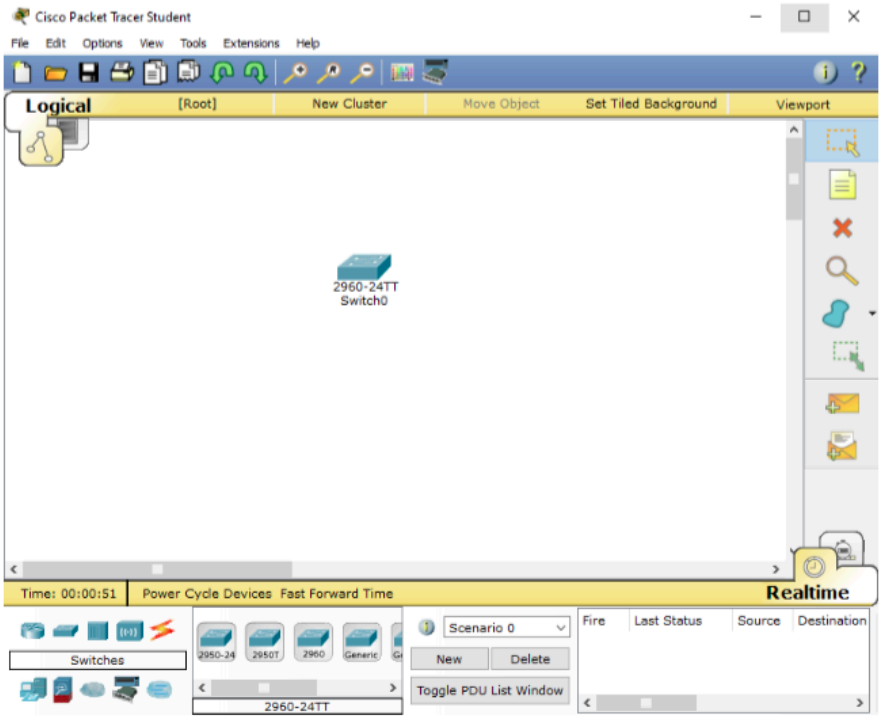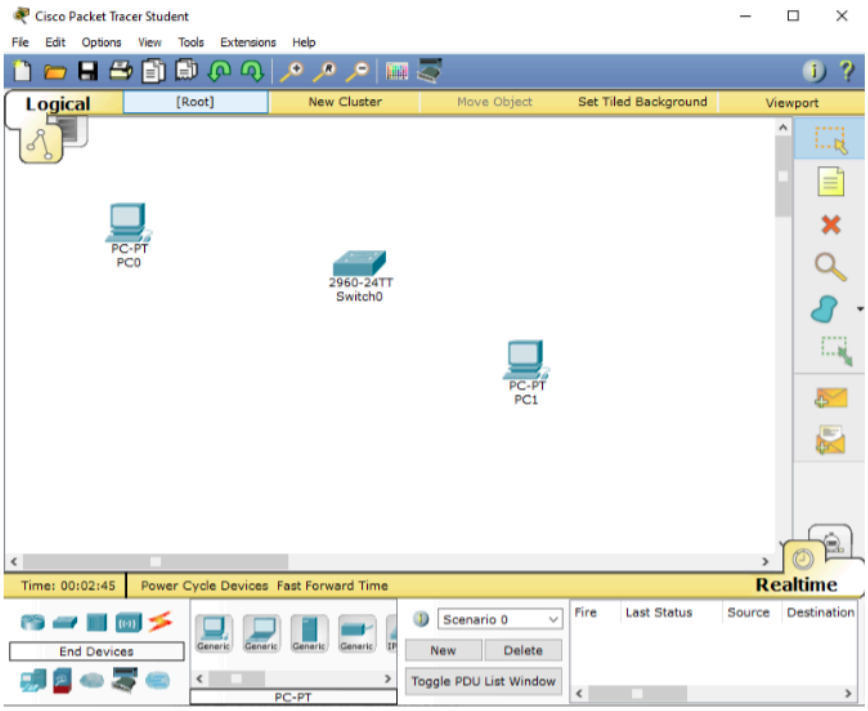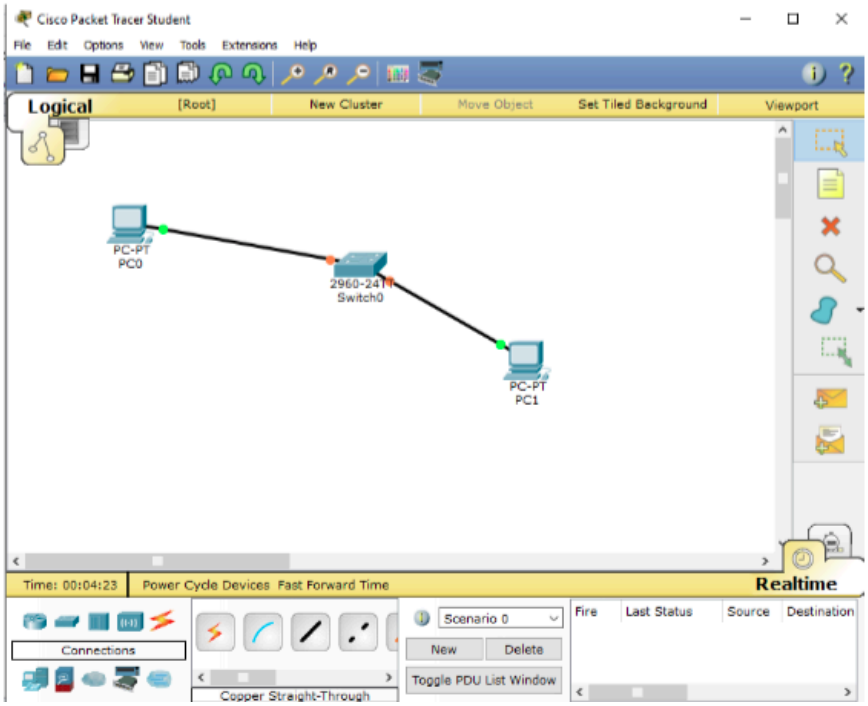


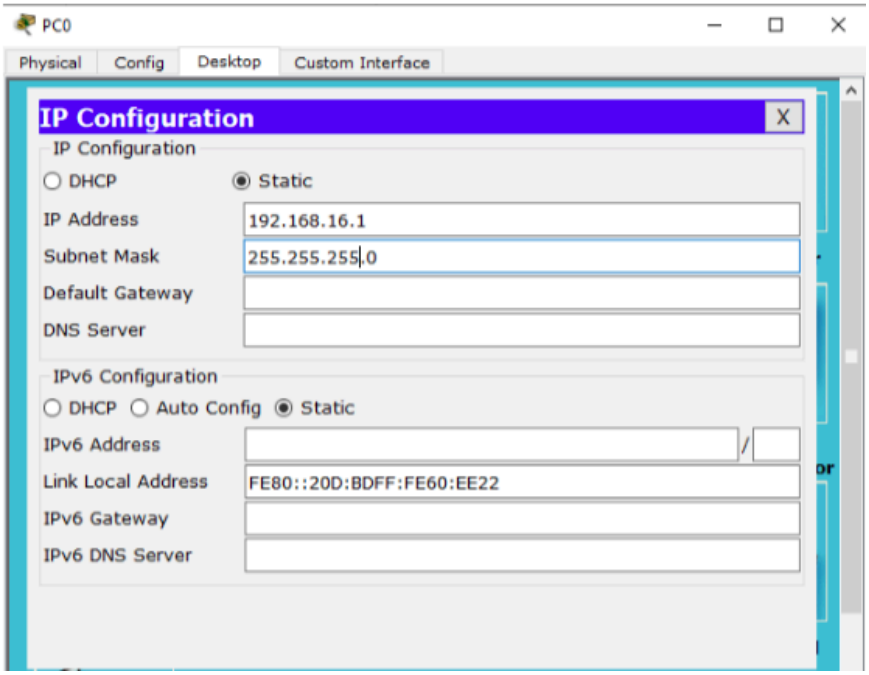



Cisco Packet Tracer Student
File Edit Options View Tools Extensions Help
Logical
[Root]
New Cluster
Move Object
Set Tiled Background
Viewport
PC-PT
PC0
2960-24TT
Switch0
PC-PT
PC1
Time: 00:04:23
Power Cycle Devices Fast Forward Time
Realtime
Connections
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination


PC0
Physical
Config
Desktop
Custom Interface
IP Configuration
X
IP Configuration
DHCP
Static
IP Address
192.168.16.1
Subnet Mask
255.255.255.0
Default Gateway
DNS Server
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
Link Local Address
FE80::20D:BDFF:FE60:EE22
IPv6 Gateway
IPv6 DNS Server

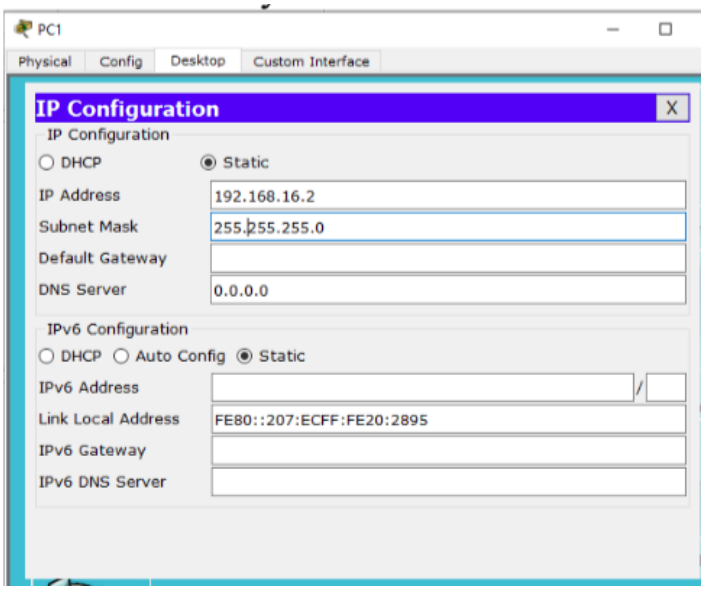
PC1
Physical
Config
Desktop
Custom Interface
IP Configuration
IP Configuration
DHCP
Static
IP Address
192.168.16.2
Subnet Mask
255.255.255.0
Default Gateway
DNS Server
0.0.0.0
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
Link Local Address
FE80::207:ECFF:FE20:2895
IPv6 Gateway
IPv6 DNS Server

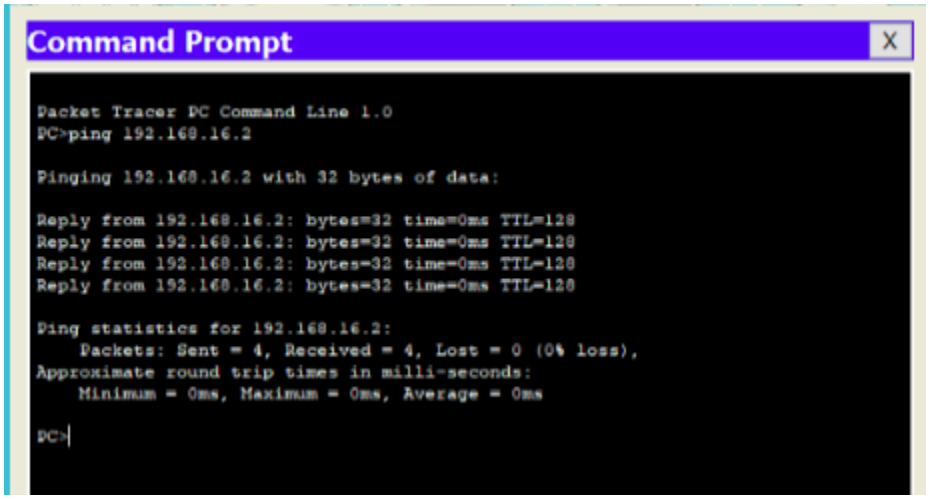
Command Prompt
Packet Tracer PC Command Line 1.0
PC>ping 192.168.16.2
Pinging 192.168.16.2 with 32 bytes of data:
Reply from 192.168.16.2: bytes=32 time=0ms TTL=128
Reply from 192.168.16.2: bytes=32 time=0ms TTL=128
Reply from 192.168.16.2: bytes=32 time=0ms TTL=128
Reply from 192.168.16.2: bytes=32 time=0ms TTL=128
Ping statistics for 192.168.16.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
PC>

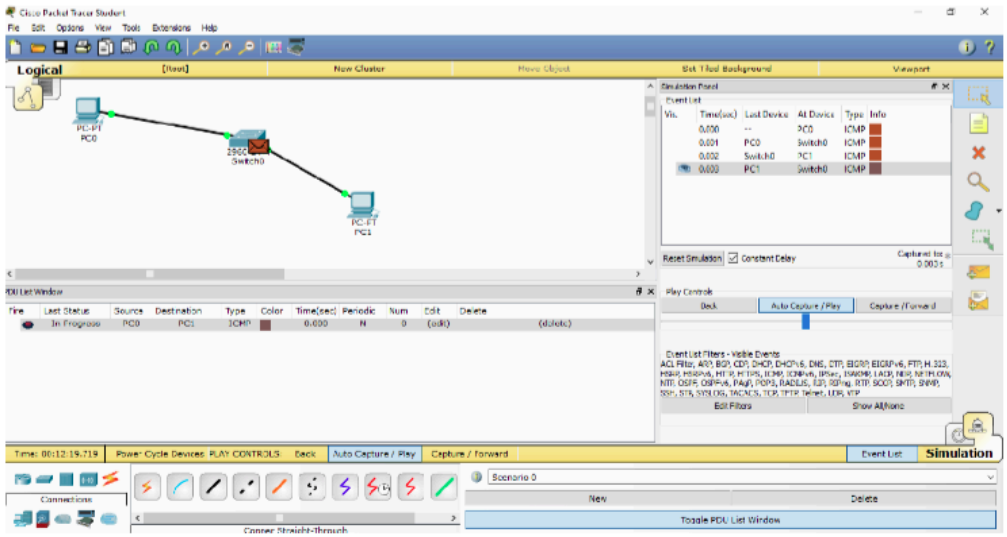
Logical
PC-PT
PC0
2960
Switch0
PC-PT
PC1
Simulation