



EXPERIMENT 9

Design a simple topology and configure with one router, two switches and PCs using Cisco Packet Tracer

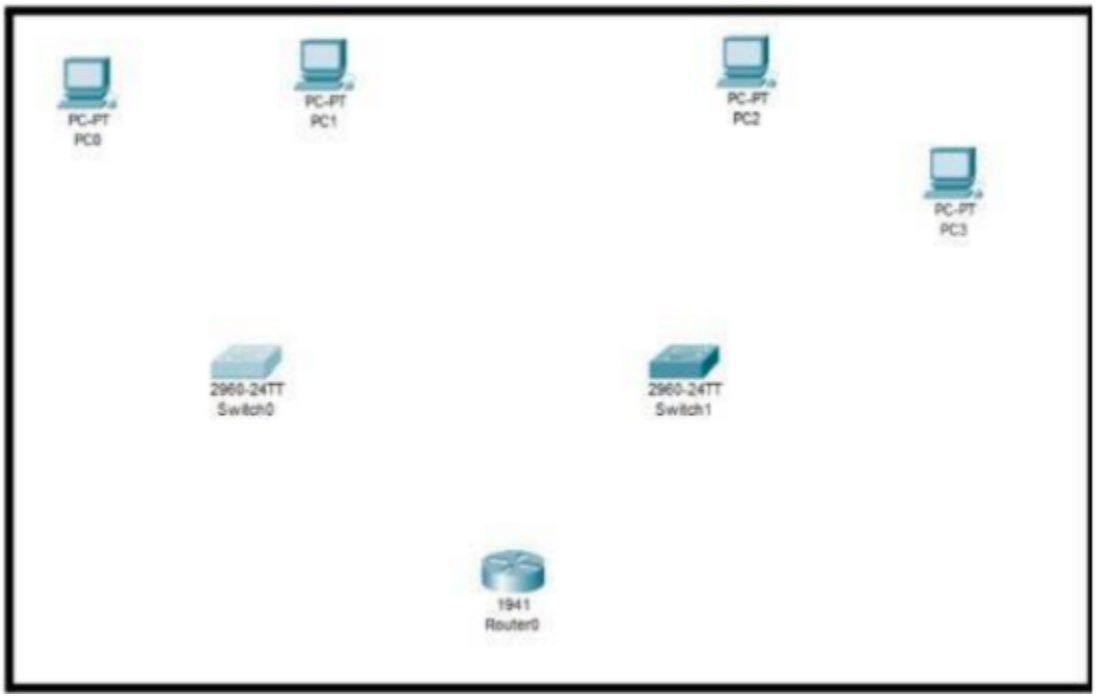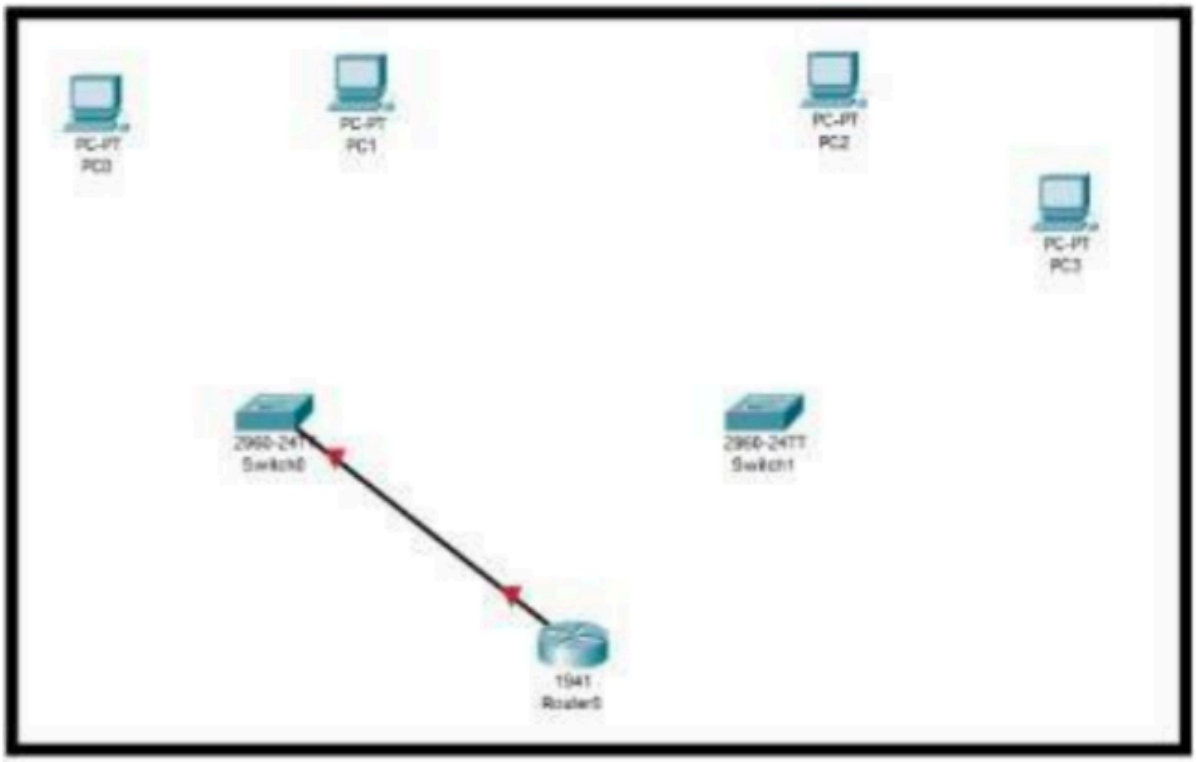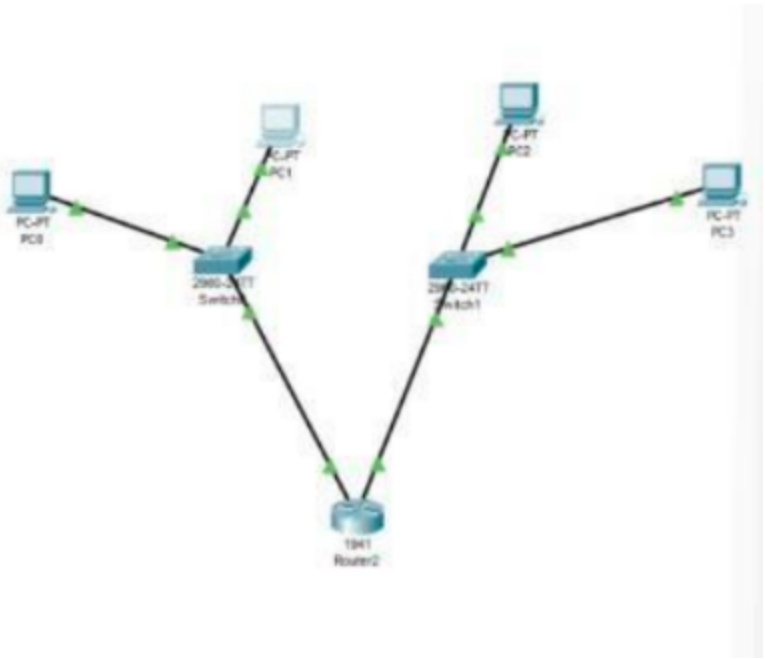

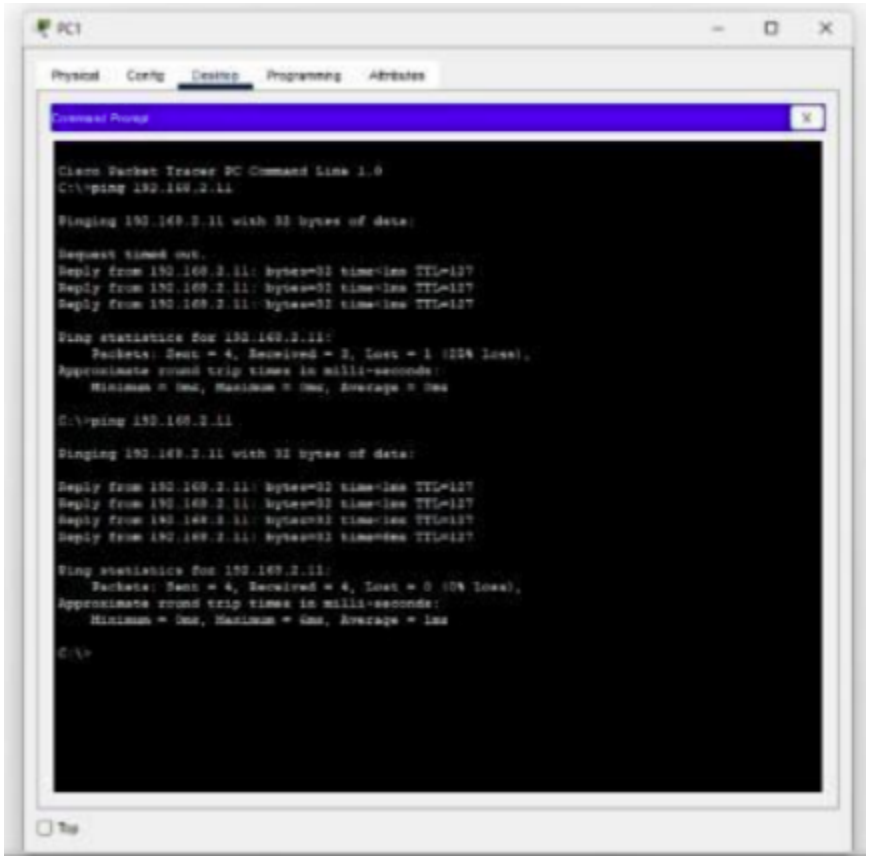


PC-PT
PC0
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
Switch0
Switch1
1941
Router2


PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.11
Pinging 192.168.2.11 with 32 bytes of data:
Request timed out.
Reply from 192.168.2.11: bytes=32 time<1ms TTL=127
Reply from 192.168.2.11: bytes=32 time<1ms TTL=127
Reply from 192.168.2.11: bytes=32 time<1ms TTL=127
Ping statistics for 192.168.2.11:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.2.11
Pinging 192.168.2.11 with 32 bytes of data:
Reply from 192.168.2.11: bytes=32 time<1ms TTL=127
Reply from 192.168.2.11: bytes=32 time<1ms TTL=127
Reply from 192.168.2.11: bytes=32 time<1ms TTL=127
Reply from 192.168.2.11: bytes=32 time=0ms TTL=127
Ping statistics for 192.168.2.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top