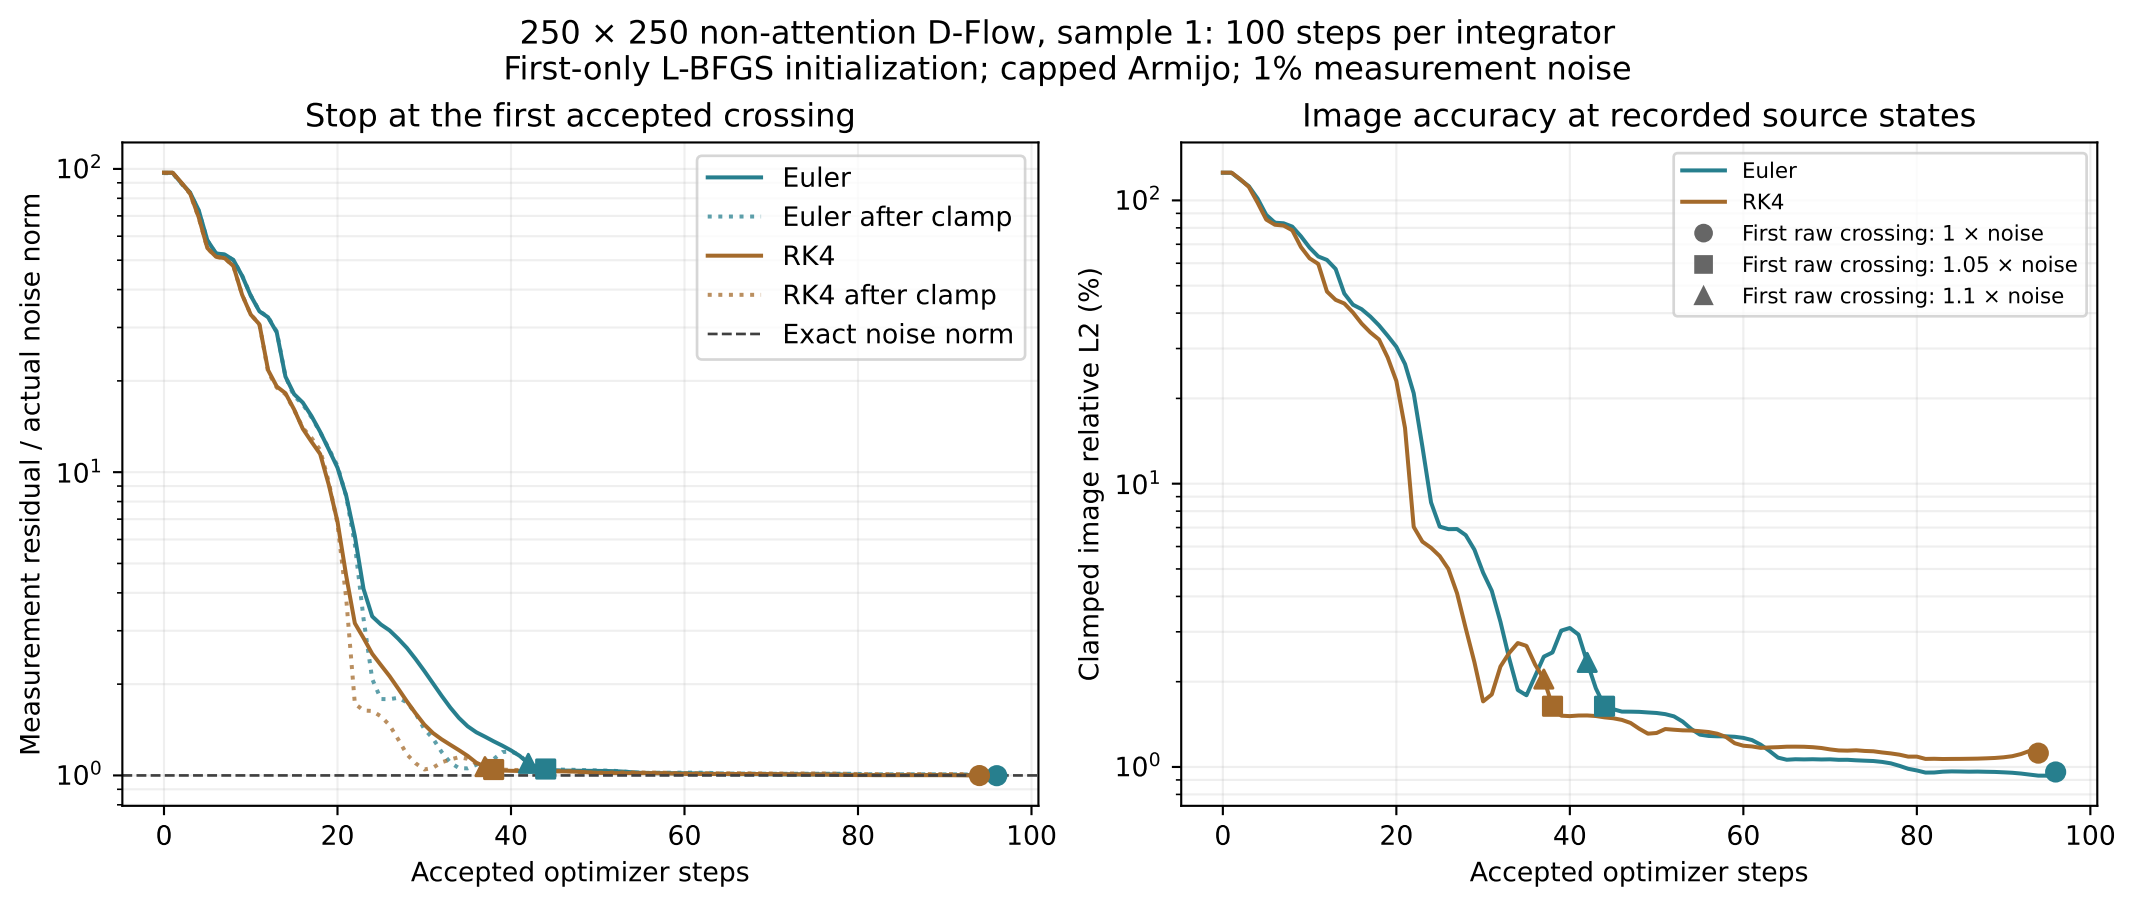
250 × 250 non-attention D-Flow, sample 1: 100 steps per integrator
First-only L-BFGS initialization; capped Armijo; 1% measurement noise
Stop at the first accepted crossing
Measurement residual / actual noise norm
Accepted optimizer steps
Euler
Euler after clamp
RK4
RK4 after clamp
Exact noise norm
Image accuracy at recorded source states
Clamped image relative L2 (%)
Accepted optimizer steps
Euler
RK4
First raw crossing: 1 × noise
First raw crossing: 1.05 × noise
First raw crossing: 1.1 × noise