



EXPERIMENT-9

Implementation of SUBNETTING in CISCO PACKET TRACER simulator.

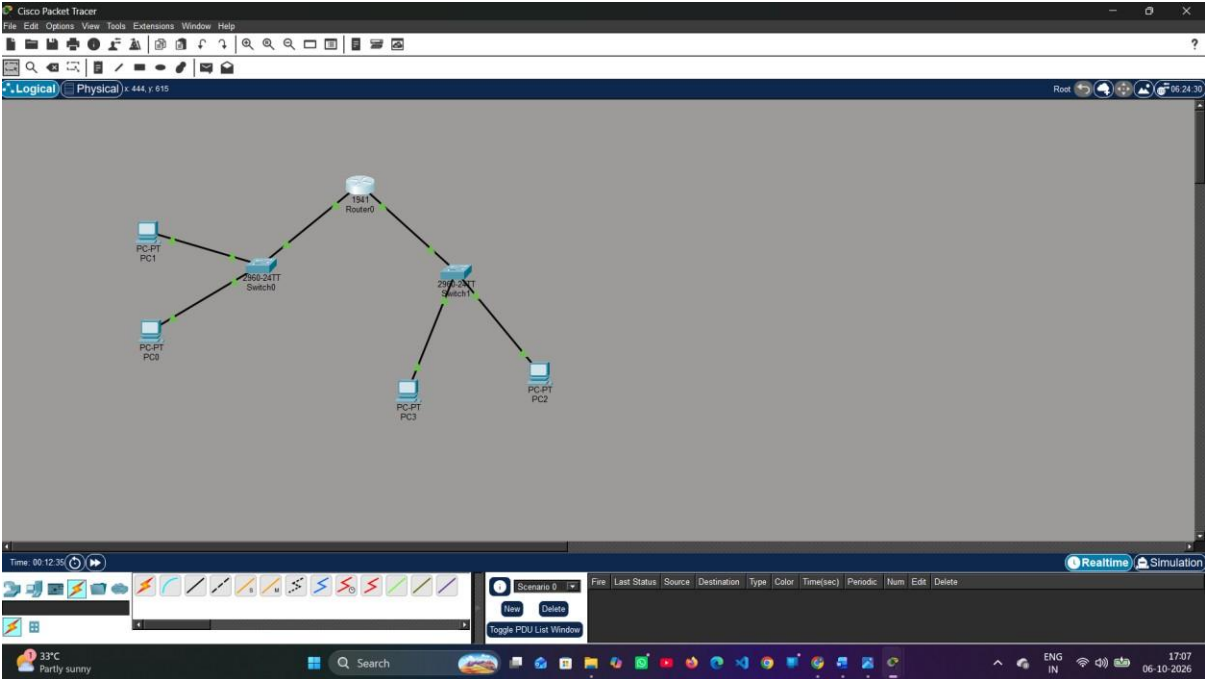

```
Router0
Physical Config CLI Attributes
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: NO
Press RETURN to get started!

Router>configure terminal
% Invalid input detected at '^' marker.
Router>interface gigabitEthernet 0/0
% Invalid input detected at '^' marker.
Router>ip address 192.168.1.1 255.255.255.0
% Invalid input detected at '^' marker.
Router>no shutdown
Translating "no"...domain server (255.255.255.255)
Router>enable
% Unknown command or computer name, or unable to find computer address
Router>configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gigabitEthernet 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-3-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
Router(config)#interface gigabitEthernet 0/1
Router(config-if)#ip address 192.168.2.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-3-CHANGED: Interface GigabitEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up
Router(config)#exit
Router>
!SYS-5-CONFIG_1: Configured from console by console
```

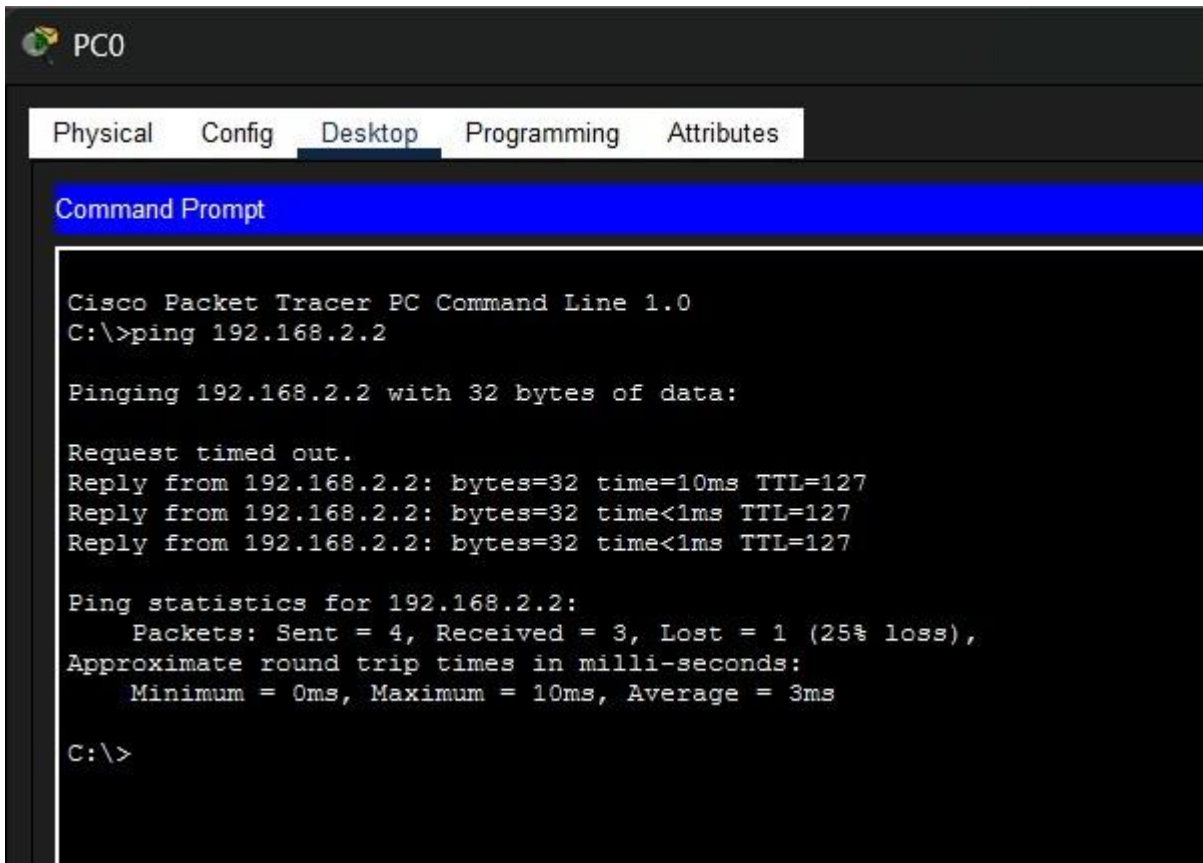

The screenshot shows a PC0 interface in Cisco Packet Tracer. The 'Desktop' tab is selected, displaying a 'Command Prompt' window. The window title is 'Cisco Packet Tracer PC Command Line 1.0'. The command 'C:\>ping 192.168.2.2' has been entered. The output shows a successful ping with 32 bytes of data, a request timed out, and three successful replies from 192.168.2.2 with times of 10ms, <1ms, and <1ms, all with a TTL of 127. Ping statistics for 192.168.2.2 are also displayed, showing 4 packets sent, 3 received, and 1 lost (25% loss). The approximate round trip times in milliseconds are: Minimum = 0ms, Maximum = 10ms, and Average = 3ms. The prompt 'C:\>' is visible at the bottom.

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.2: bytes=32 time=10ms TTL=127
Reply from 192.168.2.2: bytes=32 time<1ms TTL=127
Reply from 192.168.2.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 3ms

C:\>
```