

Garment Conveyor Correction



SOURCE REFERENCE



CORRECTED DESIGN INTENT



The conveyor must follow the supplied machine reference: overhead track, rounded end, top motor housing, hook chain and T-shaped floor supports. All hanging garments are replaced with long white branded garment bags.

REFERENCE-BASED SHAPE

WHITE LONG BAGS

IN & OUT LOGO

ROYAL PLUM FRAME

SERVICE ENVELOPE


Four-Side Visual Direction



Use this page as the visual target for the supplier and interior contractor. Exact mechanism, chain pitch and capacity must follow the selected conveyor model.

Footprint & Plan Coordination

INDICATIVE TOP PLAN

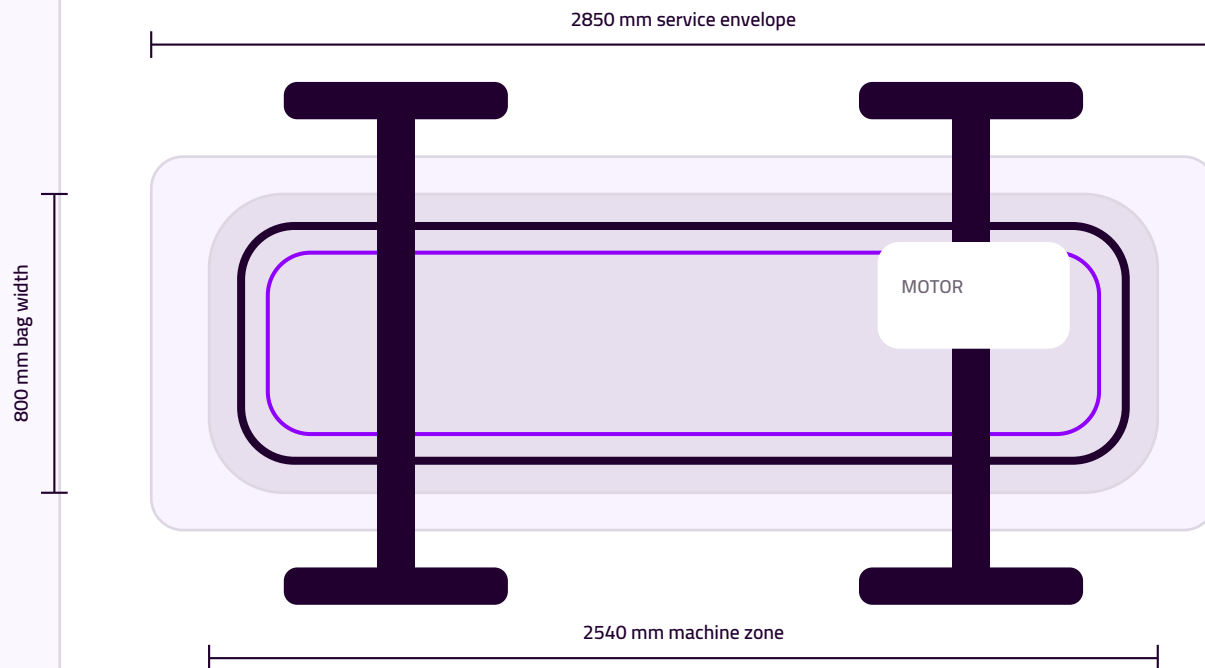



PLAN RULES

- Place the conveyor in the planned production zone beside the wall.
- Keep customer-facing circulation visually clean; avoid blocking reception sightline.
- Allow service access to motor cover and chain inspection points.
- Do not fix wall cabinets or lighting where they block conveyor movement.

DIMENSION BASIS

- Machine zone shown: approx. 2540 x 800 mm.
- Service envelope: approx. 2850 x 1000 mm.
- Final dimensions depend on supplier model and hook capacity.
- Verify ceiling, lights, AC and wall clearance on site.

Front, Back & Side Elevations

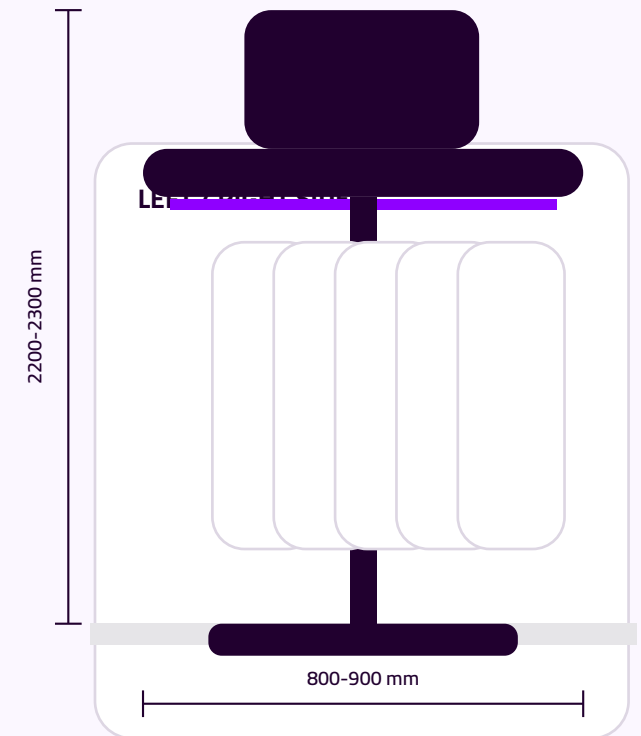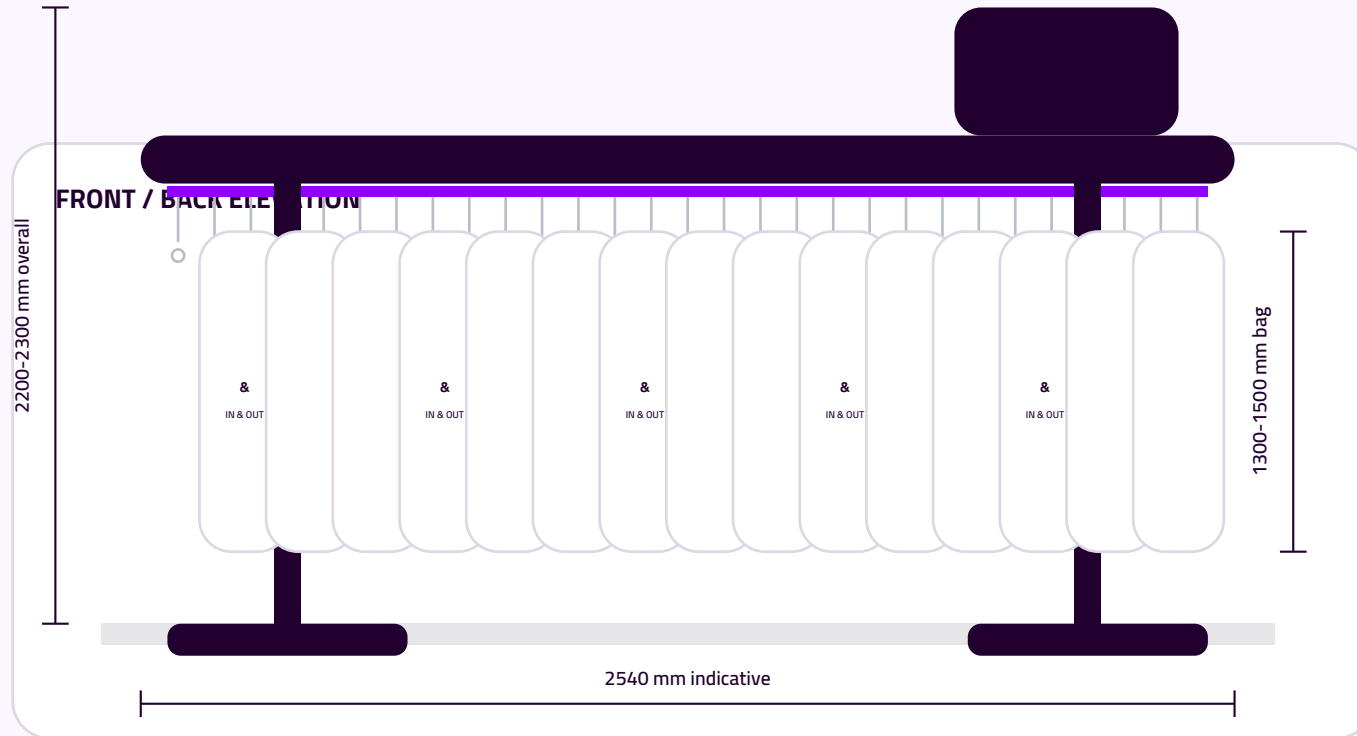

ELEVATION NOTES

- Overall height should typically sit around 2200-2300 mm, subject to supplier model and ceiling height.
- Bottom of garment bags should remain at least 150 mm above finished floor for cleaning and airflow.
- Use deep royal plum powder coating or approved HPL/paint finish for visible frame parts.
- Use brushed silver or stainless hooks, chain and exposed hardware. Keep moving parts serviceable.
- Add a subtle purple LED line only if it does not interfere with maintenance or safety.

White Garment Bag Branding

BAG MOCKUP



BAG SPECIFICATION

- Long opaque white garment bag. Avoid transparent plastic for the premium reception look.
- Logo centered on upper-middle front area, printed in royal plum and purple.
- Suggested logo print width: 220-300 mm depending on bag size.
- Use breathable but clean-looking material if garments remain bagged for long periods.

VISUAL RULES

- All visible hanging items on the conveyor should read as white branded bags.
- No mixed random colours facing the customer route.
- Keep barcode or order tag small and on the side or lower rear.
- Logo must use the refreshed circular IN & OUT mark from the identity package.

Supplier & Contractor Handover

WHAT TO CONFIRM BEFORE ORDERING

- Exact conveyor model, load capacity, hook count, chain speed and motor power.
- Final length, width, turning radius, support positions and floor fixing plate size.
- Required power supply, switch location, emergency stop and maintenance access.
- Noise level and vibration control suitable for a compact laundry branch.
- Clearance between conveyor, wall, ironing tables, cabinets, lighting, sprinklers and AC outlets.

CONTRACTOR NOTES

- Do not fabricate surrounding joinery until supplier shop drawing is approved.
- Mark motor side and service side clearly on the plan.
- Keep the plum frame visible and clean; avoid hiding it behind storage.
- Protect moving parts from dust during construction.

OWNER APPROVAL

- Approve four-side visual direction.
- Approve white bag length and logo size.
- Approve exact conveyor supplier model.
- Approve final installed position after site measurement.