



VISUAL IDENTITY & INTERIOR CONCEPT

NEW BRANCH / DESIGN ENGINEER BRIEF

ROYAL | CLEAN | OPERATIONAL

CONCEPT DESIGN - NOT FOR CONSTRUCTION

IN & OUT LAUNDRY



Primary Logo Refresh

The refreshed mark keeps the original IN / OUT directional idea and ampersand DNA, then reorganises them into a cleaner circular system that matches the new royal-purple interior identity.

SOURCE BRAND MARK



REFRESHED PRIMARY LOCKUP



USE THE APPROVED VECTOR ARTWORK FOR FABRICATION - DO NOT TRACE THE 3D RENDERERS

Design Direction

Premium cleanliness without operational friction

The branch uses a bright white base, deep-plum architectural blocks and restrained royal-violet light. The customer sees a refined brand; the team gets a durable, easy-to-clean workplace.

BRAND IMPRESSION

Premium, organised, trustworthy, quick and visibly clean.
Never nightclub-like or over-saturated.

COLOUR BALANCE

70% white/pale lavender, 20% deep plum, 8% silver and
2% royal-violet light.

OPERATION FIRST

Every aesthetic decision must protect circulation,
maintenance access, ventilation and hygiene.



THE SPATIAL PROMISE

Customers see order and cleanliness from the first step. Staff find every tool in place without crowding the workflow.

Colour System



ROYAL PURPLE

#8F00FF

Wayfinding and light accents



DEEP ROYAL PLUM

#21002F

Counter, fascia and strong fields



SATIN VIOLET

#C026D3


Secondary and digital accent



PALE LAVENDER

#FBF7FF


Backgrounds and ceilings

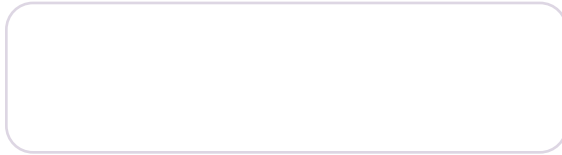

PURE WHITE

#FFFFFF

Walls and work surfaces

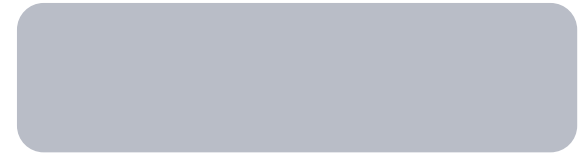

BRUSHED SILVER


#B9BDC7

Letters, plinths and equipment

COLOUR EXCLUSIONS

No blue, teal, green, orange or gold in branded architectural elements. Do not cover large production surfaces in purple.

Spatial Zoning & Workflow

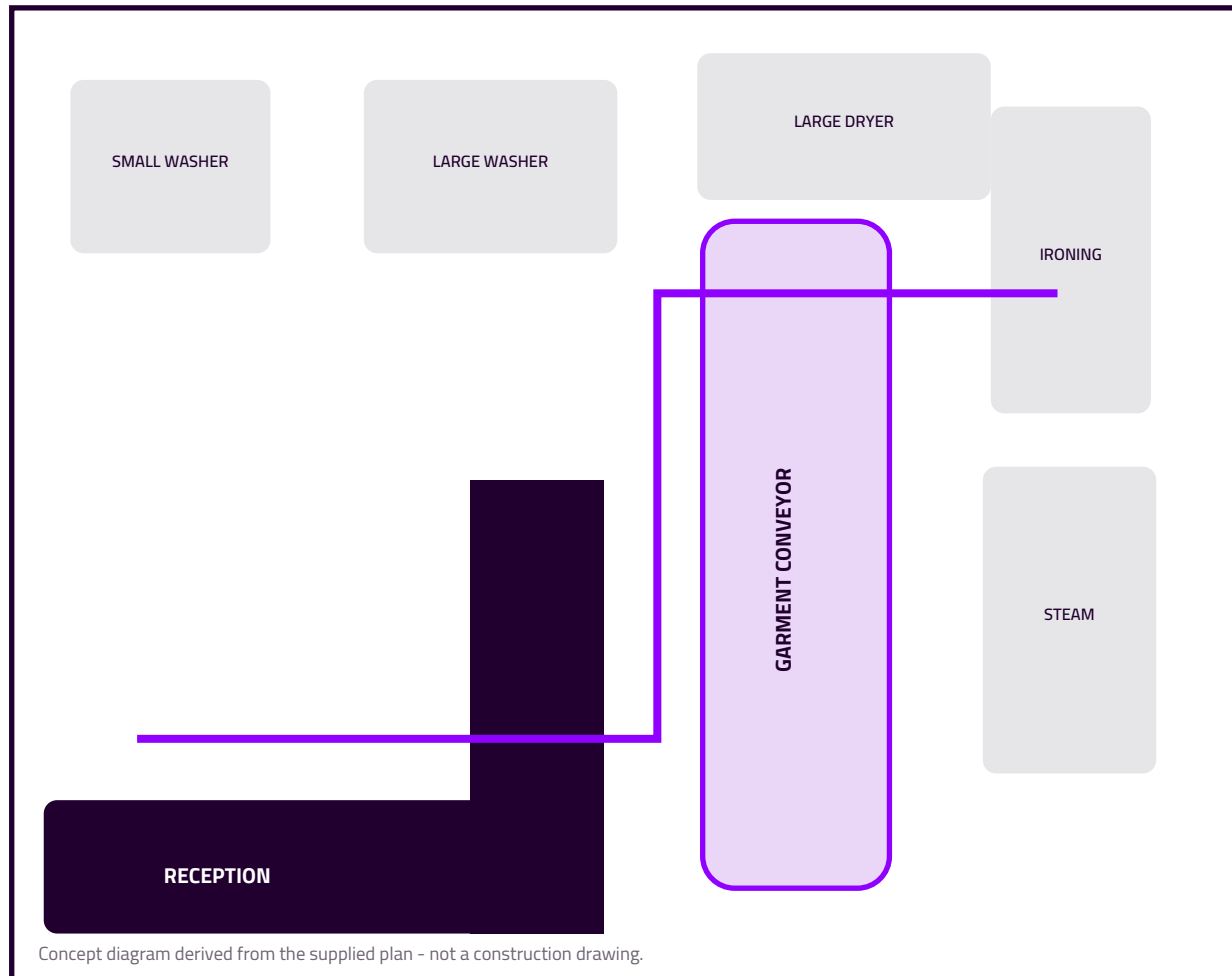

RECOMMENDED SEQUENCE

- Receive and inspect at the counter.
- Move orders to washing and drying without crossing the customer route.
- Iron or steam with tools stored above each station.
- Hang and sort finished garments on the conveyor.
- Return completed orders to reception for collection.

CLEAR CIRCULATION

Target 1000 mm clear on the primary route and 900 mm local minimum, subject to authority and accessibility requirements.

Reception Counter & Feature Wall



THE PRIMARY BRAND MOMENT

A calm deep-plum counter, white worktop, controlled violet reveal and a fluted white logo wall visible from the street.

WHITE QUARTZ

MOISTURE-RESISTANT HPL

STAINLESS PLINTH

SERVICEABLE LED

HIDDEN CABLES


The refreshed circular brand mark is centred on the customer sightline and shown as serviceable dimensional signage.

Indicative Counter Dimensions

FABRICATION NOTES

INDICATIVE FRONT ELEVATION

All dimensions in millimetres

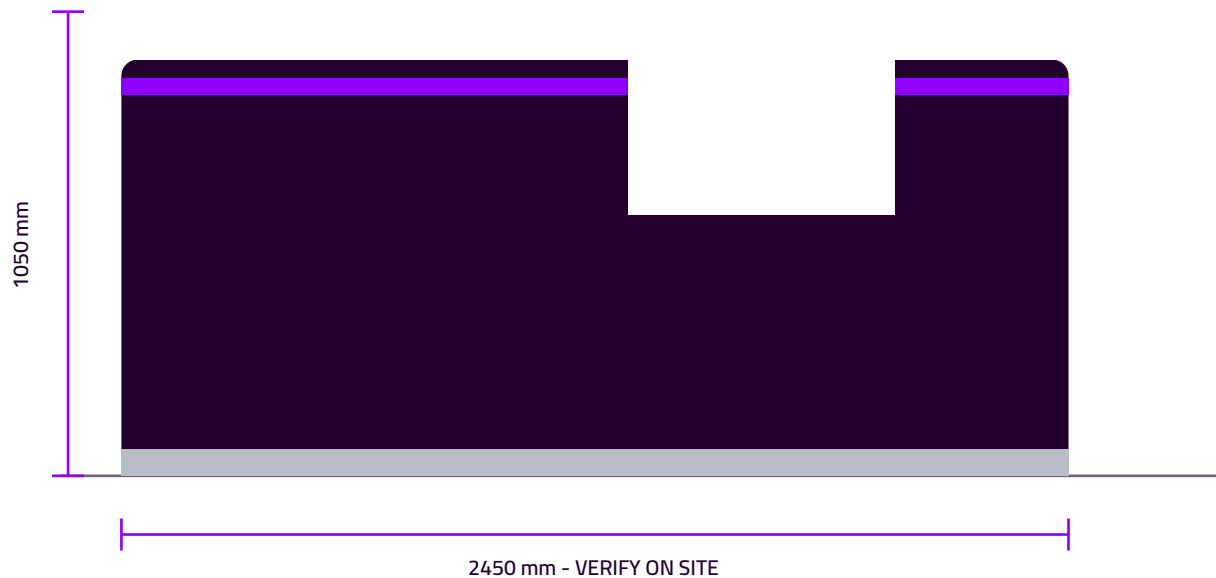

- Staff worktop height: approx. 1050 mm; worktop depth: 650-700 mm.
- Accessible lowered customer section: 760-800 mm high and at least 900 mm wide where required.
- 30-40 mm visual thickness white quartz or solid surface with softened edges.
- Moisture-resistant HPL body on marine plywood or approved compact board.
- 100 mm stainless plinth and LED in aluminium profile with opal diffuser.
- Lockable internal service access for power, data, UPS and POS cables.

External Storefront



- Use the refreshed circular IN & OUT mark consistently on fascia, interior wall and side panel.
- Use silver or white channel letters with a restrained violet halo.
- Suggested letter height: 350-500 mm, subject to site survey and authority approval.
- Frosted privacy band: approximately 850-1200 mm above finished floor.
- Keep the entrance threshold accessible and the storefront visually open.

Production Area & Overhead Storage



350-400 mm DEEP

SAFE HEAD CLEARANCE

STEAM-RESISTANT HPL

4000K TASK LIGHT

SOFT-CLOSE DOORS

Do not store flammable or heat-sensitive products above steam equipment. Final clearances follow each manufacturer's manual.

Materials & Finishes Schedule

ELEMENT	SPECIFICATION
GENERAL FLOOR	Light-grey commercial porcelain, R10 slip resistance, limited joints and medium-grey grout.
EQUIPMENT FLOOR	Same finish or higher-rated system to drainage design, with hygienic coved skirting.
WALLS	Washable paint or white hygienic panels in splash and steam zones.
COUNTER	Matt deep-plum HPL, white quartz top and stainless-steel 304 plinth.
LOGO WALL	Warm-white fluted panels with removable access around power and service points.
OVERHEAD STORAGE	Matt white moisture-resistant HPL, plum detail band and soft-close hardware.
FASCIA	Matt deep-plum ACP with UV-resistant finish and detailed movement joints.
LETTERS	Coated aluminium or stainless steel, 4000K face light and low-output violet halo.

Contractor to submit physical samples for colour, texture and gloss approval before procurement.

Signage, Typography & Lighting

PRIMARY BRAND ART

Use the refreshed circular mark and approved vector artwork. Do not redraw the logo from a render or screenshot.

TYPOGRAPHY

Cairo SemiBold for bilingual wayfinding and labels. Use short, high-contrast messages with generous spacing.

SECONDARY EMBLEM

The circular emblem may be used alone on glass, doors, uniforms and small applications.

LIGHTING LAYERS

GENERAL

4000K / CRI 90+ / low glare



IRONING TASK

4000K / continuous under-cabinet



LOGO WALL

3500-4000K / soft wall wash



VIOLET ACCENT

Low output / dimmable



NON-NEGOTIABLES

- No exposed LED dots or visible drivers.
- No violet task light directly on garments.
- Consistent colour temperature in work zones.
- Separate circuits for signage, accent and task lighting.
- All drivers and transformers remain serviceable.

Technical Coordination & Handover

BEFORE SHOP DRAWINGS

- Complete site survey: storefront, levels, columns, doors and ceiling services.
- Confirm exact machine models, utility connections, ventilation and maintenance clearances.
- Issue counter, cabinet and signage shop drawings with fixing details and sections.
- Coordinate conveyor movement before fixing cabinets or lighting tracks.
- Approve HPL, quartz, ACP, frosted film and colour samples under site lighting.
- Combine electrical, plumbing, drainage, HVAC and fire systems in one coordinated drawing.
- Build a counter and logo-wall mock-up before full fabrication.
- Approve the refreshed logo as final vector artwork before signage manufacture.

DOCUMENT STATUS

Visual identity and concept-design brief ready for development into construction documents. All dimensions are indicative and must be verified on site and against equipment manuals.