

Washer & Dryer Equipment



Corrected equipment vision based on the submitted supplier PDFs: ED460E tumble dryer, GS7018E washer extractor, and LS100 dosing coordination.

EQUIPMENT

- ED460E commercial tumble dryer - Girbau Spain.
- GS7018E wet cleaning washer extractor - Girbau Spain.
- LS100 Venturi dosing unit - Seko Italy, coordinated with washer.
- Royal identity applied only as subtle trim and decals.

IMPORTANT

- This PDF is an interior/design coordination package.
- Final installation follows supplier manuals and MEP drawings.
- All utility clearances and service access must be verified on site.

ED460E Dryer - All Sides



Visual target: keep the industrial grey/black dryer body, large round door, rear exhaust/service access, with only restrained IN & OUT purple accents.

GS7018E Washer - All Sides



Visual target: keep the commercial washer proportions, stainless door, top control screen and rear water/drain connections, with restrained brand trim.

Footprint & Site Coordination

INDICATIVE PLAN

minimum service envelope to be finalized by supplier



PLAN NOTES


- Place washer near water, drain and dosing connections.
- Place dryer where exhaust duct can run directly and safely.
- Keep removable panels and rear service zones accessible.
- Do not block fire, AC, electrical isolation or maintenance routes.

CLEARANCE

- Show clear service envelope on final MEP plan.
- Allow door swing and loading basket movement.
- Use anti-vibration leveling and floor load verification.
- Confirm exact supplier clearance before ordering.

Relative Elevation & Key Dimensions

FRONT RELATIVE HEIGHTS

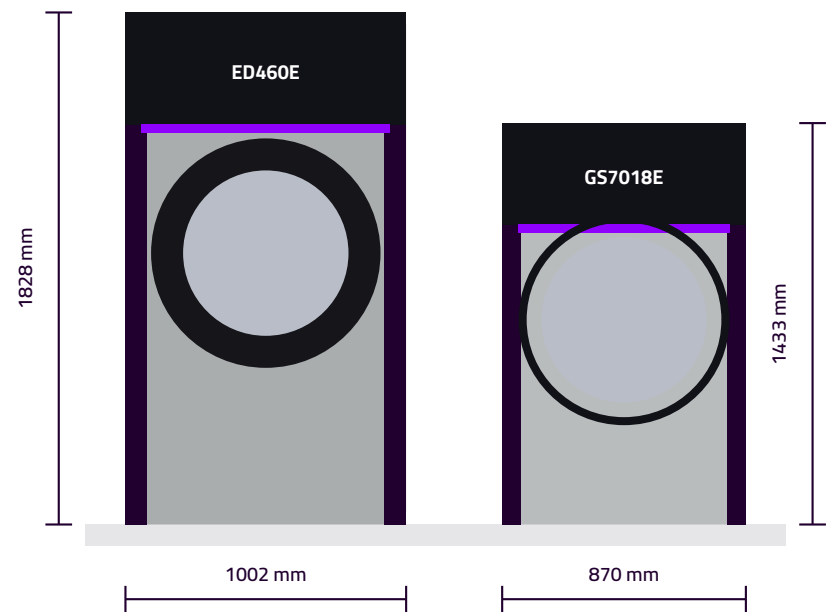

ED460E DRYER

Capacity	23 kg
Drum	940 dia x 663 L mm
Volume	460 lit
Door open height	695 mm
Dimensions	1002 x 1056 x 1828 mm
Weight	339 kg

GS7018E WASHER

Capacity	20 kg wet / 18 kg wash
Drum	700 dia x 459 D mm
Volume	177 dm3
Door opening	470 mm
Dimensions	870 x 975 x 1433 mm
Static load	499 kg

MEP, Dosing & Services

DRYER SERVICES - ED460E

- Power consumption: 24 kW.
- Applied voltage: 380-415 V / 3 Ph / 50 Hz.
- Isolator: 63 A.
- Exhaust outlet: 200 mm.
- Airflow: 802 CFM.
- Coordinate heat, ventilation and duct route before fixing cabinets.

WASHER SERVICES - GS7018E

- Power: 15.4 kW.
- Applied voltage: 380-415 V / 3 Ph / 50 Hz.
- Isolator: 32 A.
- Water connection: 2 x 19 mm, pressure 58 PSI.
- Consumption: 270 L/hr.
- Drain diameter: 76 mm.

LS100 DOSING UNIT

- Wall-mounted dosing system from the supplied GWET kit.
- Dimensions: 1166 x 160 x 270 mm.
- Power: 0.27 kW, 220/1/50, isolator 13 A.
- Keep chemical containers in a ventilated safety cabinet or tray.

COORDINATION RULES

- MEP contractor to provide final utility drawings.
- Supplier to approve exhaust, drain, water, isolation and anchoring.
- Provide shutoff valves, service loops and accessible isolation.
- Protect purple identity finishes from heat, water and chemicals.

Submitted PDF References



ED460E PDF

Technical Specification Sheet			
Model: ED460E	Made: GIRAUBAU - Spain	Reference:	Quantity:
Tumbler Dryer: High Performance & Energy Saving (Heat Capture) Electric Heated Capacity: 23 kg Ratio: 1/20 Drum: Diameter: 940 mm, Length: 663 mm, Volume: 460 lit Door Opening Height: 695 mm Power Capacity of Motor: 0.80 KW Power Capacity of Fan: 0.55 KW G. Drive: to control connection to the inverter, motor and microprocessor Speed Control: in manual or automatic mode Humidity Control residual: moisture control system is highly accurate & reliable Care Touch Dryer Drum: designed to achieve extremely delicate clothing treatment Trans Flow: the combination of radial air flow and axial allows to achieve an optimum drying cycle with reduced time Heat Capture: that avoid any air leakage and heat to the environment of the laundry 1. Stainless steel drum with care touch 2. Drum speed control 3. Drum reversing action 4. Humidity Control 5. Radial and axial air flow through the drum 6. Management control between invert motor & microprocessor			
SN	Installation Details	Units	Data
1	Power Consumption	KW	24
	Applied Voltage	V/Ph/Hz	380-415/3/50
2	Exhaust Voltage Isolator	Amps	63
	Exhaust Outlet	mm	200x3
3	Airflow	CFM	802
	Dimensions of the Machine	mm	1002X1050X1626
Height		kg	1326




GS7018E PDF

Technical Specification Sheet			
Model: GS7018E	Made: Giraubau - Spain	Reference:	Quantity:
Wet Cleaning Washer Extractor: High Speed, Freestanding, Electric Heated Capacity: 20kg (1/9), 1.8kg (1/10) Drum: Diameter: 700 mm, Depth: 459 mm, Volume: 177 dm³ Door Opening: 470 mm Floor to Door Height: 521 mm Washing Speed INTELI: 45 rpm Spin Speed: 1071 rpm G force: 450 Robustness, durability and reliability The redesigned floating system together with the Motor Guard sensor to monitor the machine at all times ensure the robustness and reliability for customer needs. Optimized features The new GS7018E goes a step further in terms of optimum operation thanks to the above mentioned acceleration. This device monitors and corrects any out-of-balance to ensure rapid positioning and outstanding spinning, and adapts to meet each customer's needs. Care Plus The innovative dosing design ensures not only top-quality washing but better care of linen and prolonging its useful life, which means lower power consumption, thanks to water extraction of moisture from the linen. GENUS, control over every variable Powerful, easy, intuitive and versatile New Genus control allows total versatility in programming, switching from control for professional bundles to standard at the press of a button. The two machines are completely different, adapted to wet Wet Cleaning laundry process with endless options to boost the profitability of your business. Constant 450G GENUS dryers have a powerful 450 G-force extract speed, kept up throughout the spin phase. This powerful spin enables us to increase productivity by 10% and cut the residual moisture level of linen during the wash, at the same time cutting heat energy costs and drying time by up to 20%. SmartConnectivity Ready When we talk about the new GENUS, we're talking about CONNECTIVITY. A totally revolutionary machine in the world of laundry. Equipped with Internet of Things (IoT) in GENUS. • Comprehensive data: minimal productivity, alarms, reports and more. • Different modules for productivity (PAP), maintenance (DAP) and improvements in services (SAP). • A smart machine for all parameters are connected to Genus control. Wi-Fi and 4G connection are also featured in this range. 360 Vision The new light status corner gives complete visibility, intuitiveness and agility in the laundry, showing the status of the washers at all times. This is thanks to an LED system at the top right corner connected to the Genus system. 10-inch user-interface screen The new user-interface screen on the Genus series is the biggest, easiest to use, most intuitive and robust on the market. It can be used even while wearing industrial gloves, and is waterproof and scratch-resistant. Genus Load Automatic weight detection for automatic adjustment of water, energy and chemicals, thanks to a precision weighing system connected to Genus control, to give a precise, intuitive and sustainable experience.			
Installation Details		Units	Data
Power	Kw	15.4	
	Applied Voltage	V/Hz/Ph	380-415/50/3
Normal Temp. Water Connection (Soft Water)	mm	3/2	
	Pressure	PSI	2X19
Consumption	l/h/yr	58	
	mm	270	
Drain Dia.	mm	76	
	Static load	kg	499
Dynamic Load	Kg	119	
	Dimensions of the Machine	WxDxHmm	870 875 1433



LS100 DOSING PDF

Technical Specification Sheet			
Model: LS100 VENTURI	Made: Seko - Italy	Reference:	Quantity:
DESCRIPTION: CHEMICAL DOSING PUMP LS100 Venturi is venturi inducers based dosing system for OPL laundry applications designed for Low maintenance and easy installation. With a modular design the range is composed by 2 main unit by 4 and 6 chemical inlets and an extension for 4 chemical inlets to manage up to 10 chemicals. A Multi-Washer module to manage installations with any combination of up to 4 washer extractors with a maximum machines load of around 150-200kg. Max Flowrates: Low Flow rate: 650 ml/min @ 1.5bar + High Flow rate: 1300 ml/min @ 2 bar + (flow derates with high viscosity fluids) Max suction: 6 meters long, 3 m lift			
SN	Installation Details	Units	Data
1	Normal Temp. Water Connection (Soft Water)	mm	190
	Pressure	bar	6 max.
2	Power	Kw	0.27
	Applied Voltage Isolator	V/Hz/Ph Amps	220V/50 15
3	Dimensions of the Machine	mm(WxDxH)	1165x185x270



Chemical start-up kit

1. OZERA COLOR GREEN 20kg
2. LIZERNA CARAT 20kg
3. LIZERNA CITRO 25kg
4. LIZERNA PROTEKEX 20kg
5. LIZERNA OLDOPOL QUICK 20kg



These thumbnails are included only to show the submitted source sheets used for design coordination. Supplier manuals override this concept package.

Engineer Handover Checklist

WHAT TO CONFIRM BEFORE INSTALLATION

- Confirm exact supplier models, machine serial drawings, clearances and utility locations.
- Confirm floor load capacity, anti-vibration requirements and machine leveling method.
- Confirm dryer exhaust duct size, duct route, airflow, heat discharge and make-up air.
- Confirm washer drain route, water pressure, soft water connection and dosing tie-in.
- Confirm electrical isolators, emergency access, maintenance panels and service routes.
- Approve final machine finish/branding decal size before applying any identity elements.

DESIGN APPROVAL

- Approve all-side visual direction for dryer.
- Approve all-side visual direction for washer.
- Approve interior corner arrangement.
- Approve LS100 dosing and chemical storage location.

SAFETY NOTES

- Keep chemicals away from heat and electrical panels.
- Use non-slip service floor and clear loading path.
- Do not cover ventilation or exhaust points with decor panels.
- Provide access for cleaning lint, drain and dosing maintenance.