

• Client List. py :: NaaradNotify()

Now in
code help
text

$modeid = -1 \Rightarrow$ Notify broadcast
 $\geq 0 \Rightarrow$ Notify all threads for modeid
 $cmd = -1 \Rightarrow$ Ignore cmd & src settings
 capture any cmd from any src.
 $\geq 0 \Rightarrow$ Capture for the given cmd, src pair

March 21st '25

• Why does the server still goes into an inf loop with "Not a JSON"?

• Naarad does not start by itself on reboot? Aug. 12, 2025

- Ask K5utt? some RPI expert? DONE
 - Which logs to look for?

naarad-restart.sh in
etc/rc.local.

• Detect com port timeout
 - issue "shutdown"
 - exit run().

in NaaradTopic2.py.

This exists The thread started in
initServer() in naarad.py.

This exists startNaarad() call in naarad.py --main--

• naarad.py --main--

while (1)
 initServer();
 startNaarad();

This is reboot

• Initialize settings, PacketHandler in the global scope of naarad.py.

This carries the general state of the system, including packet history automatic reboots.

Aug 19 '25

• Cleaned-up and re-factored imports in naarad.py.


- This allows naarad.py to be used directly as a simulator by loading a version of comPort.py which simulates arrival of OTA packets.

- This make the simulator.py a true simulator that can be used to test new devel. before deployment.

Jan. 23 '26

• The packet with "source=Init RFM" is generated in the VNO. If no pkt is received for 10 sec, the RFM is initialized.

• The comPort.readline() also times out at 10s.

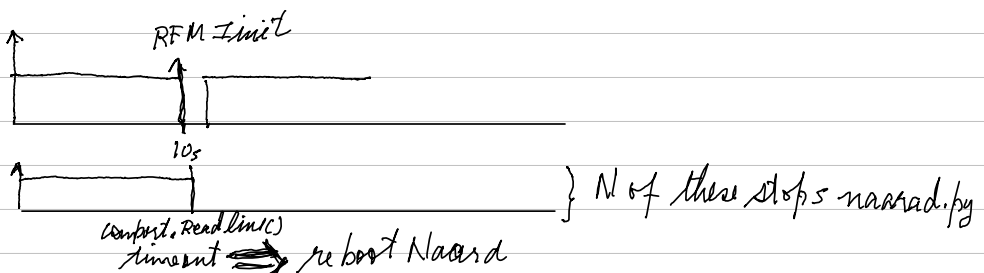

• Increase Init RFM timeout to several minutes (M)
- if no packet is received, reset RFM.

• comPort.readline() timeout $\xrightarrow{M^R} > M$. In that time either a real packet is received, or "Init RFM" pkt is received.
 $\Rightarrow$ The server will keep alive.

• If nothing is received for M^R sec. (not even "Init RFM"), then reboot naarad comPort. After N reboots, exit.