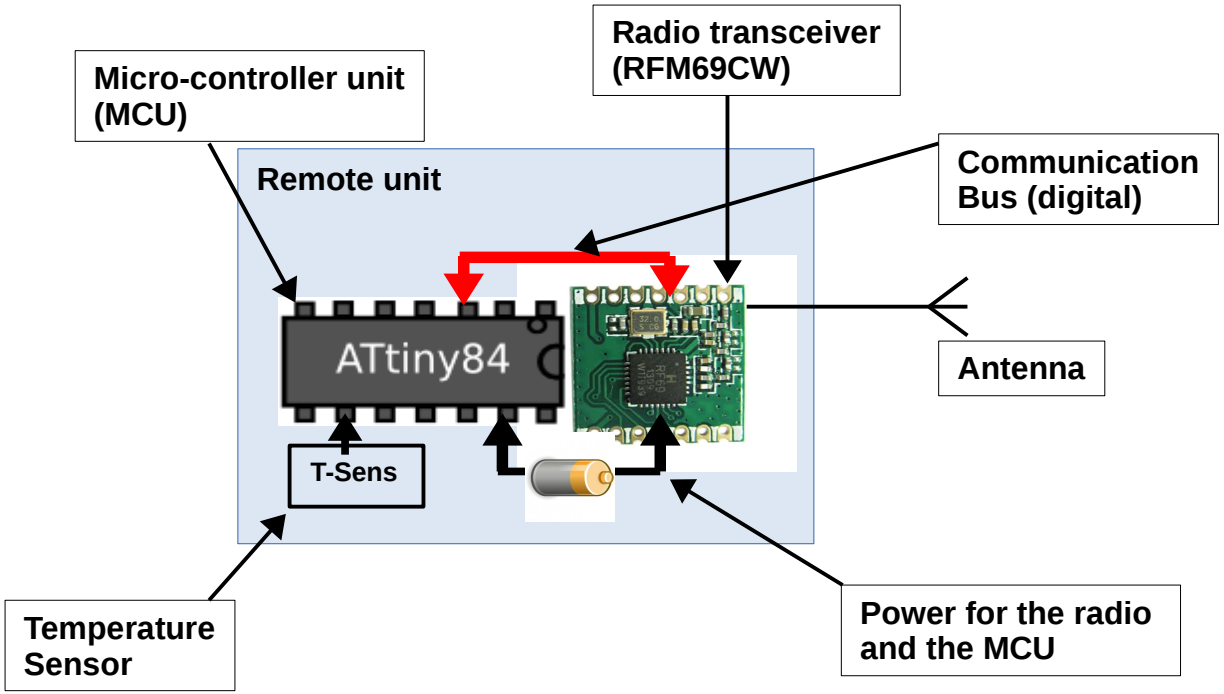
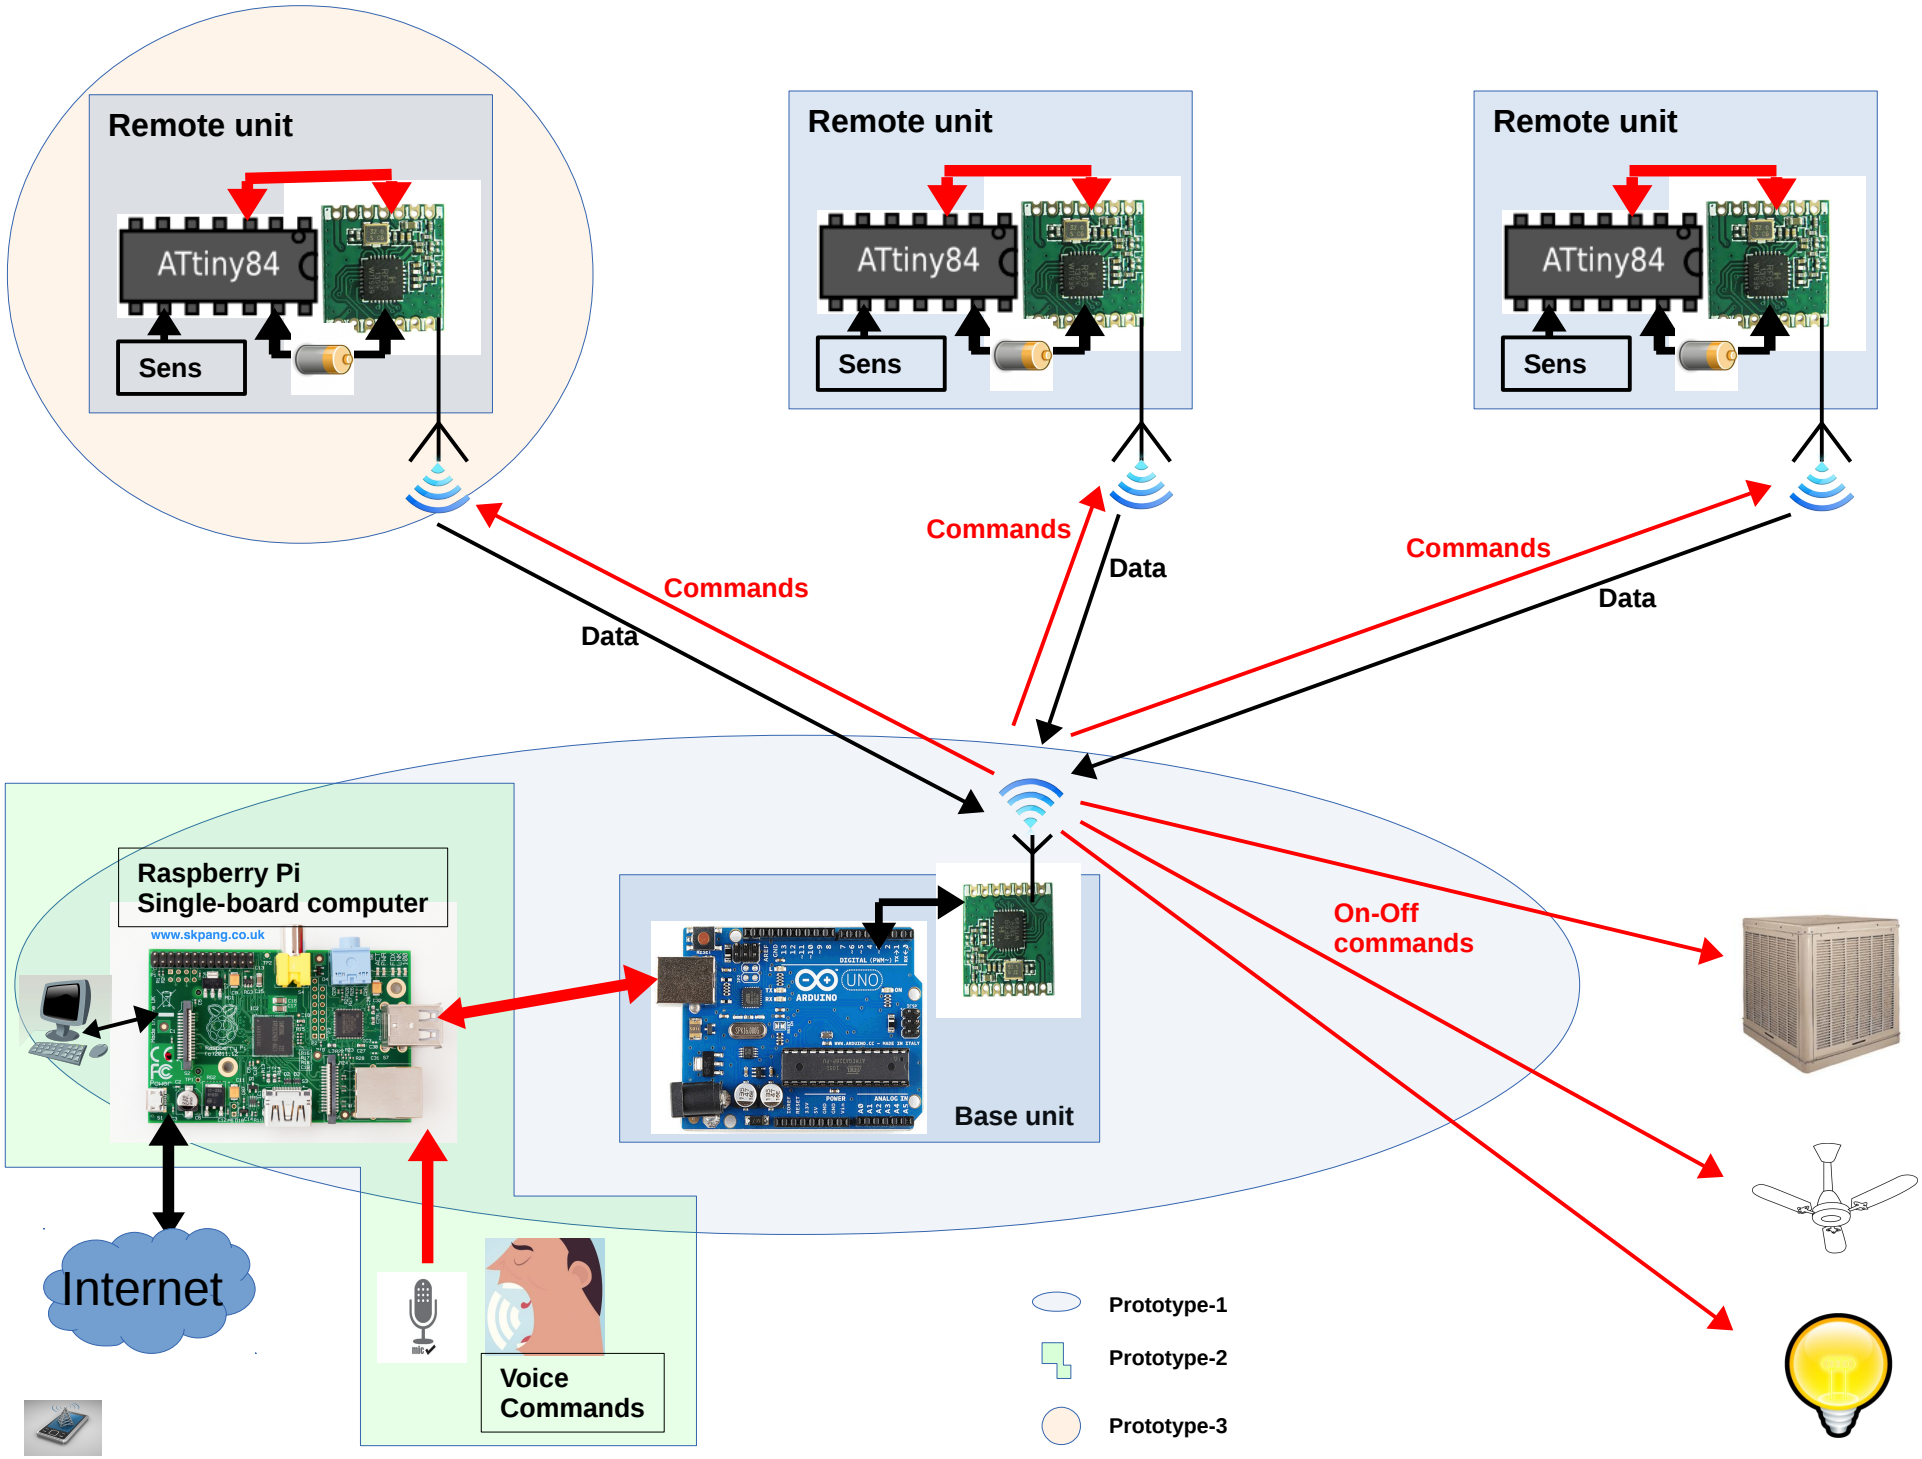


- The micro controller unit (MCU) is a specialized CPU with on-chip Analog-to-digital converters, analog and digital I/O pins, and even an internal temperature sensor which measures the temperature of the chip itself. The MCU I am using is called ATtiny84 (AT84).

- The radio transceiver (named RFM69CW) also has a smaller micro-controller (visible in the picture above as a rectangular chip). The AT84 is programmed to read the temperature from the sensor outside (T-Sens), convert it into digital value, and send it to the radio. The radio then transmits that value (or anything else it is asked to send).

- The unit is powered with 2xAA batteries. Hence is autonomous and can be placed anywhere. More sensors can also be added to it easily.


Remote unit
ATtiny84
Sens
Remote unit
ATtiny84
Sens
Remote unit
ATtiny84
Sens
Commands
Data
Commands
Data
Commands
Data
Raspberry Pi
Single-board computer
www.skpang.co.uk
Base unit
On-Off
commands
Internet
Voice
Commands
Prototype-1
Prototype-2
Prototype-3