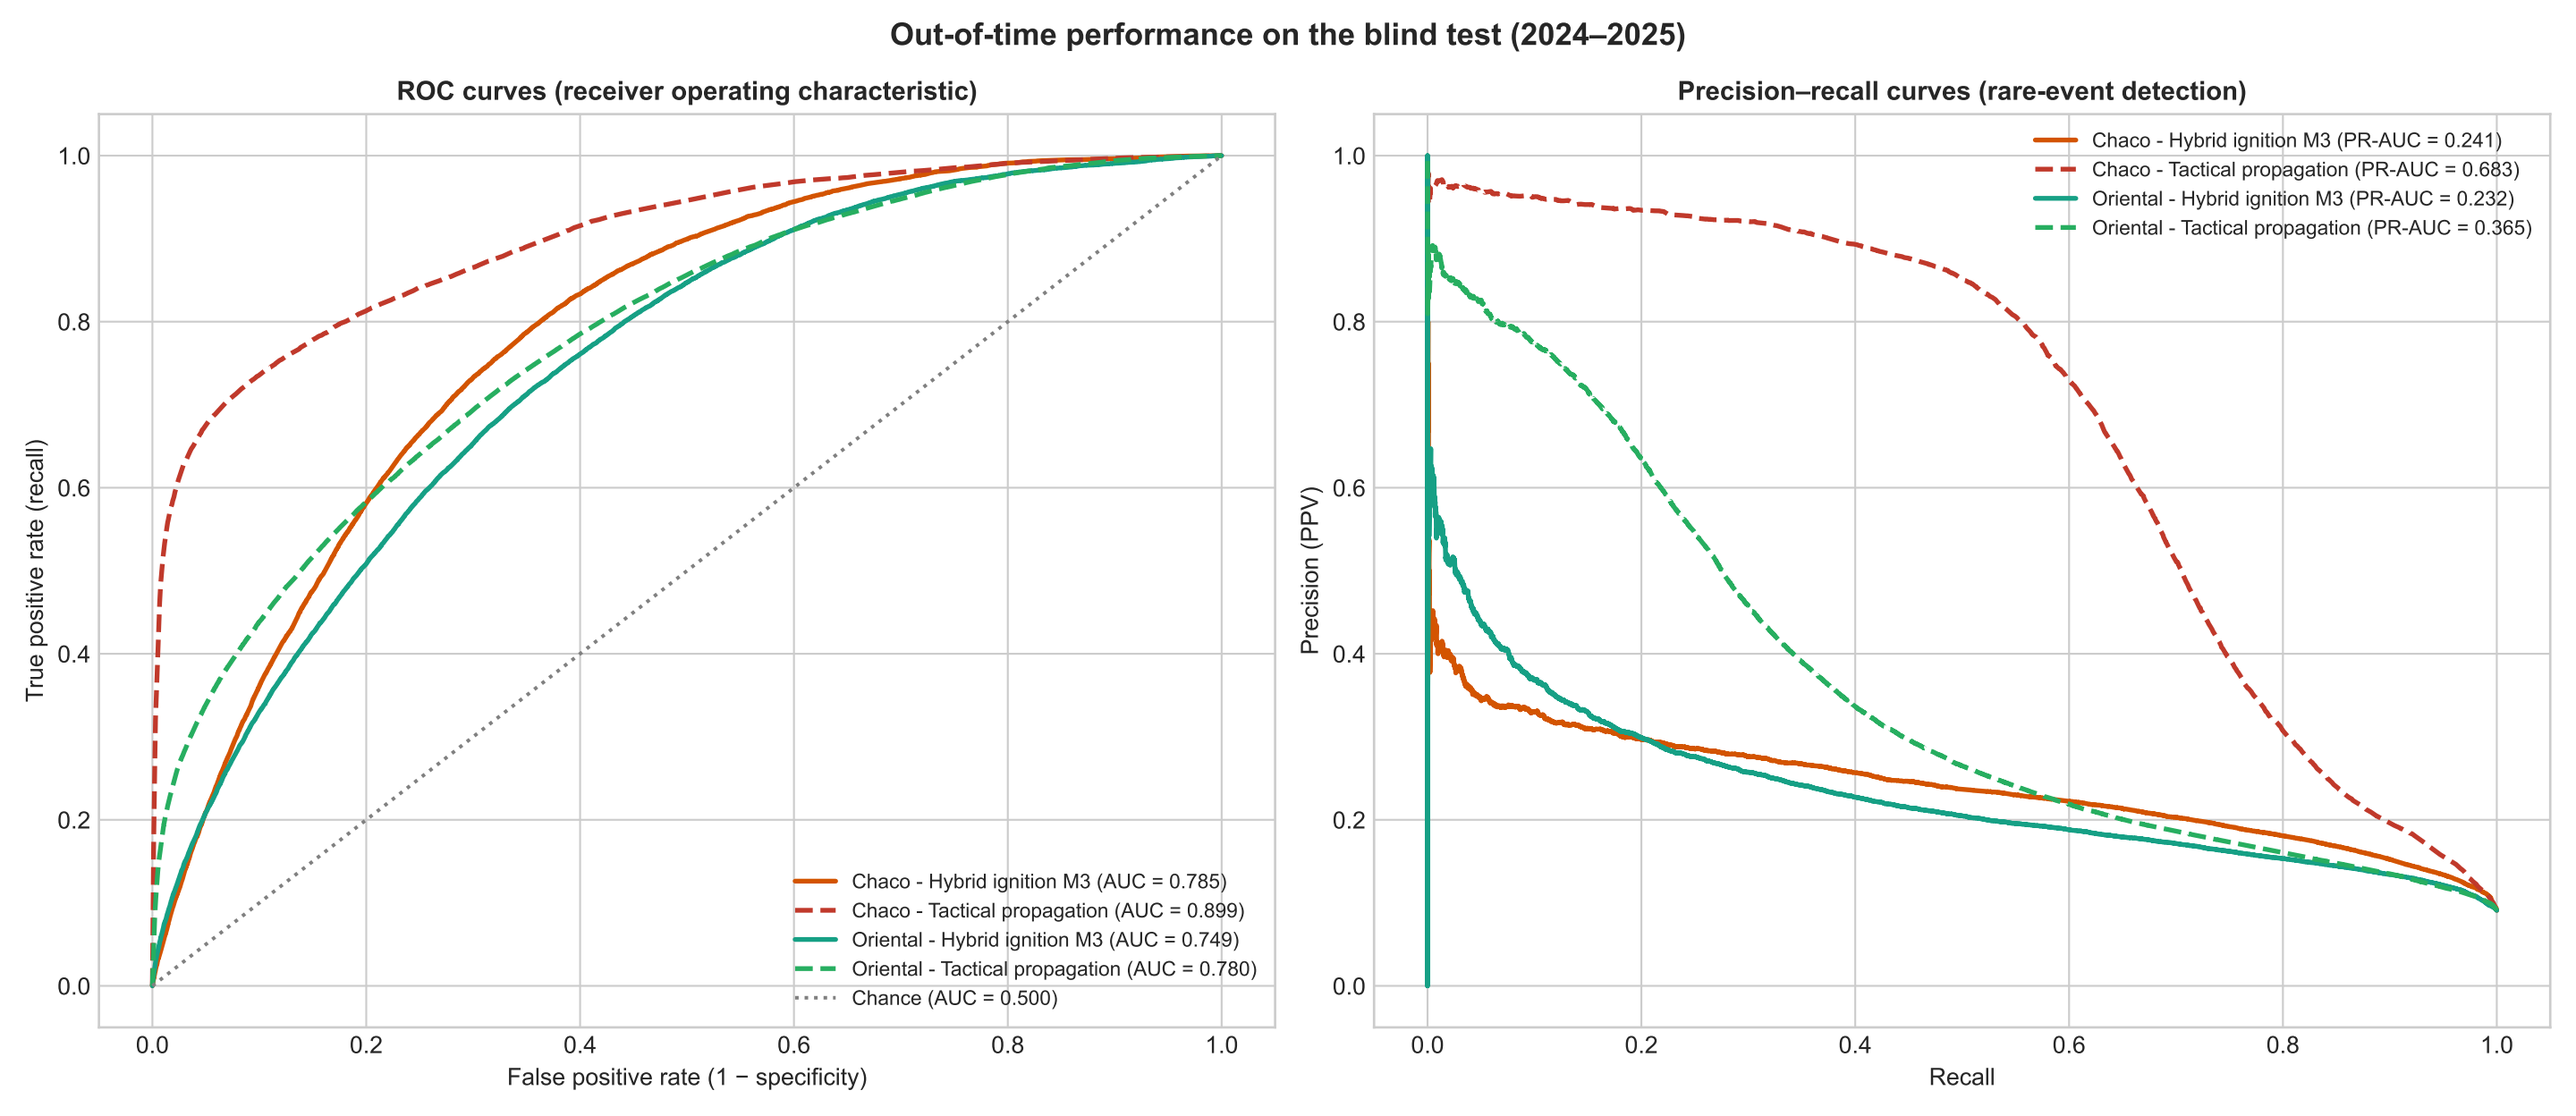

Out-of-time performance on the blind test (2024–2025)
ROC curves (receiver operating characteristic)
True positive rate (recall)
False positive rate (1 − specificity)
0.0
0.2
0.4
0.6
0.8
1.0
Chaco - Hybrid ignition M3 (AUC = 0.785)
Chaco - Tactical propagation (AUC = 0.899)
Oriental - Hybrid ignition M3 (AUC = 0.749)
Oriental - Tactical propagation (AUC = 0.780)
Chance (AUC = 0.500)
Precision–recall curves (rare-event detection)
Precision (PPV)
Recall
Chaco - Hybrid ignition M3 (PR-AUC = 0.241)
Chaco - Tactical propagation (PR-AUC = 0.683)
Oriental - Hybrid ignition M3 (PR-AUC = 0.232)
Oriental - Tactical propagation (PR-AUC = 0.365)