
INCENDIOS_PY · SOVEREIGN GEOAI SYSTEM

Decoupled Biophysical Ignition Hazard & Tactical Wildfire Propagation Framework

24-HOUR FORECAST · 1-km² RESOLUTION · SUB-SECOND INFERENCE

PHASE 1 Multisource Ingestion & Two-Stage Gating

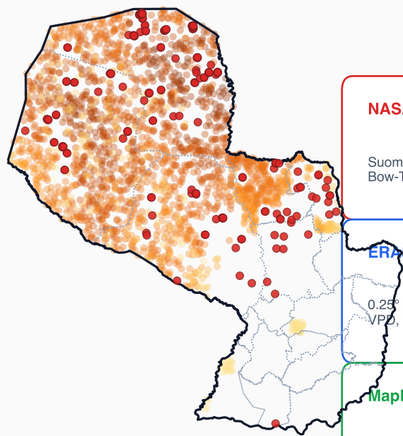

NASA FIRMS (VIIRS 375m)

Suomi-NPP, NOAA-20, NOAA-21
Bow-Tie filtered (scan ≤ 1.5 km)

ERA5-Land Reanalysis

0.25° grid (640 national nodes)
VPD, Wind, CDD, FFMC, ISI

MapBiomas Collection 4

30m aggregated to 1 km²
5 dominant fuel/forest classes

STAGE 1: KINEMATIC BIO-PHYSICAL GATING

Condition: VPD ≥ 0.8 kPa AND Rainfall 48h < 10 mm AND Fuel = 1

- Automatically excludes water, wet savannas & saturated air cells.
- Discards 92% of non-fire national territory with 0% false dismissal.
- Reduces computational space from 1.46B to 4.4M candidate cell-days.

PHASE 2 Decoupled Dual-Layer GeoAI Engine

MODE 1: PURE BIOPHYSICAL IGNITION HAZARD

Features: Weather + Fuel Structure + Ecotone Edge Contrast

- STRICT CAUSAL ISOLATION: No fire history lags allowed (t-1 = 0).
- Drivers: VPD max, Thermal amplitude, Wind speed, FFMC, Ecotone.
- Calibrated via Monotonic Bounded Platt Scaling (w in [0.1, 10.0]).

Output: P(Ignition) --> Pre-suppression & Forest Patrol


MODE 2: TACTICAL FIRE SPREAD & CONTAGION

Features: Physical Drivers + Spatial Proximity Kernel (t-1)

- Causal spatial memory: dist_foco_t1_km, focos_25km_t1, frp_25km_t1.
- Models convective advection & active flame front advancement.
- Evaluated with 20-km Dead-Zone spatial buffer to prevent leakage.

Output: P(Propagation) --> Tactical Firefighting Deployment

PHASE 3 Sovereign Alert & Benchmark Validation

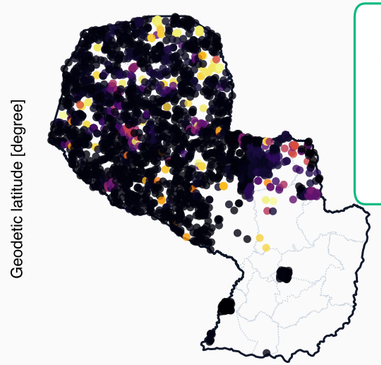

OPERATIONAL METRICS

- Inference Time: 0.75 s
- Grid: 400,006 cells (1 km²)
- Chaco Spread ROC: 0.941
- Tactical Precision: 97.71%

International Benchmarking (Blind Test)

