




欧拉排外设规划，核心板+底板

Ebaina®

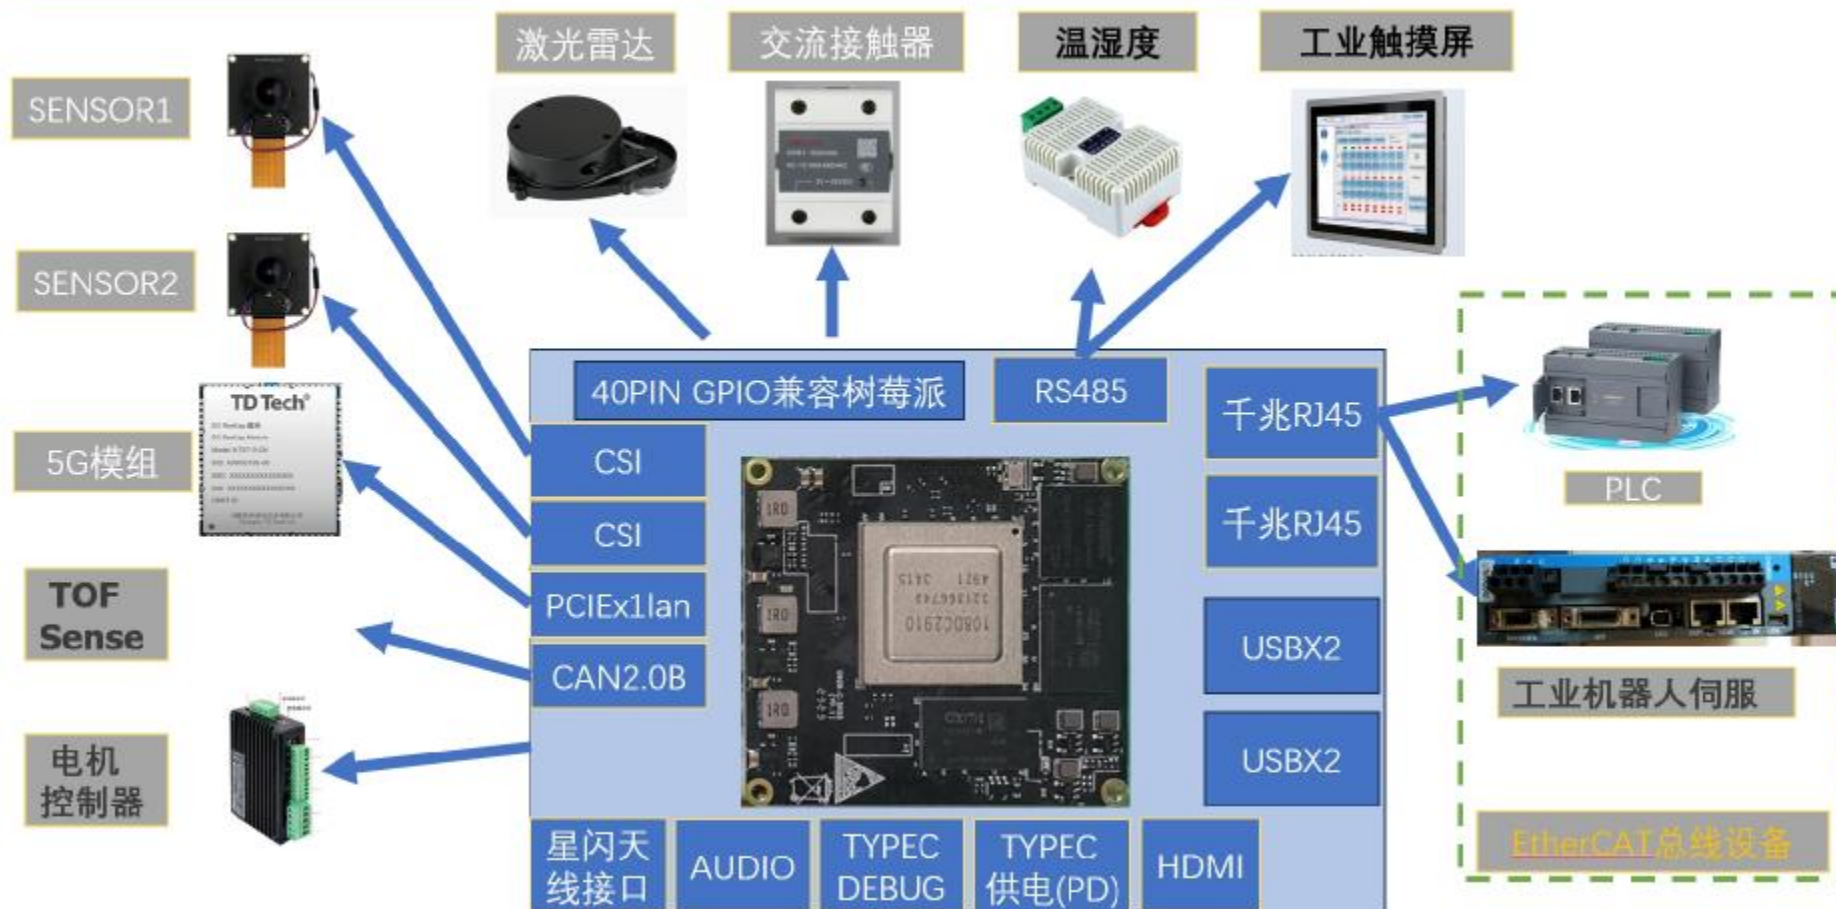


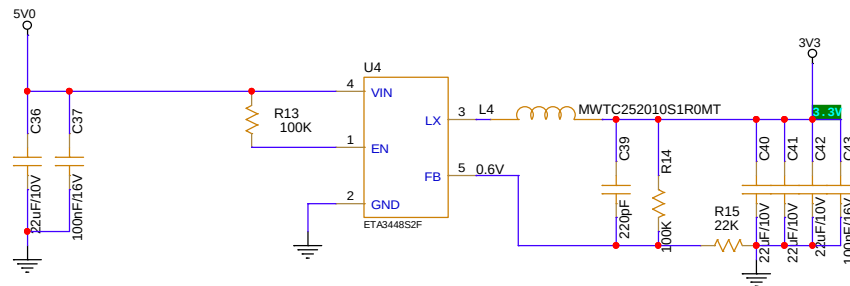


$$V_{out} = 0.6 * (1 + 100k/22k) = 3V3$$

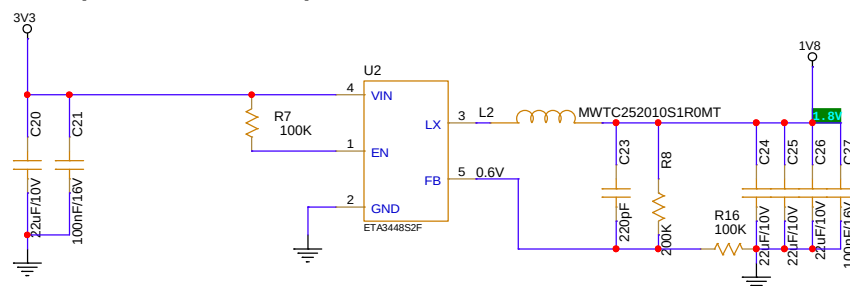


$$V_{out} = 0.6 * (1 + 200k/100k) = 1V8$$

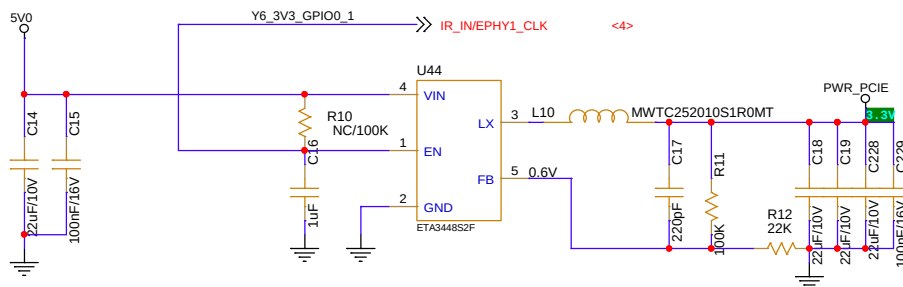

$$V_{out} = 0.6 * (1 + 100k/22.1k) = 3V3$$


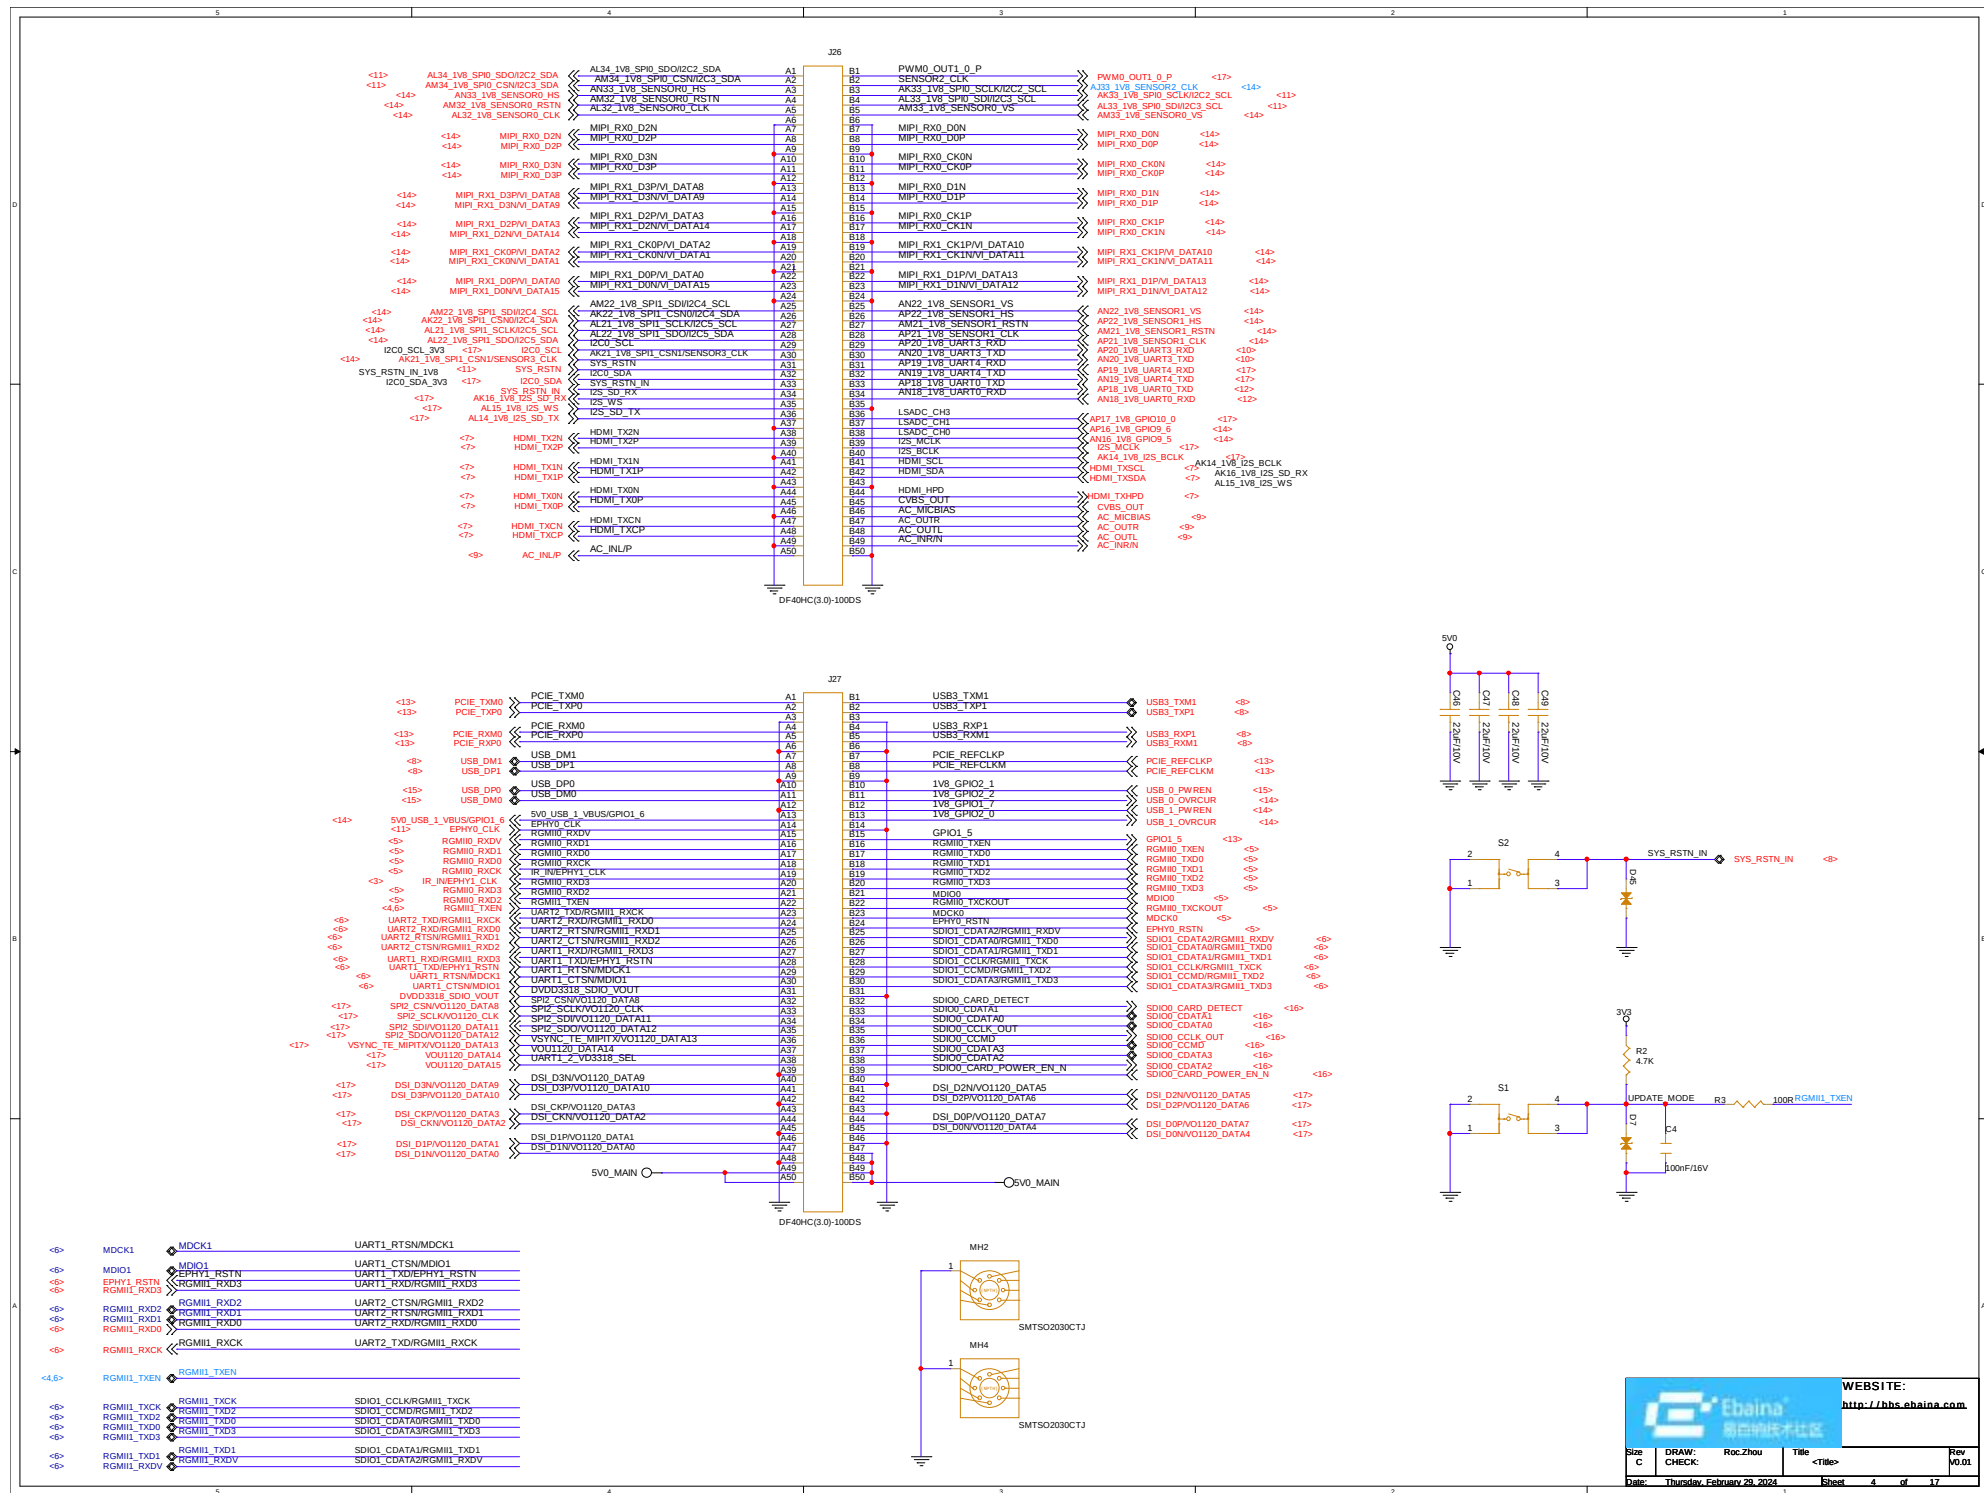


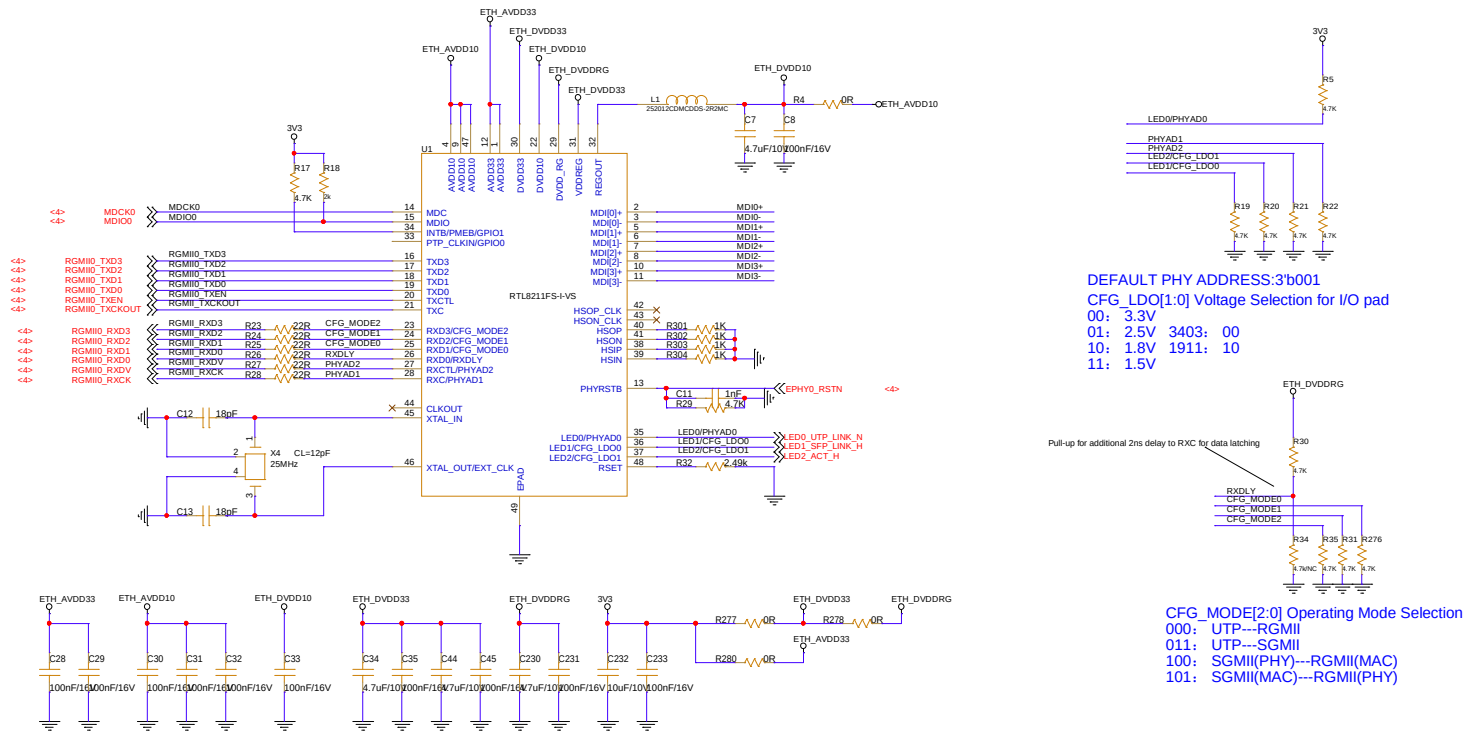









DEFAULT PHY ADDRESS:3'b001
CFG_LDO[1:0] Voltage Selection for I/O pad
00: 3.3V
01: 2.5V 3403: 00
10: 1.8V 1911: 10
11: 1.5V

Pull-up for additional 2ns delay to RXC for data latching


CFG_MODE[2:0] Operating Mode Selection
000: UTP---RGMII
011: UTP---SGMII
100: SGMII(PHY)---RGMII(MAC)
101: SGMII(MAC)---RGMII(PHY)

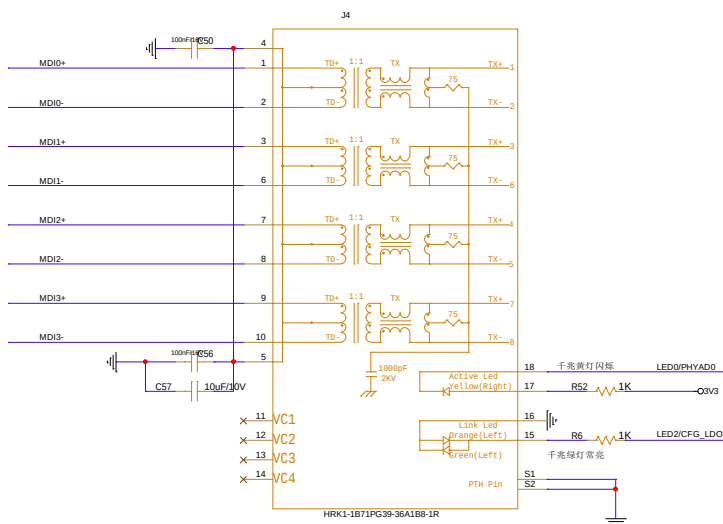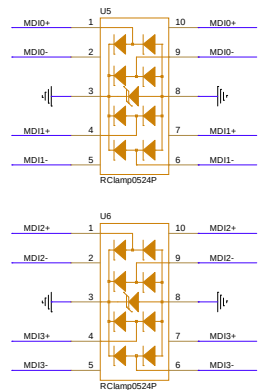






ETH

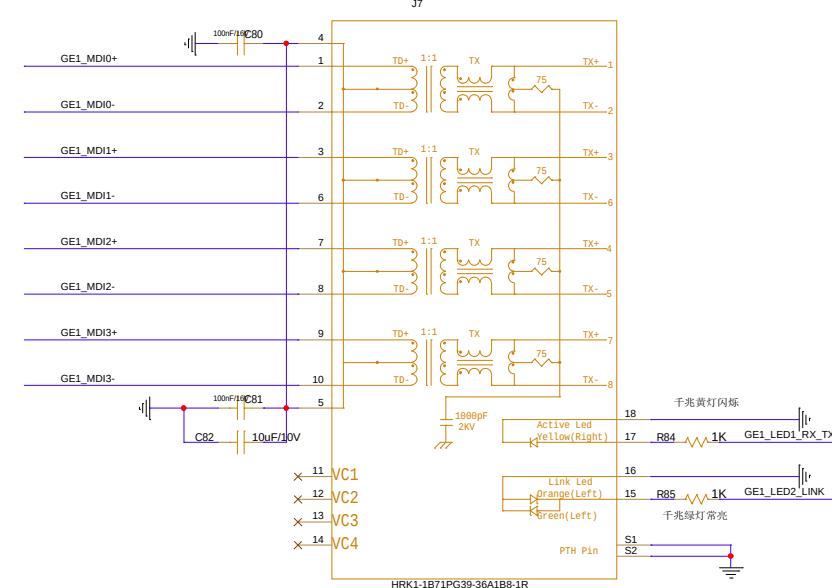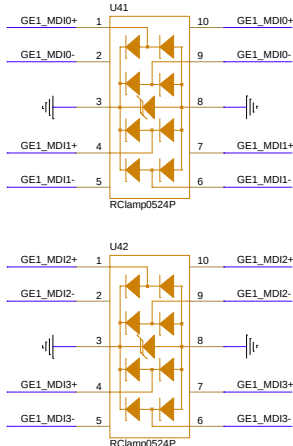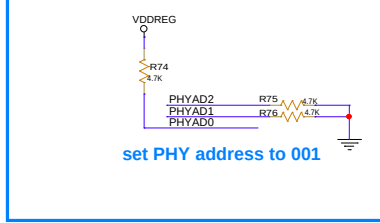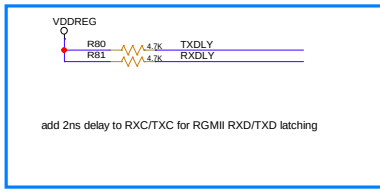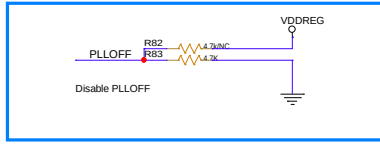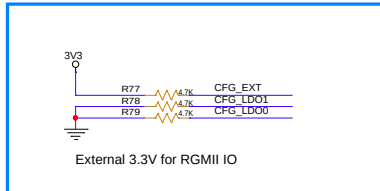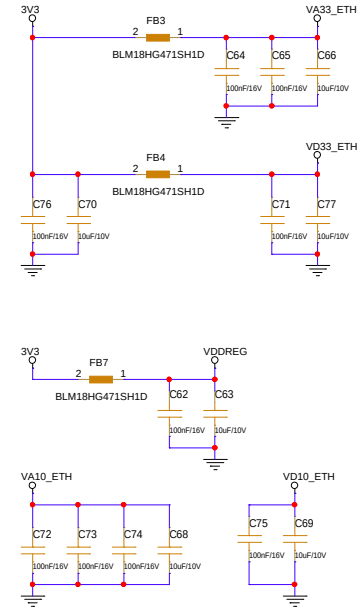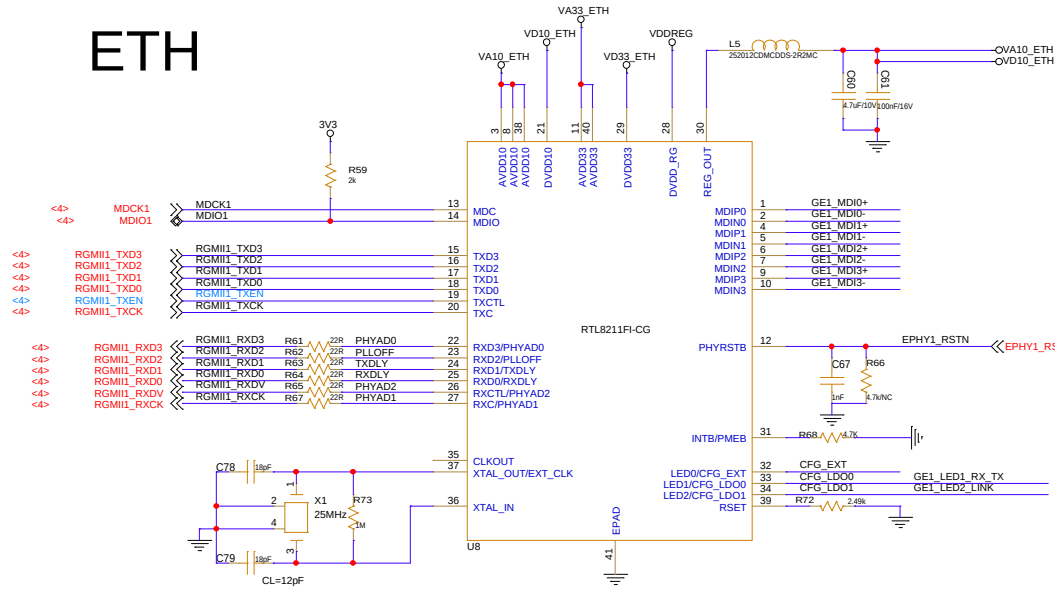








<4> HDMI_TX2P >> HDMI_TX2P TX_D2P
 <4> HDMI_TX2N >> HDMI_TX2N TX_D2N
 <4> HDMI_TX1P >> HDMI_TX1P TX_D1P
 <4> HDMI_TX1N >> HDMI_TX1N TX_D1N
 <4> HDMI_TX0P >> HDMI_TX0P TX_D0P
 <4> HDMI_TX0N >> HDMI_TX0N TX_D0N
 <4> HDMI_TXCP >> HDMI_TXCP TX_CKP
 <4> HDMI_TXCN >> HDMI_TXCN TX_CKN

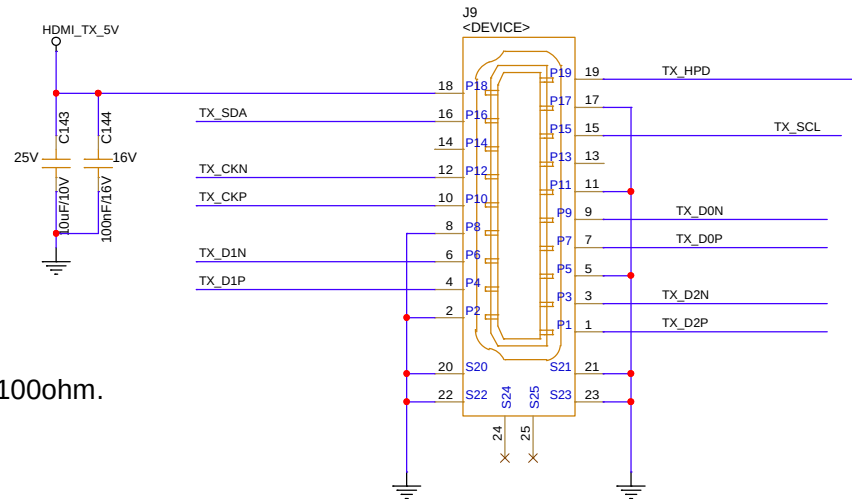


The HDMI differential trace impedance is 100ohm.

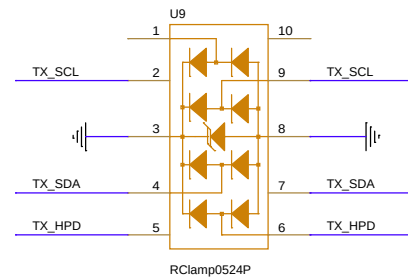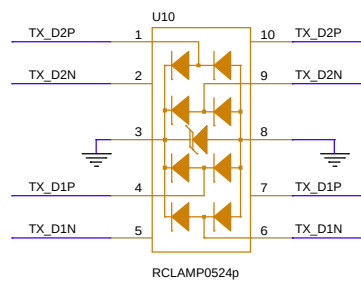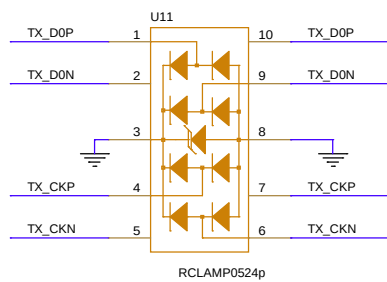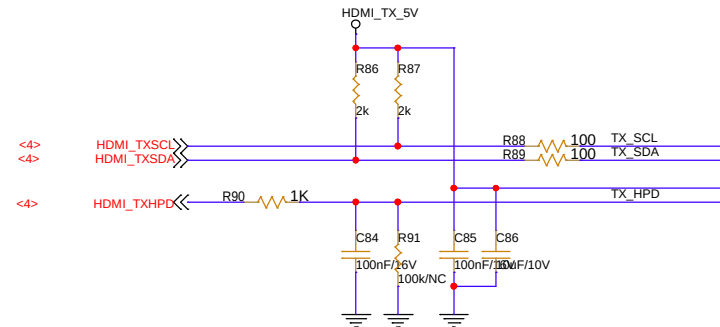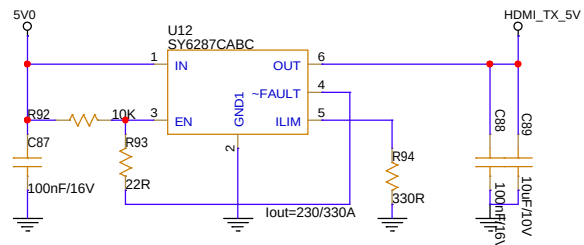


USB3.0

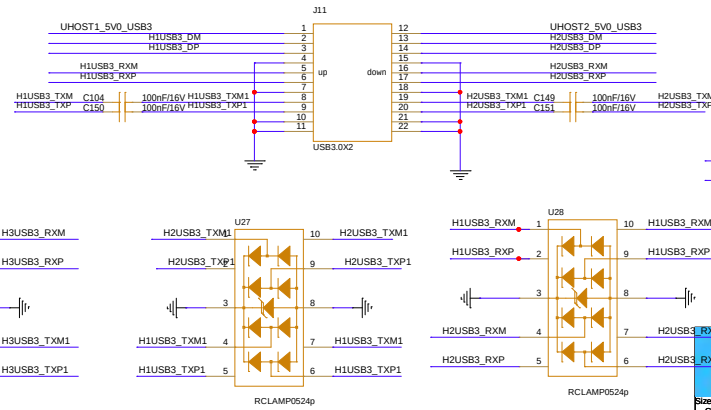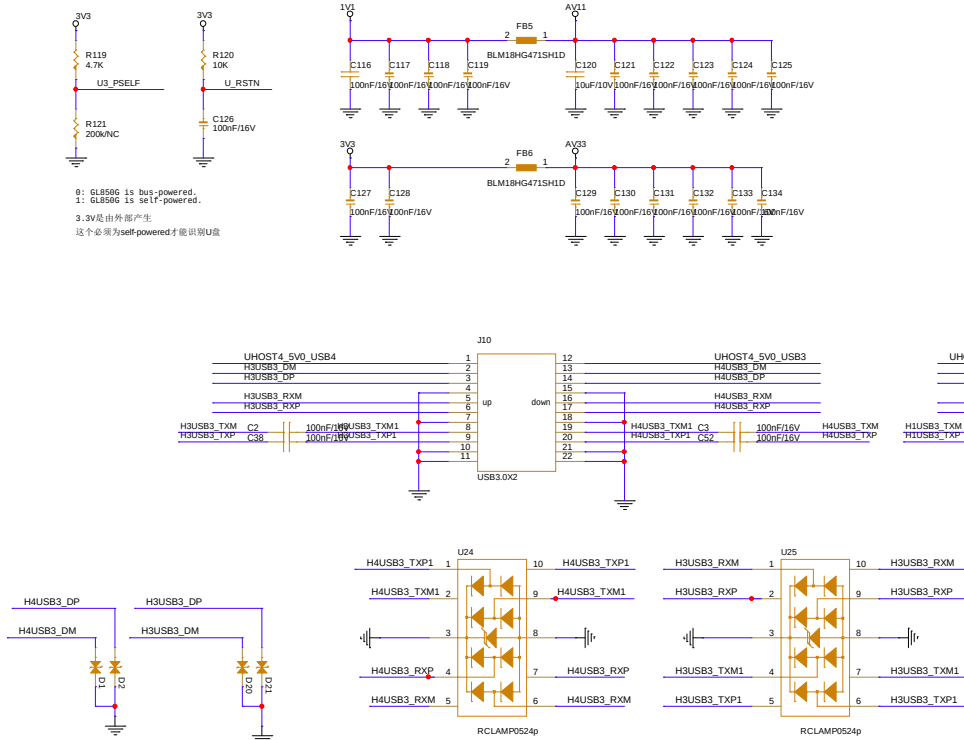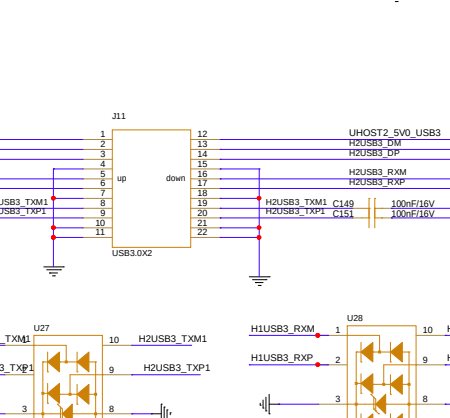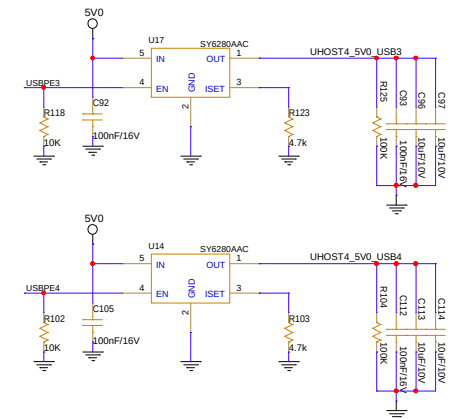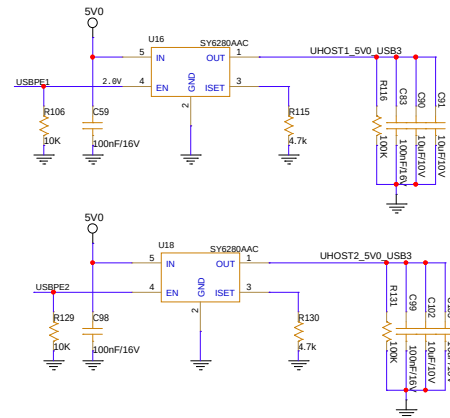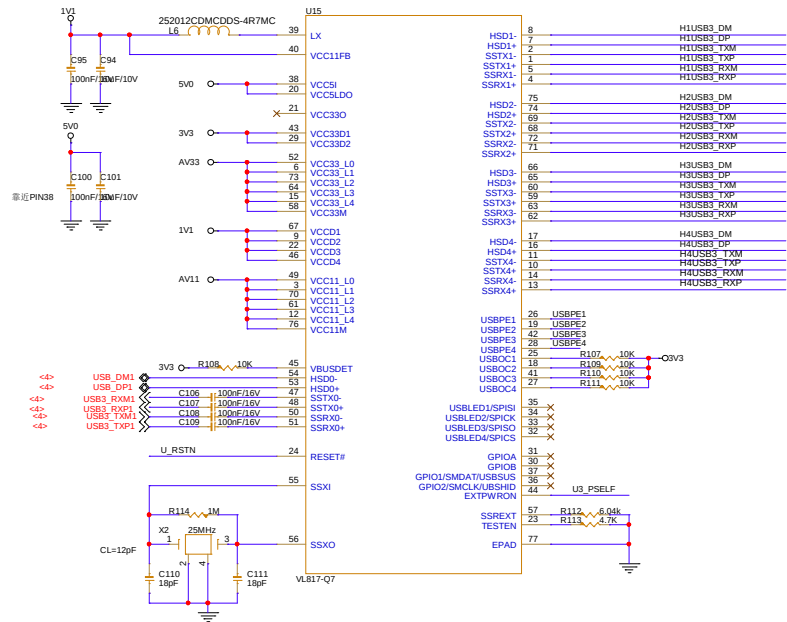

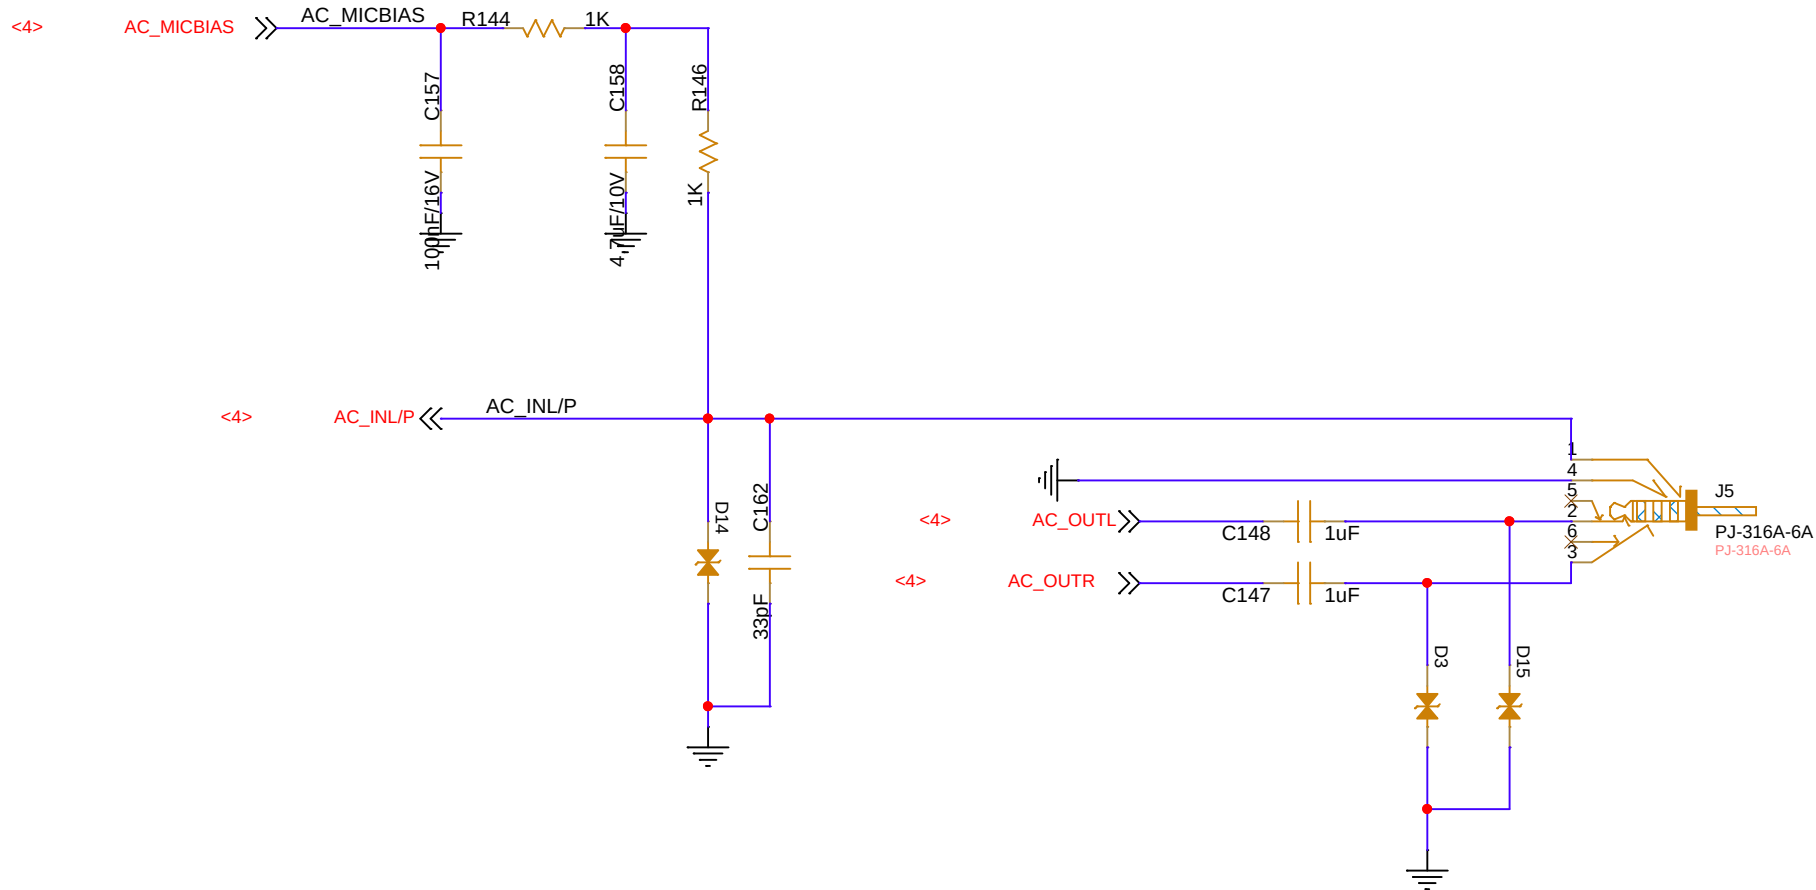

RS485

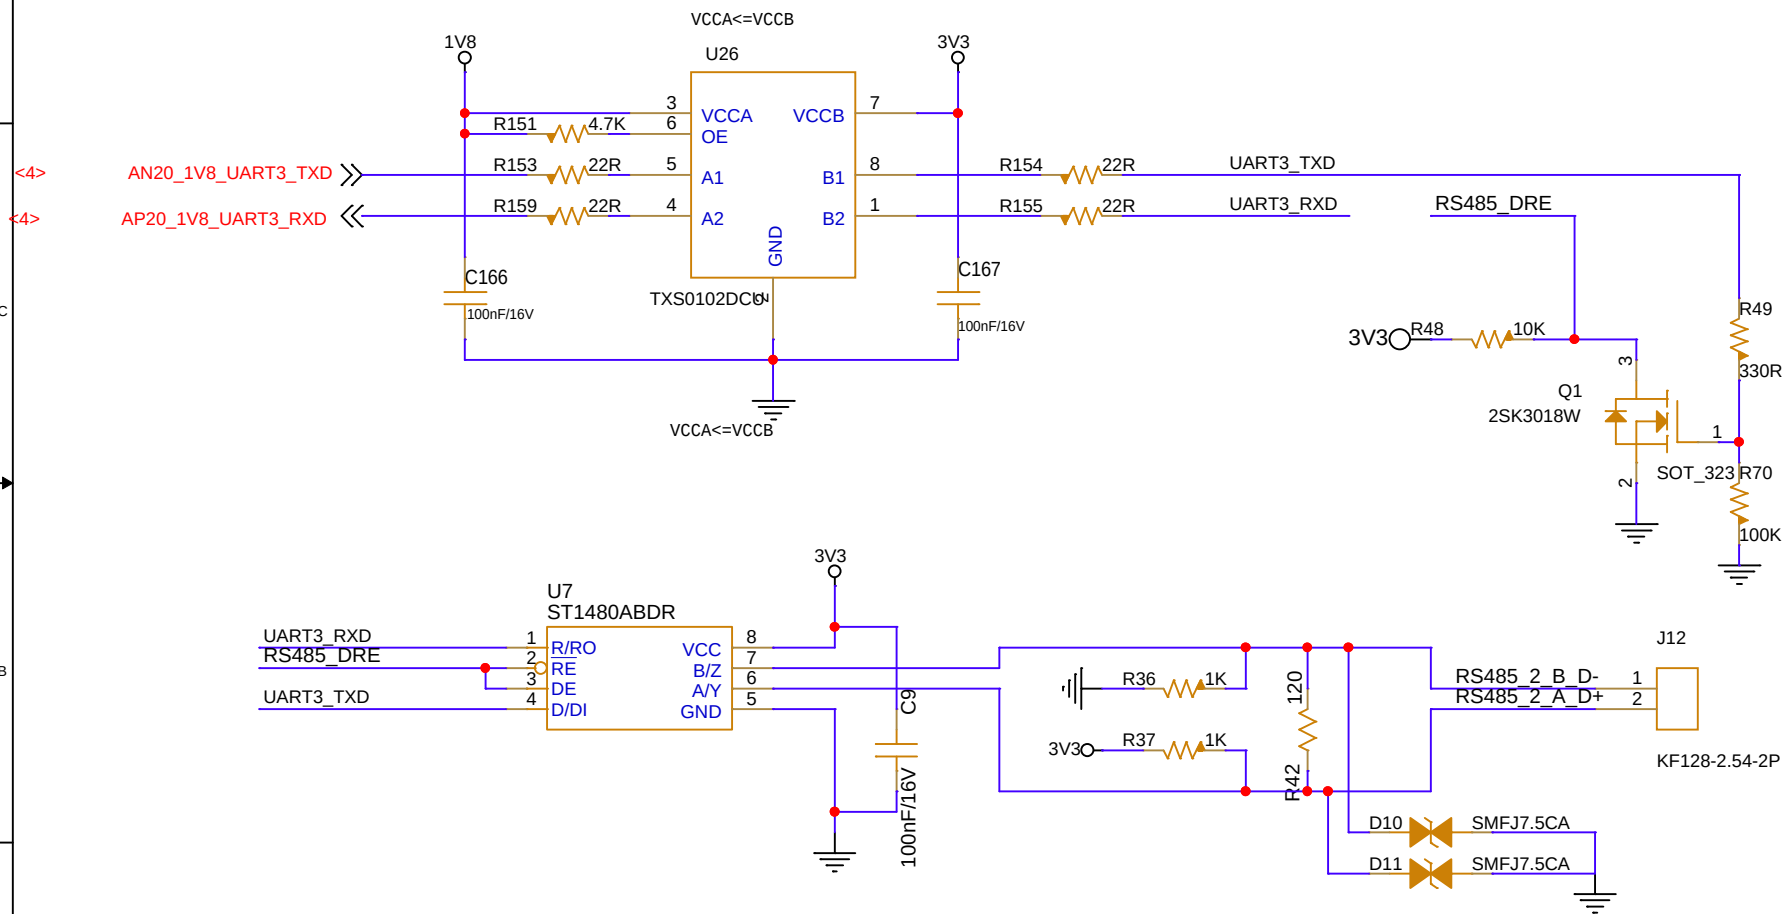


WEBSITE:

<http://bbs.ebaina.com>



Size A	DRAW: CHECK:	Roc.Zhou	Title <Title>	Rev V0.01
Date:	Friday, March 01, 2024		Sheet	10 of 17

CAN

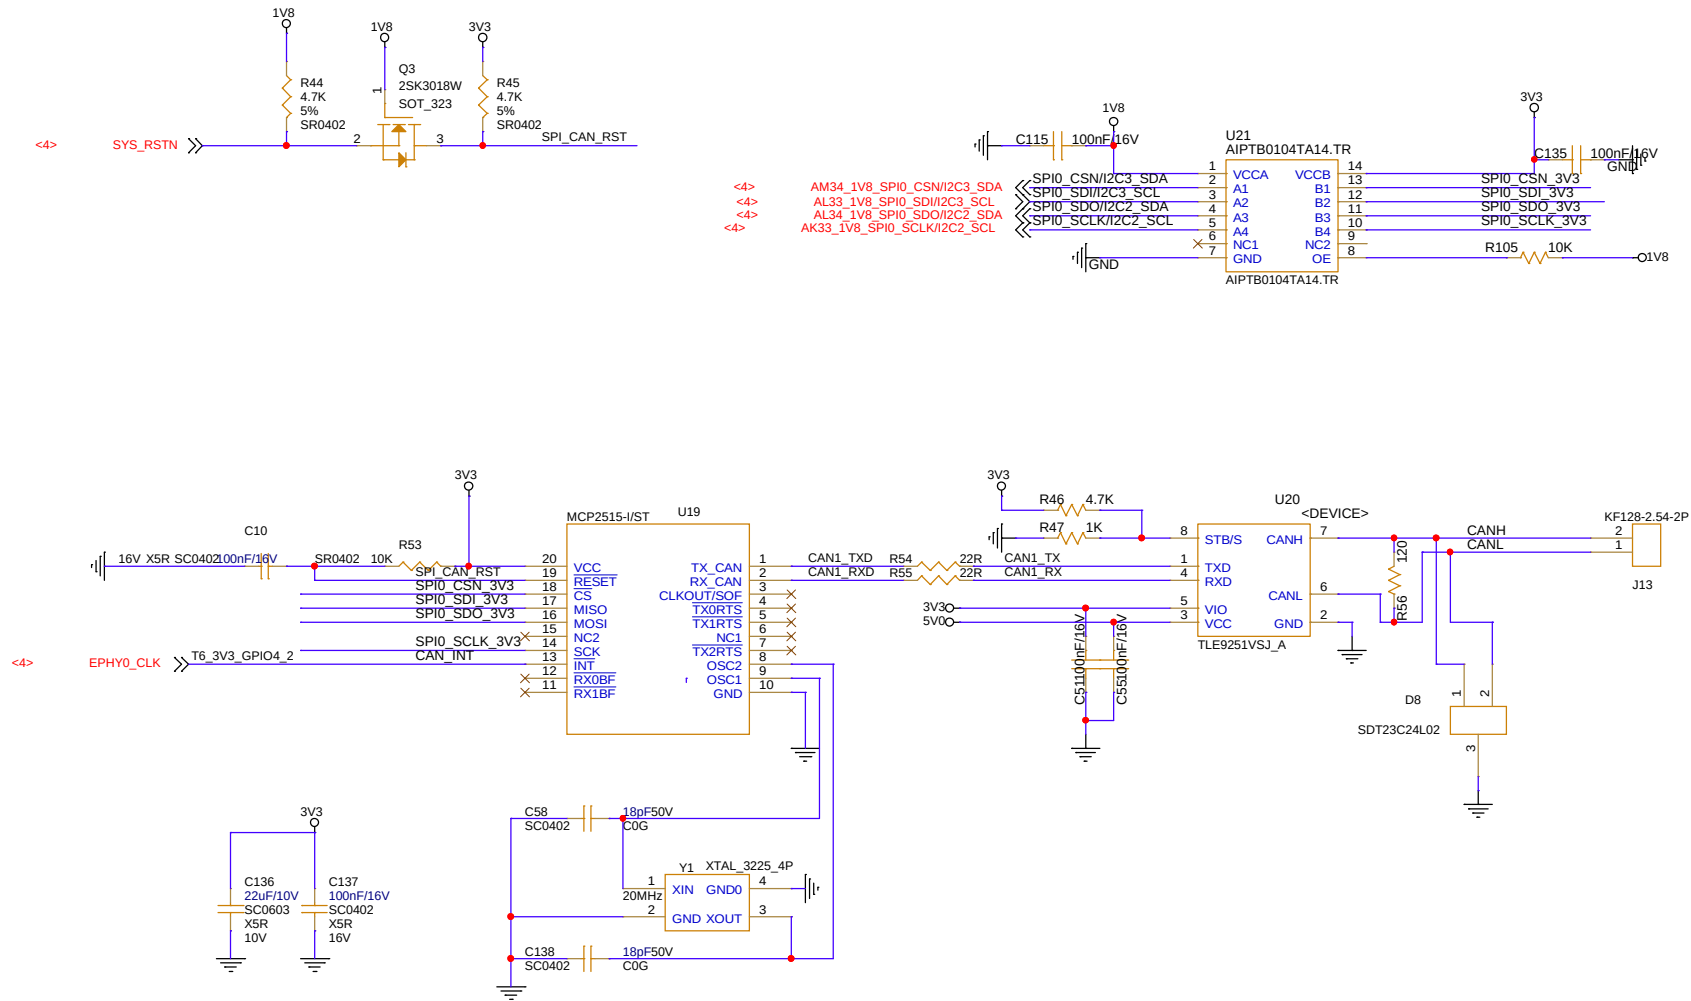

 Ebaina 易百纳技术社区		WEBSITE: http://bbs.ebaina.com		
Size B	DRAW: CHECK:	Roc.Zhou	Title <Title>	Rev V0.01
Date:	Saturday, November 25, 2023		Sheet	11 of 17

DEBUG

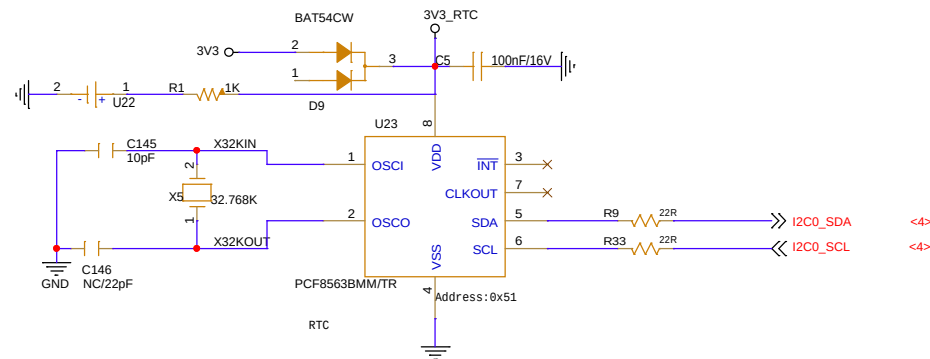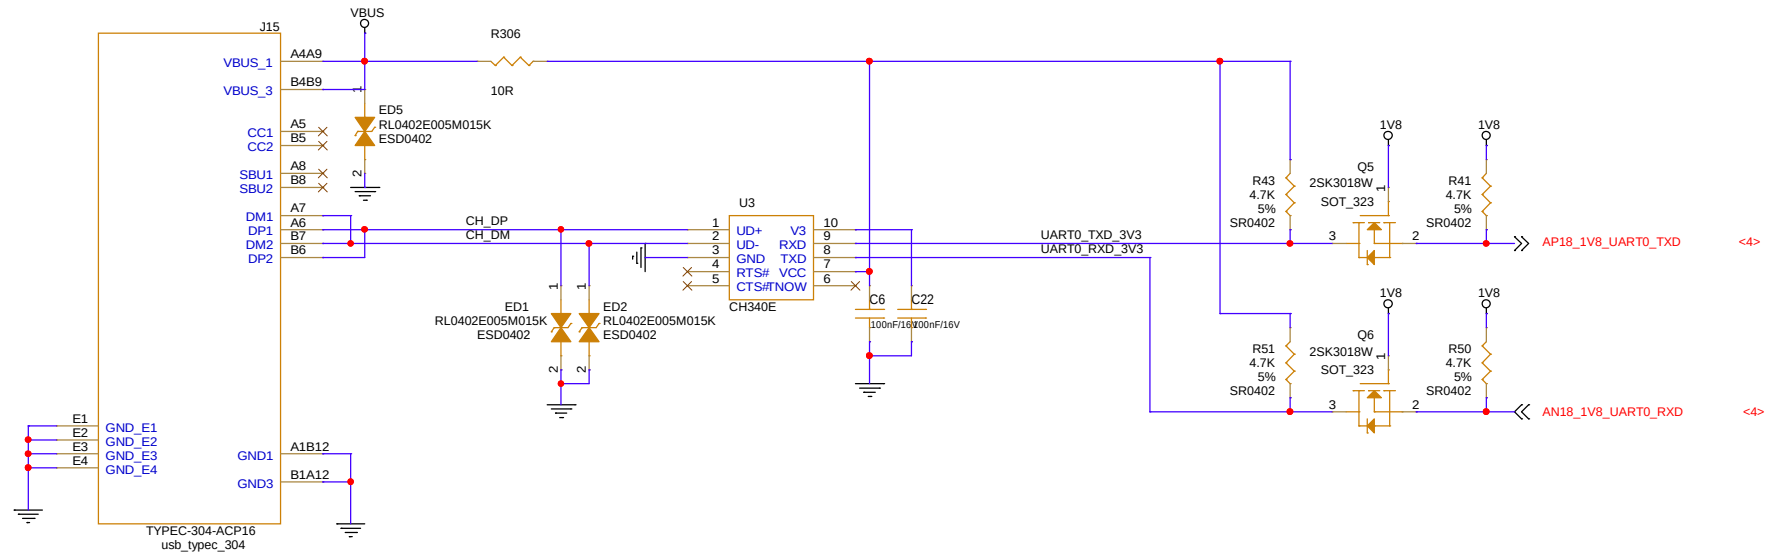

mipi_in

Sensor Connector

