

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6

A

B

C





D

A

B

C

D

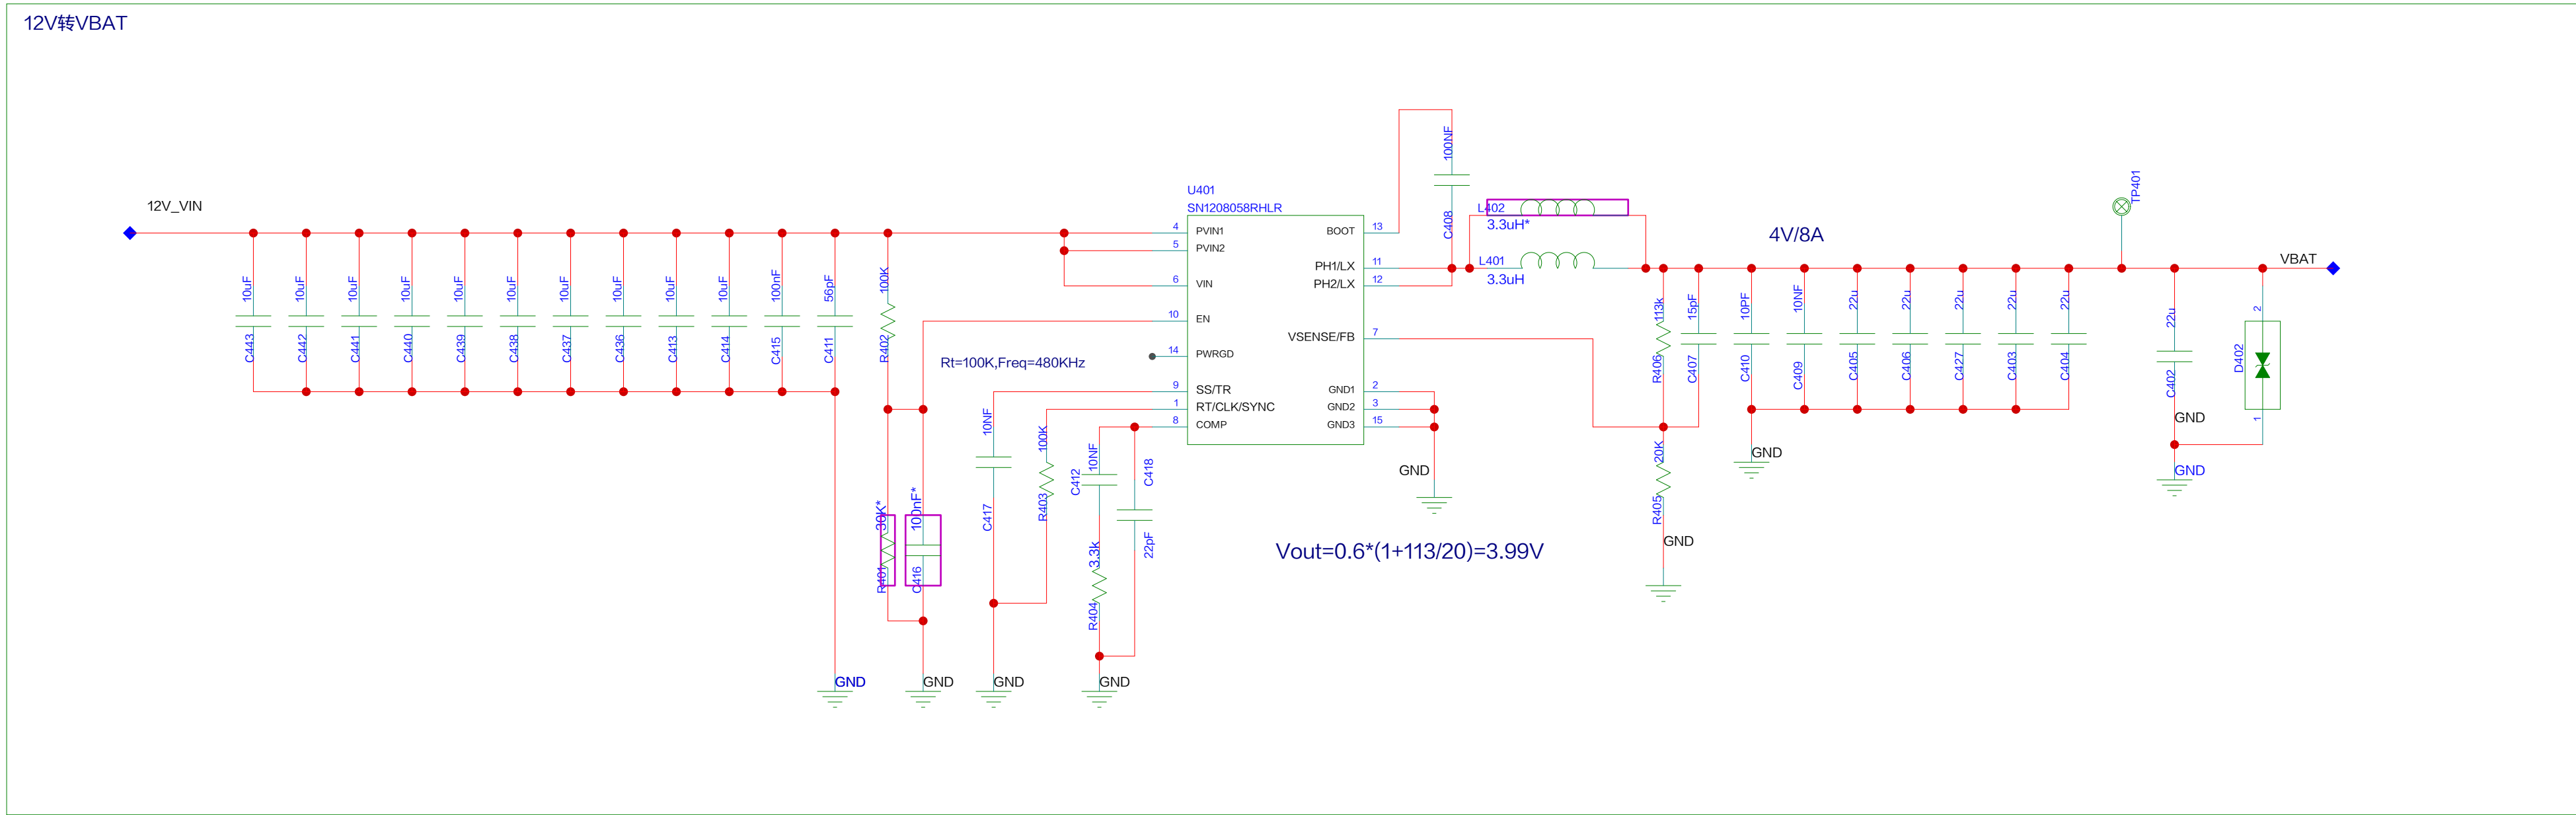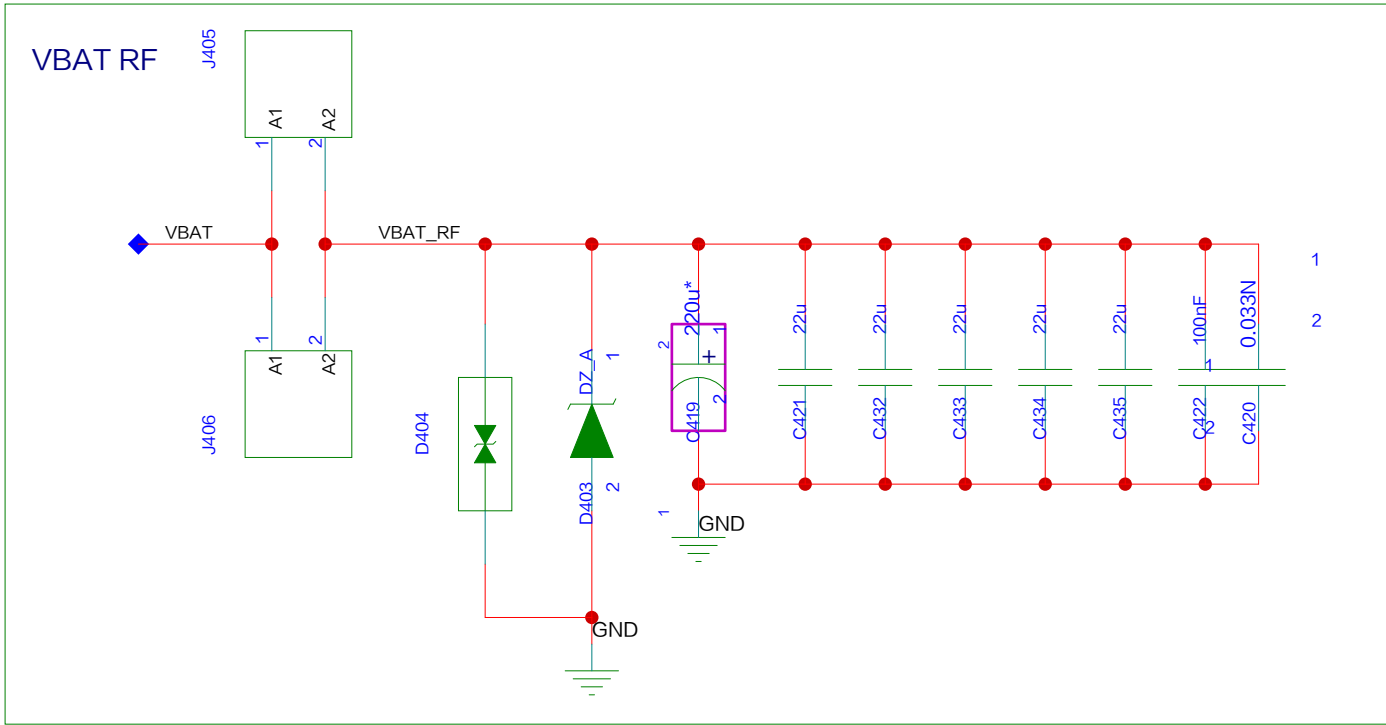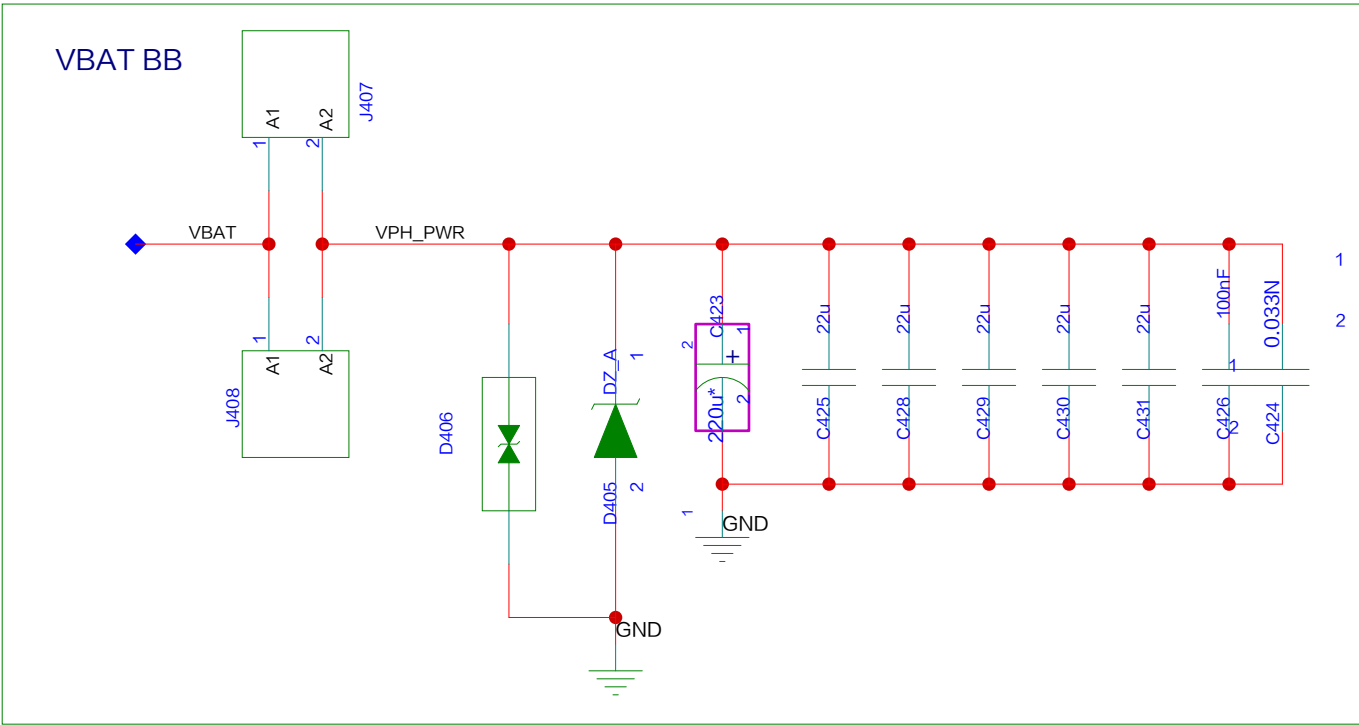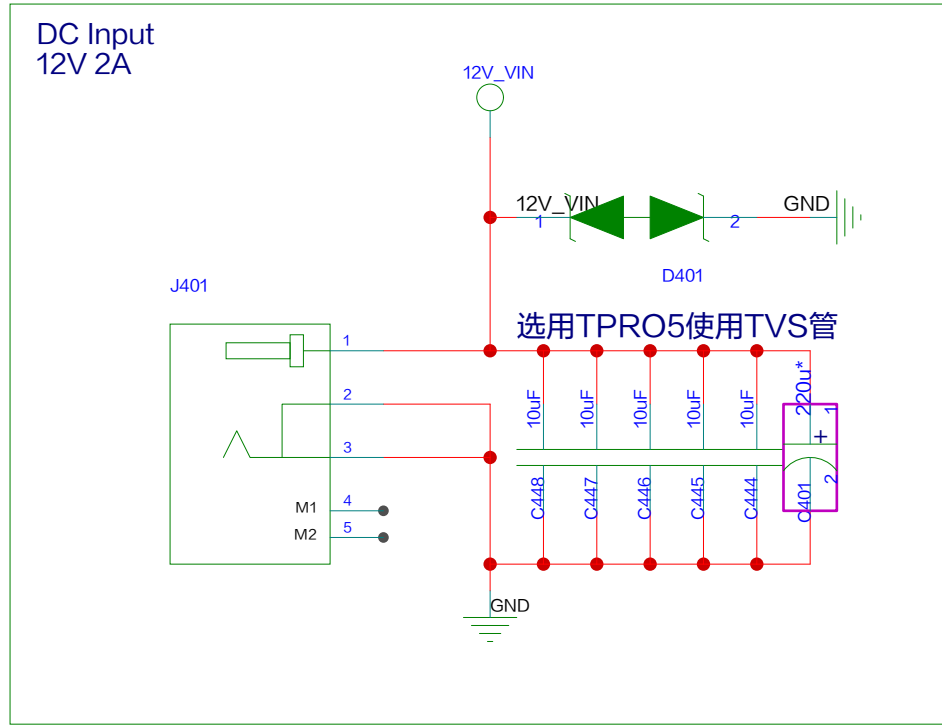

A

B

C

D


A

B


C

D


3.3V转1.8V

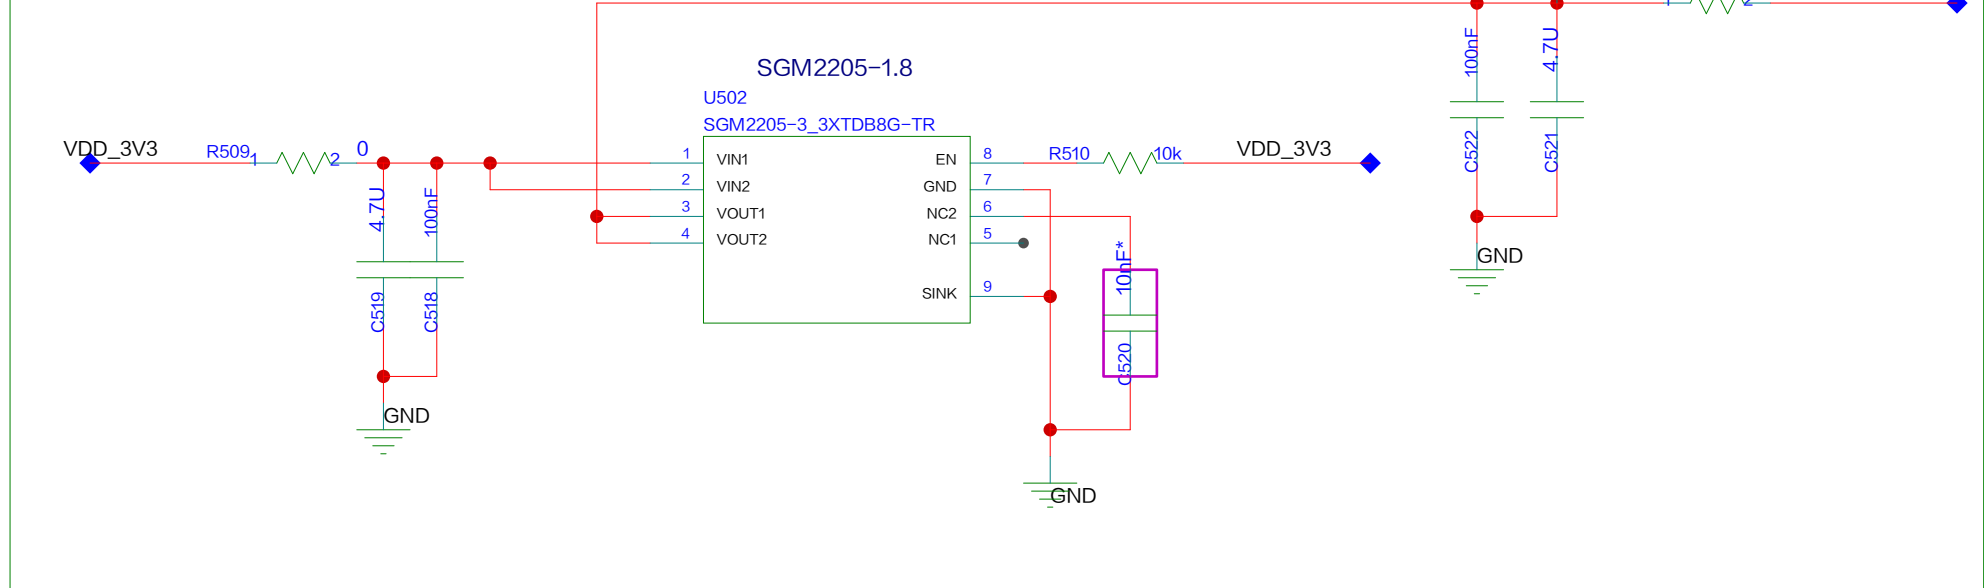


VBAT LED Inde

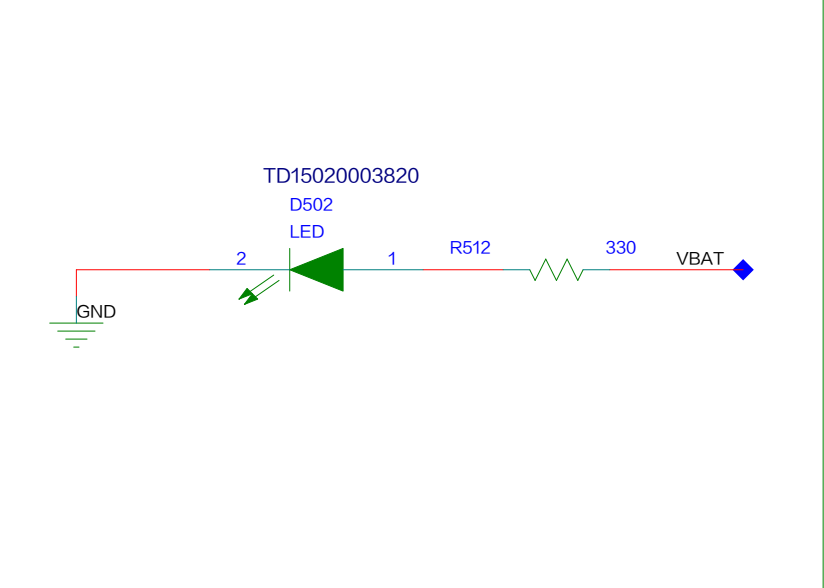

3.3V LED Inde

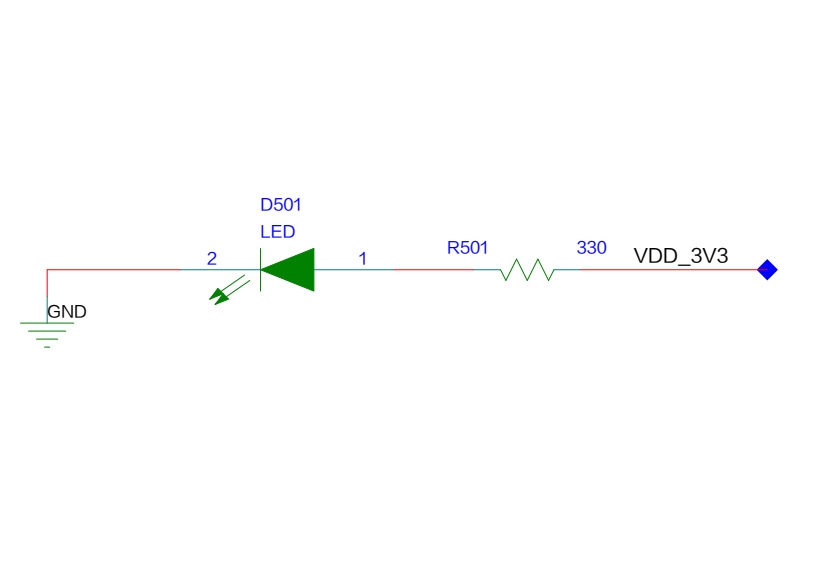

12V转3.3V

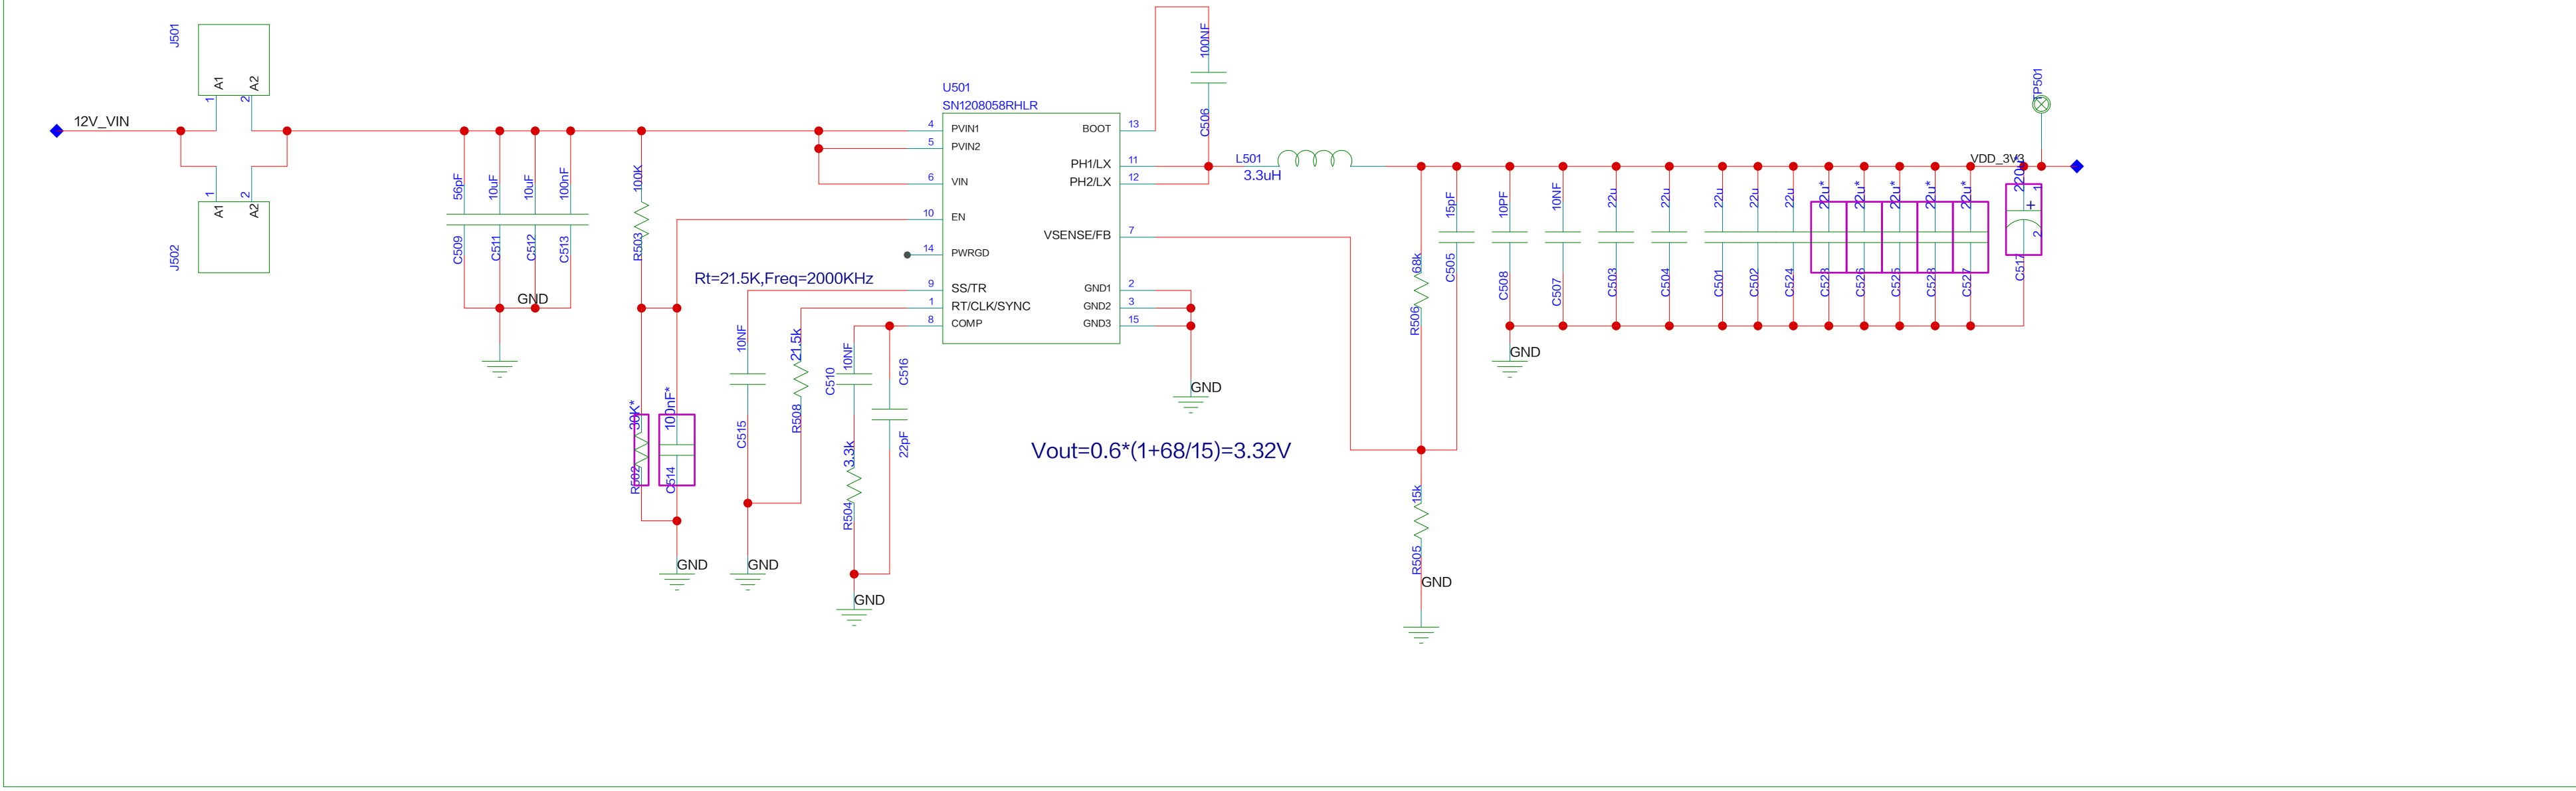

A

B

C

D

A

B

C

D

1

2

3

4

5

6

1



2

3

4

5

6

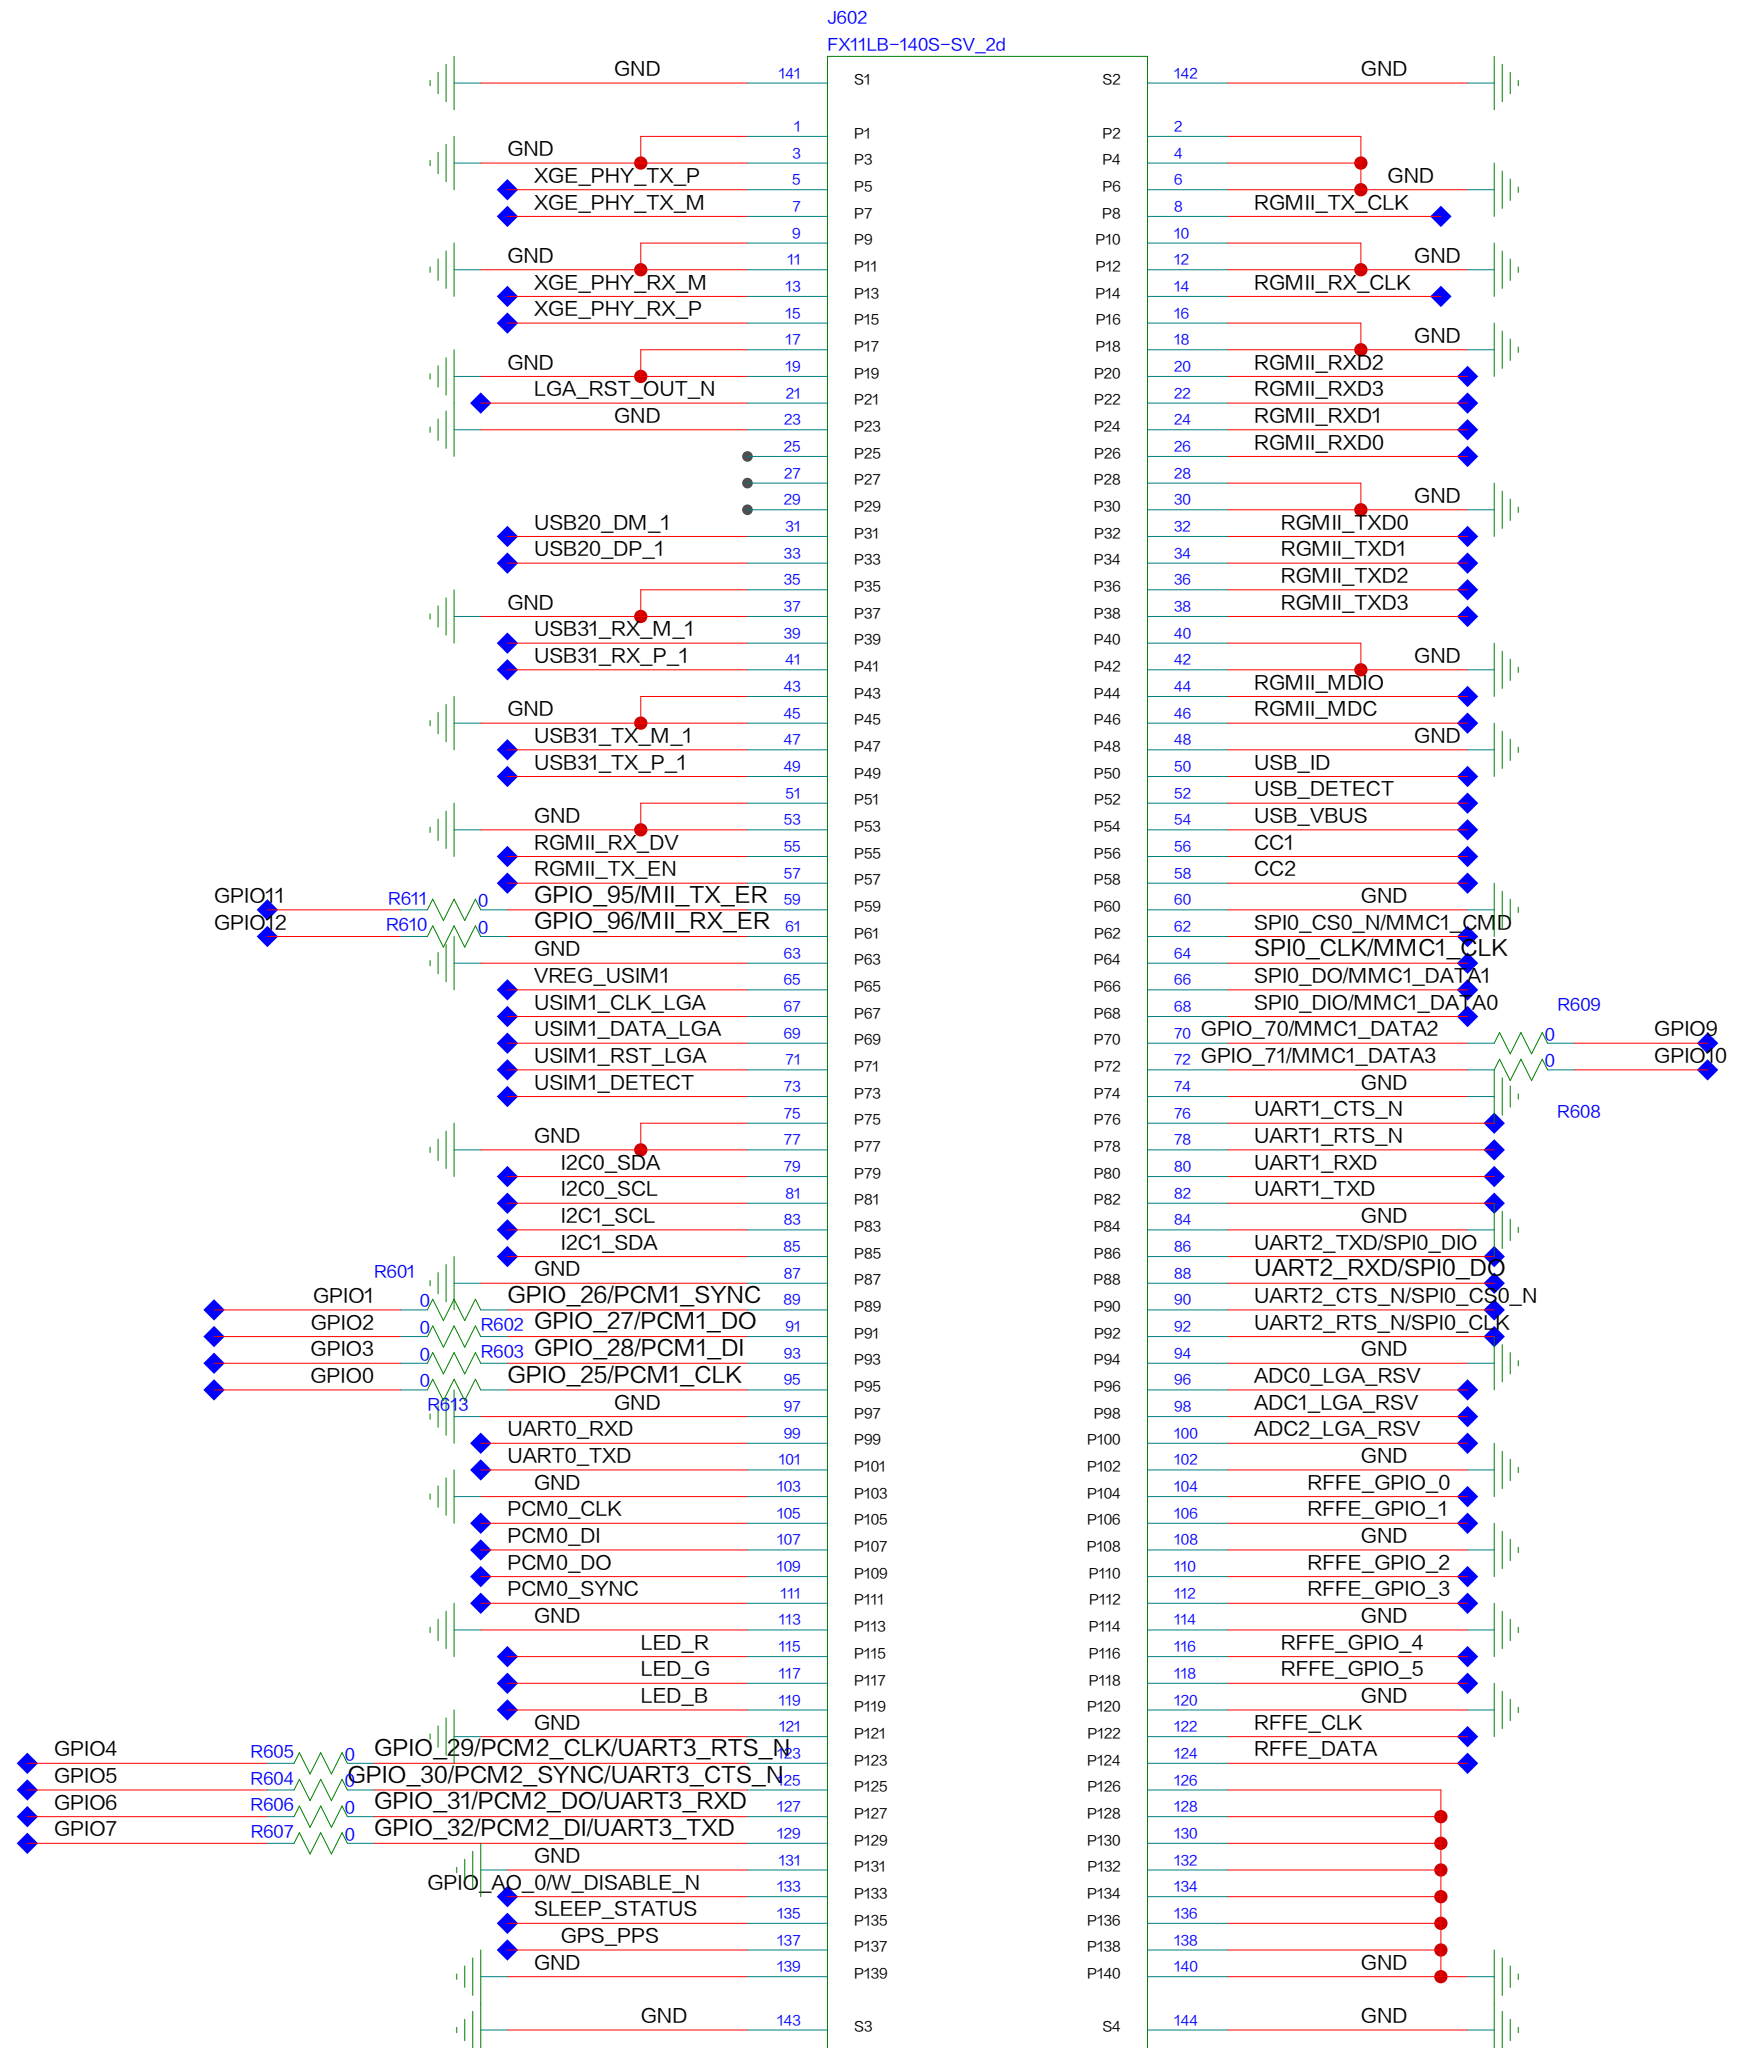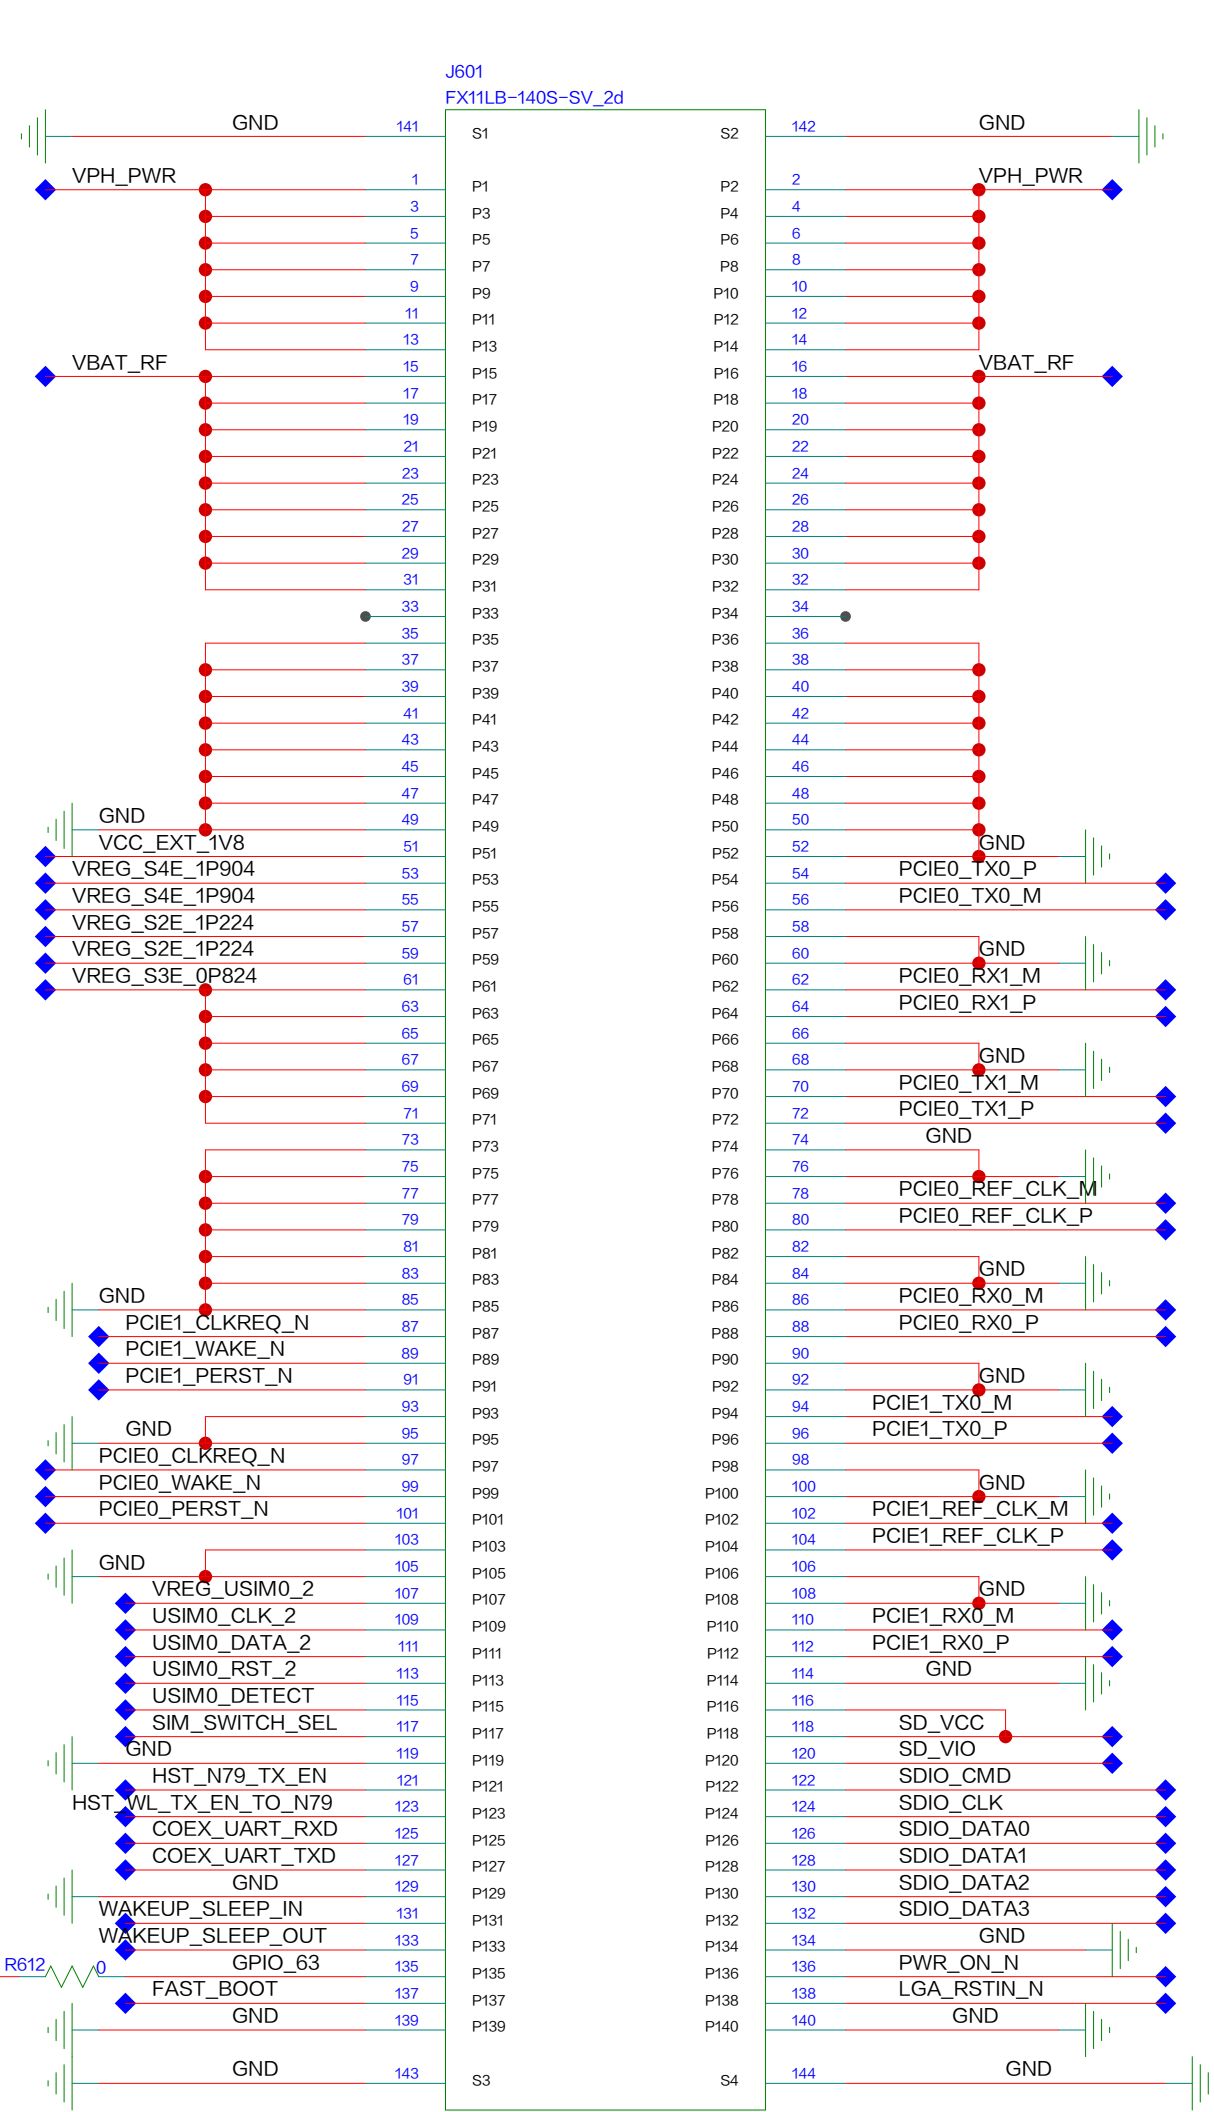

A

B

C



D

A

B



C

D

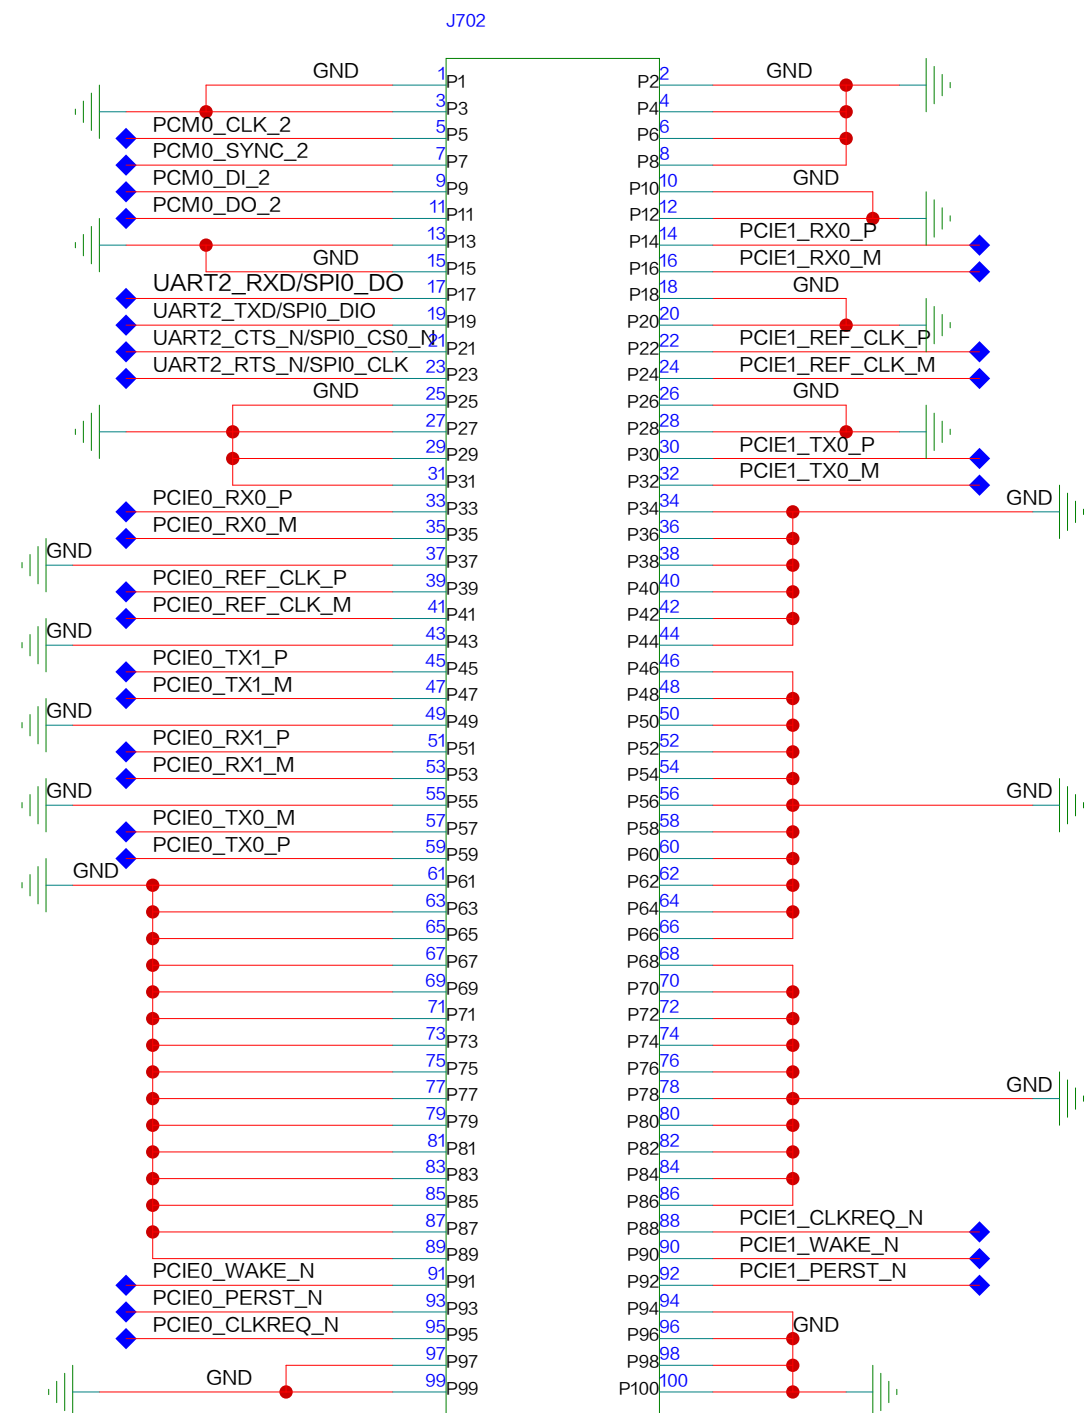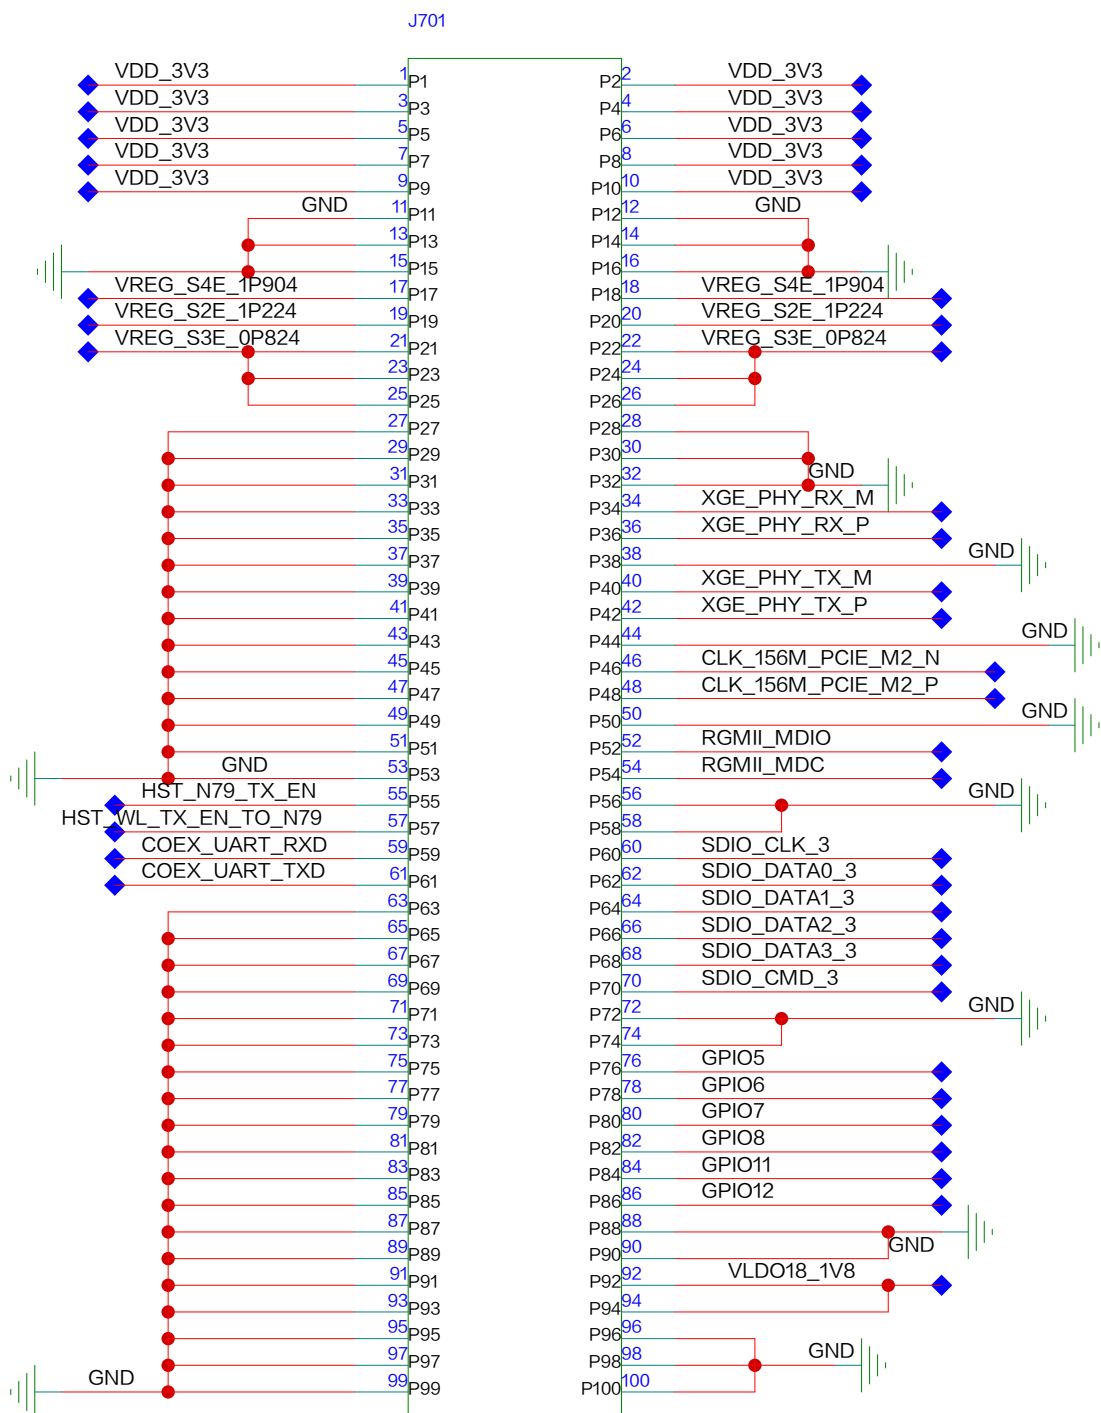


A

A

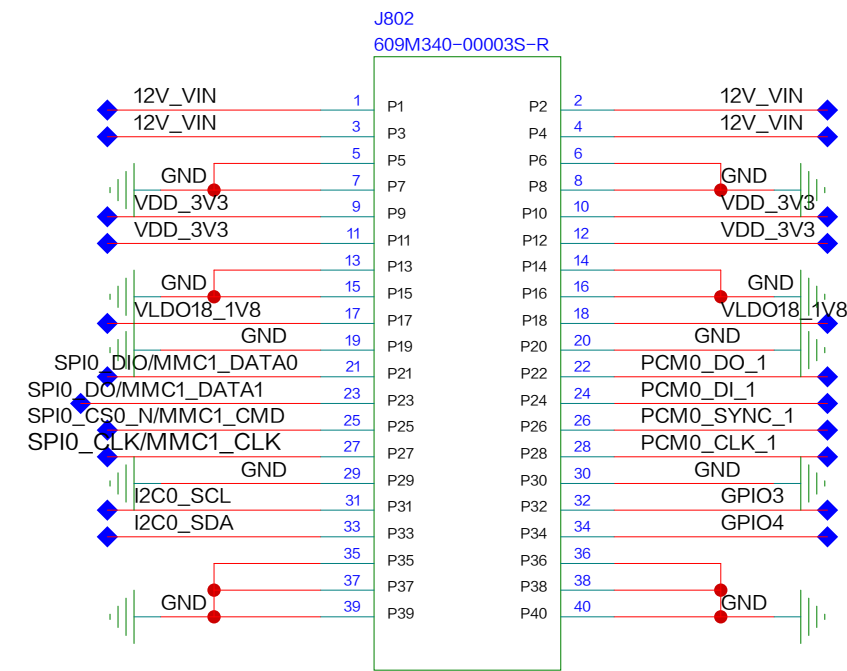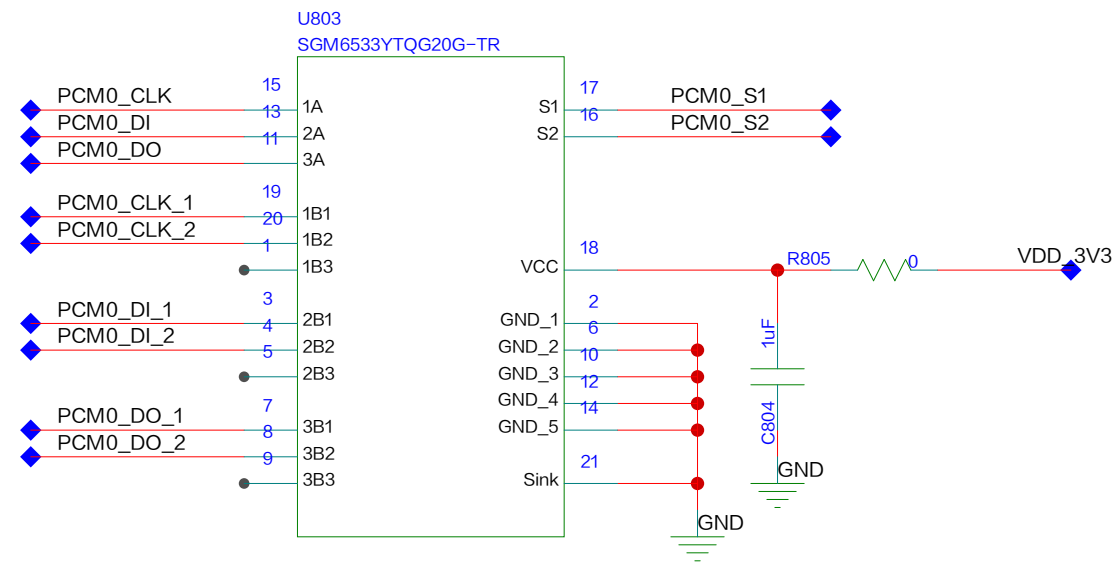


B

B

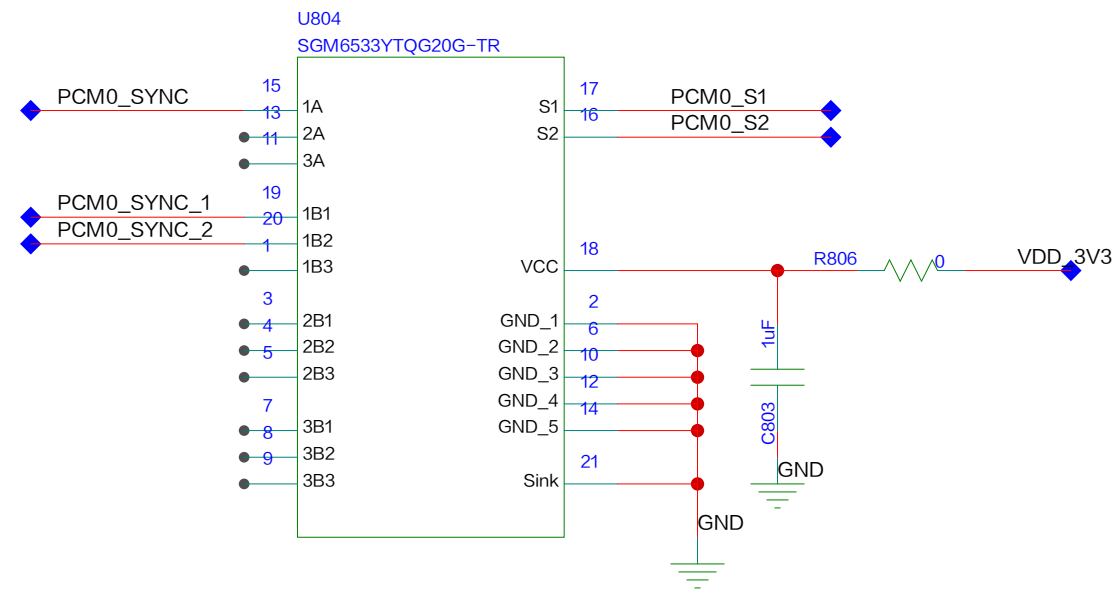

C

C

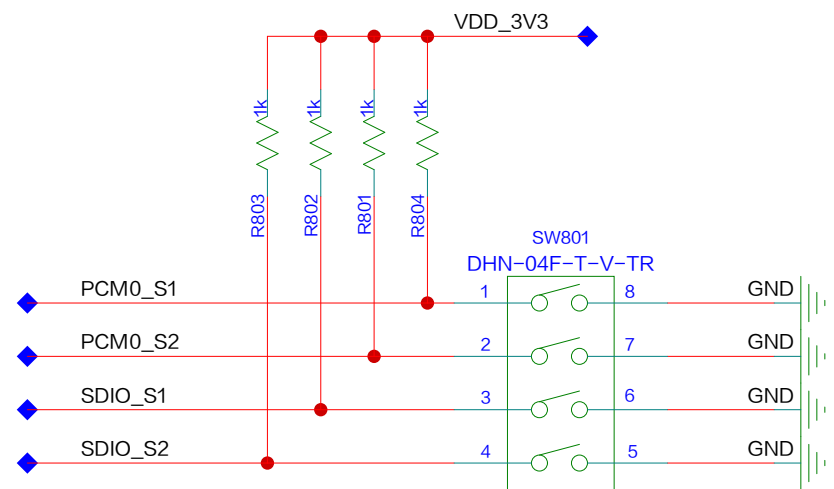

PCM0_S1	PCM0_S2	FUNCTION
LOW	LOW	X
LOW	HIGH	SLIC
HIGH	LOW	WIFI/BLUETOOTH
HIGH	HIGH	X

A=B1

A=B2

SDIO_S1	SDIO_S2	FUNCTION
LOW	LOW	X
LOW	HIGH	EMMC
HIGH	LOW	SD
HIGH	HIGH	SDIO WIFI


A=B1

A=B2

A=B3

D

D

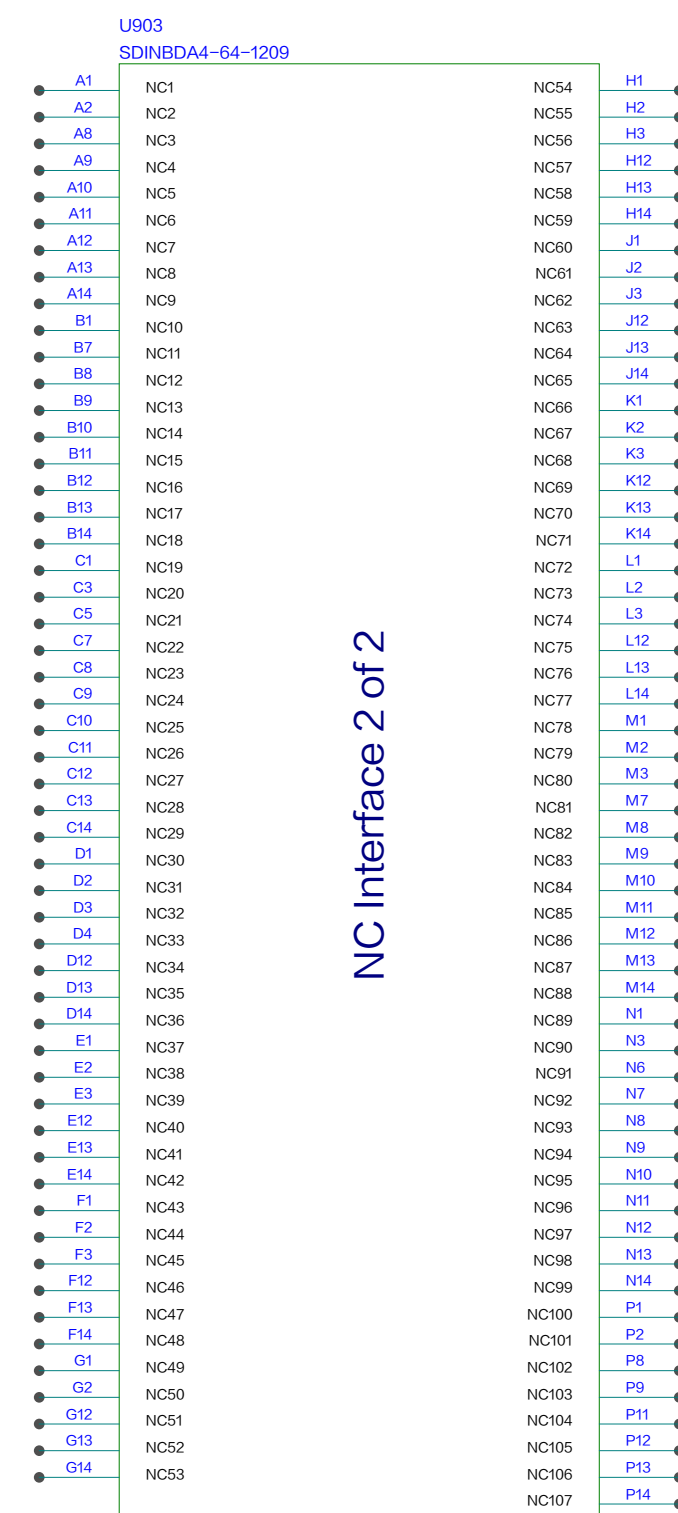

A

B

C


D

A


B

C


D

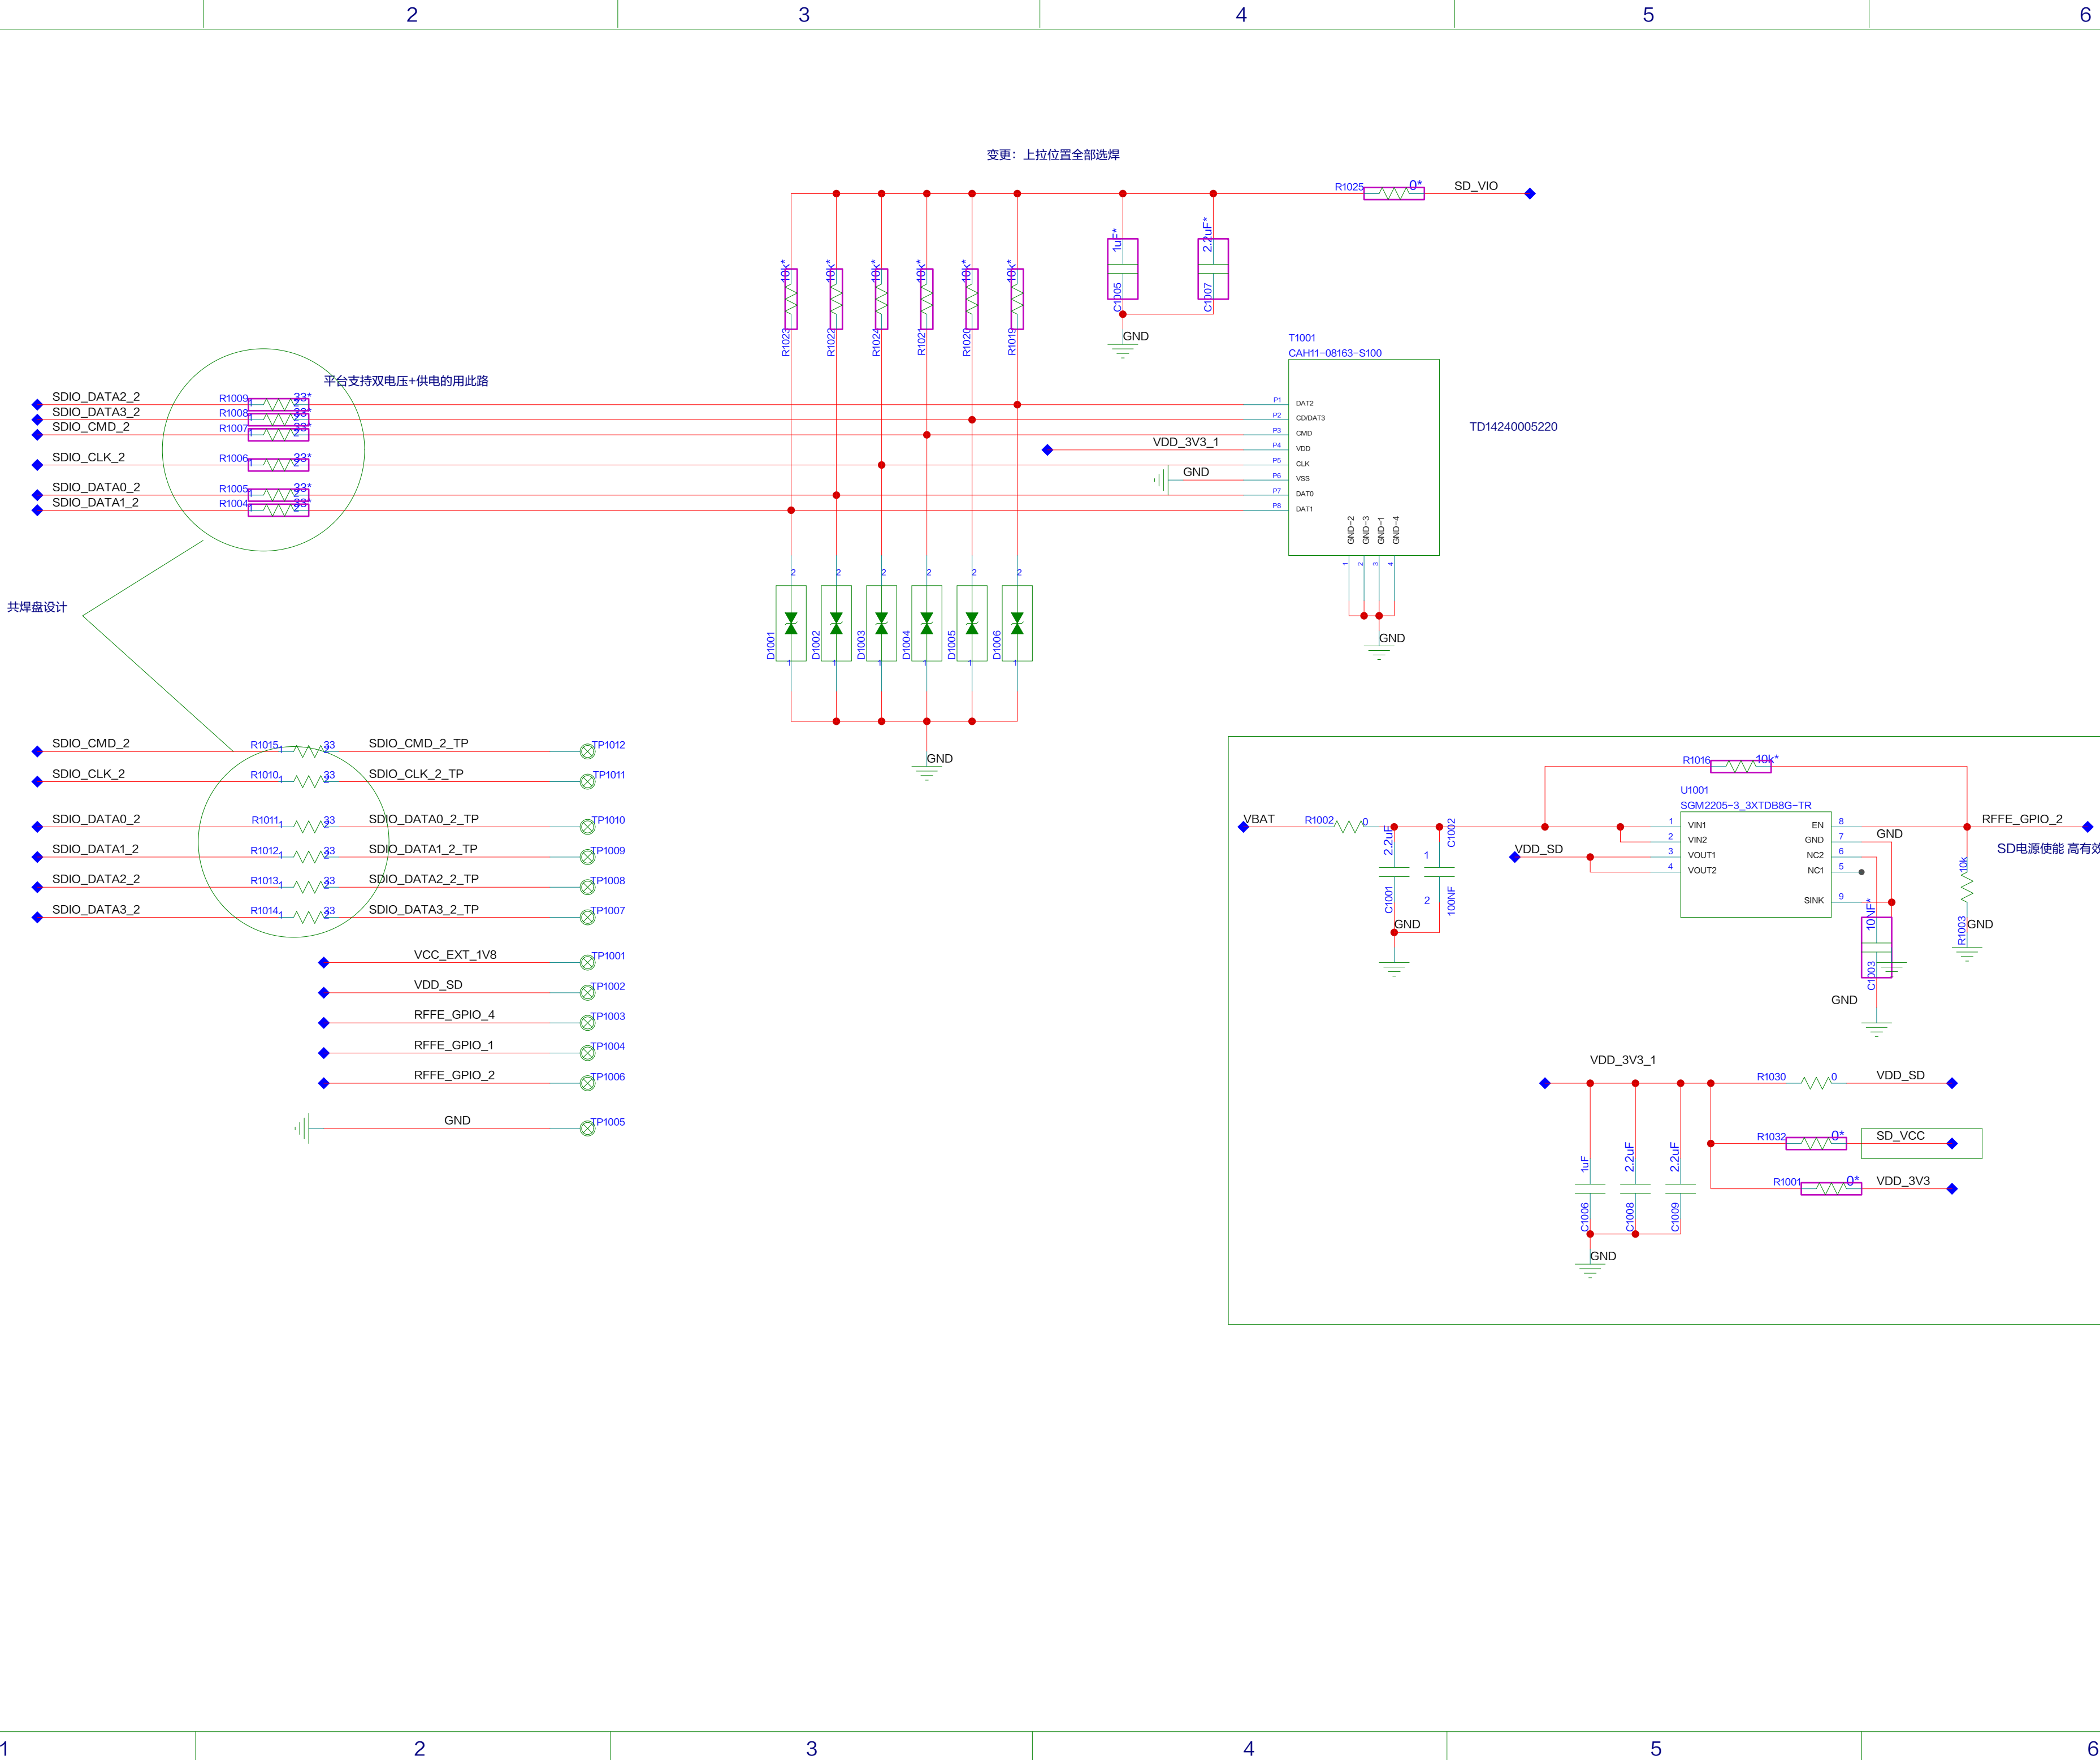


3V3 Power Supply

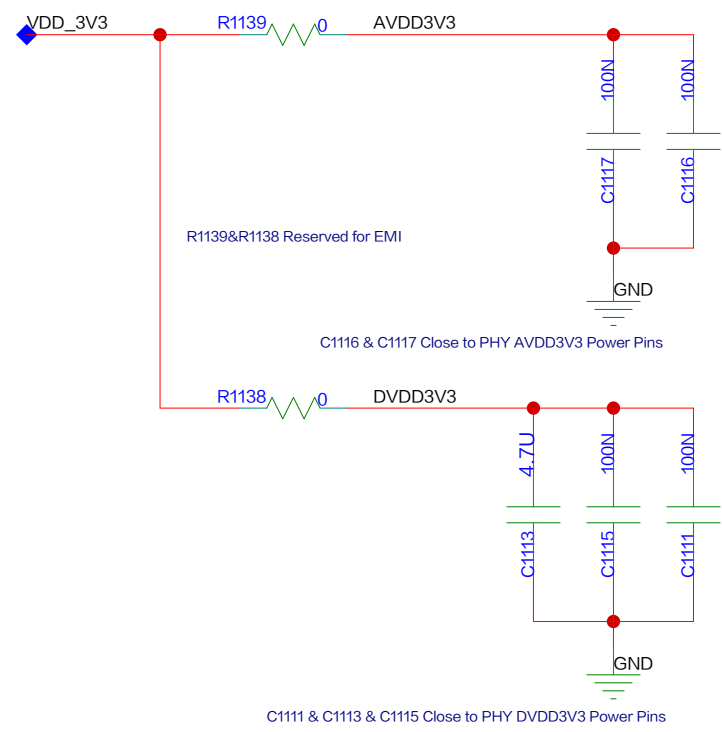


Digital RGMII I/O,MDIO,MDC Pad Power




Switching Regulator

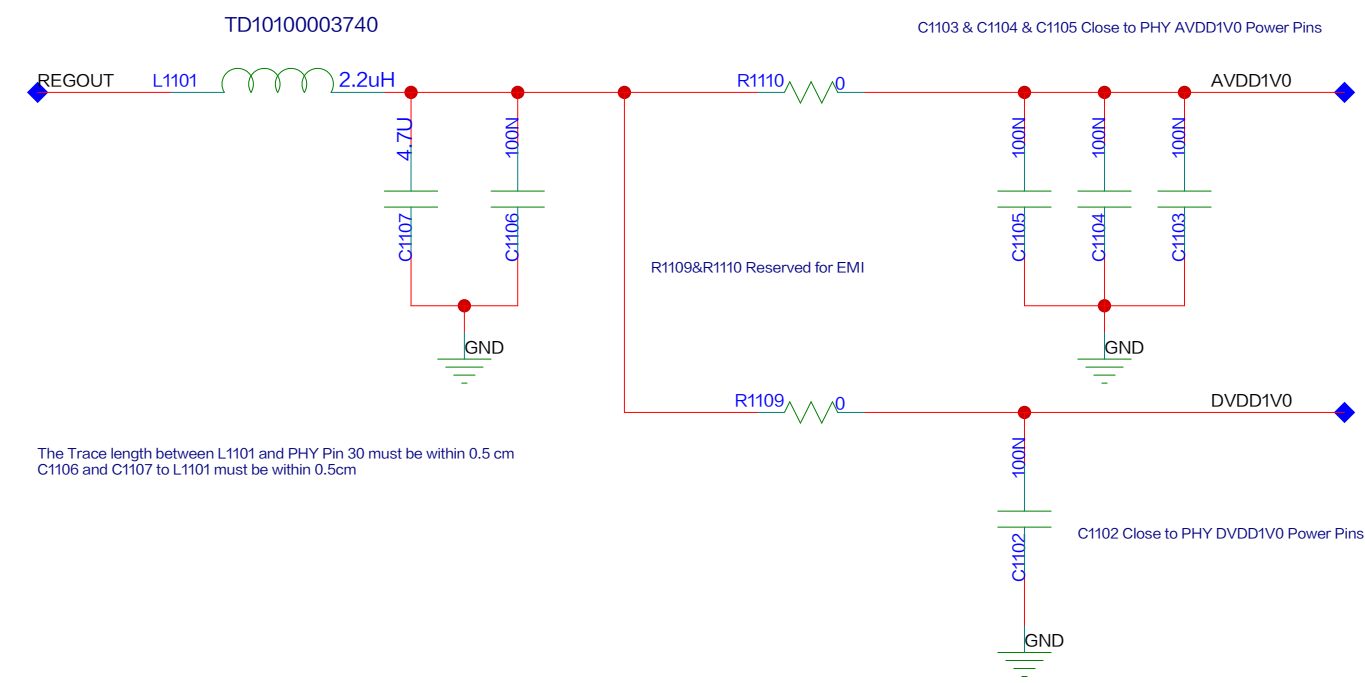


Crystal

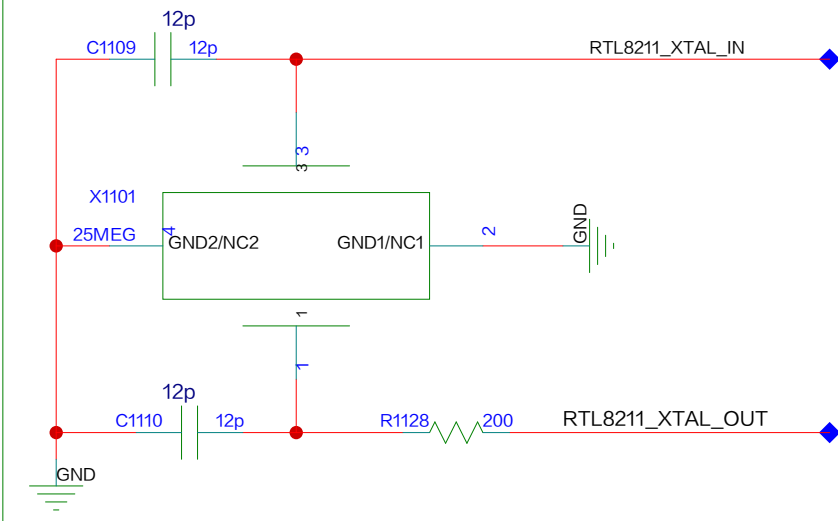

Reset

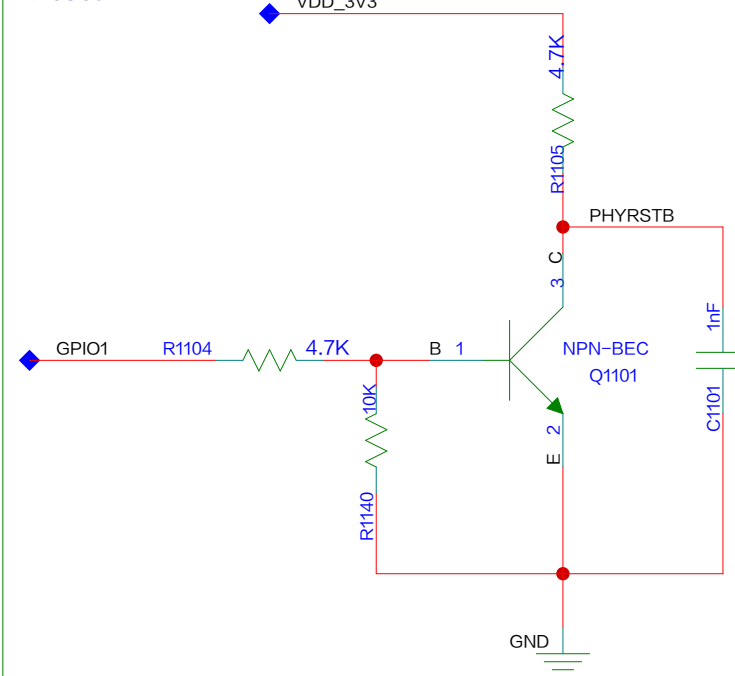

LED

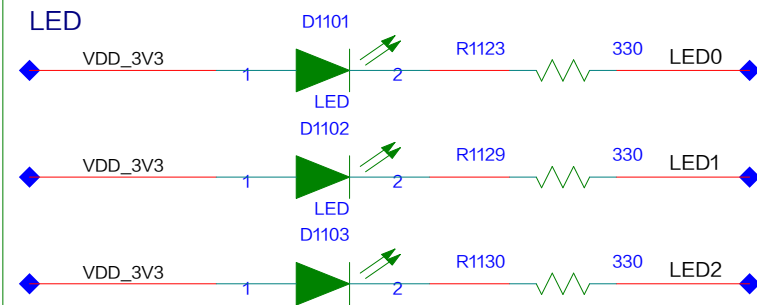

CFG_LDO[1:0]: Voltage Selection for the RGMII I/O,MDIO,MDC Pad
CFG_LDO[1:0]=2b10 : 1.8V

VDD_3V3 R1145 4.7K* LED1 R1144 4.7K GND

VDD_3V3 R1142 4.7K LED2 R1143 4.7K* GND

CFG_EXT: I/O Pad External Power Source Mode Configuration
CFG_EXT=1b0 ;use the integrated LDO

CPG_EX1=100, use the integrated LDO

VDD_3V3 R1108 4.7K* LED0 R1107 4.7K GND

RXC Delay
Pull-up for

Full stop for additional 21.3% delay to POCO for data matching

DVDD_RG R1126 4.7K* RGMII_RXD0 R1120 4.7K GND
 DVDD_RG R1118 4.7K* RGMII_RXD1 R1111 4.7K GND

MDIO

PHYAD[2:0]:PHY Address Configuration
PHYAD[2:0]=3b001(Default)

PHYADJ(2:U)=3600U(Default)


Signal	Value	Unit	Signal	Value	Unit	Signal	Value	Unit
DVDD_RG	R1113	4.7K	RGMII_RXD3	R1112	4.7K*	GN		
DVDD_RG	R1117	4.7K*	RGMII_RX_CLK	R1116	4.7K	GN		
DVDD_RG	R1114	4.7K*	RGMII_RX_DV	R1115	4.7K	GN		

PLL

DVDD_RG R1122 4.7K* RGMII_RXD2 R1121 4.7K GN

INTB

VDD_3V3 R1106 2K GPIO2 R1103 2.49K G

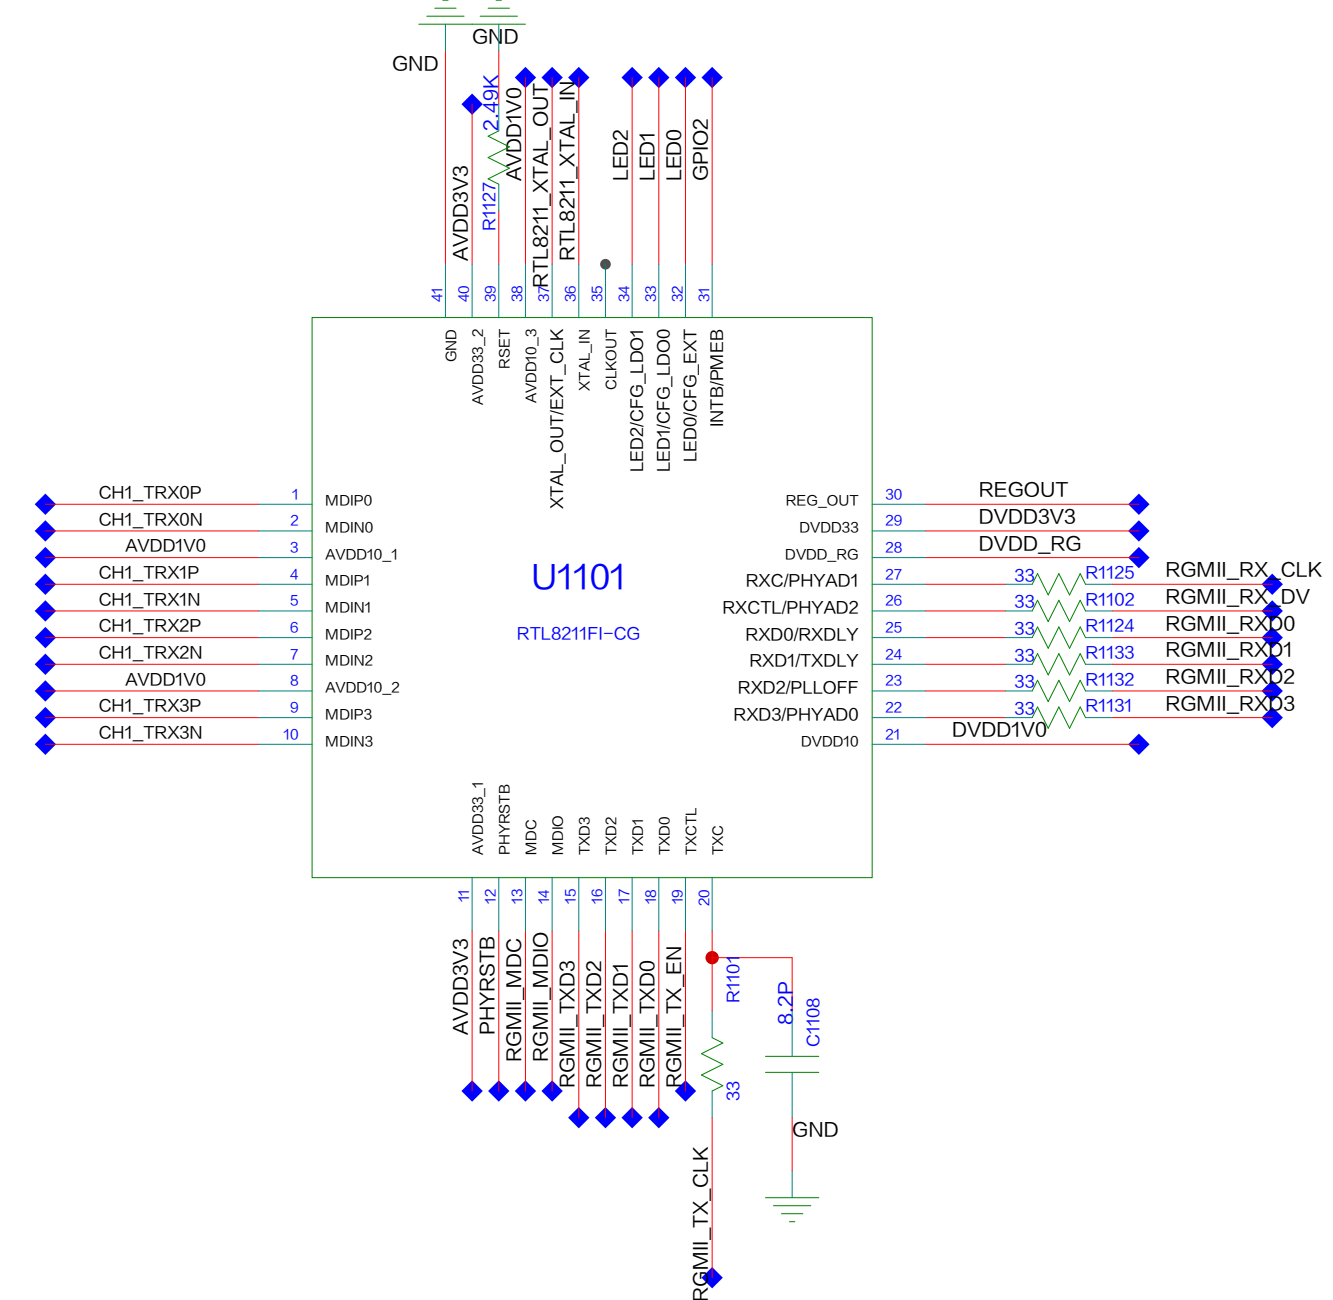

A

B

C


D

A

B

C

D

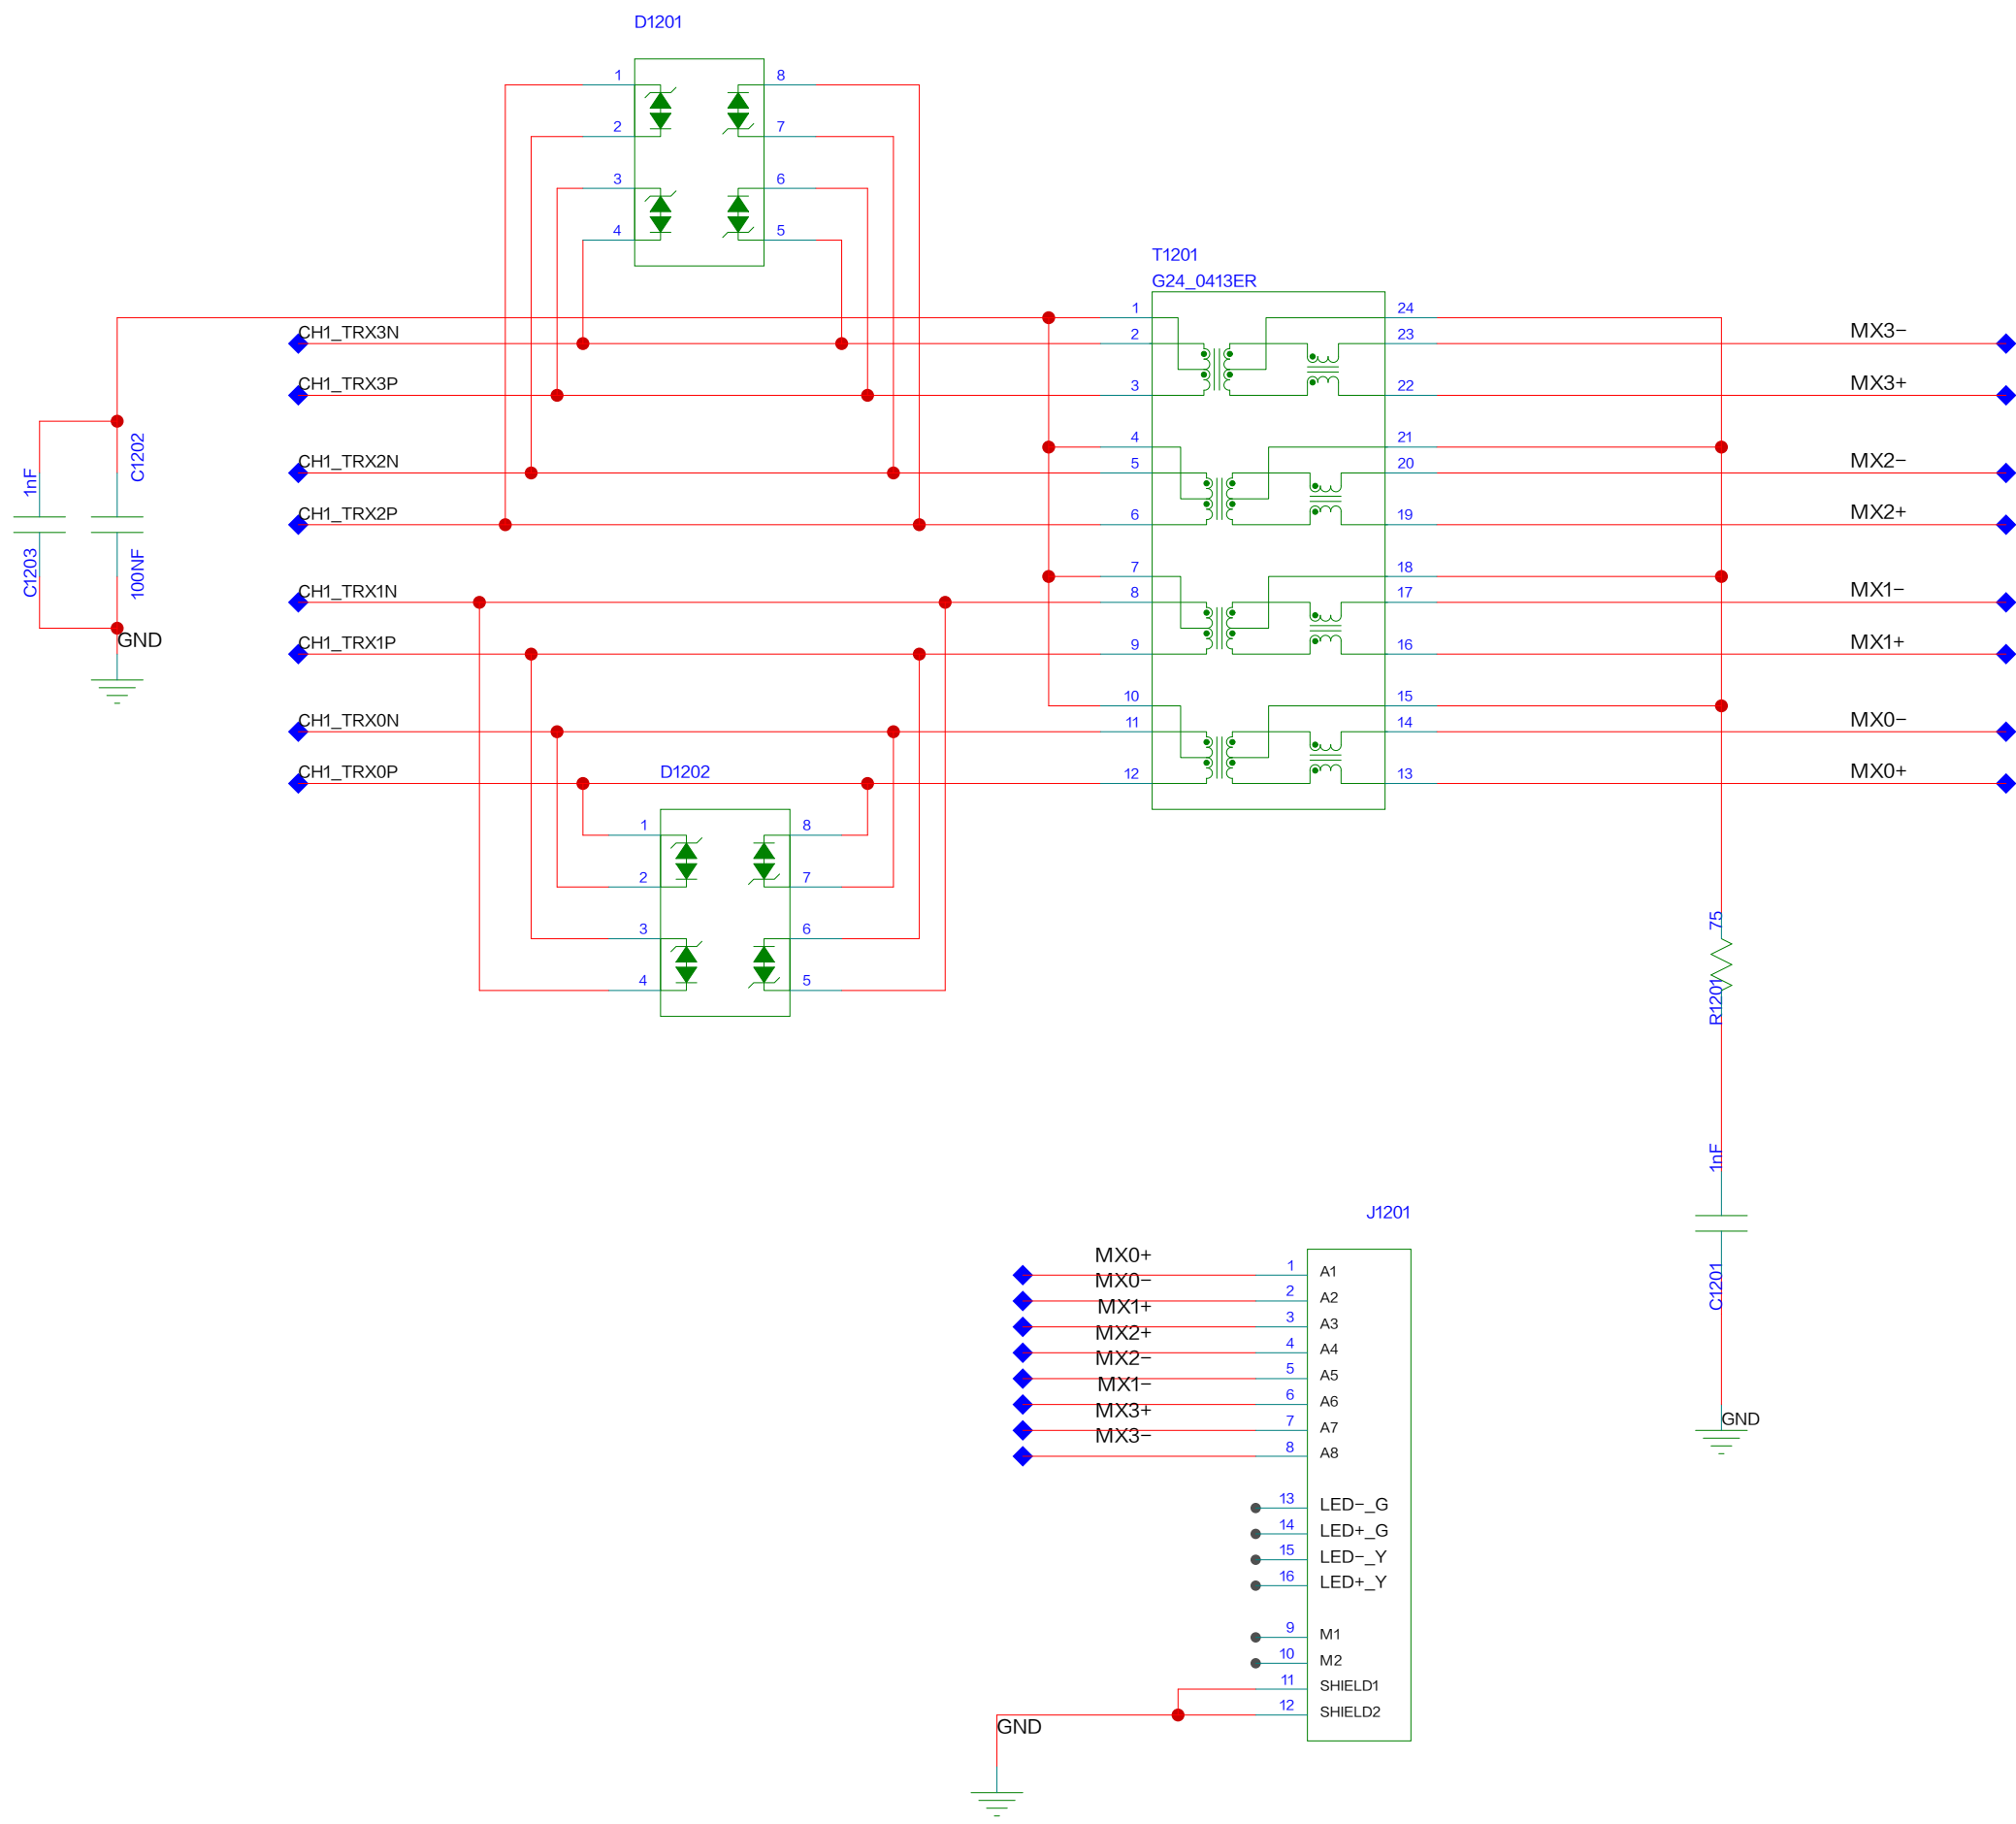

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6

A

B

C


D

A

B

C

D

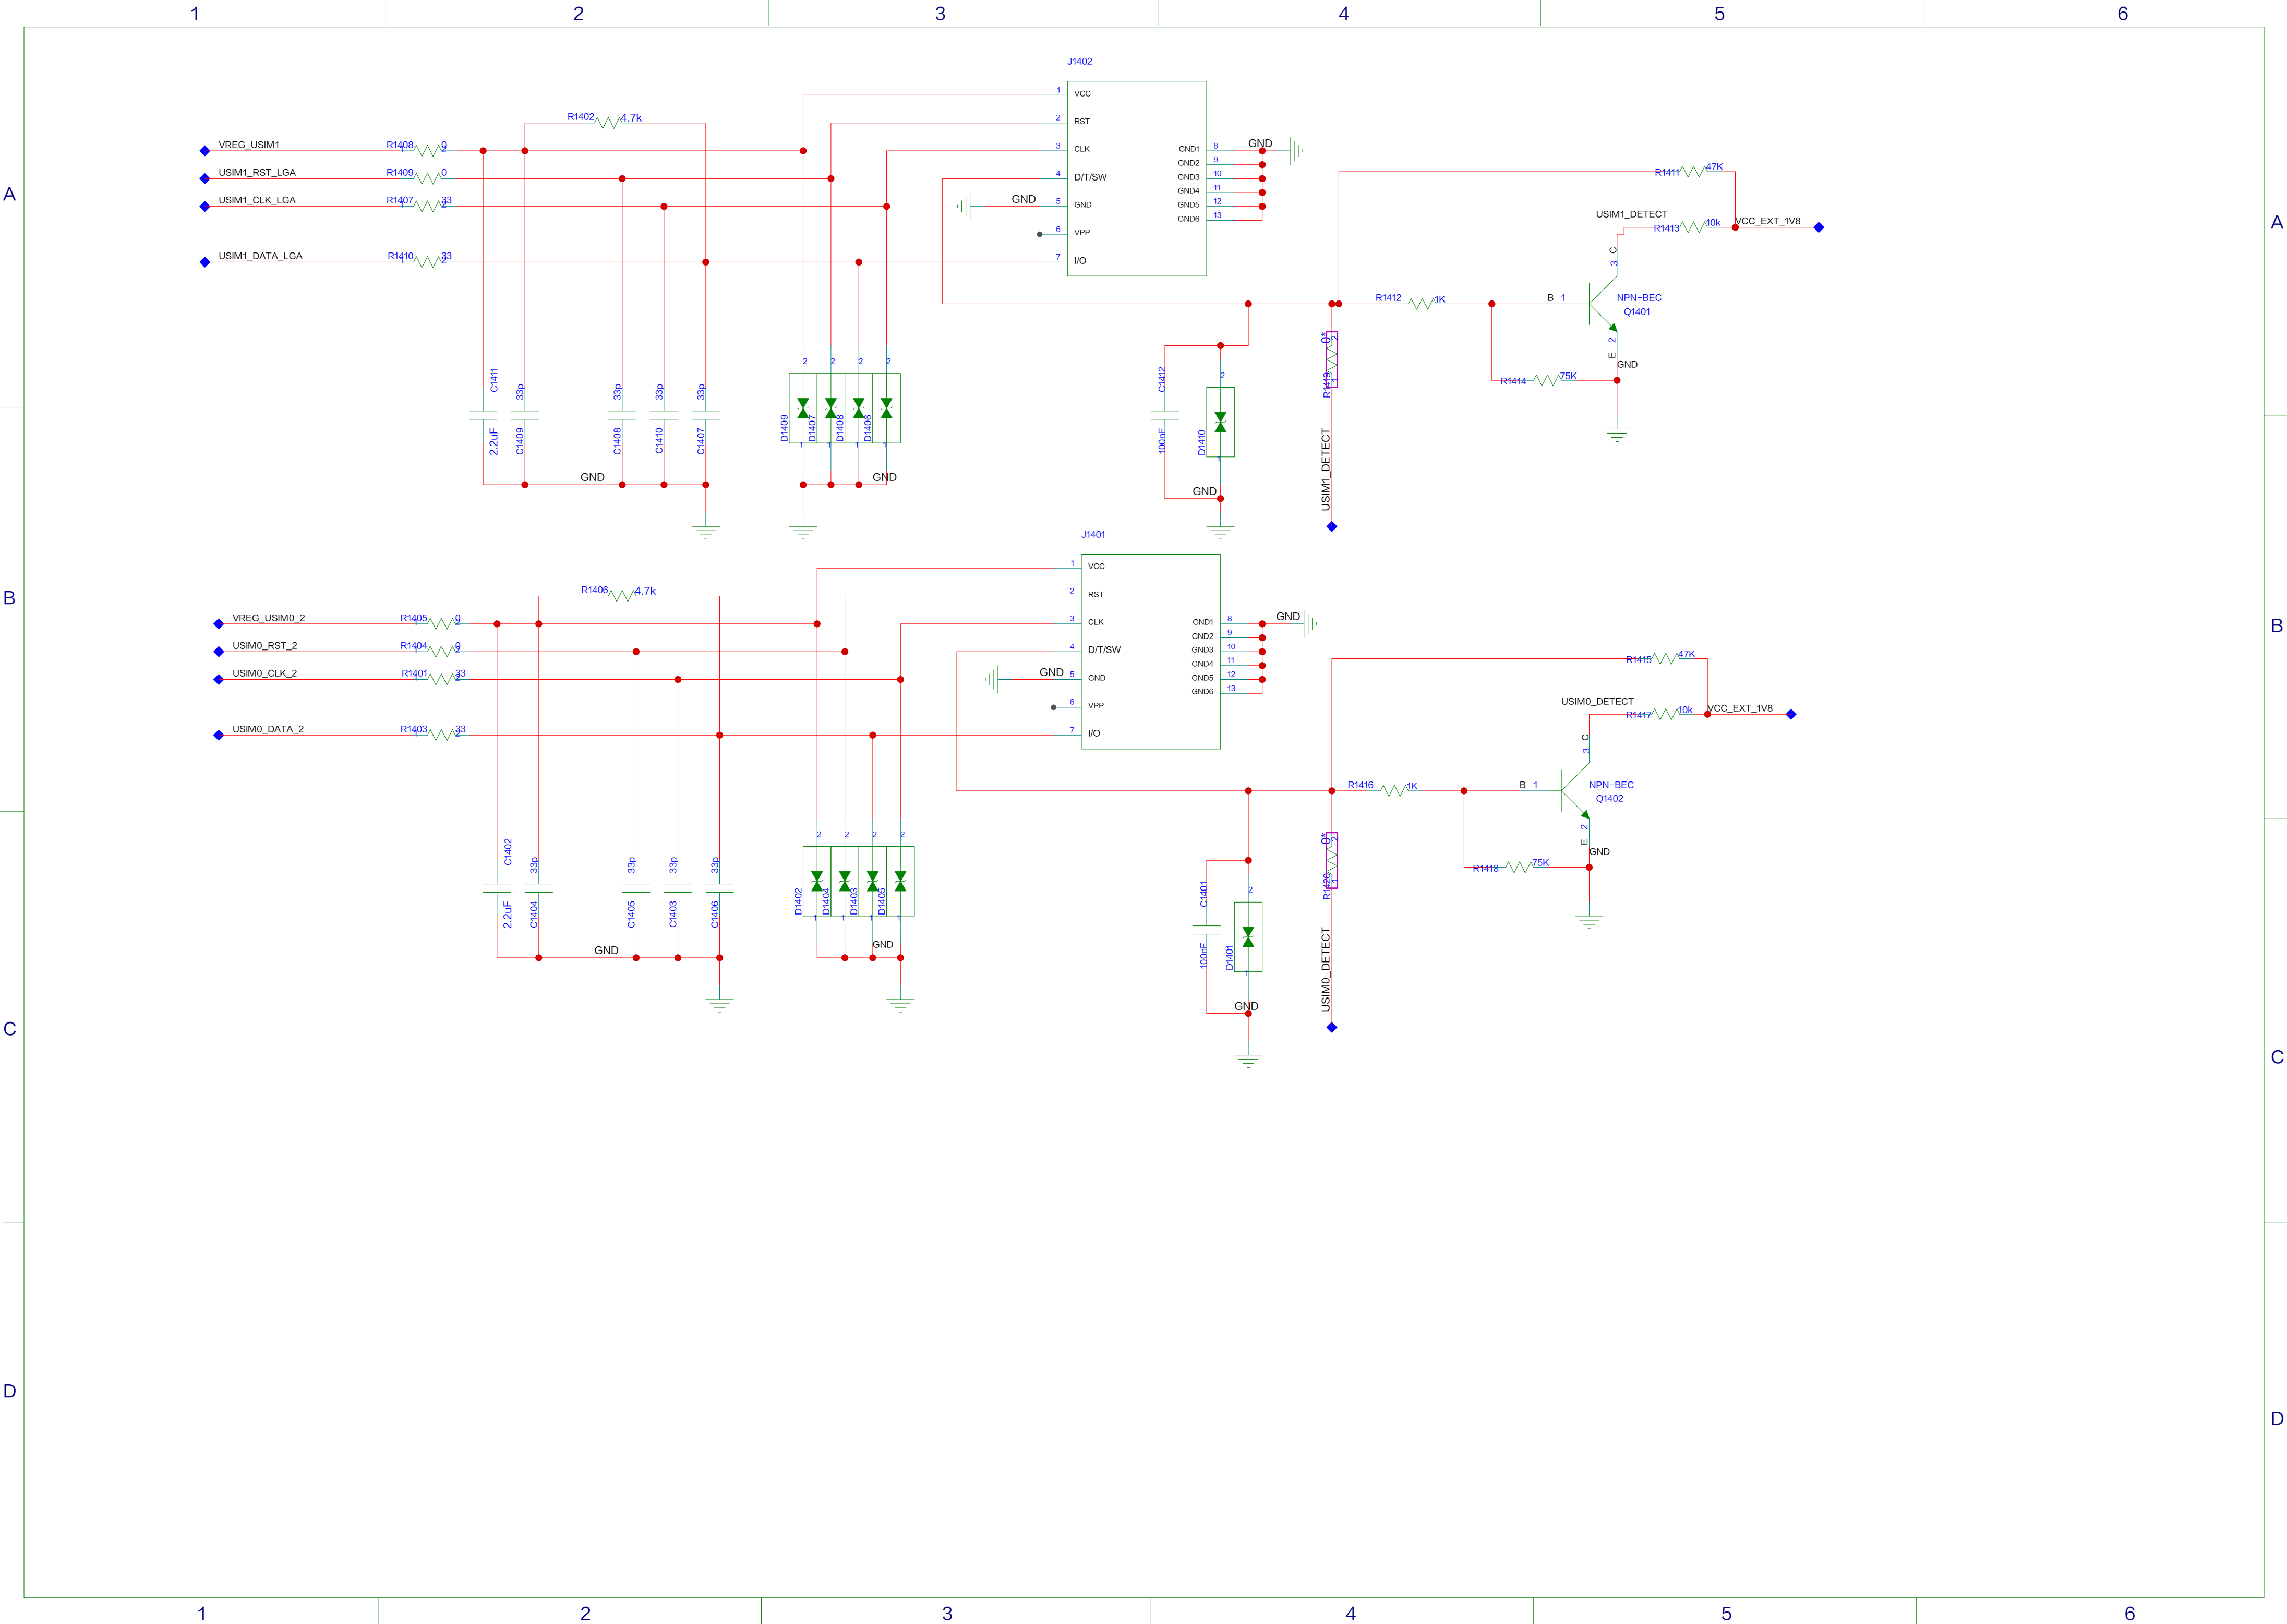

A

B

C








D

A




B

C

D

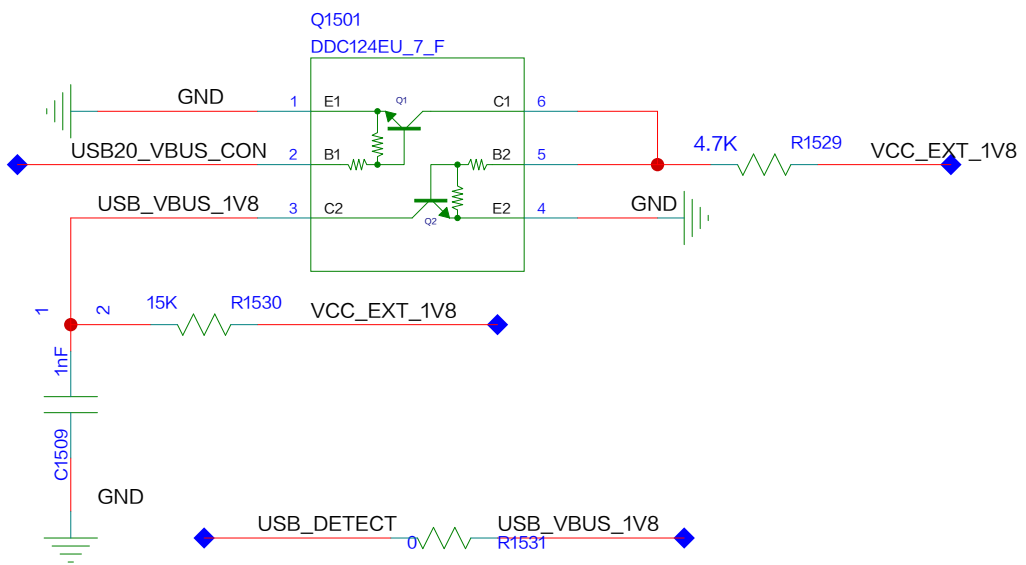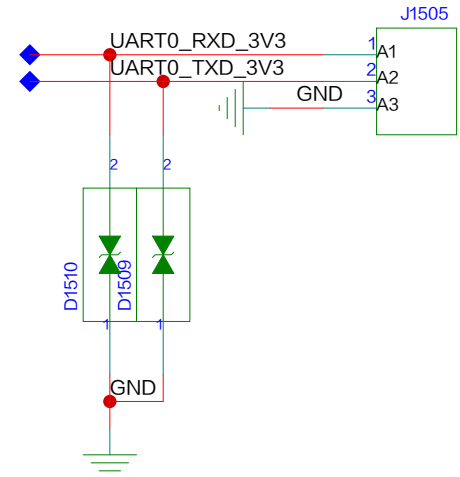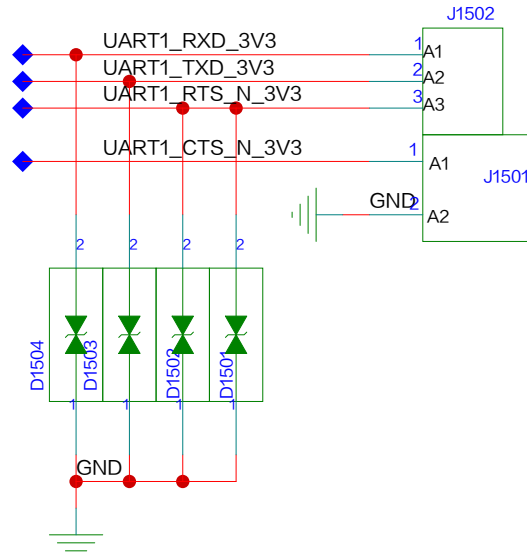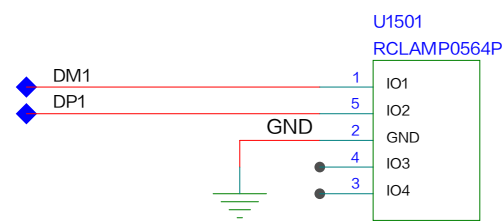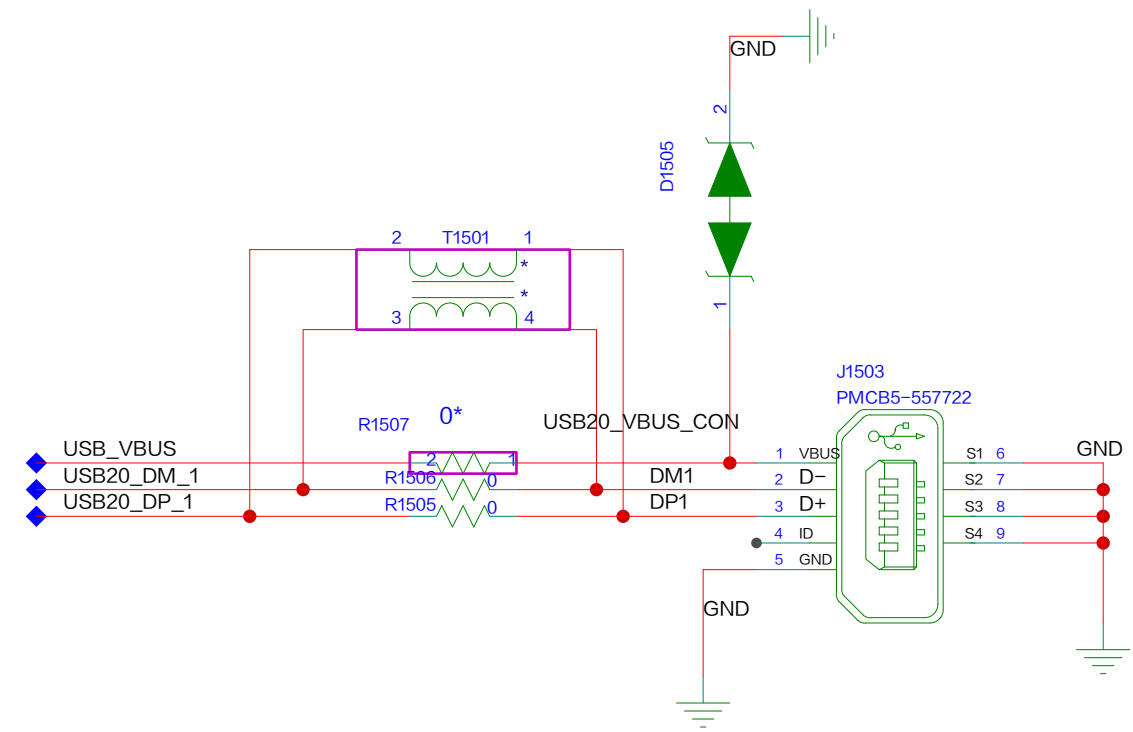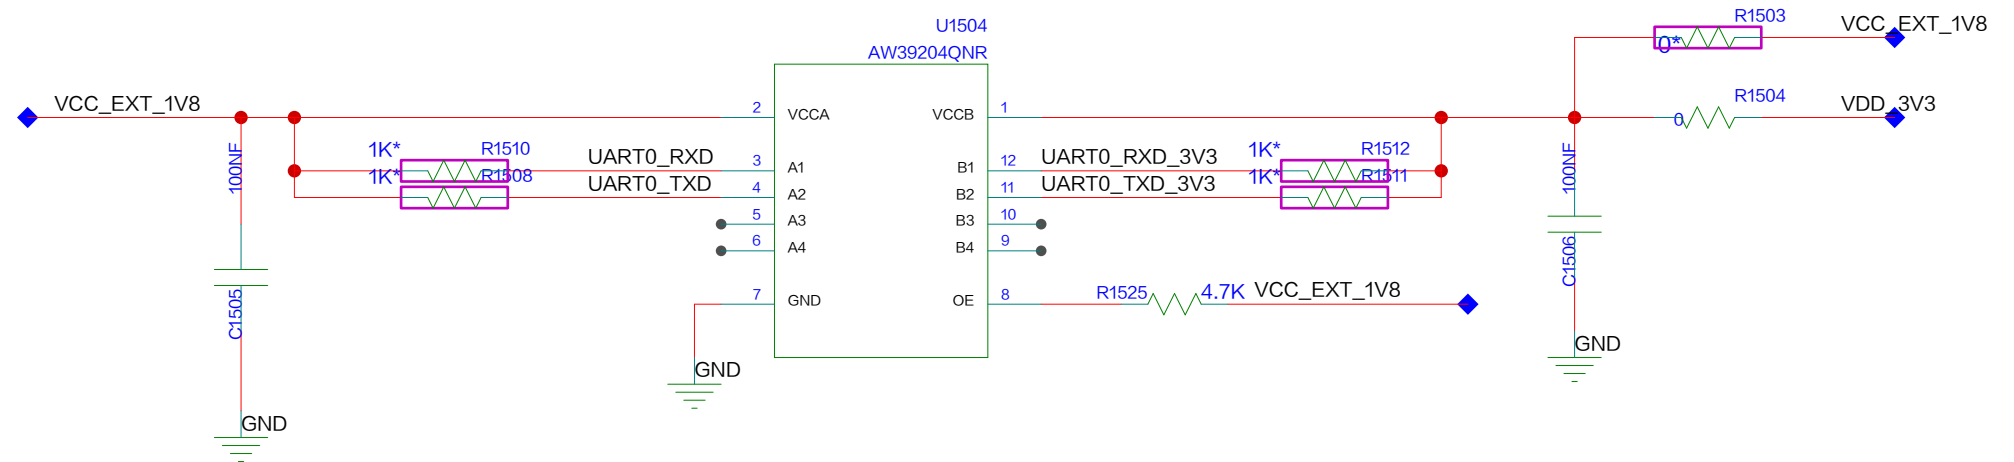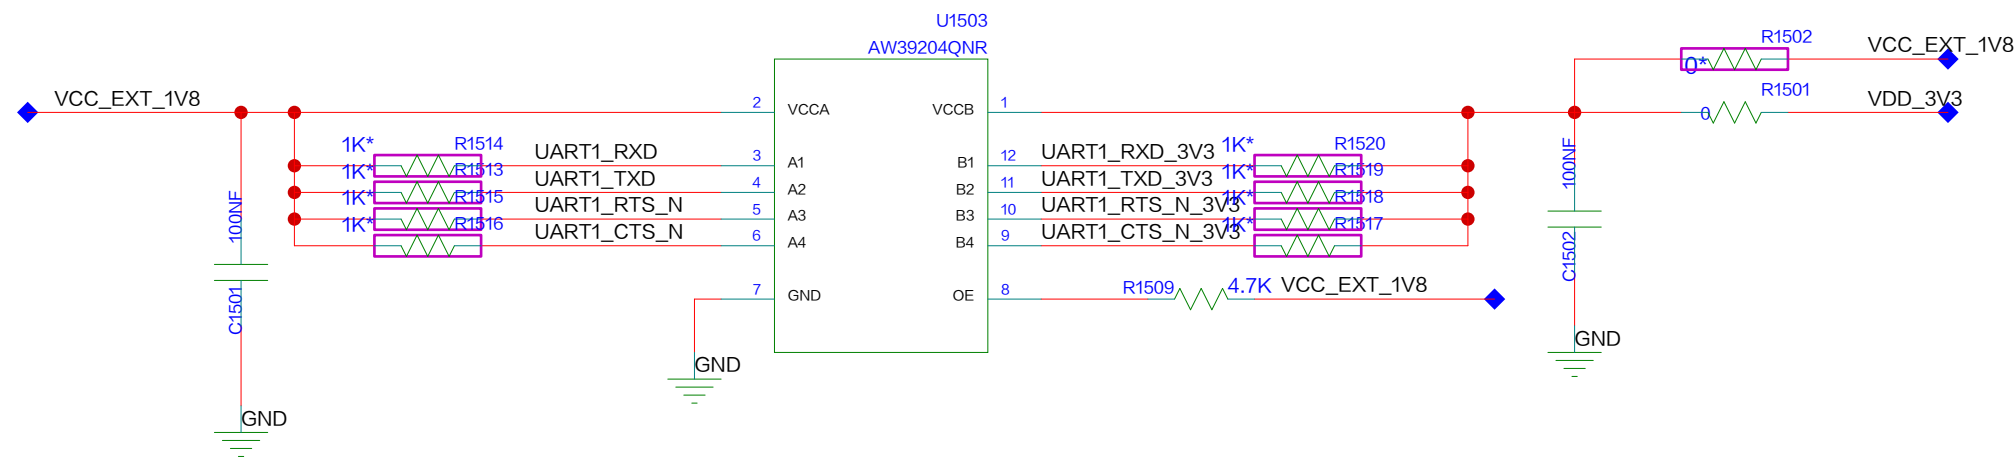


A

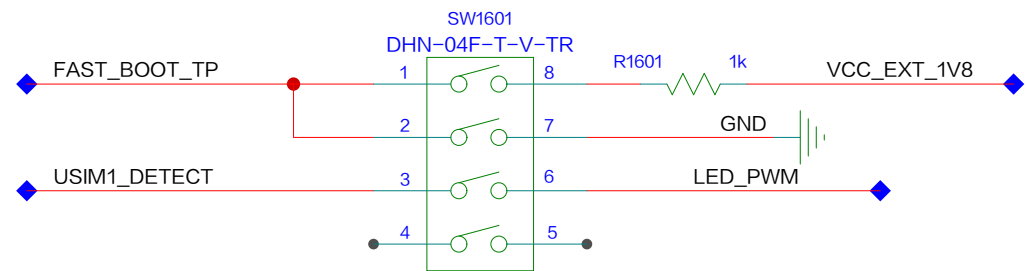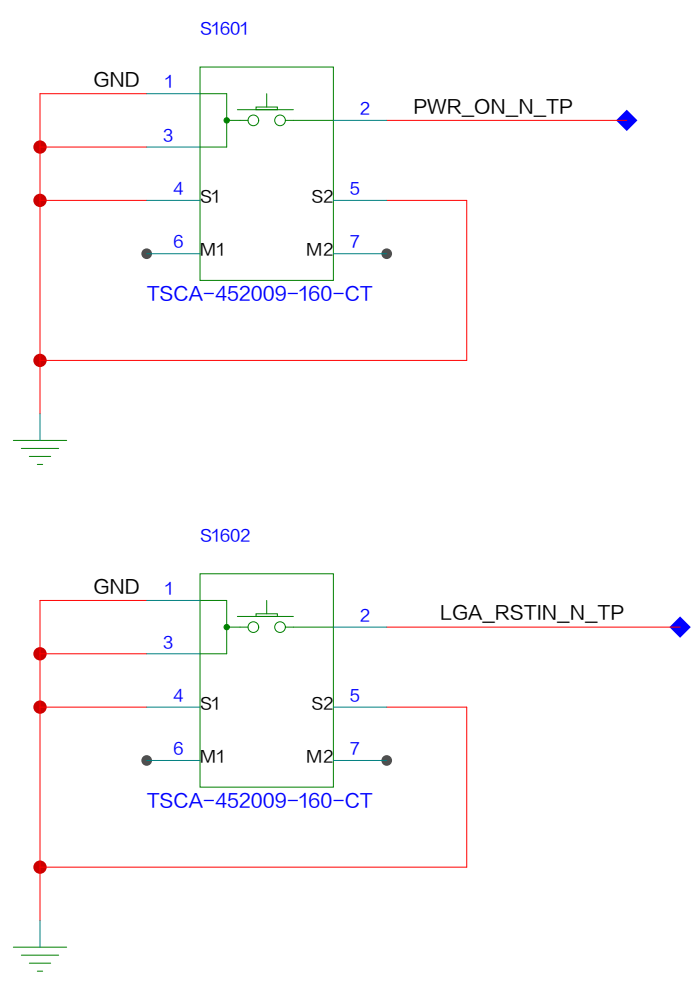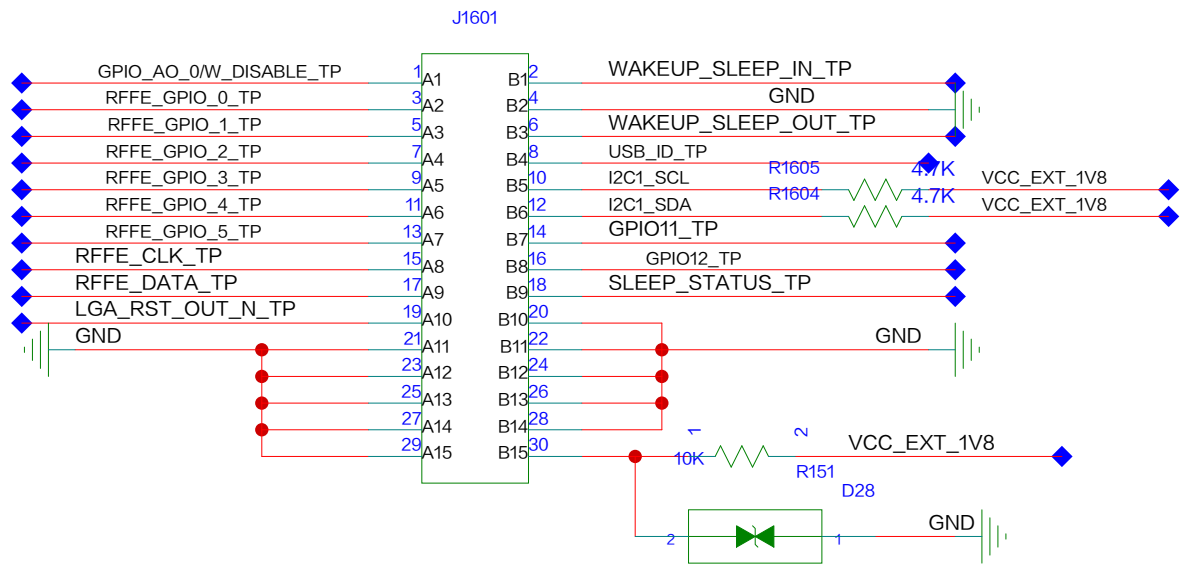

A


B

ESD防护，先放置TVS管，再放置电容

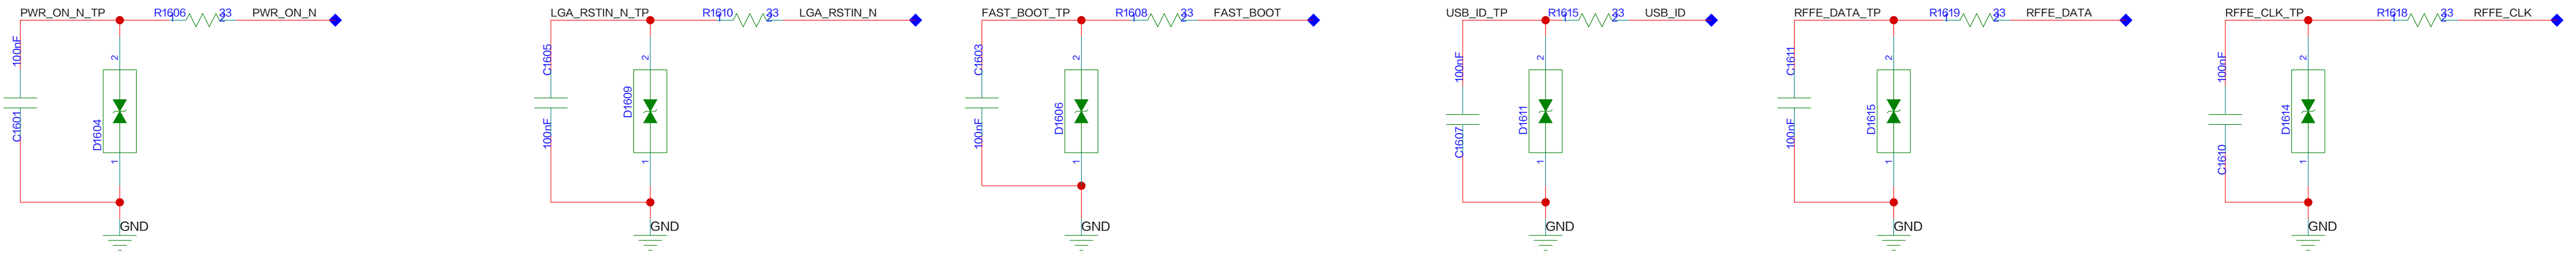


B

C

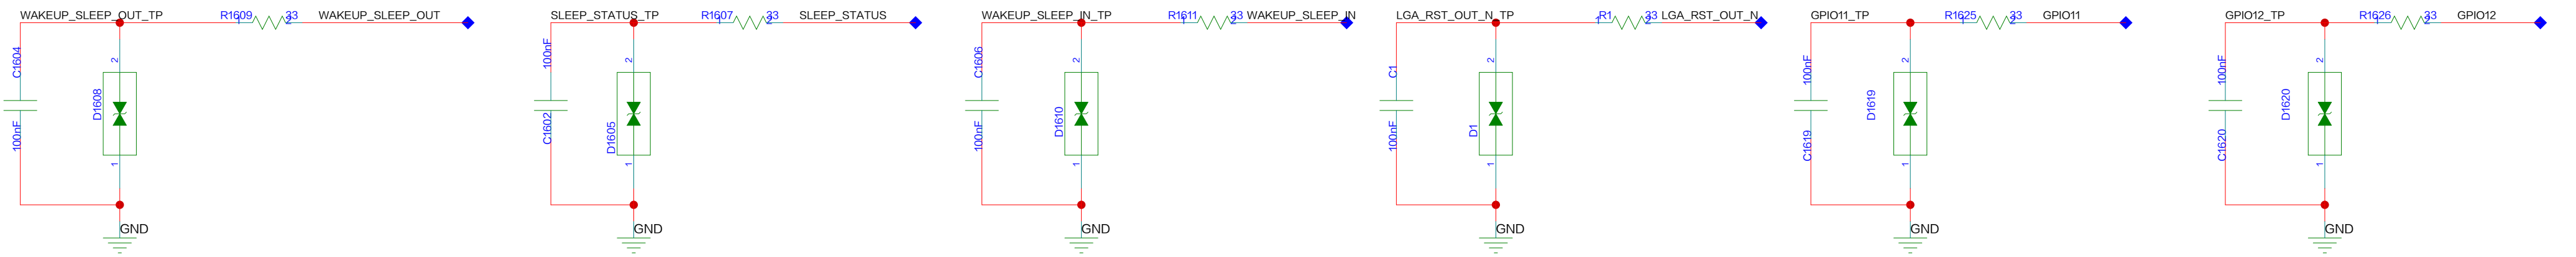

C

D

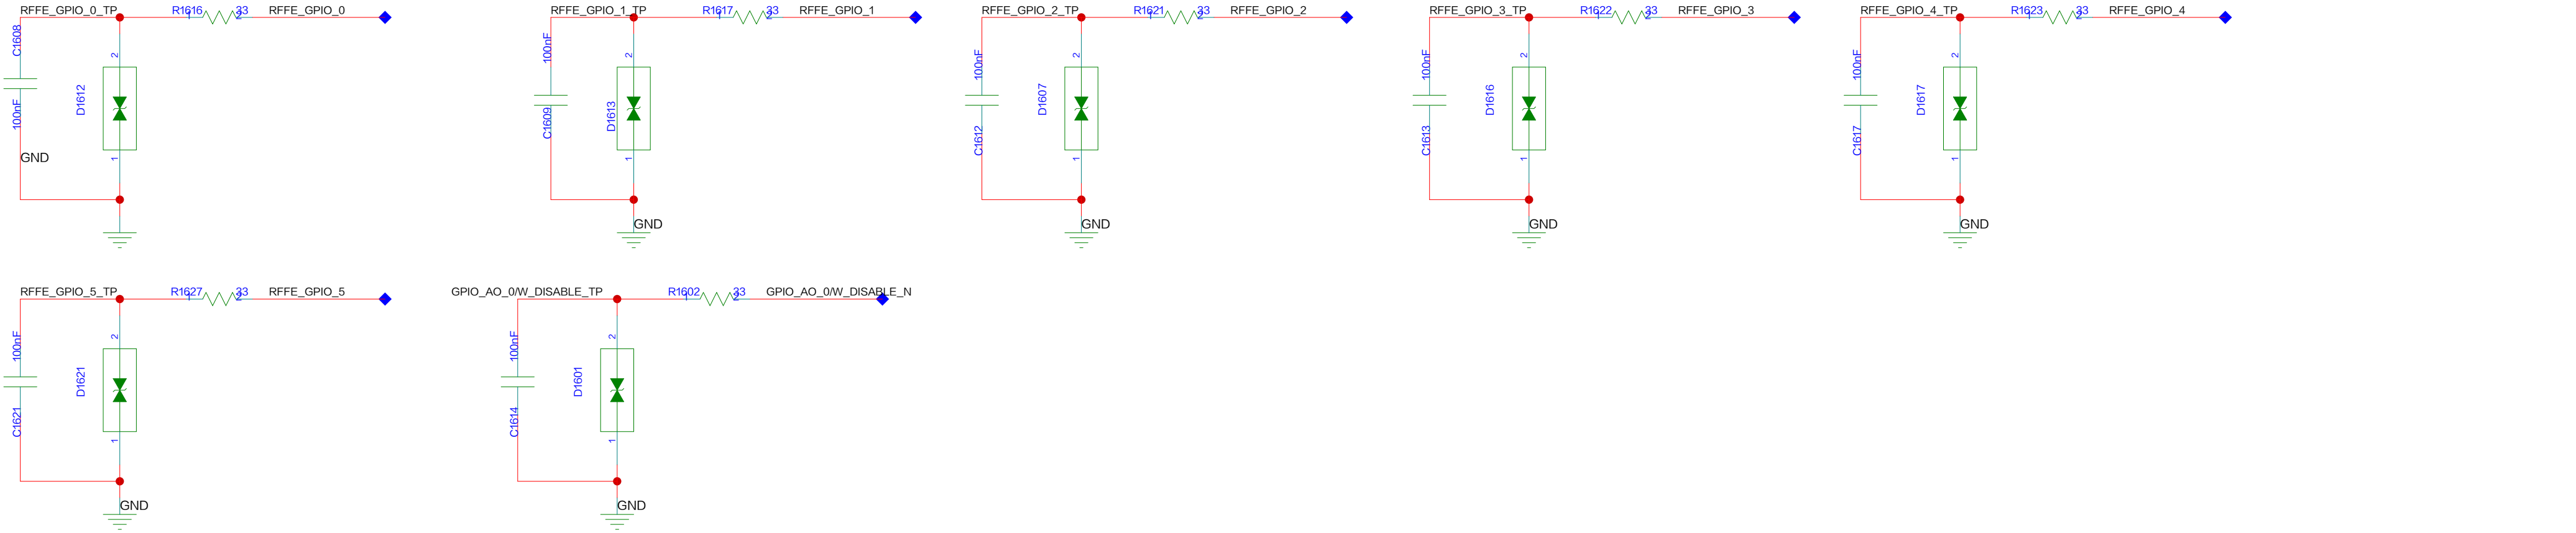

D

A

B

C

D







A

B

C

D

定位孔 & MARK点

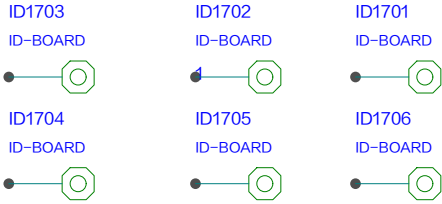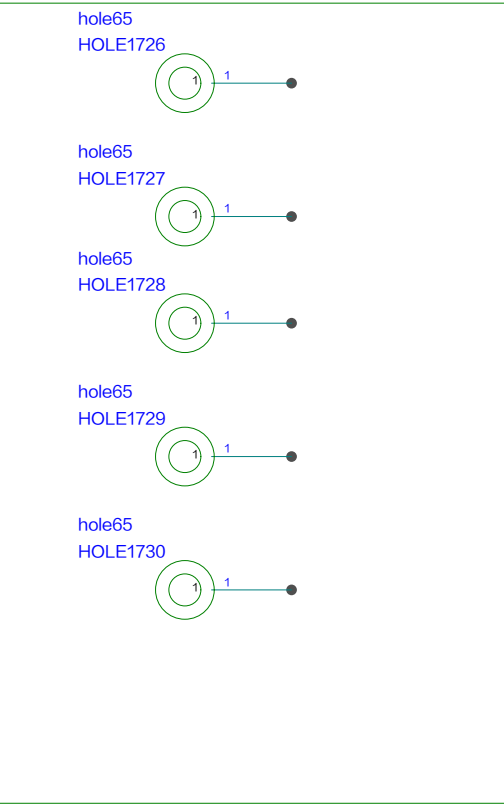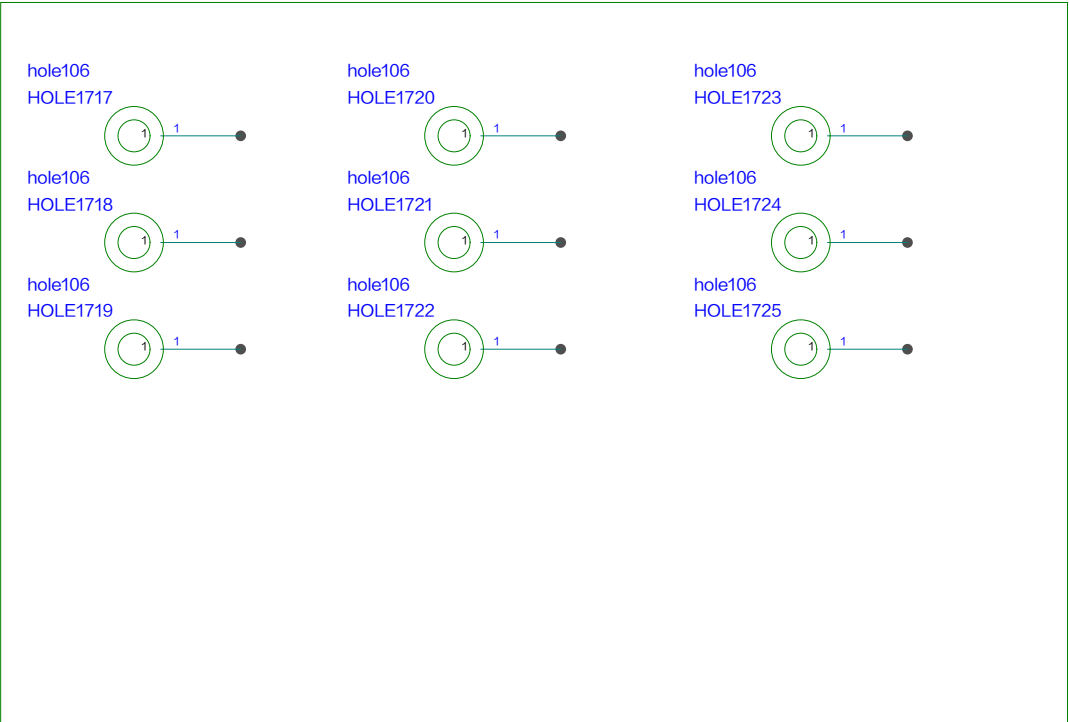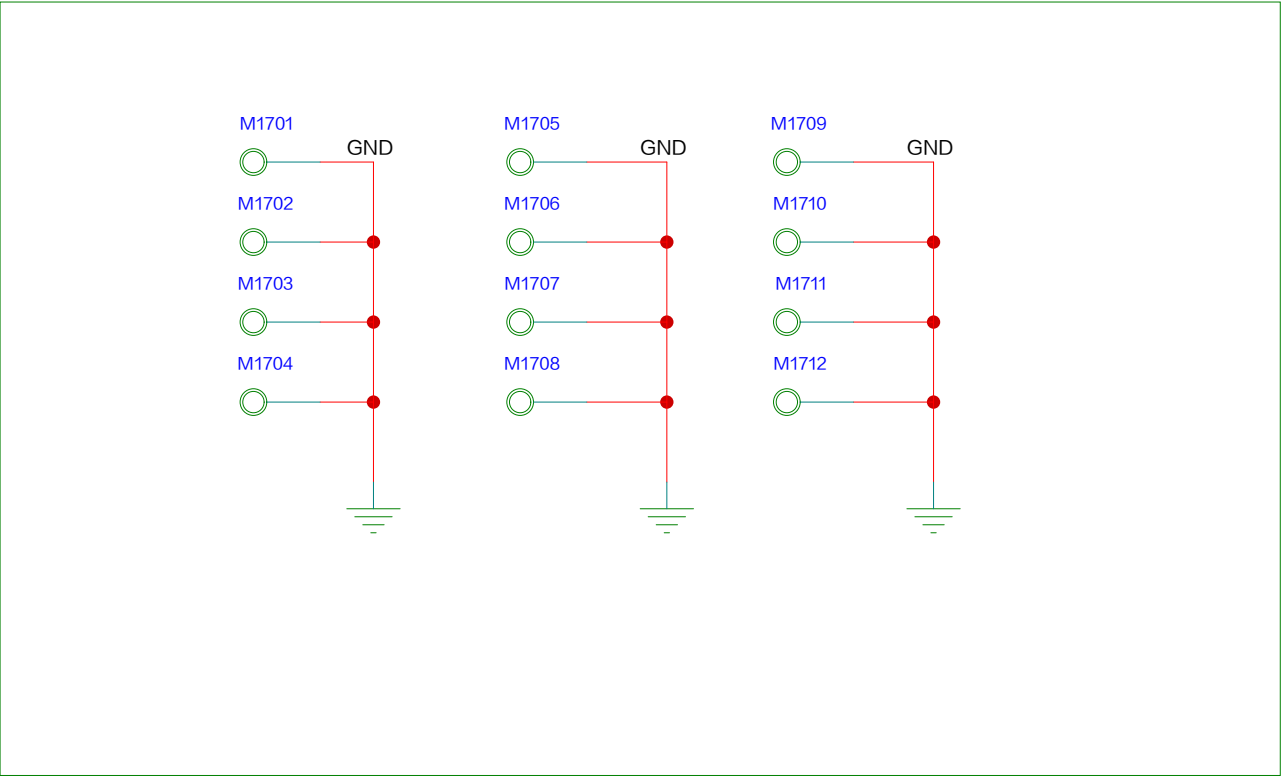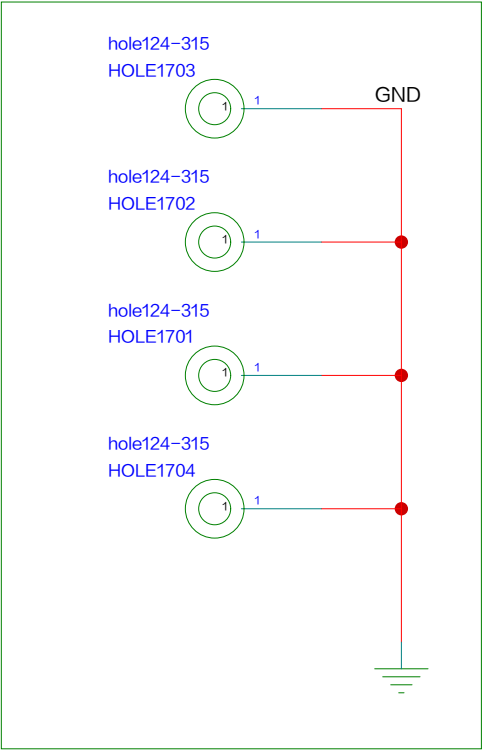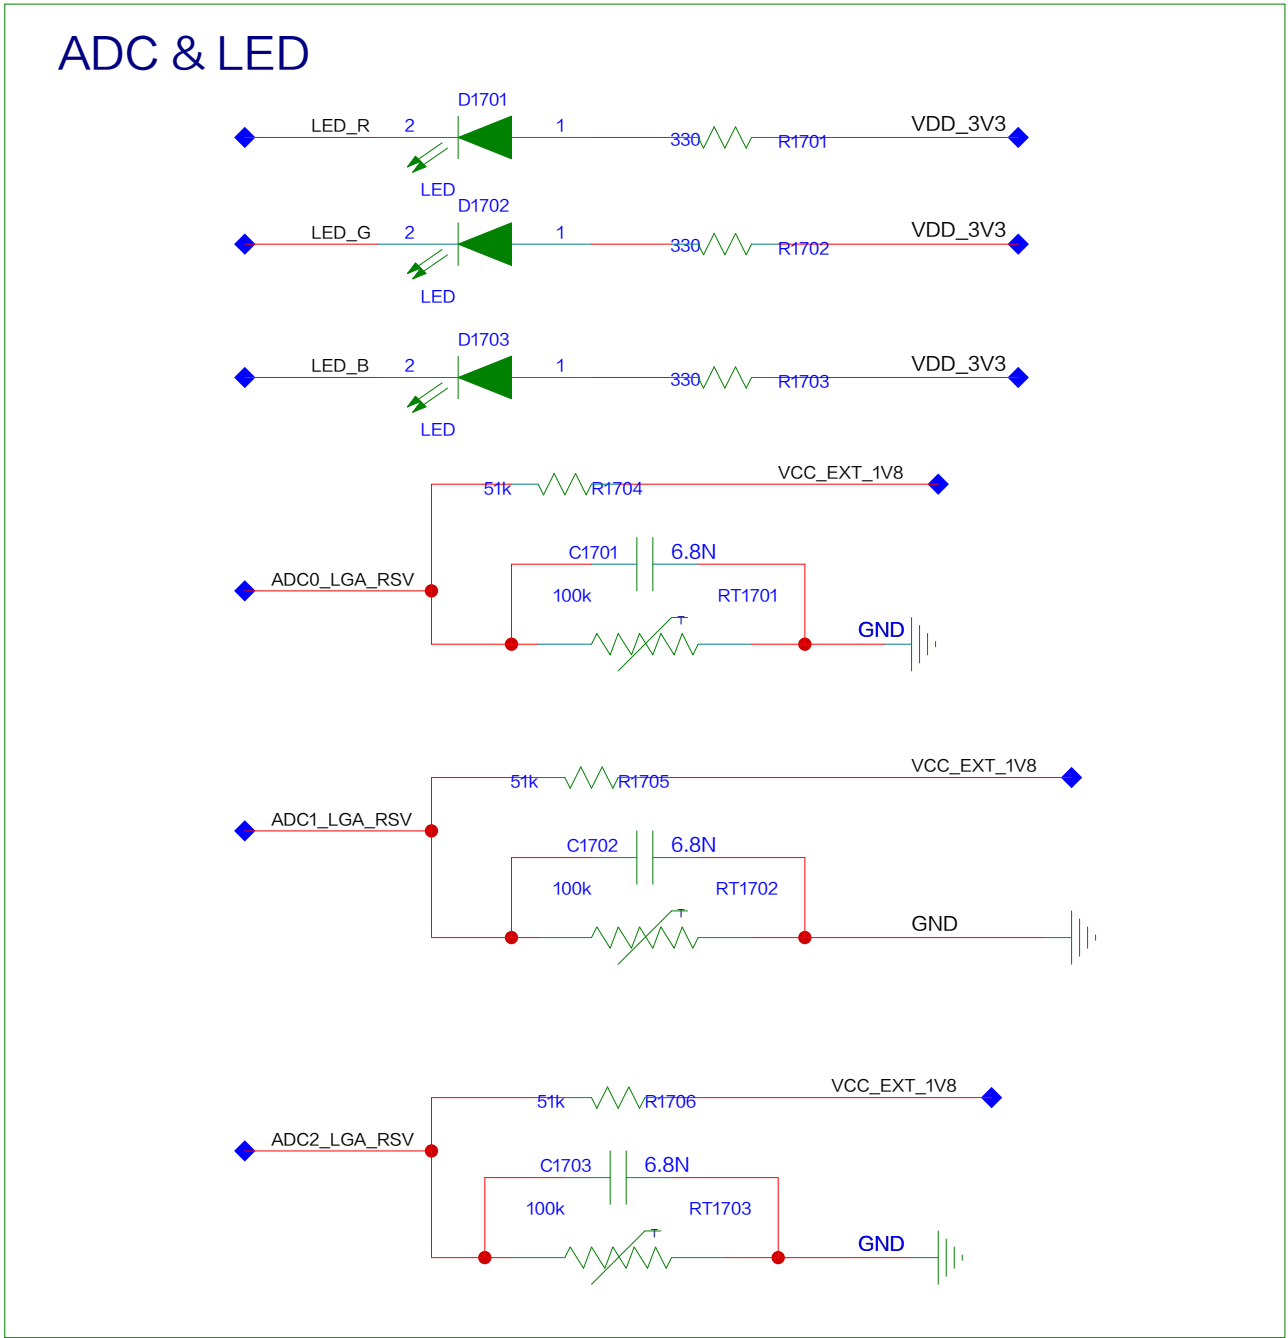

A

B

C



D


A

B

C

D

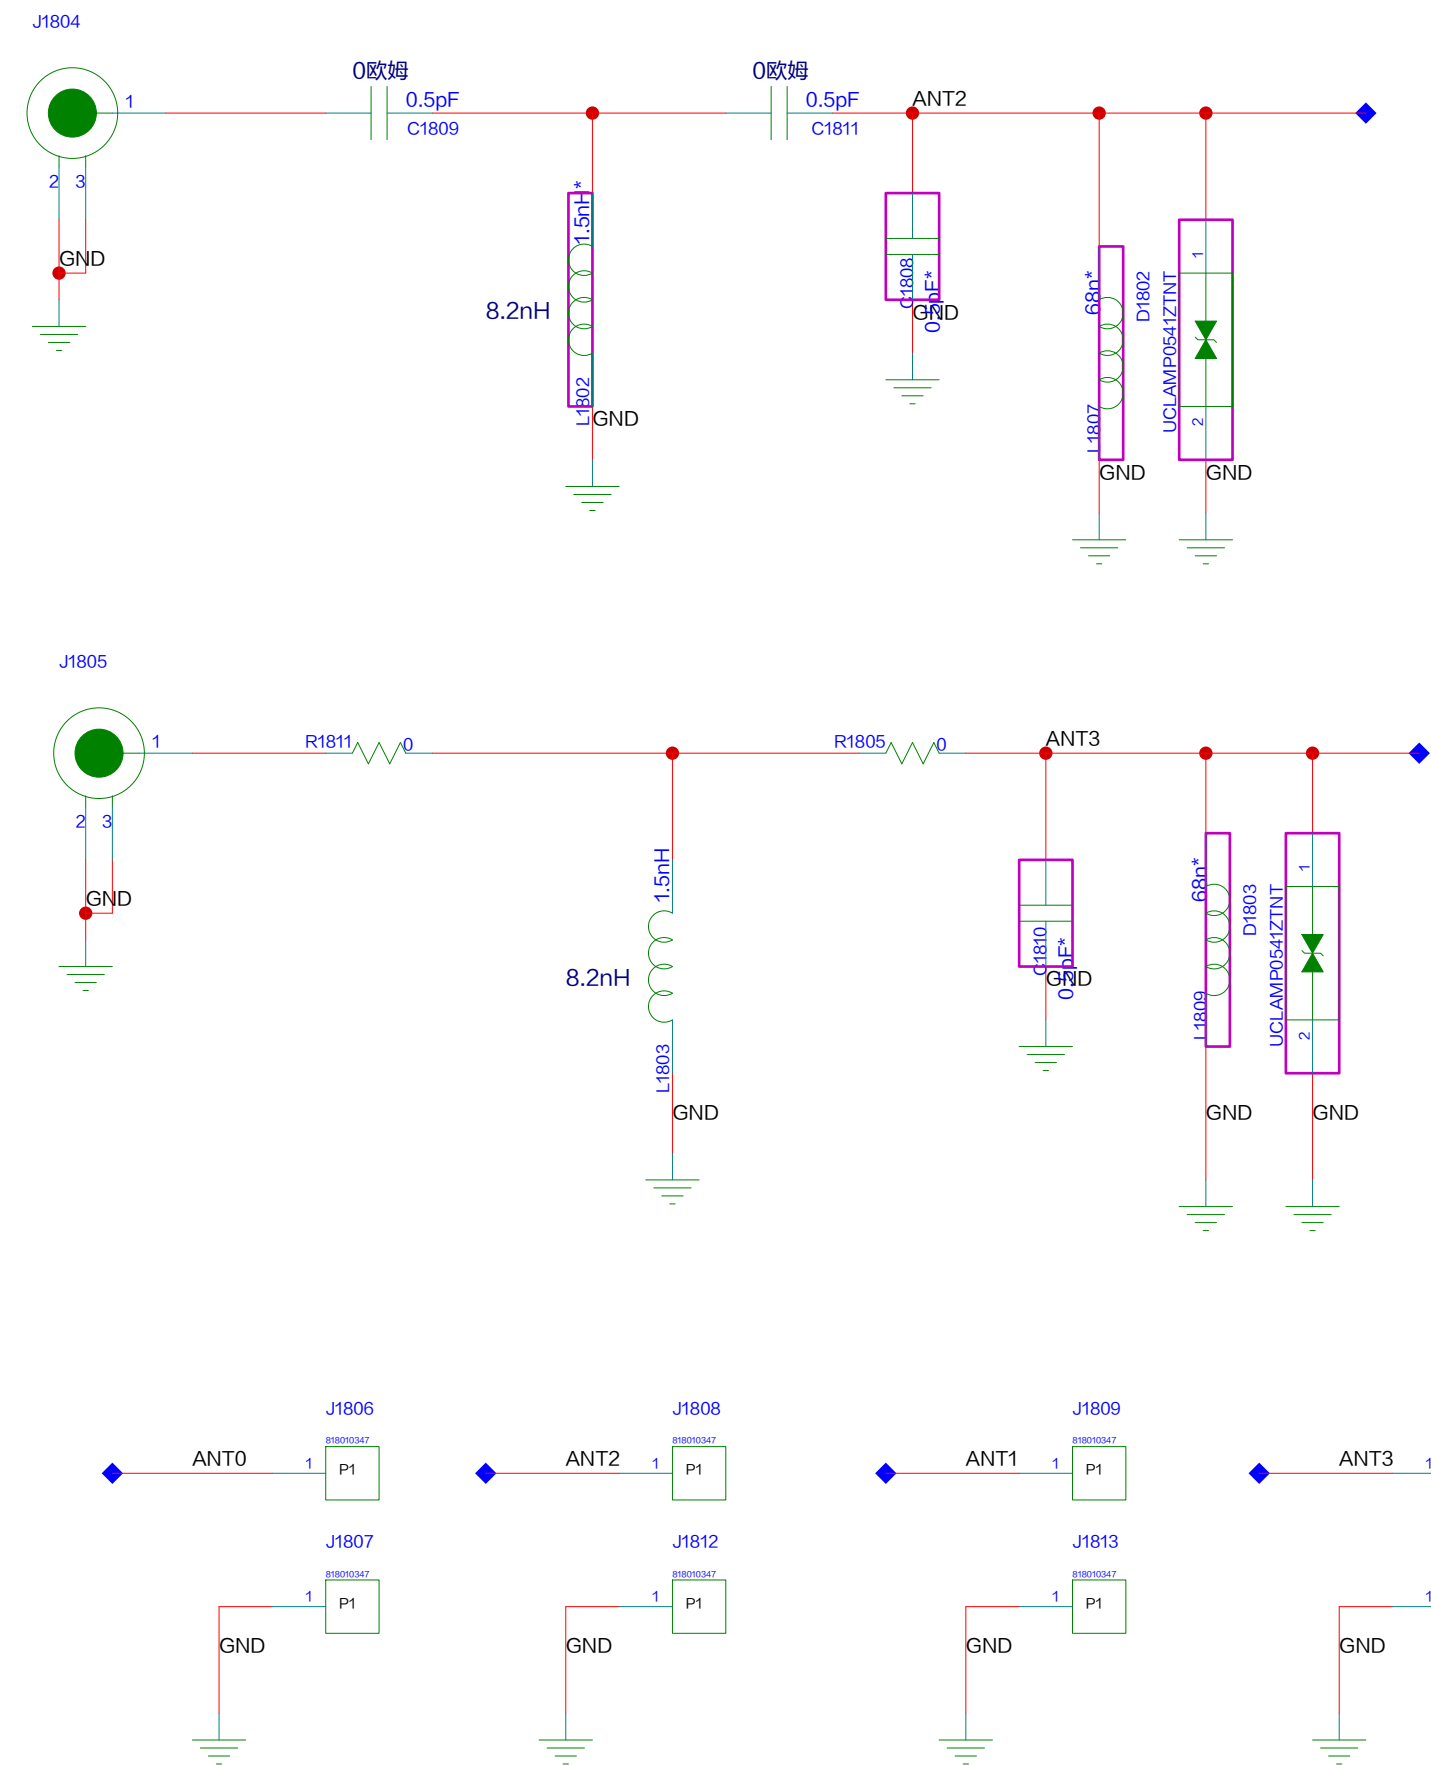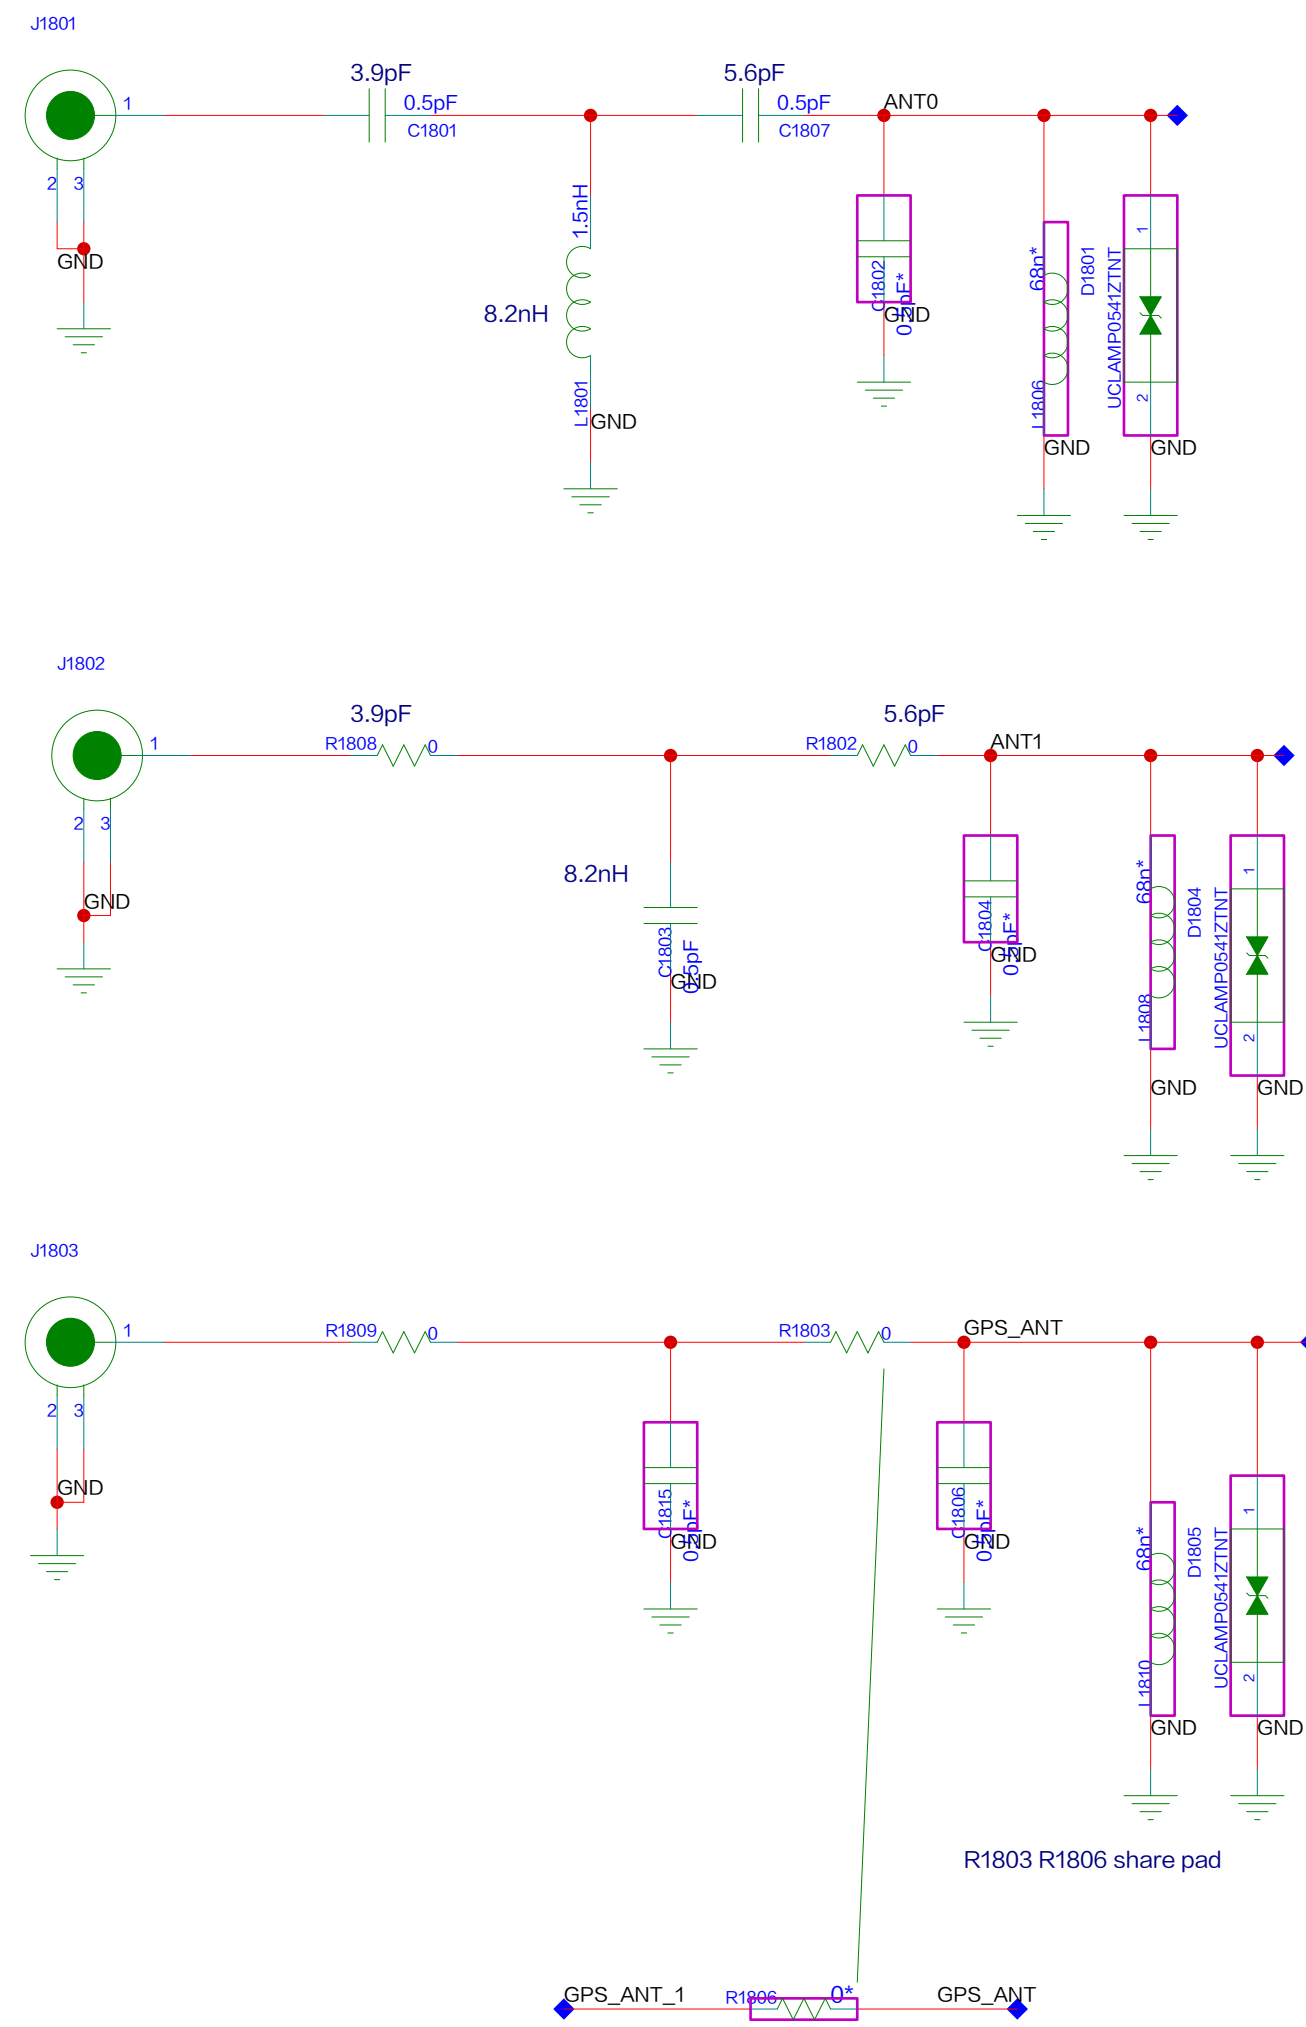

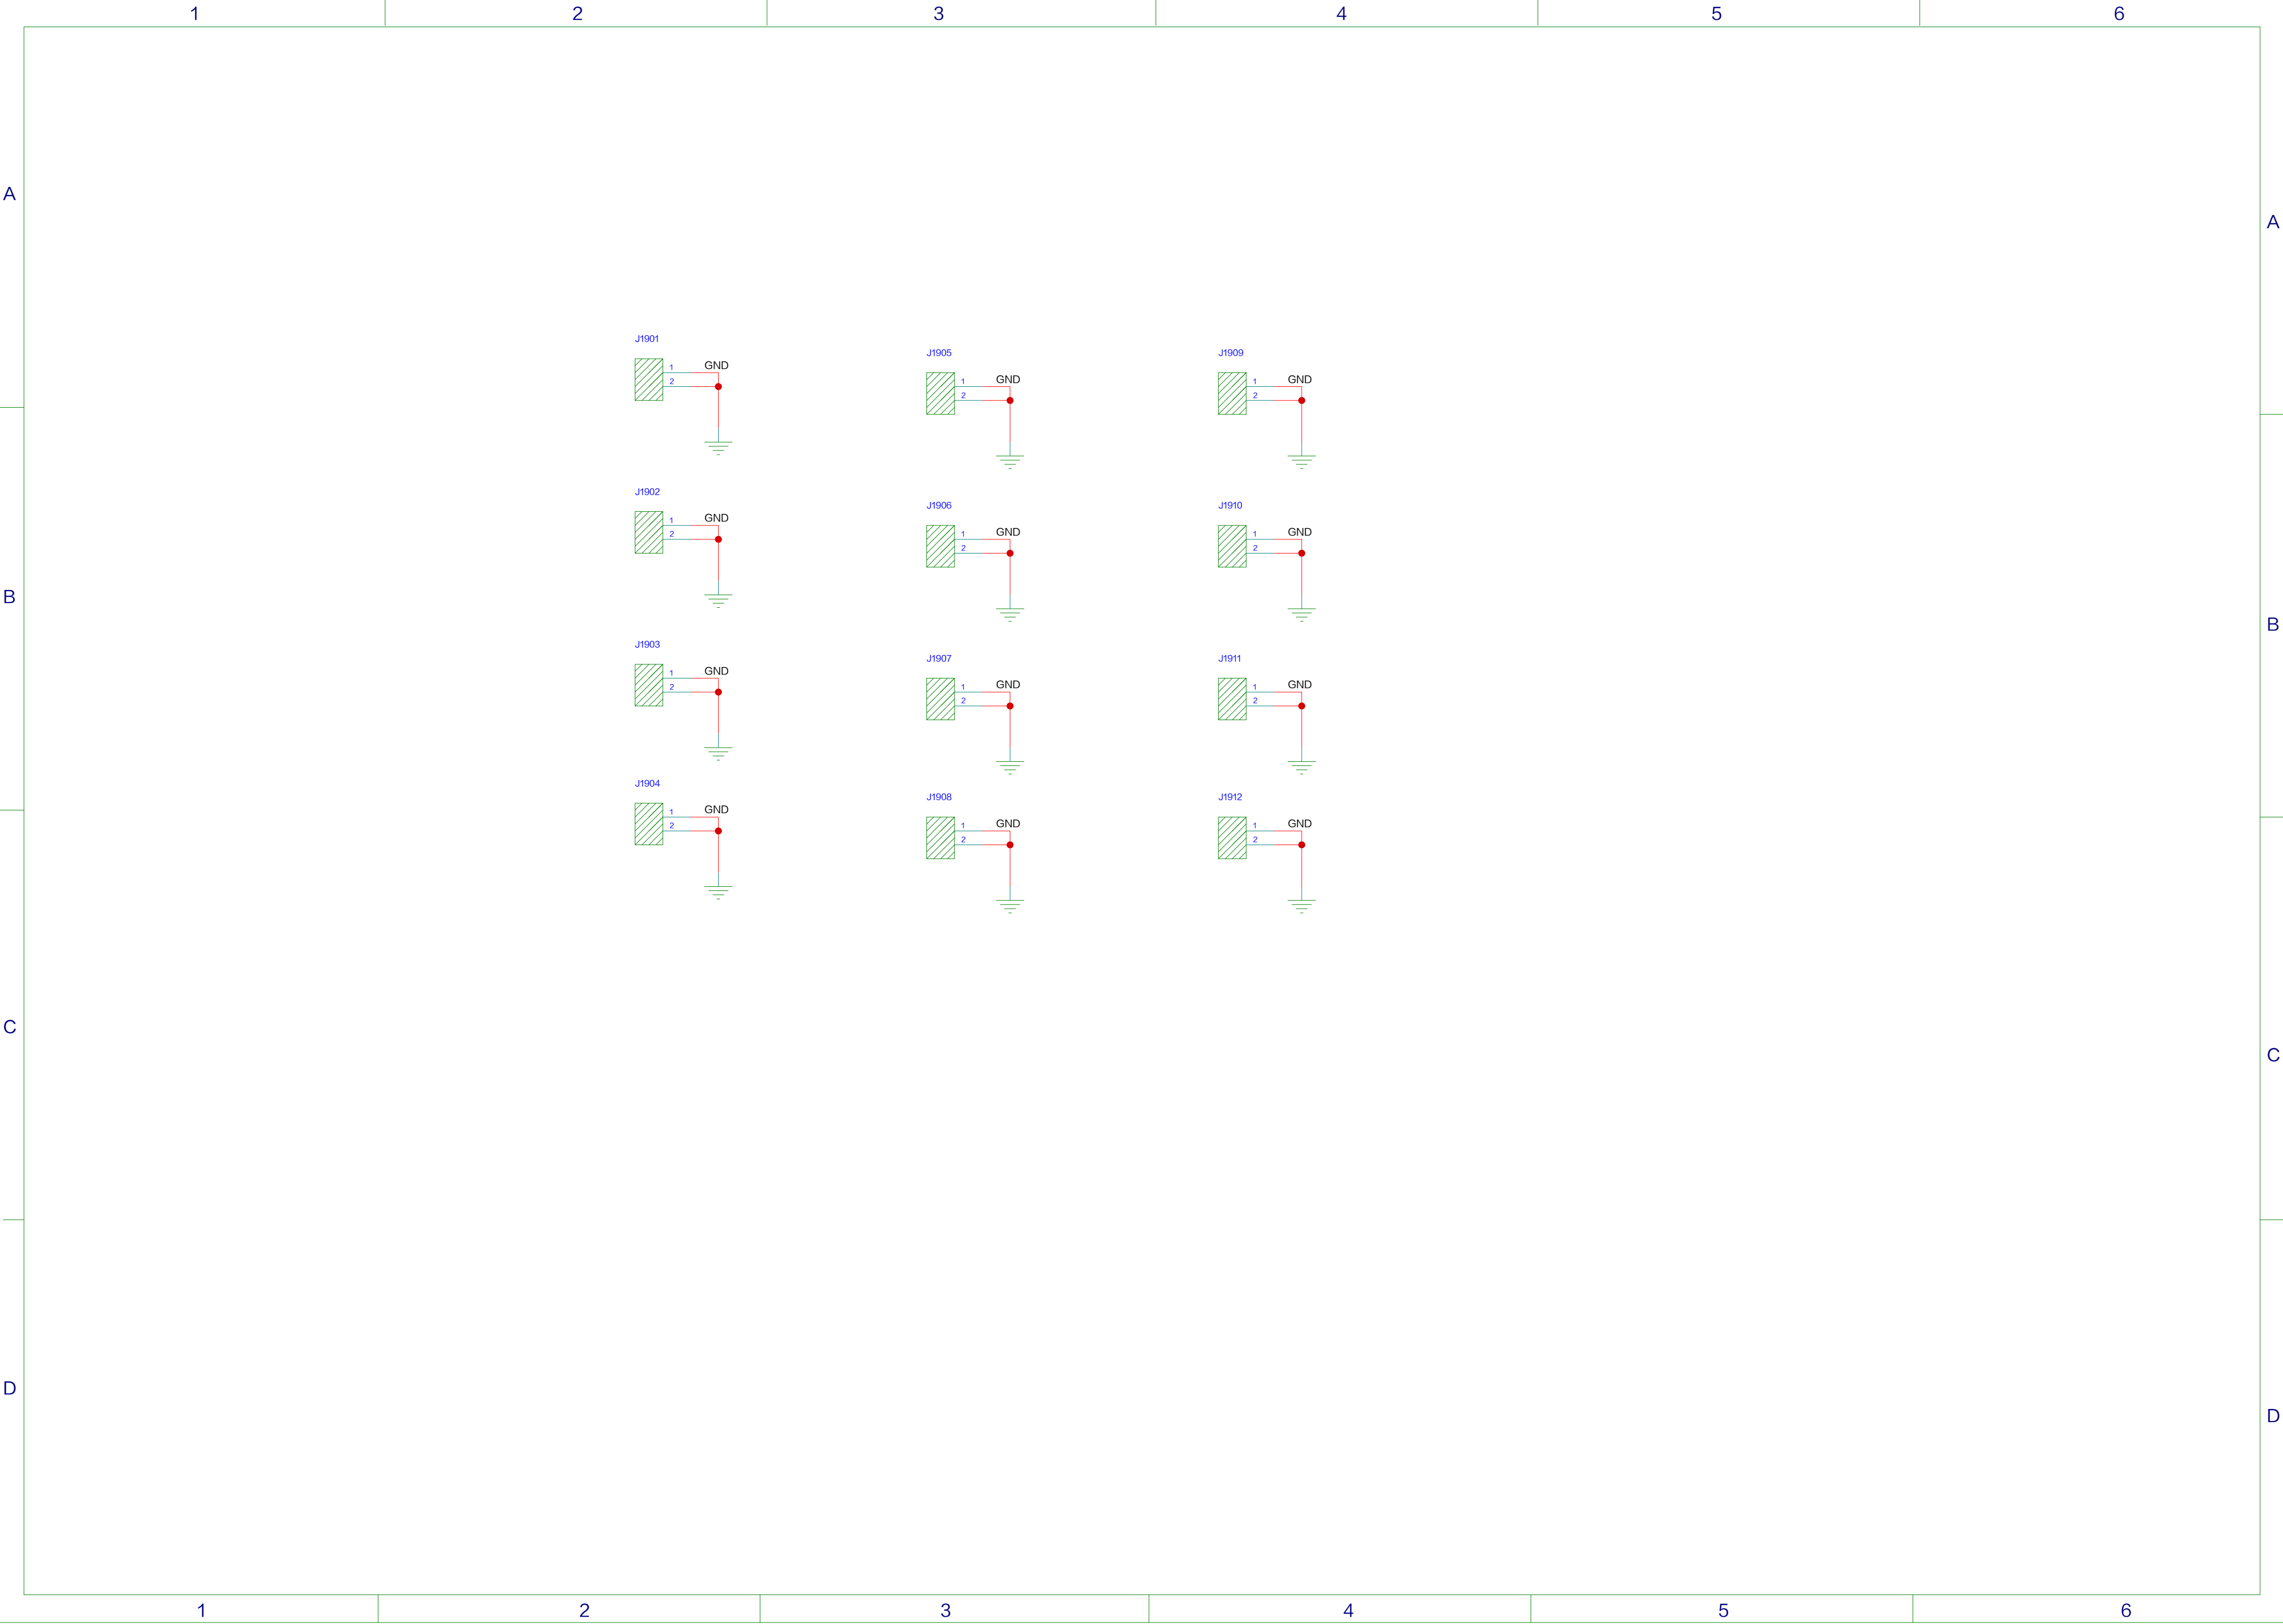

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6