



**Model: PT9700-1-A**

120VAC - 60Hz 5A Tested: **61710**

Temperature Ratings

Ambient: -30°C to 70°C

Liquid: -10°C to 80°C

Air: -10°C to 80°C



Serial No: 10E23A0001

Air Pressure: 100psi (Max)

Continuous Duty: 30,000 psi

Pressure Ratio: 500:1


**SJ**  
**SYSTEMS**

**SJ Systems, Inc.**

**Made in the USA**

**100 Technology Drive, Suite 250A • Broomfield, CO • 80021 • USA**



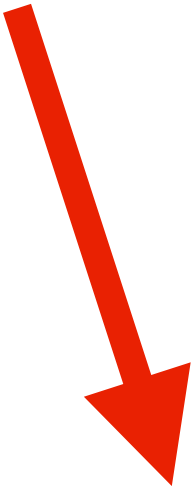

class

id

**Model: PT9700-1-A**

120VAC ~60Hz 5A Tested: **6 17 10**

Temperature Ratings

Ambient: -30°C to 70°C

Liquid: -10°C to 80°C

Air: -10°C to 80°C



Serial No: 10E23A0001

Air Pressure: 100psi (Max)

Continuous Duty: 30,000 psi

Pressure Ratio: 500:1

**SJ**  
**SYSTEMS**

**SJ Systems, Inc.**

**100 Technology Drive, Suite 250A • Broomfield, CO • 80021 • USA**

**Made in the USA**

# Let's try it

1. Make a copy of your previous exercise.
2. Give various elements classes and IDs.
3. Style them so you can try out the following CSS:

	Property	Effect	Value
1	color	controls text color	name of color or hex/RGB value
2	font-family	sets font (use Web fonts or import Google fonts)	Arial, Helvetica, Serif, etc.
3	font-size	sets size of text	pixels or em
4	font-weight	sets weight of text (like how bold)	1-900, with 900 being the heaviest
5	text-align	aligns text to the right, left or center	right, left or center
6	text-transform	controls capitalization	uppercase, lowercase, capitalize