



Brand Guidelines

PRECISION AT SCALE

ISSUE	3.0
STATUS	CONTROLLED
SCOPE	GLOBAL
FORMAT	A4 LANDSCAPE
SECTIONS	07
PAGES	36

Contents

This document defines the KIT identity system: what the elements are, how they are built, and how they are applied across every channel the business operates in.

It is a controlled document. Where a situation is not covered here, contact Marketing & Communications before proceeding.

01 BRAND

Brand introduction 03

Brand essence 04

02 LOGO

Identity elements 05

Logo anatomy 06

Logo construction 07

Clear space 08

Minimum size 09

Logo variations 10

Identity gradients 11

Logo and colour 12

Logo misuse 13

03 COLOUR

Primary colour 14

Secondary and neutrals 15

Extended palette 16

Usage proportion 17

Colour accessibility 18

Colour misuse 19

04 TYPOGRAPHY

Typeface system 20

Typographic hierarchy 21

Type and colour 22

05 GRAPHIC SYSTEM

Graphic language 23

Graphic elements 24

Iconography 25

Imagery 26

Layout and grid 27

Brand composition 28

06 APPLICATIONS

Digital applications 29

Presentation system 30

Social media 31

Industrial applications 32

Operational signage 33

Partnerships 34

07 GOVERNANCE

Brand checklist 35

Contact 36

Brand introduction

KIT — Krest Industrial Technologies — designs, integrates and maintains the industrial systems that production depends on. We work across process engineering, automation and industrial data as a single accountable discipline.

Our customers do not buy components. They buy the certainty that a line will run, a tolerance will hold, and a plant will still be performing in year ten.

THE BRAND IN ONE LINE

We engineer the certainty
that industry runs on.

WHAT WE ARE

An industrial technology company. Not a consultancy, not a distributor, not a software vendor. We take responsibility for the engineered outcome and everything required to reach it.

HOW WE BEHAVE

We work to the number. We commit to what we can prove. We say what a system will and will not do, and we stay accountable for it long after commissioning.

WHY THE IDENTITY MATTERS

Consistency is the visible form of reliability. A brand applied with the same discipline as an engineering tolerance tells the market how the company works before a single conversation begins.

Brand essence

The essence is the fixed point of the brand. Every message, image and application should be traceable back to it.

The four pillars below are the working translation of that essence. They govern what KIT says, and equally what it declines to say.

BRAND ESSENCE

Engineered certainty

01

Precision

Tolerance is a commitment, not an aspiration. We work to the measured number and we publish it.

02

Systems thinking

Nothing is specified in isolation. Every component is designed for the system it will live inside for a decade.

03

Reliability

Performance is judged in year five, not week one. Uptime is the only metric that survives contact with a factory floor.

04

Scale

What holds on one line holds across a plant, a network and a continent. Repeatability is the product.

Identity elements

The KIT identity has two approved elements and no others. The supplied artwork is the single source of truth: the marks are never redrawn, re-set from a font, traced or rebuilt.

The primary expression is the lockup on KIT Navy, with the metallic wordmark. Every other version answers a constraint that prevents it.

FULL CORPORATE LOCKUP
PRIMARY



The default in every context that allows a dark ground: covers, signage, stationery, first screens, tender documents, presentation masters and vehicle livery.

LOCKUP ON LIGHT
ALTERNATE



Used where a dark ground is not available or not appropriate — long-form documents, technical specifications, third-party templates and partner material.

WORDMARK
SECONDARY



Used once the corporate name is established in the same view, and in constrained formats: app icons, avatars, machinery plates, apparel, embossing.

There is no standalone symbol. The accent is never extracted from the i.

Logo anatomy

The wordmark is a drawn form, not typography. Its details are deliberate, and they are what keep the mark recognisable at small size and in low-fidelity reproduction.

All values are measured from the supplied master artwork. x denotes the vertical stem weight; H denotes the cap height.



01 Cap height H

The shared height of K, i and T. $H = 4.22x$ and is the clear-space unit for the whole system.

02 Stem weight x

The vertical stem of the K and T. This is the base construction unit; every other dimension is a multiple of it.

03 Tangent vertex

The arm and leg of the K converge and meet the stem at the vertical midpoint of the cap height.

04 The accent

The upper segment of the i bar, in flat KIT Gold. The bar is one continuous full-height form, not a letter with a separate dot.

05 The cut

Three parallel diagonals at 44° divide the i bar; the K arm and leg run at 45° .

06 The descriptor

Two centred lines of bold uppercase. KREST INDUSTRIAL takes the wordmark colour; TECHNOLOGIES is always gold.


07 The gradient

The wordmark and the first descriptor line carry a vertical gradient. It is part of the artwork — see page 11.

Logo construction

The wordmark is built on a single modular unit — x , the vertical stem weight. Every dimension in the mark resolves to a multiple of it.

These figures are published for verification, not for reconstruction. The mark is always reproduced from the supplied master files.

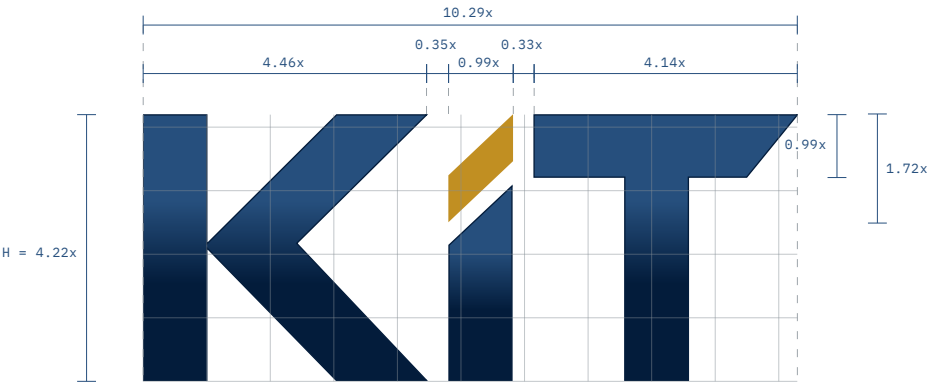

CONSTRUCTION SPECIFICATION

Base unit	x
Vertical stem weight of the K and T	
Cap height	4.22x
Shared by K, i and T	
Wordmark width	10.29x
Ink box, K left edge to T right edge	
K width	4.46x
Stem plus arm and leg	
T width	4.14x
Crossbar, left edge to outer terminal	
i bar width	0.99x
One stem weight, optically corrected	
Letter gap	0.35x / 0.33x
K to i, and i to T	
Accent depth	1.72x
Cap line to the lowest point of the accent	
Crossbar depth	0.99x
T horizontal, equal to the stem	
Cut angle	44°
The three diagonals of the i bar	
Diagonal angle	45°
Arm and leg of the K	
Crossbar terminal	51°
Outer cut of the T crossbar	
Vertex	0.49H
Where the K diagonals meet the stem	
Descriptor cap	0.15H
Both lines, bold uppercase	
Descriptor leading	0.24H
Baseline to baseline	
Descriptor offset	0.37H

Clear space


Clear space is measured in H — the cap height of the KIT wordmark, taken from the baseline to the top of the K. It is the only unit used, and it scales with the mark.

Minimum clear space is 1H on all four sides of the artwork bounding box. Nothing enters this zone: no type, no rule, no image edge, no other logo, no page trim.

FULL CORPORATE LOCKUP



WORDMARK

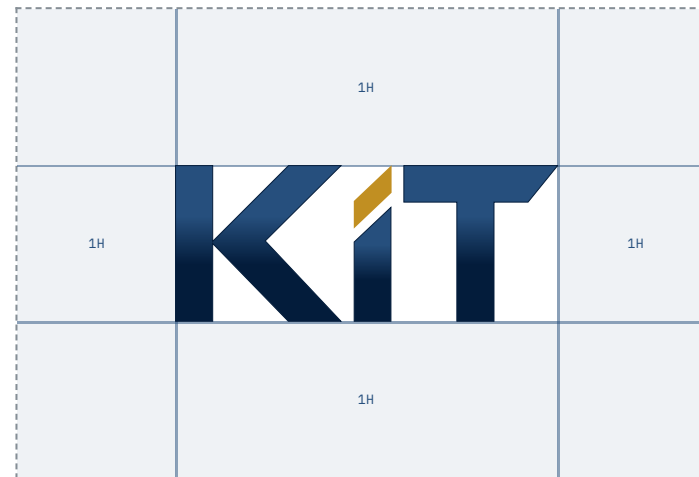

DEFINING THE UNIT

H is the cap height of the wordmark — 4.22x, where x is the stem weight. Because H is read directly off the artwork, clear space is correct at any scale without recalculation.

CONSTRAINED EXCEPTION

In fixed interface furniture — application bars, browser tabs, embedded video overlays — clear space may reduce to 0.5H. This is the only permitted reduction, and it does not apply to print, signage or partner materials.

MEASURE FROM THE INK

Clear space is measured from the outer edge of the artwork, not the file boundary. Supplied masters carry no built-in padding; if a file has been re-exported with margins, re-measure from the ink.

Minimum size

Minimum sizes are set by the descriptor, which fails before the wordmark does. Below these values the lockup stops working and the wordmark is used on its own.

The gradient also has a floor. Below 20 mm the ramp is no longer legible as a finish and the monochrome versions are used instead.

ACTUAL SIZE – FULL CORPORATE LOCKUP



RECOMMENDED 44 MM
Comfortable — use wherever space allows



MINIMUM 32 MM
Absolute floor for print



UNACCEPTABLE 21 MM
Descriptor illegible — use the wordmark instead

MINIMUM SIZE SCHEDULE

Full lockup — print	32 mm
Descriptor cap height 1.9 mm	
Full lockup — digital	130 px
Descriptor cap height 7.5 px	
Wordmark — print	14 mm
Cap height 5.7 mm	
Wordmark — digital	56 px
Cap height 23 px	
Website header	170 px lockup
or 72 px wordmark	
Social profile image	96 px wordmark
on a 400 px canvas	
Application icon, favicon	32 px wordmark
Wordmark only, never the lockup	
Engraving, embossing, moulding	20 mm wordmark
Monochrome, no gradient	
Embroidery	25 mm wordmark
Monochrome + accent thread	

THE SWITCH POINT

When available width falls below 32 mm in print or 130 px on screen, do not scale the lockup further. Change element: use the wordmark on its own and carry the corporate name in the surrounding typography.

Logo variations

Four master files cover every reproduction condition. There are no other approved versions, and new ones are not created locally.

The two gradient versions are always preferred. Monochrome is a response to a production constraint, never a stylistic choice.



PRIMARY — ON NAVY

PRIMARY

Metallic wordmark, flat gold TECHNOLOGIES, Light Grey KREST INDUSTRIAL. Use on KIT Navy and Deep Charcoal.



ON LIGHT GROUNDS

ALTERNATE

Blue-to-Navy wordmark and first descriptor line, with the gold second line. Use on white, KIT Paper and Light Grey.



MONOCHROME — WHITE

CONSTRAINED

Single-colour reverse. Photography, dark substrates, single-pass print and any process that cannot hold a gradient.



MONOCHROME — NAVY

CONSTRAINED

Single-colour positive. One-colour print, engraving, etching, moulding and fax-grade reproduction.

FILE FORMATS

SVG, EPS and PDF hold the gradient as vector and are the masters. PNG with transparency for presentation and document templates. No JPEG masters — the format cannot hold a transparent ground.

KREST INDUSTRIAL TECHNOLOGIES

NAMING

KIT_lockup_dark, KIT_lockup_light, KIT_lockup_mono-white, KIT_lockup_mono-navy — and the matching KIT_wordmark_* set. Do not rename or re-version locally.

NEVER GENERATE A NEW VARIATION

If a situation appears to need a version that does not exist — a different accent colour, an outlined mark, a re-angled gradient, a single-line descriptor — the answer is a different application, not a new logo file.

Identity gradients

The wordmark carries a vertical gradient across the cap height. It is the most distinctive feature of the mark and the one most often reproduced incorrectly.

Both gradients are built entirely from the core palette. Neither introduces a new hue, and neither is ever re-created by hand — they are held in the master artwork.



METALLIC — PRIMARY

The primary finish. Used on KIT Navy and all dark grounds.

START	END	AXIS
#D4D5D7	#868F96	Vertical 180°

A Light Grey highlight falling to Cool Grey. Both stops sit in the core palette.

KREST INDUSTRIAL TECHNOLOGIES



TONAL — LIGHT GROUNDS

Used on white, KIT Paper and Light Grey grounds.

START	END	AXIS
#264F7D	#031C3B	Vertical 180°

KIT Blue falling to KIT Navy. No colour outside the palette is introduced.

RAMP POSITIONS

0%	Solid
32%	Ramp begins
63%	Ramp ends
100%	Solid

Measured down from the cap line. Flat for the first third and the last third; only the middle ramps.

DESCRIPTOR COLOUR

ON DARK

KREST INDUSTRIAL	#CCCCCC
TECHNOLOGIES	#8F6C1C

ON LIGHT

KREST INDUSTRIAL	#264F7D → #031C3B
TECHNOLOGIES	#C18F22

NEVER

Do not re-angle, re-scale, invert or re-stop the gradient. Do not apply it to type, panels, icons or graphic elements. It belongs to the wordmark and the first descriptor line, and nothing else.

Logo and colour

The logo is placed on flat brand colour or on white. Contrast between the mark and its ground is the only criterion, and it is measured rather than judged by eye.

The metallic version belongs on dark grounds and the tonal version on light. Swapping them is the single most common error in the system.

APPROVED



— KIT Navy — Primary ground



— Deep Charcoal — Technical ground



— White — Primary light ground



— KIT Paper — Alternate page ground



— Light Grey — Light panel



— KIT Blue — Secondary ground

NOT APPROVED



× Metallic on white — The silver ramp disappears on light grounds



× Light version on Navy — Navy on Navy — the wordmark vanishes



× Logo on KIT Gold — White on Gold is 2.93:1 — Gold is never a logo ground

Logo misuse

The treatments below are prohibited without exception. They are not a complete list — anything that alters the artwork, its colour, its gradient, its proportion or its spacing is misuse.

If a layout appears to require one of these, the layout is wrong. Adjust the composition, not the logo.



✗ Do not stretch



✗ Do not compress



✗ Do not rotate



✗ Do not skew or distort



✗ Do not recolour the mark



✗ Do not alter the gold accent




✗ Do not substitute another gradient



✗ Do not invert the gradient



✗ Do not add shadows

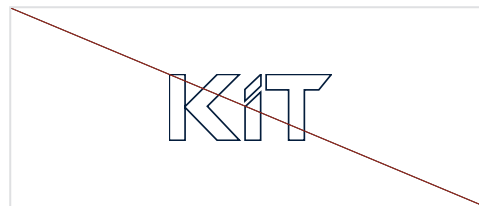

✗ Do not outline



✗ Do not place on low-contrast grounds



✗ Do not rearrange the elements




✗ Do not alter internal spacing



✗ Do not add decorative effects



✗ Do not enclose in arbitrary shapes

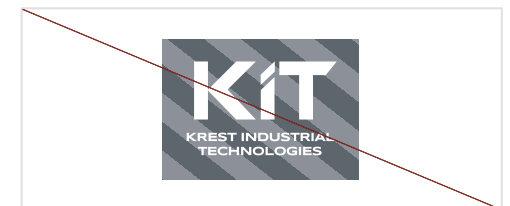

✗ Do not place on busy backgrounds

Primary colour

KIT Navy is the brand. It is the dominant surface across every channel and the colour the company should be recognised by before any mark is read.

KIT Gold is its counterweight: a controlled accent that signals precision. It appears inside the mark itself, and sparingly everywhere else.

PRIMARY

KIT Navy

HEX	#031C3B
RGB	3 28 59
CMYK	97 71 40 61
PANTONE	289 C

ACCENT

KIT Gold

HEX	#BF8F21
RGB	191 143 33
CMYK	6 30 84 20
PANTONE	1245 C

KIT NAVY – WHERE IT GOES

Dominant brand surface. Covers, hero panels, presentation masters, signage grounds and primary headlines on light ground.

Ground for white and Light Grey text. Never carries Blue or Charcoal text.

KIT GOLD – THE DISCIPLINE

Controlled accent. The logo accent and descriptor, single rules, key figures, one call-to-action per view. Never a background for body copy.

Text use restricted to 24pt+ on Navy or Charcoal. Never gold text on white.

THE ONE-ACCENT RULE

One gold element per view, beyond the logo. The gold inside the mark is part of the artwork and does not count against this. A rule, a figure, a single call to action — not all three.

Secondary and neutral colours

KIT Blue carries structure — panels, dividers, data series and interface states. It is also the upper stop of the tonal wordmark gradient. It supports Navy; it does not replace it.

The three neutrals do the quiet work: technical grounds, rules, annotation and light surfaces. Light Grey and Cool Grey are also the two stops of the metallic gradient.

SECONDARY

KIT Blue

HEX	#264F7D
RGB	38 79 125
CMYK	75 48 17 41
PANTONE	653 C

Secondary surface and structural element. Section dividers, data series, diagram fills, secondary panels and interface states.

Ground for white text only. Acceptable as text on white at any size.

NEUTRAL

Deep Charcoal

HEX	#101518
RGB	16 21 24
CMYK	77 70 66 72
PANTONE	Black 6 C

Technical ground. Machinery graphics, engineering documentation, product labelling and photographic overlays.

Ground for white and Light Grey text. Also body text on white.

NEUTRAL

Cool Grey

HEX	#858E95
RGB	133 142 149
CMYK	22 17 12 33
PANTONE	Cool Gray 8 C

Supporting neutral. Grid lines, secondary rules, diagram annotation, disabled states and technical callouts.

Does not meet WCAG AA as text on white (3.33:1). Use Deep Charcoal for any caption that must be read. Permitted as text on Navy.

NEUTRAL

Light Grey

HEX	#D1D2D6
RGB	209 210 214
CMYK	6 5 4 13
PANTONE	Cool Gray 2 C

Light surface. Alternate page grounds, table banding, panel fills and diagram backgrounds.

Ground for Navy and Charcoal text. Never carries white or Cool Grey text.

Extended supporting palette


The extended palette is not a second palette. It is a set of tints derived from the core colours by mixing with white at fixed percentages — nothing else.

No new hue may be introduced. If a design appears to need one, it needs a different structure, not a different colour.

TINT LADDERS — DERIVED FROM THE CORE PALETTE




NAMED DERIVED SURFACES

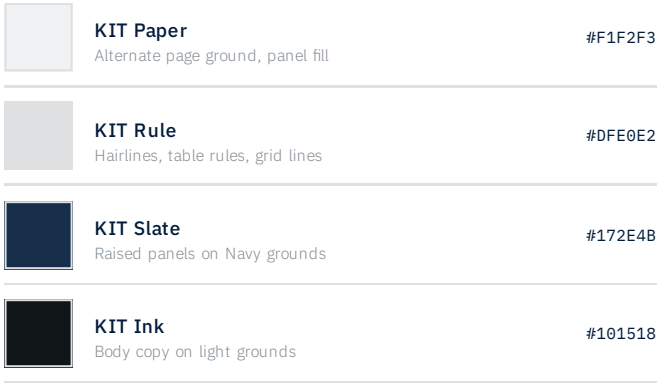

Usage proportion

Proportion is what makes a palette recognisable. These figures describe the visual presence of each colour across a body of work — a campaign, a deck, a website — not the composition of any single page.

Dark navy and neutrals dominate. Blue supports. Gold is deliberately scarce: at roughly three per cent it reads as emphasis rather than decoration.

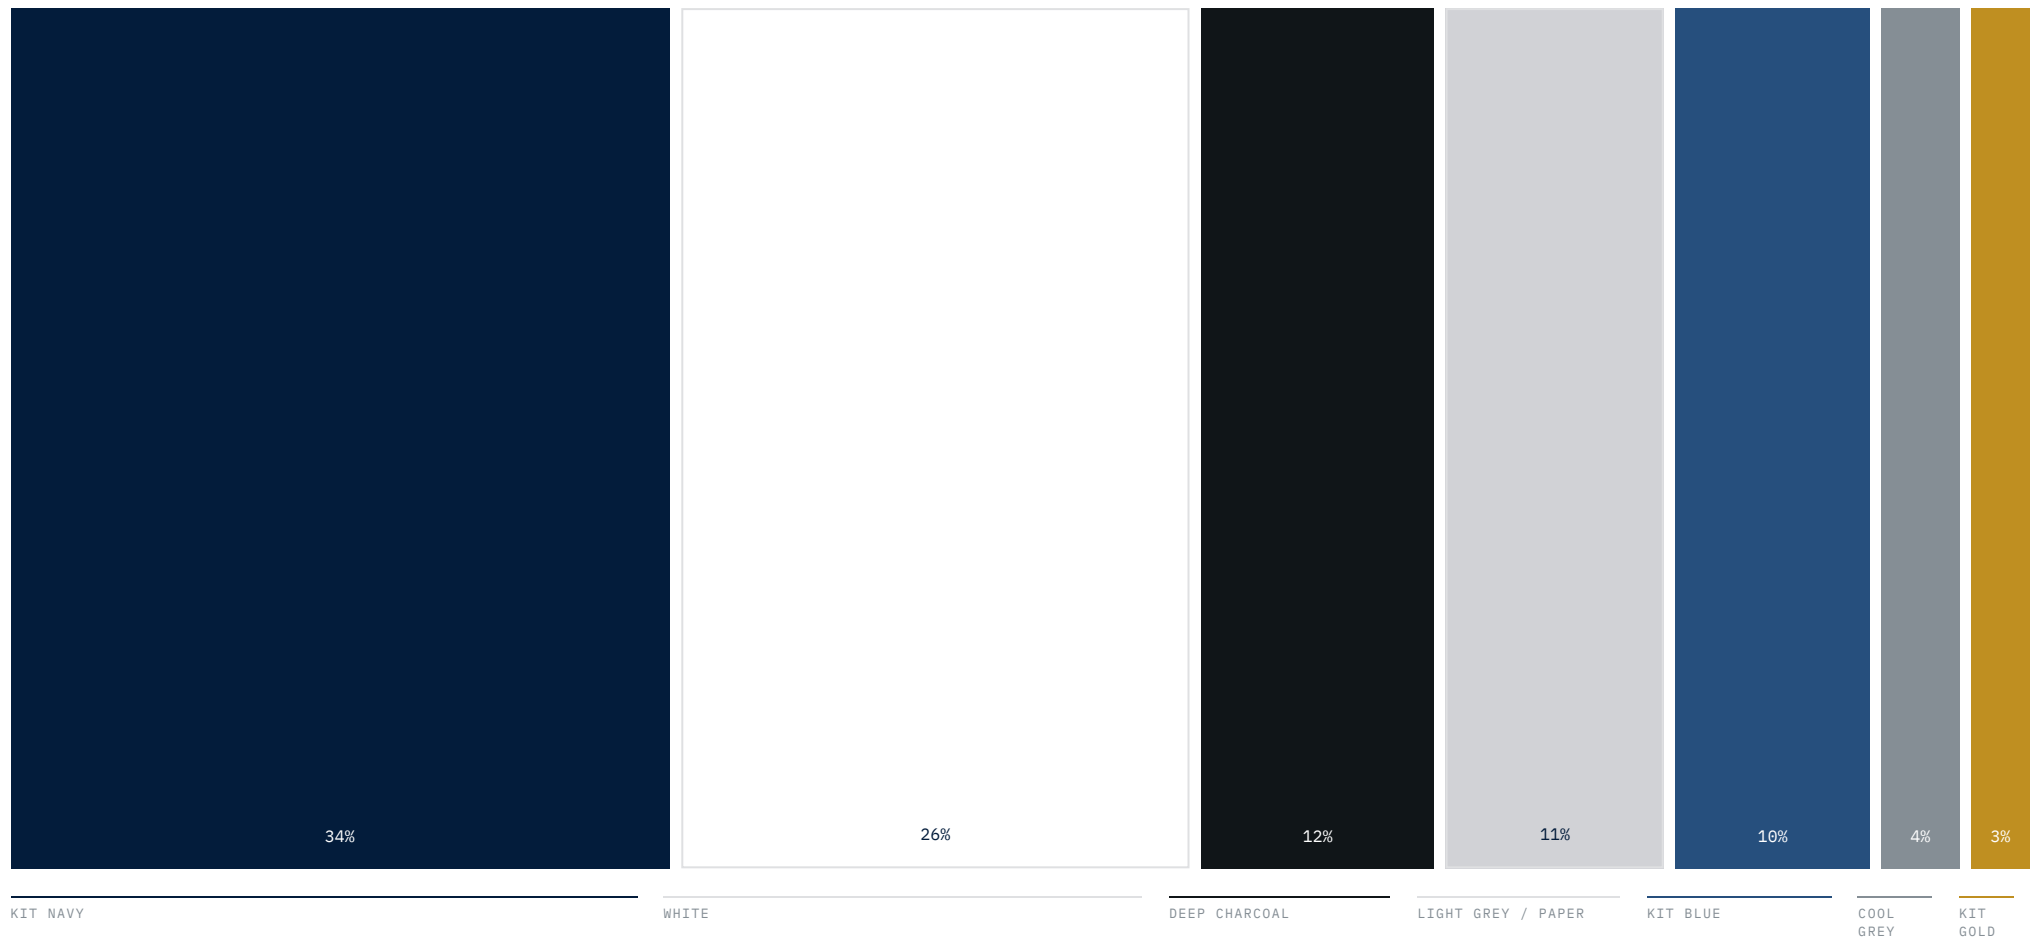

DOMINANT — NAVY AND DARK NEUTRALS

Covers, hero panels, section openers, presentation masters, signage grounds. If a piece of KIT communication is remembered as one colour, it is this one.

KREST INDUSTRIAL TECHNOLOGIES

SUPPORTING — WHITE AND LIGHT GREYS

Reading surfaces. Long-form documents, technical content, tables and specifications sit on white or Paper, with Navy type.

CONTROLLED — GOLD


A rule, a figure, one call to action. Gold is never a fill for large areas, never a background for body copy, and never used twice in the same field of view.

Colour accessibility

Every text and background pair is verified against WCAG 2.1 contrast ratios before use. Body copy must reach 4.5:1; text at 24pt or above, and bold text at 18.5pt or above, may sit at 3:1.


Ratios are printed beside each pair so they can be checked rather than assumed. The combinations on the lower row are not permitted for text at any size.

APPROVED TEXT AND GROUND COMBINATIONS

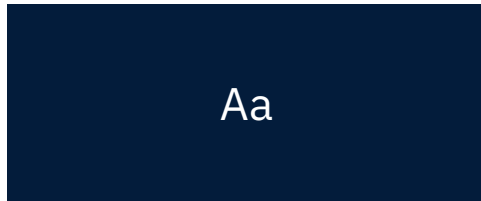


White on KIT Navy

17.03:1 AAA

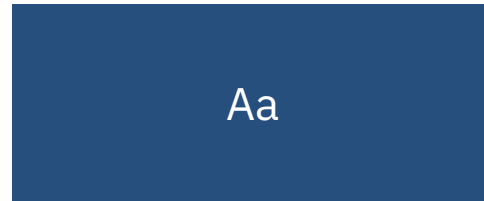


White on KIT Blue

8.41:1 AAA

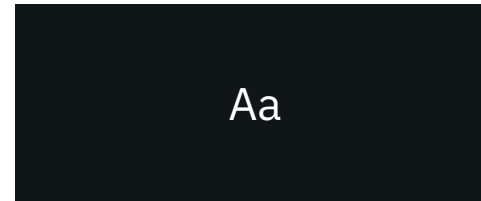


White on Deep Charcoal

18.38:1 AAA

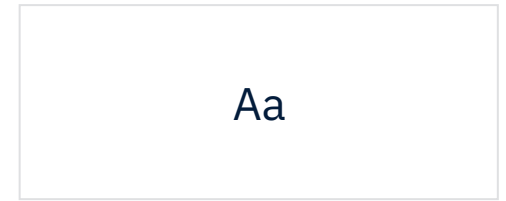


KIT Navy on White

17.03:1 AAA

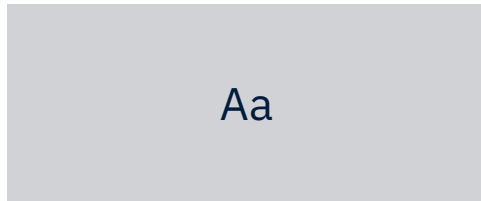


KIT Navy on Light Grey

11.27:1 AAA

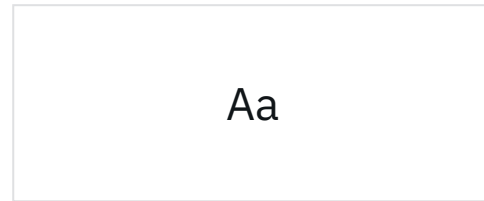


Deep Charcoal on White

18.38:1 AAA

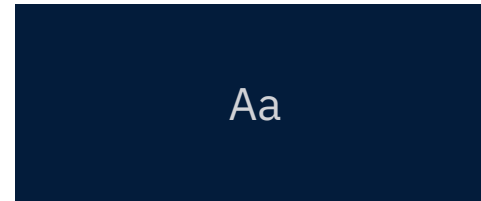

Light Grey on KIT Navy

11.27:1 AAA

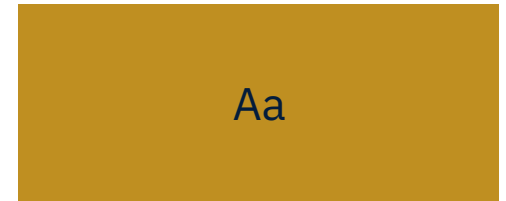

KIT Navy on KIT Gold

5.81:1 AA

FAILS – NOT PERMITTED FOR TEXT




KIT Blue on KIT Navy

2.02:1 FAIL




Deep Charcoal on KIT Navy

1.08:1 FAIL



White on KIT Gold

2.93:1 FAIL




KIT Gold on White

2.93:1 FAIL



Cool Grey on White

3.33:1 FAIL



White on Light Grey


1.51:1 FAIL

Cool Grey reaches only 3.33:1 on white — use Deep Charcoal for any text that has to be read. Note also that the gold TECHNOLOGIES line inside the dark lockup measures 3.51:1 on Navy; it is logo artwork rather than text, which is why the minimum sizes on page 9 are set the way they are.


Colour misuse

Colour is the fastest way to weaken the identity, because it degrades quietly. These are the failures that occur most often in practice.


Where a tint is needed, take it from the extended palette on page 16. Never approximate a brand colour by eye, and never rely on opacity to produce one.

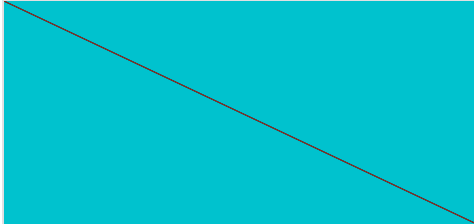


- ✗ Do not introduce colours outside the palette

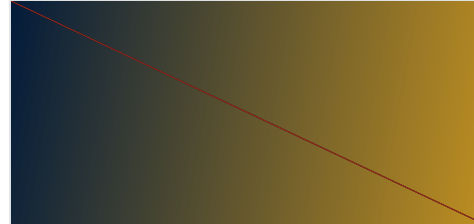

- ✗ Do not use gradients as brand surfaces — the identity gradient belongs to the wordmark alone

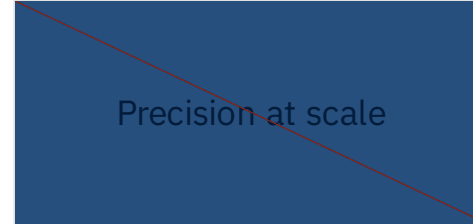


- ✗ Do not set type in low-contrast pairs

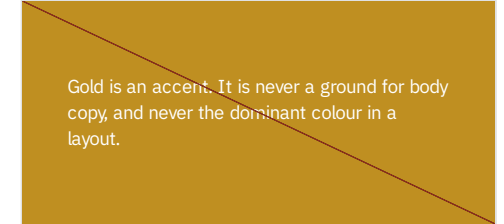


- ✗ Do not use Gold as a reading surface




- ✗ Do not use multiple text colours in one line

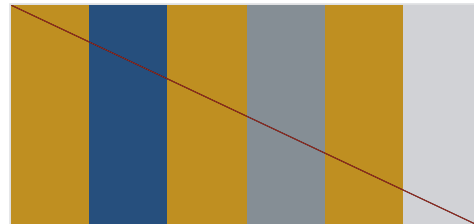

- ✗ Do not let Gold dominate a composition

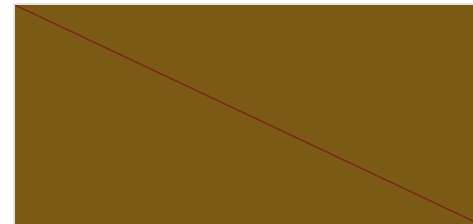

- ✗ Do not darken, lighten or tint core colours by eye

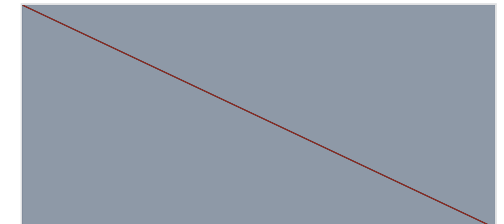

- ✗ Do not apply opacity to brand colours — use a defined tint

SPECIFY, DON'T SAMPLE

Never pick a colour from a screenshot, a PDF or a photograph. Take values from this document or the supplied swatch libraries.

KREST INDUSTRIAL TECHNOLOGIES

OPACITY IS NOT A TINT

A colour at 45% opacity changes with whatever sits behind it and will not reproduce in print. Use the fixed tint values instead.

CHECK THE RATIO

Any new colour pairing is measured before it ships. If it does not reach 4.5:1 for body copy, it is not used, regardless of how it looks.

Typeface system

IBM Plex Sans is the KIT typeface. It was drawn for an engineering company, it carries a complete weight range, and its licence permits use across print, web, product interface and embedded systems without per-seat cost.

PRIMARY — IBM PLEX SANS

SIL Open Font Licence 1.1

AaBbCc 0123

ABCDEFGHIJKLMNOPQRSTUVWXYZ abcdefghijklmnopqrstuvwxyz
0123456789 & @ % - / + × ± ° ≤ ≥ ∞

ExtraLight	200	Engineered certainty
Light	300	Engineered certainty
Regular	400	Engineered certainty
Medium	500	Engineered certainty
SemiBold	600	Engineered certainty
Bold	700	Engineered certainty

IBM Plex Mono handles anything that is measured: figures, part numbers, tolerances, labels and code. The two share proportions, so they set together without adjustment.

TECHNICAL — IBM PLEX MONO

0123456789

TOL ±0.02 mm
REF KIT-4820-A
OEE 94.6 %
IP66 / IEC 60529

WHERE MONO IS USED

Measurements, tolerances, part and drawing numbers, serial numbers, timestamps, code, table figures, section labels and page numbers.

THE LOGO IS NOT TYPOGRAPHY

The descriptor — KREST INDUSTRIAL TECHNOLOGIES — is drawn artwork, not Plex. Never re-set it, and never use Plex to extend or replace it.

SUBSTITUTION

Where Plex cannot be installed — third-party systems, email clients, customer templates — substitute Arial (Sans) and Consolas (Mono). Never Times, never Calibri, never a display face.

Typographic hierarchy

The scale is fixed. Sizes below are set for A4 print; on screen, multiply by 1.33 and round to the nearest whole pixel.

Tracking is negative on large sizes and positive on small ones. Never track body copy, and never justify it — KIT text is always set ragged right.

LEVEL	SPECIMEN	SIZE / LINE / WEIGHT / TRACKING
H1	Precision at scale	40/40.8 w200 -3.5 Covers, hero statements
H2	Precision at scale	26/28.6 w300 -2.5 Section openers, page titles
H3	Precision at scale	16/19.2 w400 -1.5 Article and panel headings
H4	Precision at scale	11/14.9 w400 -1.0 Introductions, pull quotes
Body	Precision at scale	9/14.0 w300 0 Running text, all long-form
Caption	Precision at scale	7/10.2 w300 0 Image and diagram captions
Label	SYSTEMS INTEGRATION	6/7.8 w500 +16 Section labels — Mono, caps
Nav	Precision at scale	8/10.4 w500 +2 Menus, tabs, buttons
Data	TOL ±0.02 mm	8/11.6 w400 +2 Figures, tolerances — Mono
Fig	99.4%	34/34.0 w300 -2.0 Statistics, KPIs — Mono

- MEASURE
 - Body copy runs between 55 and 75 characters per line. Below 45 the text fragments; above 85 the eye loses the return.
- ALIGNMENT
 - Always ragged right. Justification creates rivers and forces hyphenation, both of which read as carelessness in a technical document.
- BASELINE GRID
 - All text sits on a 4 mm baseline grid. Headings occupy whole multiples so columns align across a spread regardless of their content.
- EMPHASIS
 - Use weight, not italic. Plex Sans Medium or SemiBold carries emphasis; italics are reserved for publication titles and Latin abbreviations.

NEVER


No outlines, no all-caps body copy, no letter-spaced lower case, no drop shadows, no stretching or condensing to fit. If it does not fit, edit the words.

Type and colour

Typography is set in one colour at a time. A heading, its standfirst and its body copy share a single colour unless the accent rule is deliberately invoked.

Gold is available for a single word, figure or rule inside a navy or charcoal field. It is never used for a full heading and never for body copy.


APPROVED

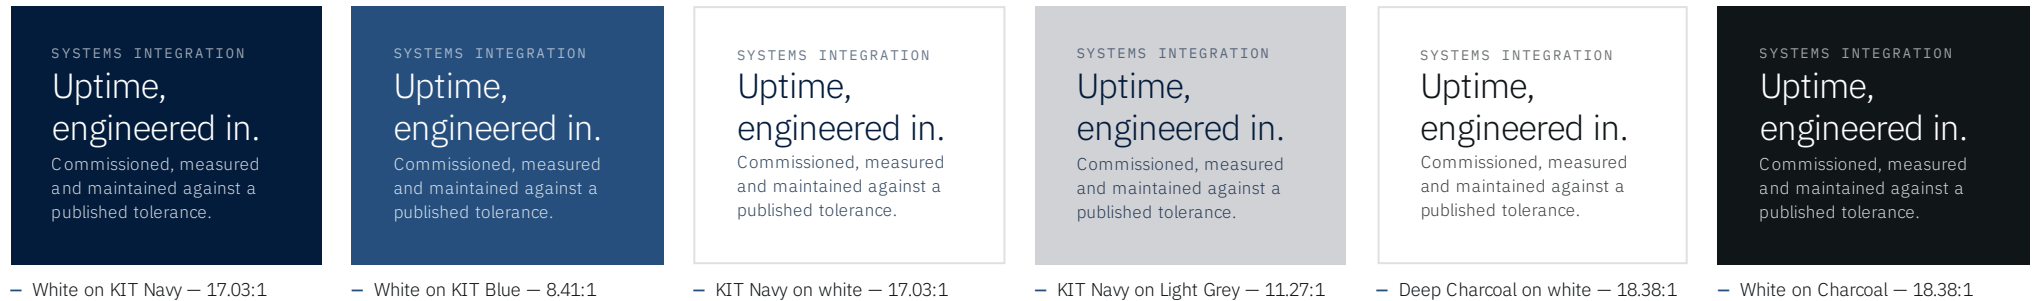

GOLD AS ACCENT — PERMITTED



NOT PERMITTED

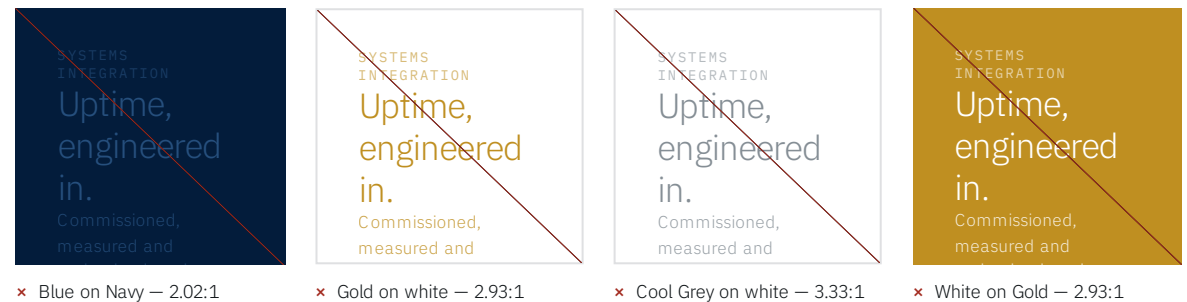

Graphic language


The KIT graphic language is drawn out of the logo, not applied to it. Every element below traces back to a measurement in the mark: the 45° cut, the bar proportion, the modular grid.

Used sparingly, these five elements are enough to make any layout recognisable without a logo present. Used decoratively, they become noise.




The Cut

The 45° diagonal that governs the K and the cuts in the i. Used for image crops, section transitions and rule terminals. One angle only.

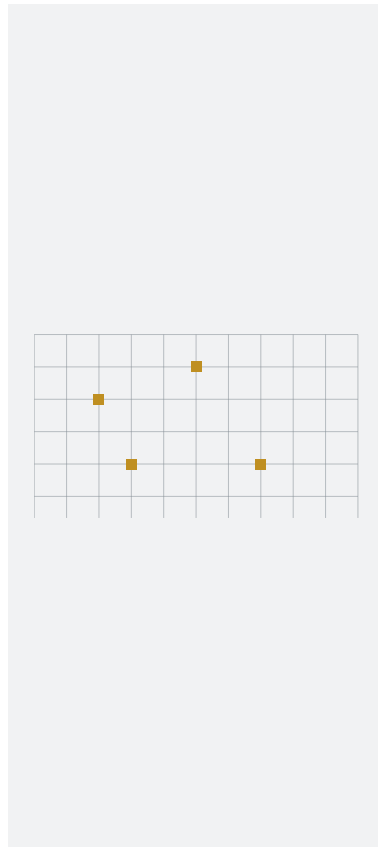


The Datum Grid

A visible engineering grid at the page module. Marks alignment and structure; sits behind content at low contrast, never over it.




Nodes and Paths

Square nodes on straight paths at 45° or 90°. Represents systems, connection and process flow without resorting to circuitry clichés.



The Bar

Derived from the proportion of the i bar (1:4.22). The unit for data visualisation and section markers.



The Measure

A technical scale rule with major and minor ticks. Used along page edges and as a datum for figures. A single gold marker indicates the value in question.

ONE SYSTEM, ONE ANGLE

45° and 90° are the only angles in the KIT system, taken straight from the mark. Any other angle is a mistake, not a variation.

STRUCTURE, NOT ORNAMENT


A graphic element earns its place by organising information. If it can be removed without losing meaning, remove it.

NEVER

No circuit boards, no glowing networks, no neural diagrams, no isometric city grids, no particle fields, no 3D renders of abstract data.

Graphic elements in application

STRUCTURAL

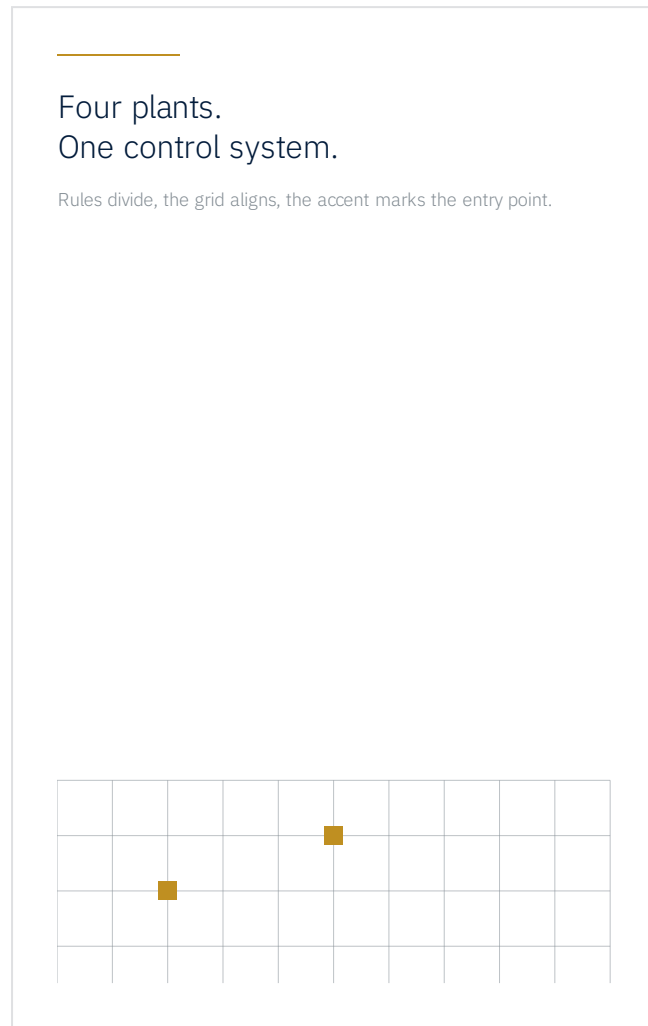


Hairlines and the datum grid carry the layout. Use on white and Paper grounds for documents and technical content.

KREST INDUSTRIAL TECHNOLOGIES

The elements are applied at three intensities. Structural use organises a page; accent use marks a single point; atmospheric use fills a dark field at very low contrast.


ACCENT

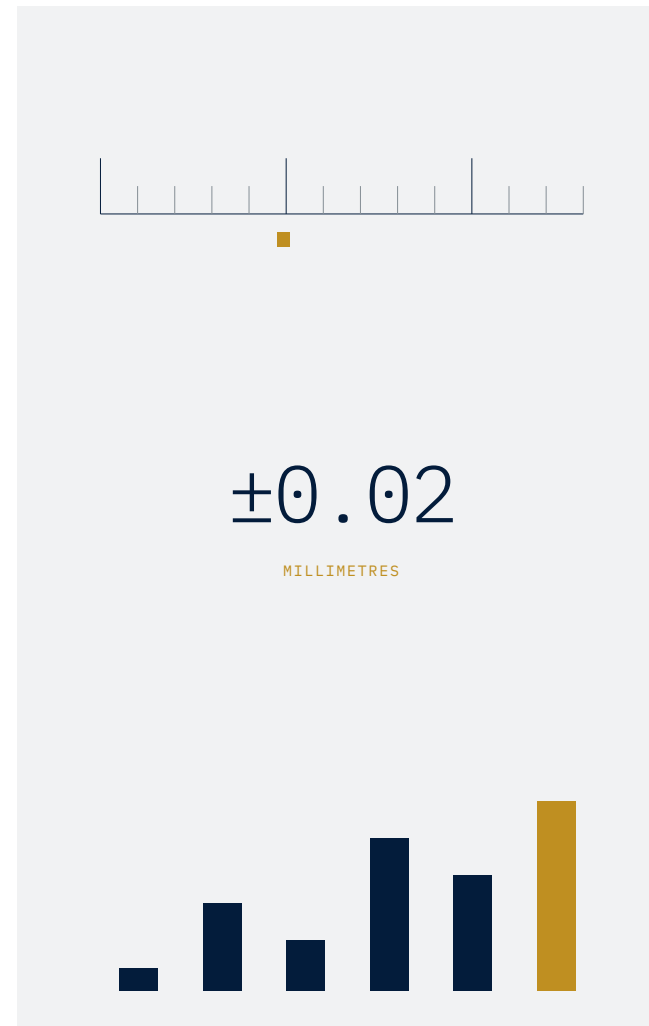

A single measure, bar or node marks one value. Used for figures, statistics and technical callouts.

Only one intensity is used per surface. A page with an atmospheric grid does not also carry structural rules and node paths.

ATMOSPHERIC

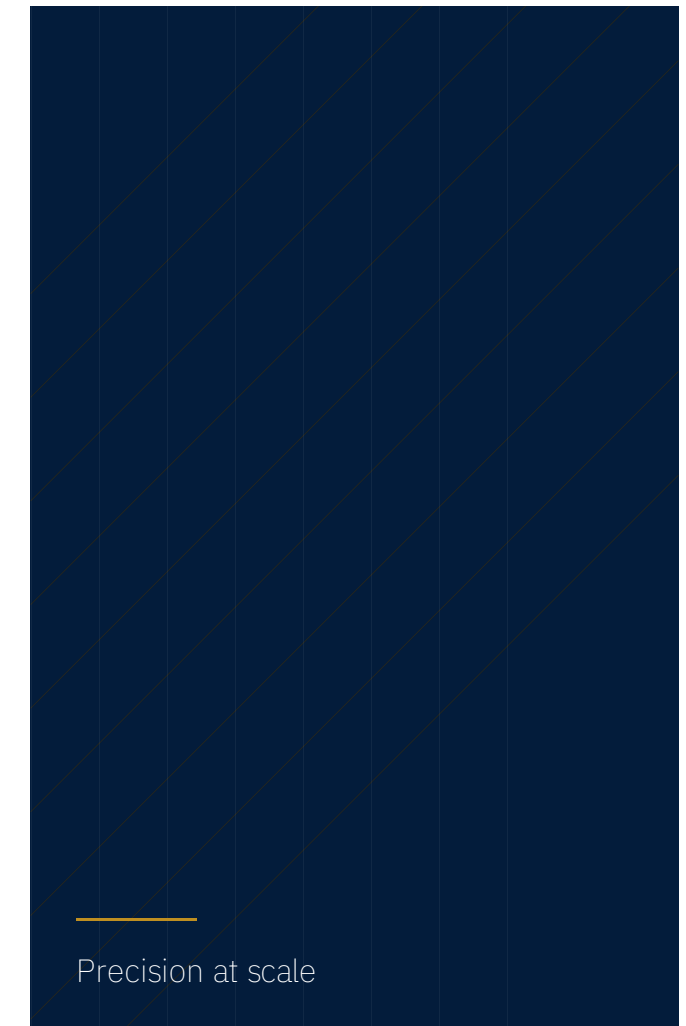

The cut and grid at very low contrast on Navy. Covers, section openers and hero panels only — never behind body copy.

Iconography

Icons are drawn on a 24-unit grid with a 20-unit live area. Stroke weight is a constant 1.6 units and never scales independently of the icon.

Corners are square, terminals are butt-cut, and geometry is restricted to 90° and 45°. No rounded joints, no filled shapes, no two-tone icons, no gradients.

CORE SET



ENGINEERING



MANUFACTURING



TECHNOLOGY



AUTOMATION



INDUSTRIAL SYSTEMS



QUALITY




ANALYTICS




GLOBAL OPERATIONS

CONSTRUCTION

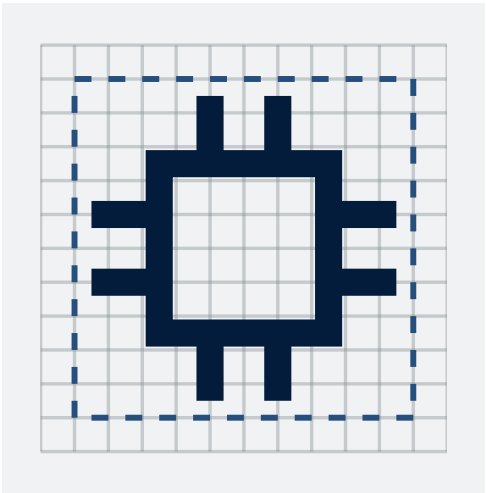

Grid	24 × 24
Live area	20 × 20
Stroke	1.6 units
Corner radius	0
Terminals	Butt
Angles	90° / 45°
Colour	Single, inherited

Icons take the colour of the text they sit with. Gold is used only when the icon marks the single accent in a view.




Icons are supplied at 16, 20, 24, 32 and 48px. Below 20px detail is removed rather than scaled down — use the supplied small-size variants.

Imagery

KIT photography is documentary, not staged. It shows real plant, real components and real people working, shot with the discipline of an architectural photographer.

Frames on this page are placement guides, not images. They describe the brief for each slot; final photography is commissioned and held in the KIT asset library.

SUBJECT DIRECTION

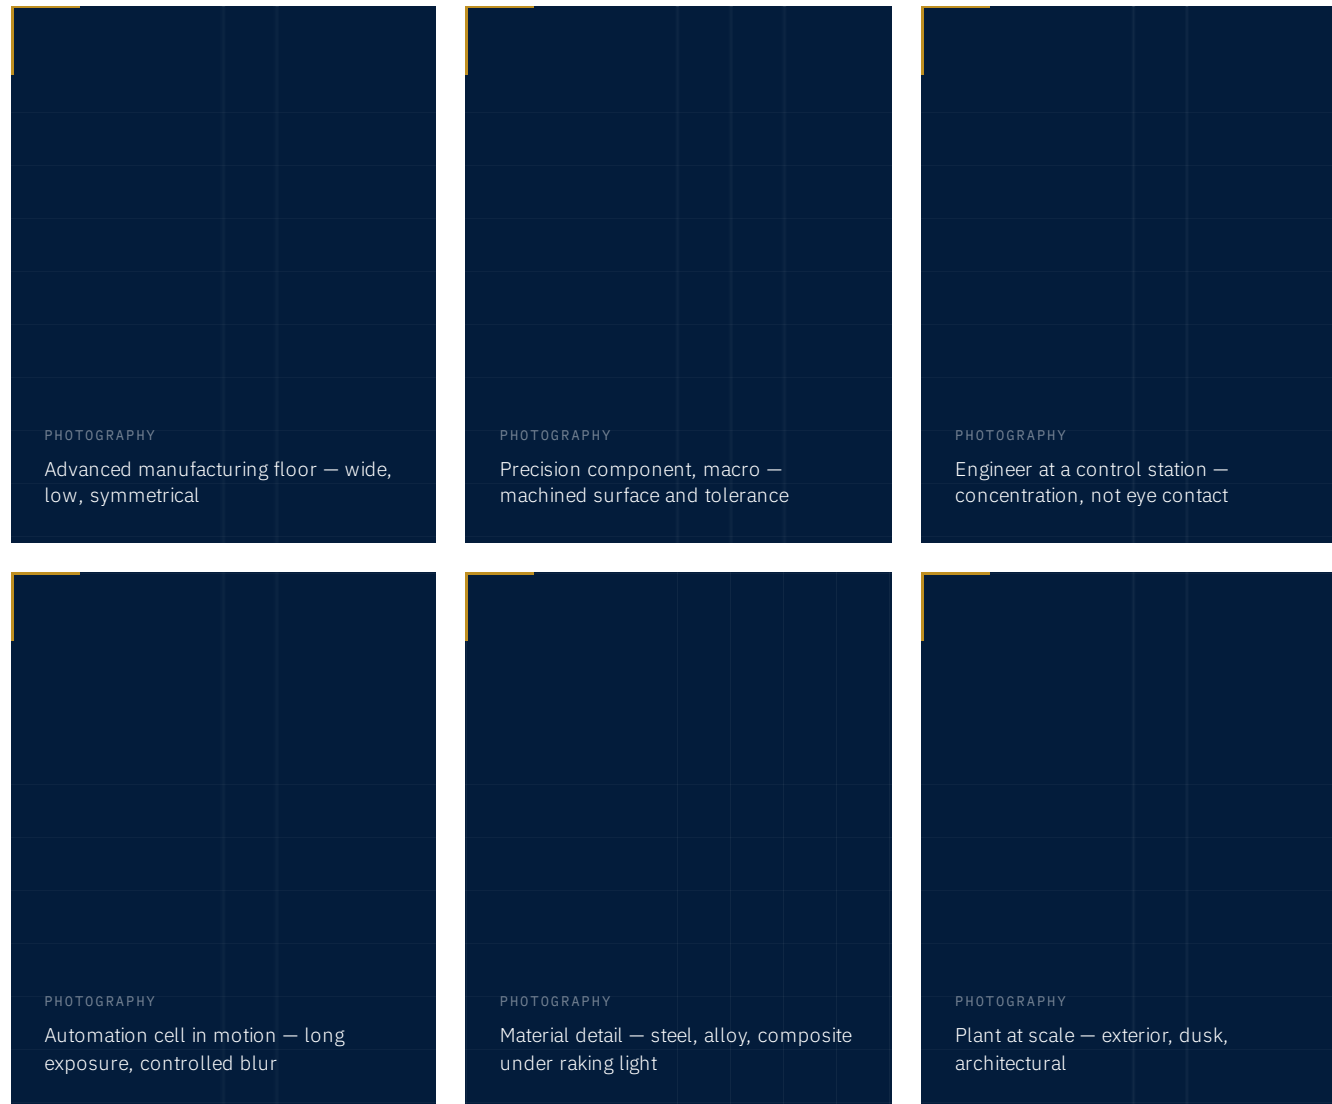

TREATMENT

Cool, neutral grade. Shadows carry a navy cast; highlights stay clean. Contrast is firm but never crushed — detail must survive at both ends.

COMPOSITION

Architectural framing. Verticals stay vertical. Compose to the page grid and crop on the grid, using the 45° cut only where the image meets a coloured field.

PEOPLE

Shown working, in correct PPE, at real installations. No posed handshakes, no arms folded in front of machinery, no stock smiles to camera.

AVOID

Generic server rooms, glowing blue interfaces, holographic overlays, composite “digital transformation” montages, and any image that could belong to any company in any sector.

TEXT OVER IMAGE


Only over a flat navy panel or a solid 70% navy scrim. Never directly on unmodified photography.

Layout and grid

Every KIT page is built on a twelve-column grid with a 15 mm outer margin and a 4 mm gutter. Twelve divides cleanly into halves, thirds, quarters and sixths, which covers every layout the system needs.

Content is placed on column boundaries without exception. Optical adjustment is permitted for type and marks; it is not permitted as a substitute for the grid.

A4 LANDSCAPE MASTER – 297 × 210 MM

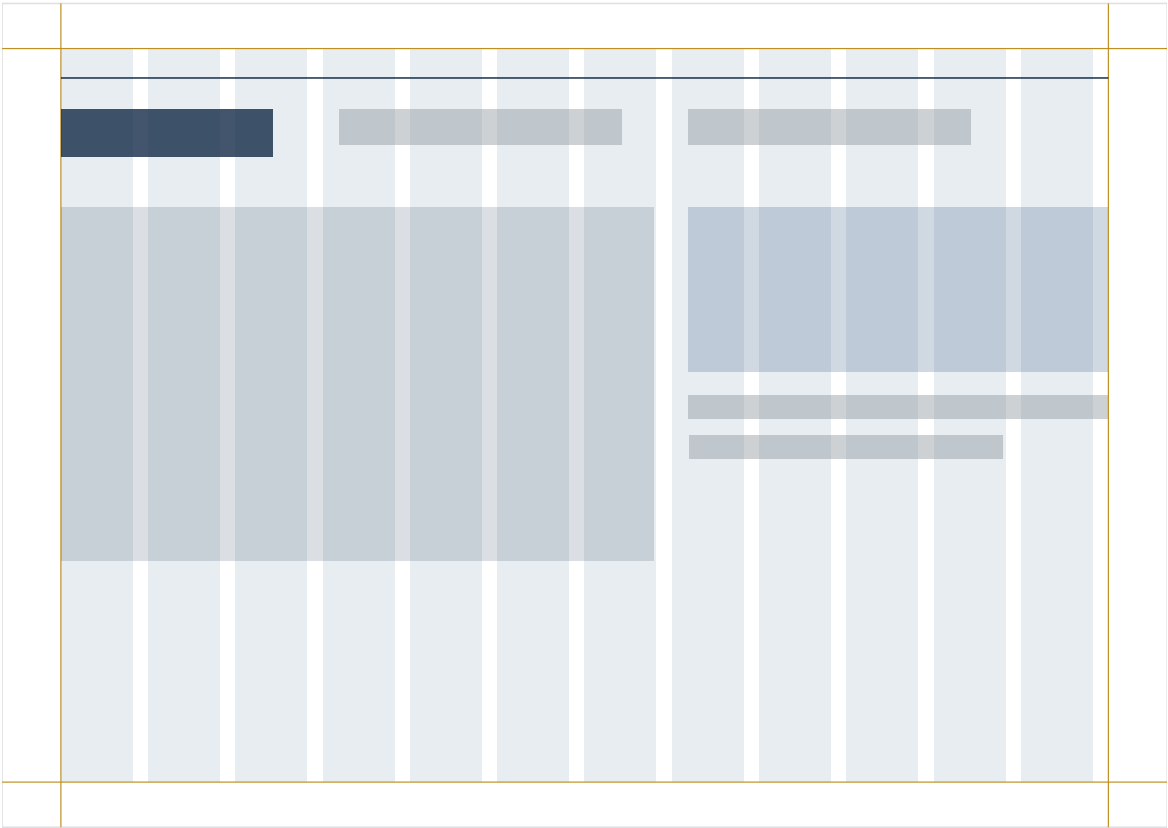

15 mm	11.5 mm	12 mm	22.25 mm	4 mm
Outer margin	Head margin	Foot margin	Column pitch	Gutter and baseline

SPACING SCALE

2 mm	Between a label and the element it names
4 mm	Baseline grid; gutter between columns
6 mm	Between related blocks in a group
8 mm	Between a rule and the content below it
12 mm	Between distinct content groups
16 mm	Between major page regions
24 mm	Around a full-bleed panel edge

ALIGNMENT PRINCIPLES

Titles sit in columns 1–3. Introductory text occupies columns 5–12 in one or two blocks. Content begins below a single hairline and runs to the foot margin.

DENSITY


No more than three distinct content groups on a page. If a page needs a fourth, it is two pages.

OTHER FORMATS

16:9 presentation and 1440px web both use twelve columns with the same proportional margins. A4 portrait uses eight.

Brand composition


01 – STATEMENT

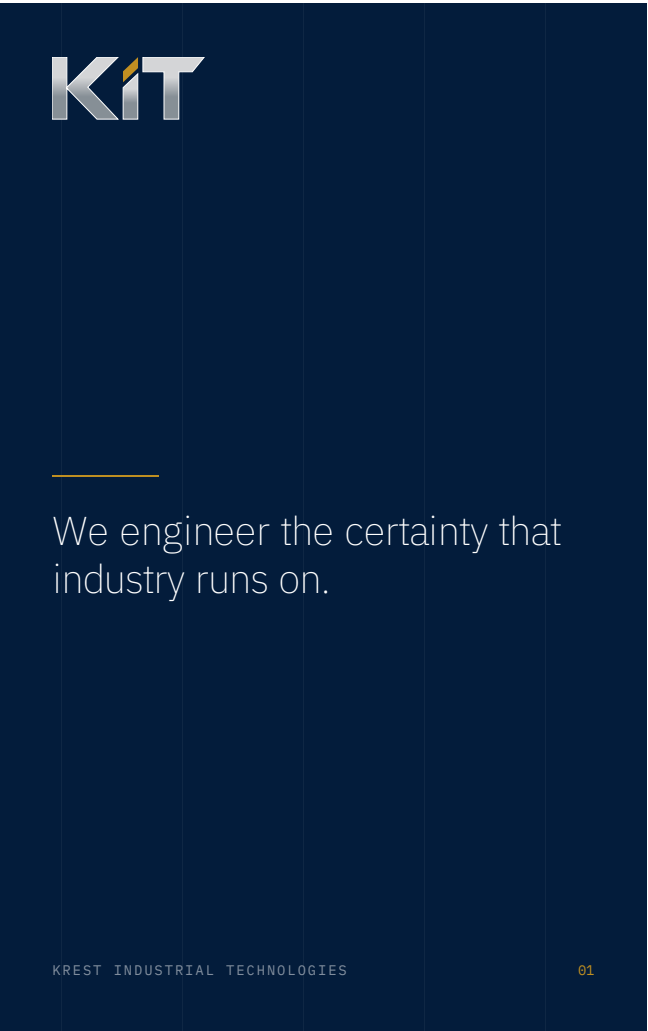

Navy field, atmospheric grid, one gold rule, wordmark small. Used for covers and section openers.

Three reference compositions showing the complete system working together: mark, typography, colour, grid, graphic elements, data and image placement.

02 – EVIDENCE

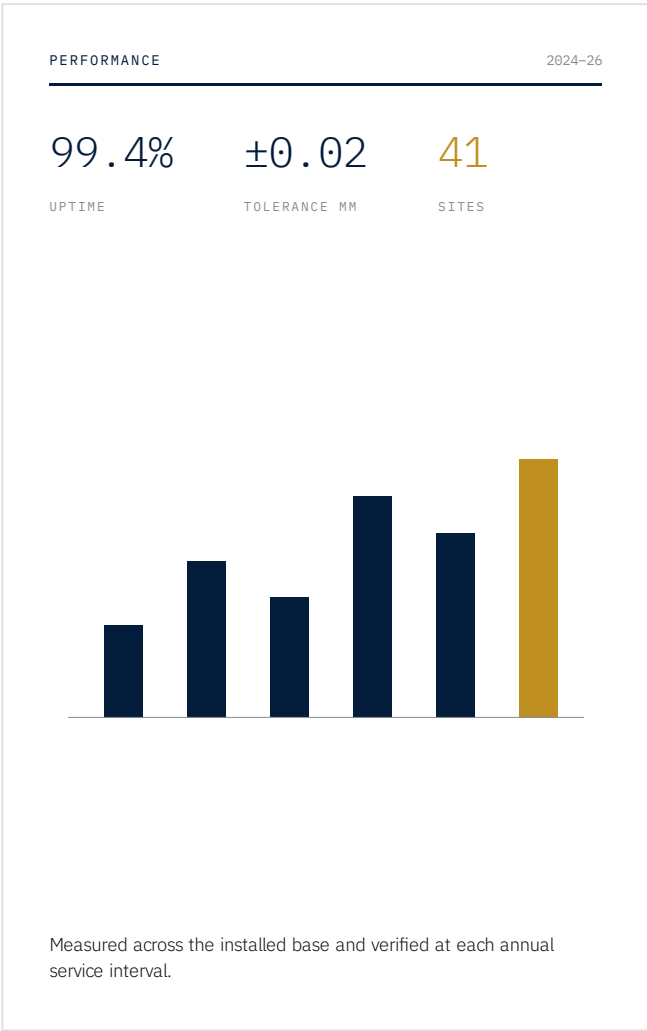

White ground, mono figures, one gold value. Used for capability, results and technical content.

These are proportional models rather than templates. What they fix is the relationship between elements, not the specific content.

03 – APPLICATION

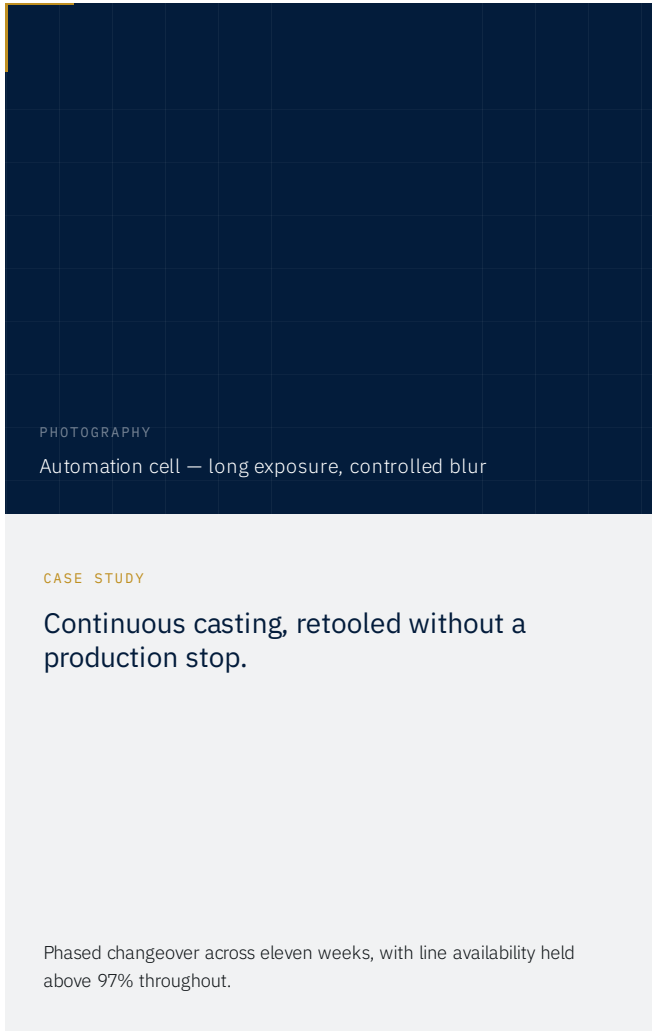



Image over a Paper panel, mark absent. Used for stories, case studies and editorial content.

Digital applications

Digital surfaces follow the same grid, scale and colour proportion as print. The logo sits at the top left of the viewport with 0.5H clear space, at 170 px minimum.

One accent per view applies here too: a single gold element — usually the primary action — and nothing else competing with it.

WEBSITE — HEADER, HERO AND SECTION

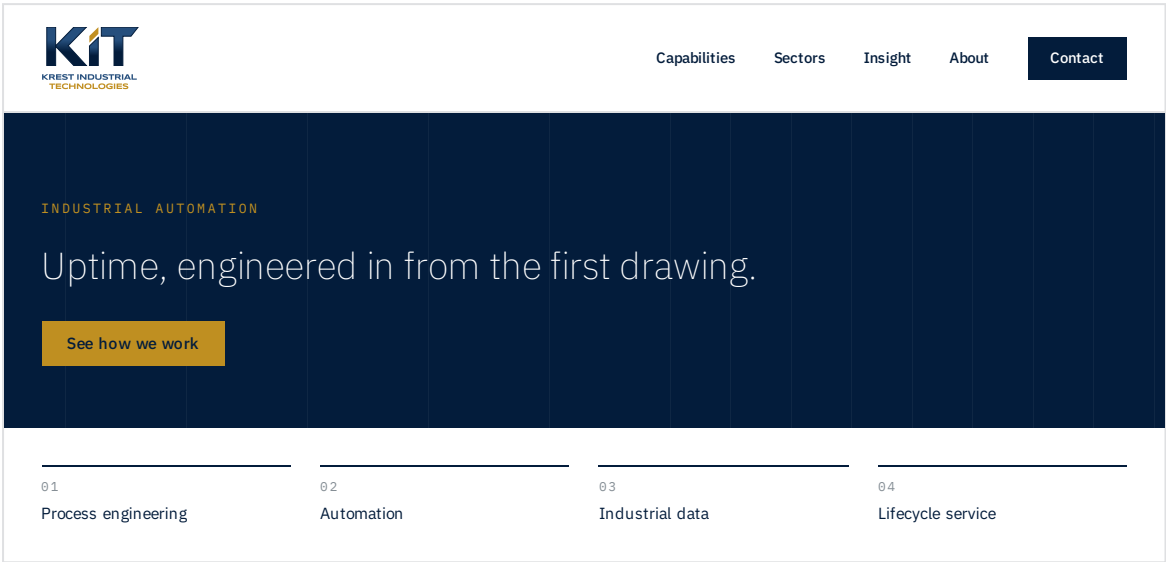

DESKTOP 1440 PX

Twelve columns, 96 px outer margin, 24 px gutter. Navy hero, single gold action, sections divided by hairline rules.


DOCUMENT COVER



A4 PORTRAIT

Wordmark top left, title at the foot, reference number in Mono.

EMAIL SIGNATURE



PLAIN HTML

Wordmark only. Gold hairline divider. No images beyond the mark.


INTERFACE STATES

Focus rings use KIT Blue at 2px. Error, warning and success states use system status colours, not brand colours.

Presentation system


Three master slides cover almost every deck: a navy cover, a white content slide and a navy data slide. Anything that does not fit is a document, not a slide.

16:9 at 1920 × 1080. Twelve columns, 64 px margins. The wordmark sits top right on content slides at 96 px; the cover carries it top left.

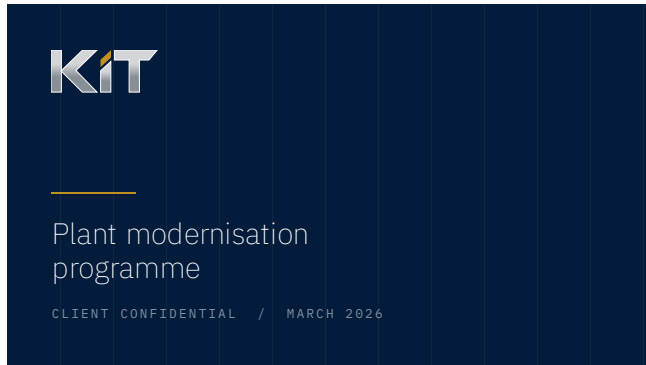

COVER

Navy, atmospheric grid, one gold rule. Title at the foot.

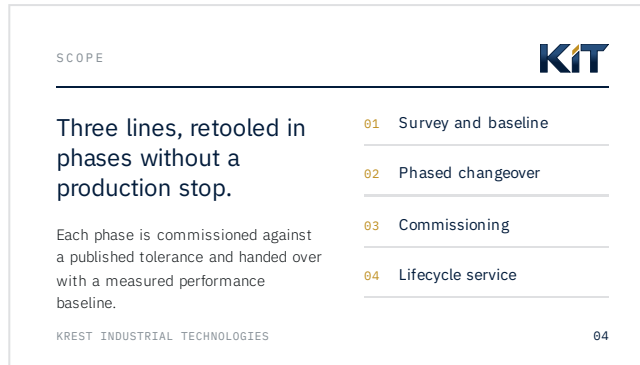

CONTENT

White ground, hairline under the running head.



DATA

Navy ground, Mono figures, one gold value only.

TYPE ON SLIDES

Slide titles 28–32pt, body 14–16pt, captions 10pt. Never below 10pt: if the content does not fit, it belongs in the appendix or a document.

KREST INDUSTRIAL TECHNOLOGIES

ONE IDEA PER SLIDE

A single headline states the point. Supporting detail sits beneath it. Slides are not read aloud and are not a substitute for a report.

NEVER


No template transitions, no drop shadows on shapes, no logo on every slide, no gradient fills, no clip art, no default chart colours.

Social media

Social posts carry the identity at its most compressed. The wordmark is used rather than the lockup, and one idea occupies the whole frame.

Text is set large enough to read at thumbnail size. If a post needs more than fifteen words on the image, the words belong in the caption.


FEED POST 1:1

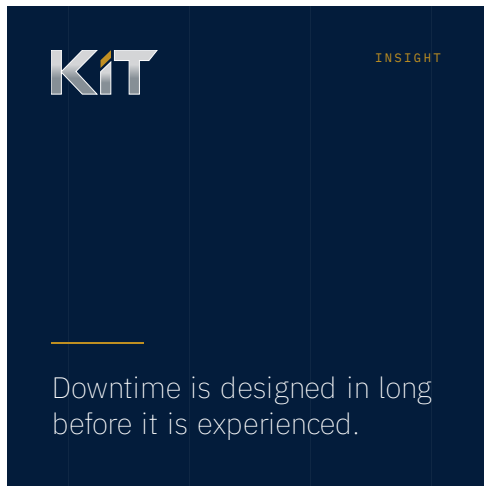

STATEMENT

Navy, wordmark top left, one gold rule, headline at the foot.


FEED POST 1:1

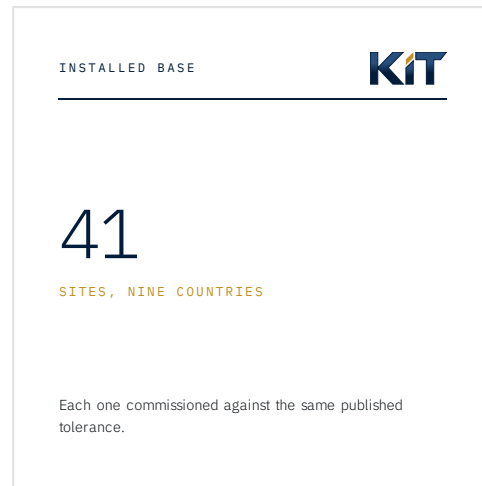

FIGURE

White ground, one Mono figure, gold label. No decoration.

PROFILE BANNER 4:1

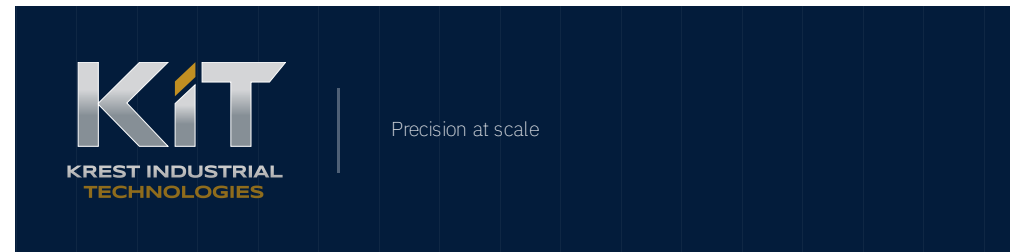

1584 × 396 PX

Lockup left, divider rule, brand line. Keep the centre clear of the profile image overlap.



PROFILE IMAGE

Wordmark on Navy, centred, at 58% of the canvas width. Minimum 96px wordmark on a 400px canvas. The lockup is never used here — the descriptor is illegible at avatar size.


The mark is never cropped to a circle by design. Where a platform applies a circular mask, the square Navy field absorbs it without touching the artwork.

Industrial applications

On plant, the identity has to survive powder coat, oil, abrasion and low light. Reproduction is single-colour more often than not, and the wordmark does the work.


The gradient is only reproduced by processes that can hold it – vinyl, digital print and powder-coat transfer. Everywhere else the monochrome master is used.

EMPLOYEE IDENTIFICATION

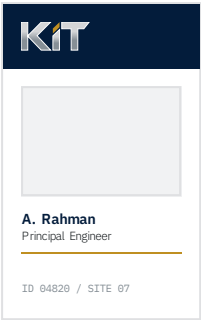

54 × 86 MM
Navy header band, metallic wordmark reversed.

MACHINERY IDENTIFICATION PLATE

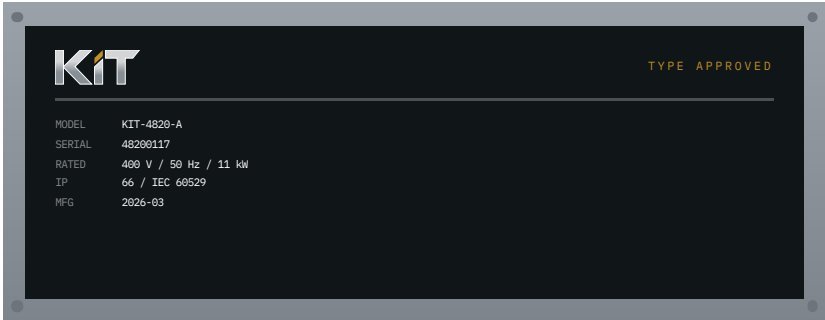

ETCHED STAINLESS, 90 × 55 MM
Charcoal ground, Mono data, wordmark reversed. Gold reserved for the approval mark.

FLEET



RIGID BODY
Navy body, lockup reversed, single gold rule above. No wraps, no imagery.

PROTECTIVE EQUIPMENT



HARD HAT
Navy monochrome wordmark, 25 mm. No gradient at this size.

PACKAGING AND SHIPPING



SINGLE-COLOUR FLEXOGRAPHIC
Monochrome lockup. The gradient is dropped for single-pass processes.

REPRODUCTION RULES ON PLANT

Engraved / etched	Mono, 20 mm min
Powder coat, single pass	Mono, 25 mm min
Screen print, two colour	Mono + accent, 25 mm
Embroidery	Mono + accent thread, 25 mm
Injection moulded	Mono, 20 mm, 0.4 mm relief
Vehicle vinyl	Gradient, 300 mm min

Operational signage

Safety signage is governed by ISO 3864 and ISO 7010, not by this document. Shape, colour and symbol are mandated and must never be restyled to match the brand.

The brand appears alongside regulatory signage, never inside it. Wayfinding and facility signage are brand-led and use the Navy system.

REGULATORY — OUTSIDE THE BRAND PALETTE

MANDATORY


PROHIBITION

WARNING

SAFE CONDITION

Safety colours are specified by standard: mandatory blue, prohibition red, warning yellow, safe-condition green. They are legal requirements. Do not tint them toward Navy, do not substitute Gold for warning yellow, and do not apply the KIT logo inside a safety sign.

WAYFINDING

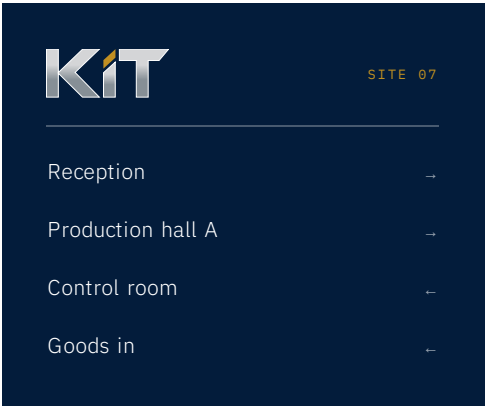

INTERNAL DIRECTIONAL

Navy ground, wordmark reversed, destinations at 8pt minimum for a 2m reading distance.

READING DISTANCE

2 m — door, desk	14 mm cap
5 m — corridor	35 mm cap
10 m — hall	70 mm cap
25 m — yard	175 mm cap
50 m — facade	350 mm cap

Cap height is approximately one seventieth of the intended reading distance. Round up, never down.

ILLUMINATION

Externally lit or halo-lit only. The wordmark is never rendered as an illuminated translucent face, which distorts the accent and the counters.

WHERE THE BRAND DOES APPEAR

On the sign carrier, the post or the surrounding board — adjacent to the regulatory panel and clearly separate from it.

Partnerships and co-branding

In a partnership the two identities carry equal visual weight, separated by a vertical rule one cap height tall. KIT sits on the left in KIT-issued material and on the right in partner-issued material.

Weight is matched optically, not mathematically. Two logos of the same width can look very unequal; match the perceived mass of the marks.

LOCKUP PAIRING – LIGHT GROUND



Partner

PRIMARY CO-BRAND

Divider is 0.4 pt, one cap height tall, in Light Grey. Clear space of 1H applies outside the pair, not between the marks.

LOCKUP PAIRING – DARK GROUND



Partner

REVERSED

Both marks reverse. Where a partner mark cannot reverse, the pairing moves to a light ground.

CONSTRAINED PAIRING – WORDMARK ONLY



Partner

KREST INDUSTRIAL TECHNOLOGIES

RULES

Order

KIT leads on material it issues. The partner leads on material they issue. Alphabetical order applies to groups of three or more.

Separation

One vertical rule, one cap height tall, 0.4 pt. Never a slash, an ampersand, a plus sign or the accent shape.

Spacing

The gap between each mark and the rule is equal, and at least 1H.

Weight

Match optical mass, not bounding-box width. Adjust the KIT mark, never the partner's.

Colour

Both marks in full colour, or both monochrome. Never one of each.

Approval

Every co-branded lockup is approved by Marketing & Communications before release. No exceptions, including internal use.

Brand checklist

Run this before anything leaves the building. Most brand failures are not disagreements about taste — they are one of these boxes left unticked.

Anything that cannot be resolved against this list goes to Marketing & Communications before it ships, not after.

- LOGO
- ☐ Supplied master file used — not a copy from a document or screenshot

☐ Correct variation for the ground: metallic on dark, tonal on light

☐ 1H clear space on all four sides, measured from the ink

☐ At or above minimum size — lockup 32 mm / 130 px, wordmark 14 mm / 56 px

☐ Proportions unaltered; no stretch, rotation, effect or recolour

- GRADIENT
- ☐ Gradient reproduced from the master, never re-created by hand

☐ Vertical axis, stops at 32% and 63% of the cap height

☐ Monochrome used wherever the process cannot hold a ramp

☐ Never applied to type, panels, icons or graphic elements

- COLOUR
- ☐ Values taken from this document or the supplied swatch library

☐ Navy dominant, Gold used once beyond the mark

☐ Tints from the extended palette — not opacity

☐ Every text pair measured at 4.5:1 or above

- TYPOGRAPHY
- ☐ IBM Plex Sans and Plex Mono, or the approved substitutes

☐ Sizes and tracking from the published scale

☐ Ragged right, 55–75 characters per line

☐ Descriptor never re-set in Plex

- IMAGERY
- ☐ Real plant, real components, real people in correct PPE

☐ Cool neutral grade, verticals true, cropped to the grid

☐ Text only over a flat panel or a solid scrim

☐ No generic technology stock

- ICONS AND GRAPHICS
- ☐ 24-unit grid, 1.6 stroke, square corners, single colour

☐ Only 90° and 45°

☐ One graphic intensity per surface

☐ No circuitry, glow, particles or 3D

- LAYOUT
- ☐ Twelve columns, content on column boundaries

☐ Spacing from the published scale

☐ No more than three content groups per page

☐ Margins respected — nothing bleeds without intent

- CO-BRANDING
- ☐ Approved lockup, correct order and separation

☐ Optical weight matched

☐ Both marks in the same colour treatment

☐ Signed off by Marketing & Communications

The identity holds
because it is applied
the same way, every time.

This is a controlled document. It is maintained by Marketing & Communications and reissued when the system changes. Where a situation is not covered here, ask before you improvise.



BRAND ENQUIRIES

brand@kit.example

ASSET LIBRARY

brand.kit.example

CO-BRAND APPROVALS

brand@kit.example

ISSUE

3.0 / September 2026

NEXT REVIEW

September 2027