

Revision 3 — 2 × 2 positive-pocket memory at 6.35 mm pitch

One row lifted; other row retained

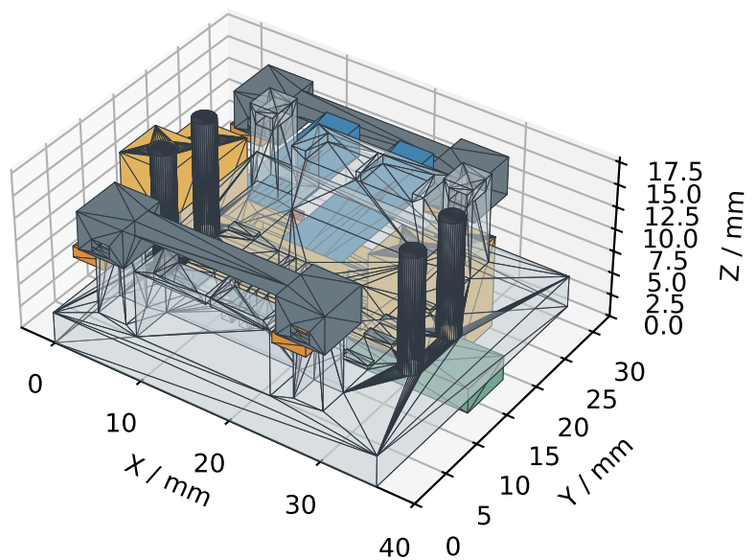


X–Z section / mm (cassette roof omitted here)

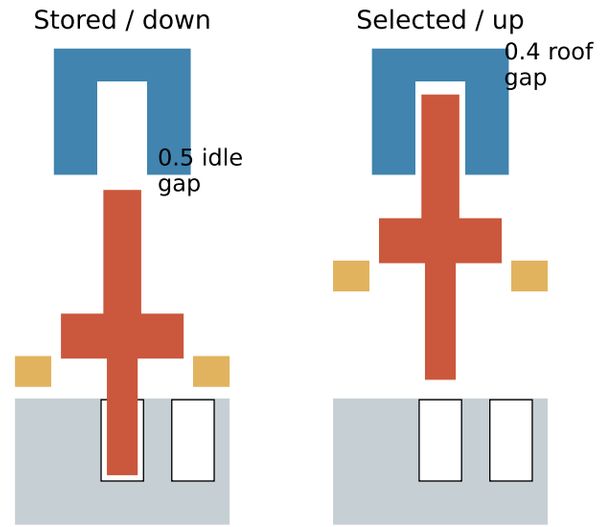

Foot engagement 2.1
Pocket floor ≥1.2 thick
Nominal overlap 1.6


Row lift 2.7
Foot release gap 0.6
Lug/channel X: 1.0 / 1.4

Y–Z section: positive shoulder capture

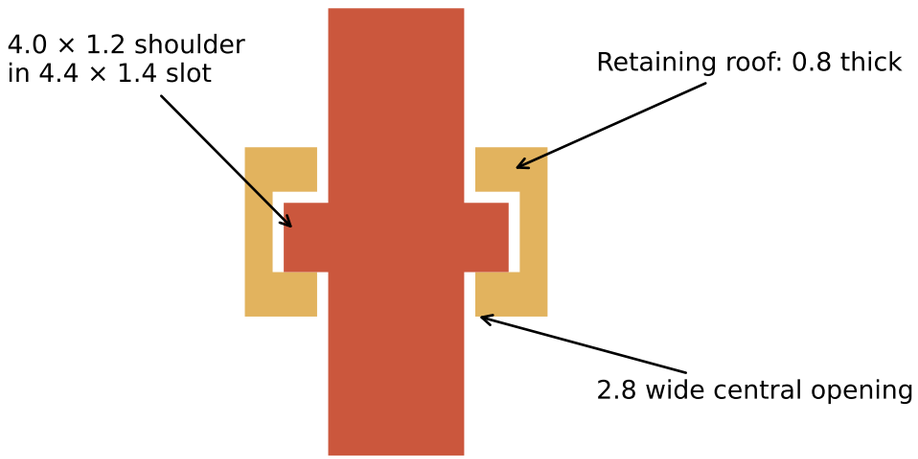

Cassette outer Y = 5.4; neighboring rows = 6.35
Load flags through the X=23.2–27.5 window off the base.
Slide first flag to X=12, then load the second at X=18.35.

Flag print section / mm

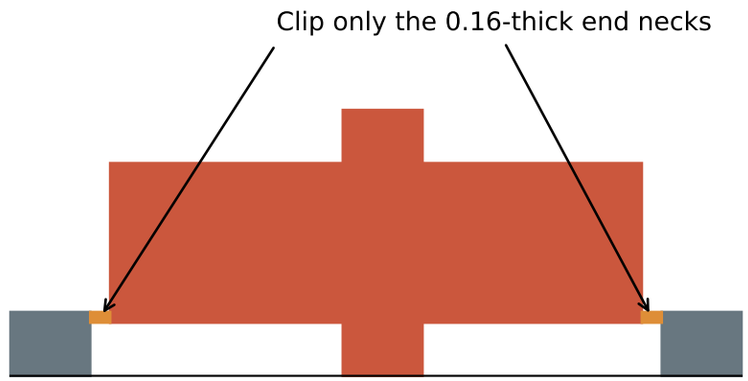

Side-down flag with sacrificial end towers
3.8 and 3.6 mm bridges; no support under the functional sides.
Inspect bridges and measure the clipped height before testing.

A restricted planar screen is not a general tolerance proof; use deliberate side/tilt-bias handoff tests.
Physical fit, bridge quality, friction, wear and powered timing are unqualified. Keep all four keeper keys fully inserted.