
Glugg carrier board rev A. Same circuit as the verified protoboard build (CLAUDE.md, Wiring).

Power: USB-C charger into the S3. S3 5V pin = +5V; H2 fed through D1. U1/U2 plug into female headers.

LED data: GPIO13 -> U3 gate 3 (pins 9+10, R2 pull-down) -> pin 8 -> R3 -> J1 DIN. Unused inputs tied off.

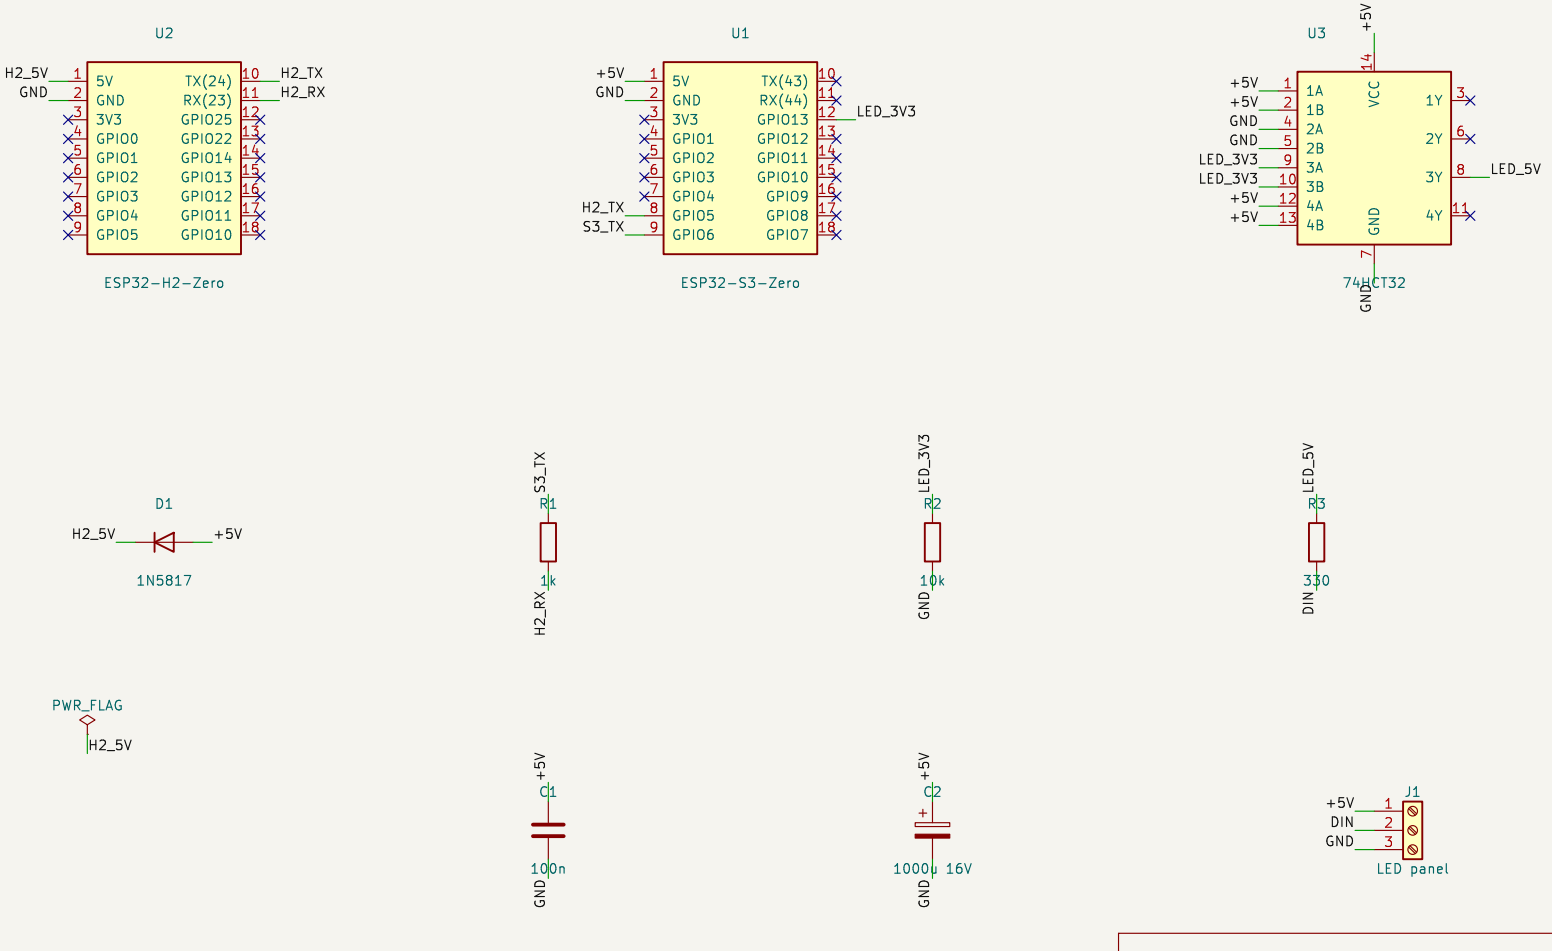

Waveshare ESP32-S3-Zero + ESP32-H2-Zero, 74HCT32 LED buffer, 8x8 WS2812 panel

Sheet: /
File: glugg.kicad_sch

Title: Glugg carrier board

Size: A4	Date: 2026-10-18	**Rev: A**
KiCad E.D.A. 9.0.2		Id: 1/1