
tag identification

Quick use

1. Power on DOGZILLA

First, we turn on the switching power supply of the mechanical dog and start the mechanical dog

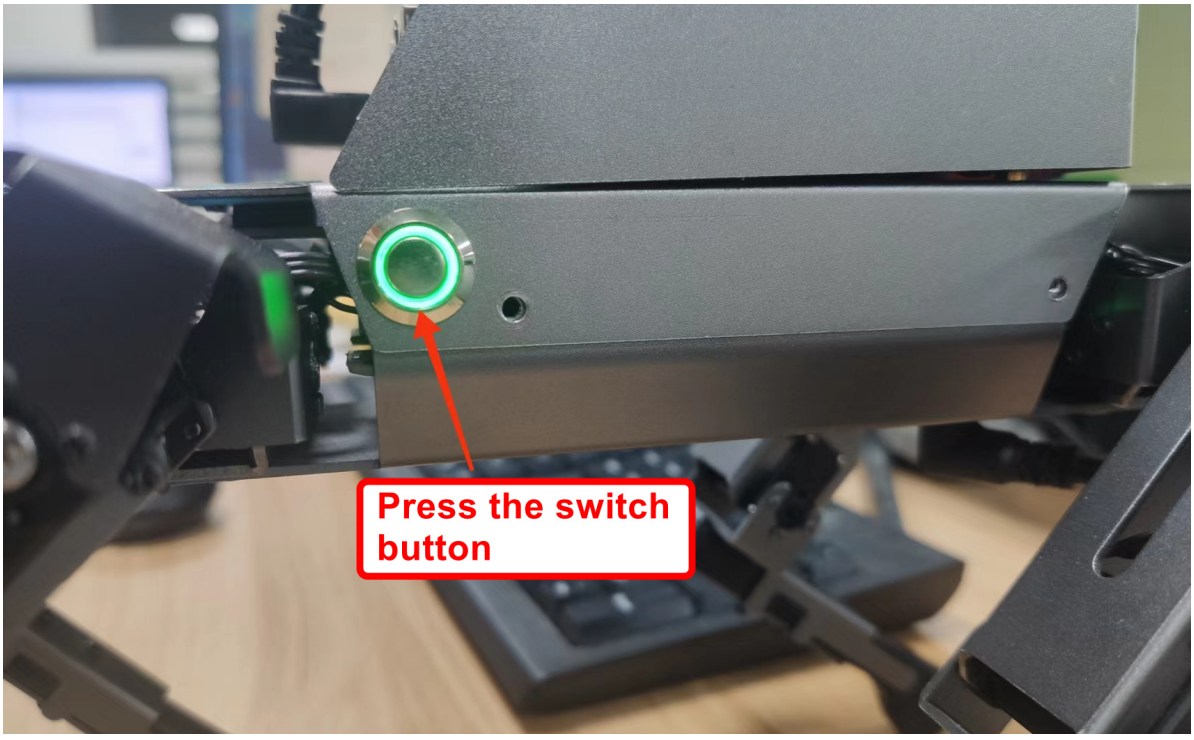

After starting, we can view the IP address on the small screen of the robot dog.

2. Start DOGZILLA chassis

PI4 version steps:


Then use the ssh terminal to connect to the robot dog.

Note: The IP address used when writing this tutorial: 192.168.2.102 User name: pi Password: yahboom The actual IP address shall prevail when used.


Open the shell tool. The shell tool I use here is FinalShell. Enter username, password, port, connection name and other information.



Select ssh connection to create a new ssh connection

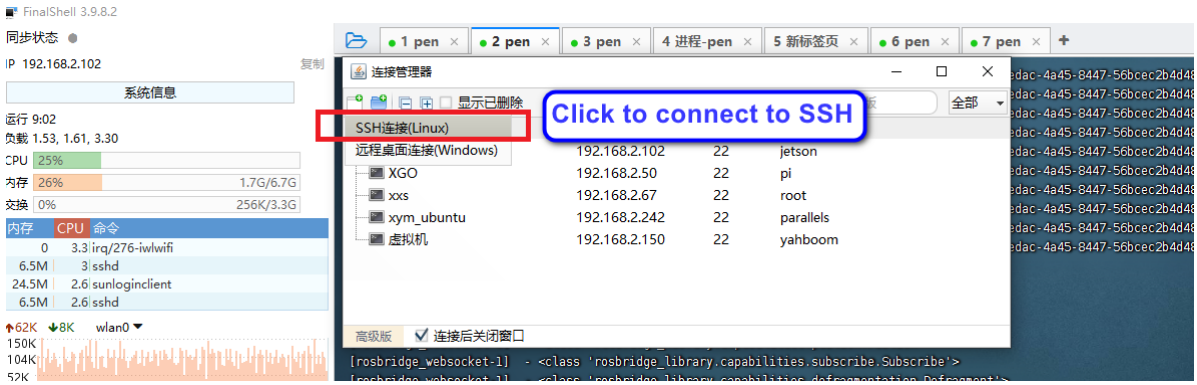

Here the username is pi, the password is yahboom, and the ip address is the IP address of the real robot dog.

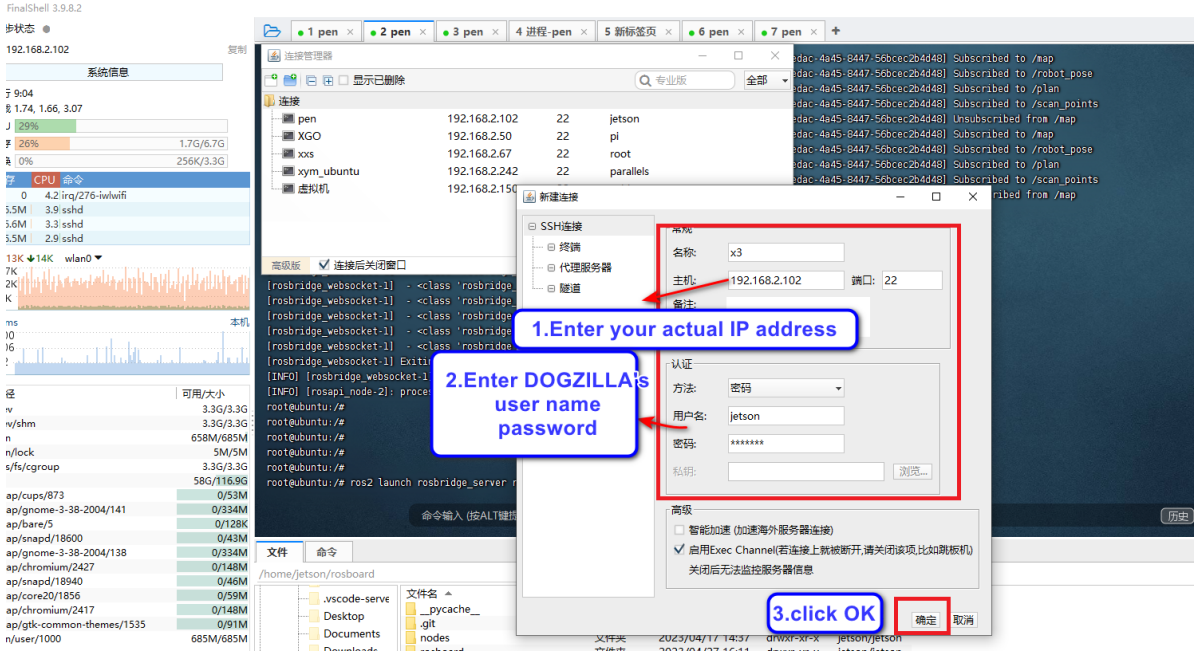


Select the ssh connection you just created here.




Enter the command in the terminal to start the chassis task.

```
sudo systemctl restart YahboomStart.service
```

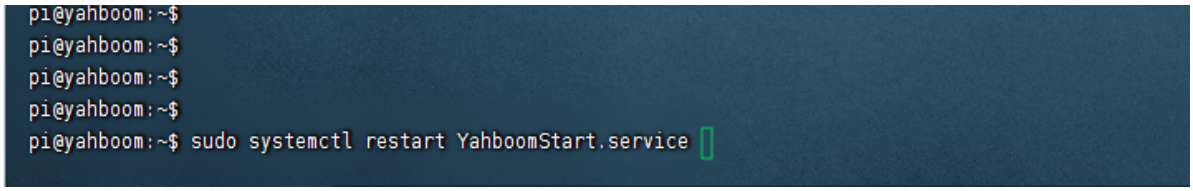

PI5 version steps:

After the mechanical dog is started, use the vnc software to remotely connect to the mechanical dog through the IP address on the OLED (**For specific steps, please see "Remote Login Operation"**).

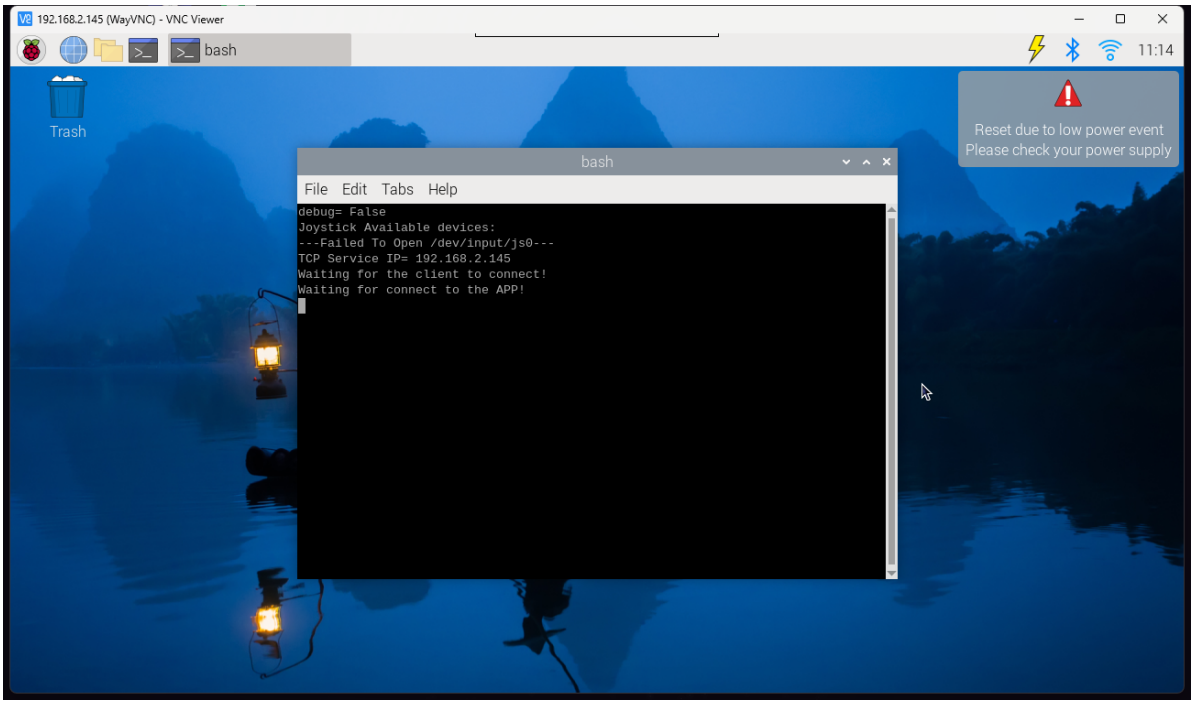


Then ctrl+c closes the large program and enter the following command to enter docker:

```
./run_humble.sh
```

```
TCP Service IP= 192.168.2.145
Waiting for the client to connect!
Waiting for connect to the APP!
^CKeyboardInterrupt
2024-04-28T10:17:27Z
-----program end-----
pi@raspberrypi:~ $ ./run_humble.sh
access control disabled, clients can connect from any host
root@raspberrypi:/#
```

Then enter the following commands in the docker terminal to start the car radar, imu, and mechanical dog joint status nodes.

```
ros2 launch bringup Navigation_bringup.launch.py
```

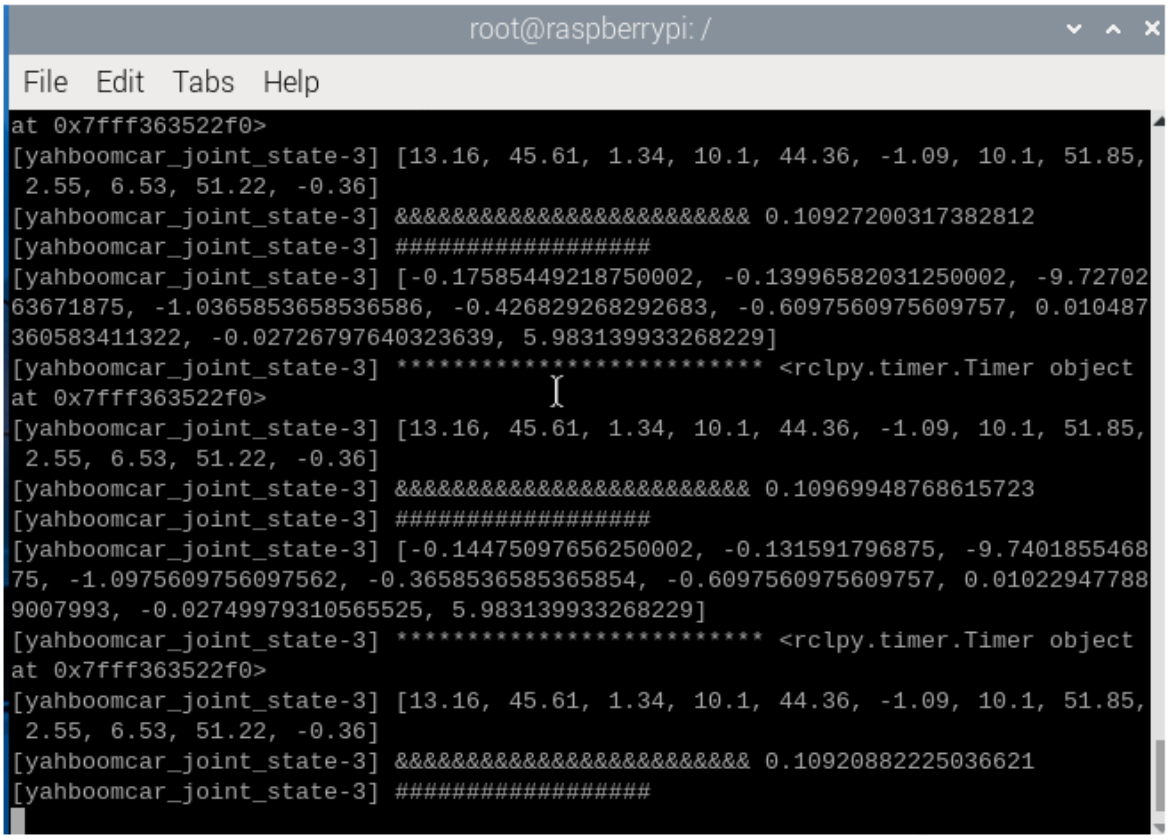

3. Start the image publishing node

PI4 version steps:

First enter the following two commands in the terminal

```
export PATH=/home/pi/opencv_install/bin:$PATH
export LD_LIBRARY_PATH=/home/pi/opencv_install/lib:$LD_LIBRARY_PATH
```

Then enter the following command in the terminal

```
cd cartographer_ws2/
```

```
source install/setup.bash
```

```
pi@yahboom:~$ cd cartographer_ws2/
pi@yahboom:~/cartographer_ws2$
pi@yahboom:~/cartographer_ws2$
pi@yahboom:~/cartographer_ws2$ source install/setup.bash
pi@yahboom:~/cartographer_ws2$
```

Then enter the following command

```
ros2 run yahboom_qrcode yahboom_qrcode_node
```

```
pi@yahboom:~/cartographer_ws2$ ros2 run xgo_qrcode xgo_qrcode_node
[ WARN:0@0.334] global cap_gstreamer.cpp:2784 handleMessage OpenCV | GStreamer warning: Embedded video playback halted; module source reported:
 Could not read from resource.
[ WARN:0@0.335] global cap_gstreamer.cpp:1679 open OpenCV | GStreamer warning: unable to start pipeline
[ WARN:0@0.336] global cap_gstreamer.cpp:1164 isPipelinePlaying OpenCV | GStreamer warning: GStreamer: pipeline have not been created
A demo program of WeChat QRCode Detector:

------------------------------------------------------------
11111,here.
------------------------------------------------------------

init,fov.0.997839
init111,foh. 0.707185
```

PI5 version steps:

Enter in the root directory of the Raspberry Pi and enter the same terminal

```
docker ps
docker exec -it id /bin/bash
```

```
pi@raspberrypi:~ $ docker ps
CONTAINER ID   IMAGE                                  COMMAND       CREATED
 STATUS          PORTS     NAMES
c06cd712e14e   yahboomtechnology/ros-humble:3.1   "/bin/bash"   24 minutes ago
 Up 24 minutes             nice_keldysh
pi@raspberrypi:~ $ docker exec -it c06c /bin/bash
root@raspberrypi:/#
```

Then enter the following command

```
ros2 run yahboom_qrcode yahboom_qrcode_node
```

```
root@raspberrypi:/# ros2 run yahboom_qrcode yahboom_qrcode_node
[ WARN:0] global ./modules/videoio/src/cap_gstreamer.cpp (2075) handleMessage Op
enCV | GStreamer warning: Embedded video playback halted; module source reported
: Could not read from resource.
[ WARN:0] global ./modules/videoio/src/cap_gstreamer.cpp (1053) open OpenCV | GS
treamer warning: unable to start pipeline
[ WARN:0] global ./modules/videoio/src/cap_gstreamer.cpp (616) isPipelinePlaying
 OpenCV | GStreamer warning: GStreamer: pipeline have not been created
A demo program of WeChat QRCode Detector:


------------------------------------------------------------
11111,here.
------------------------------------------------------------

init,fov.0.997839
init111,foh. 0.707185
```


5. Set the recognition color through the web interface


The steps are the same for PI4 and PI5 versions:

Open the virtual machine and enter the user name yahboom and the password yahboom.

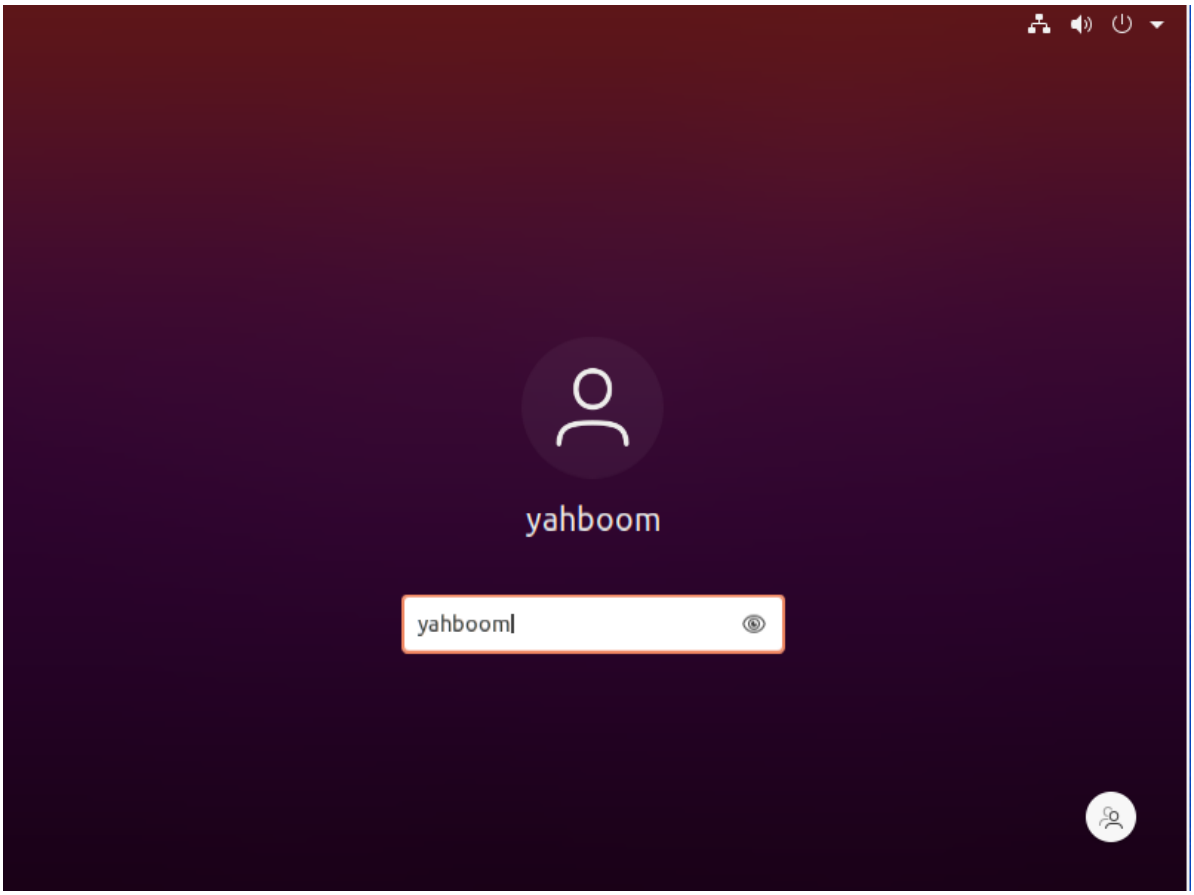


Click on the folder to open the cartoros2 folder.

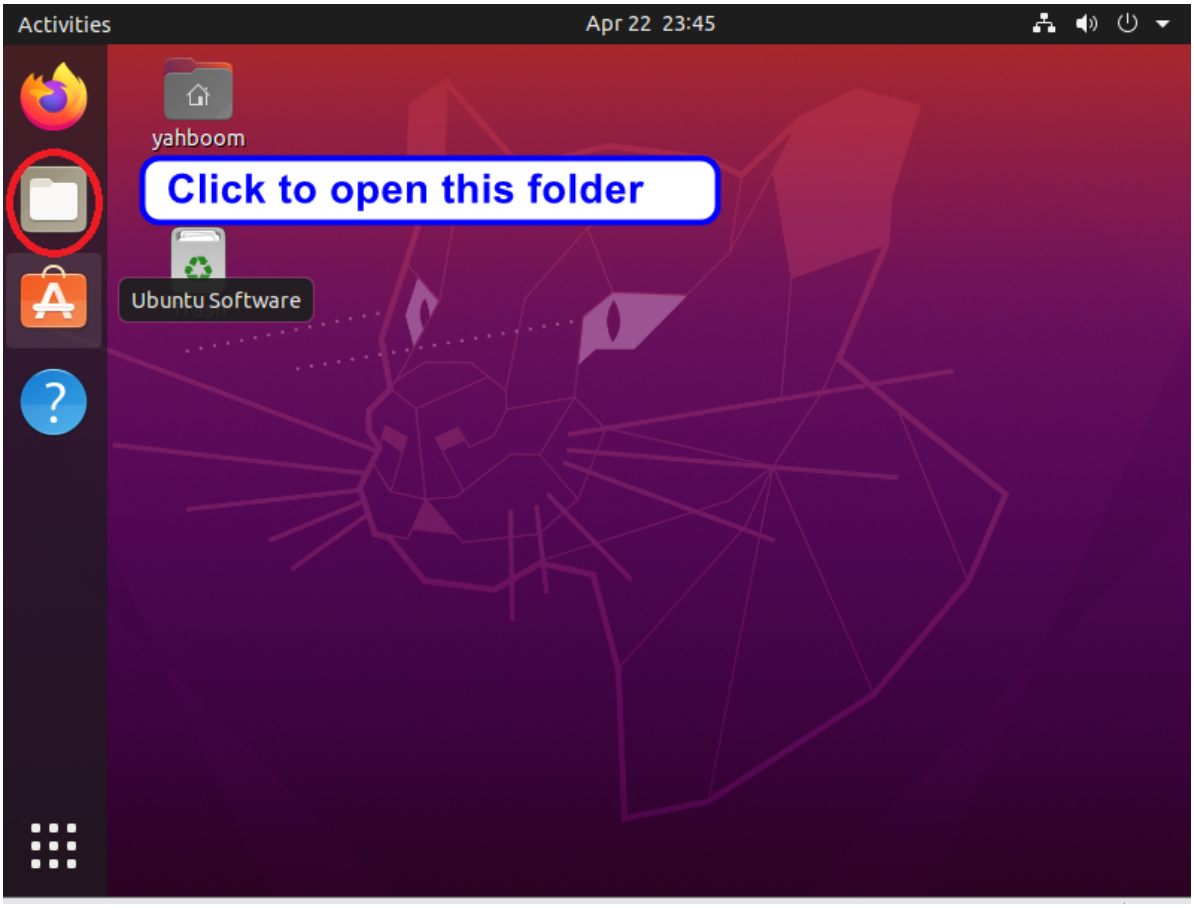

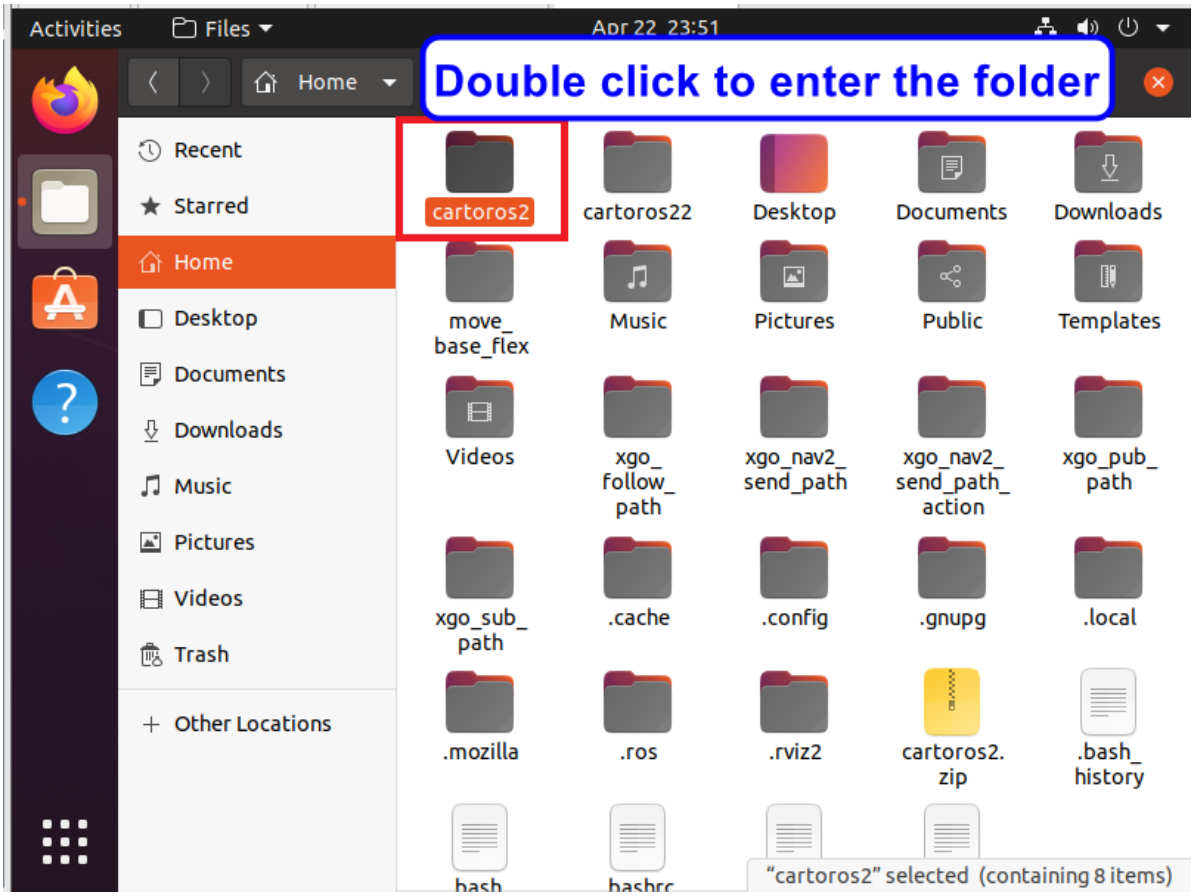


Open the terminal under the folder

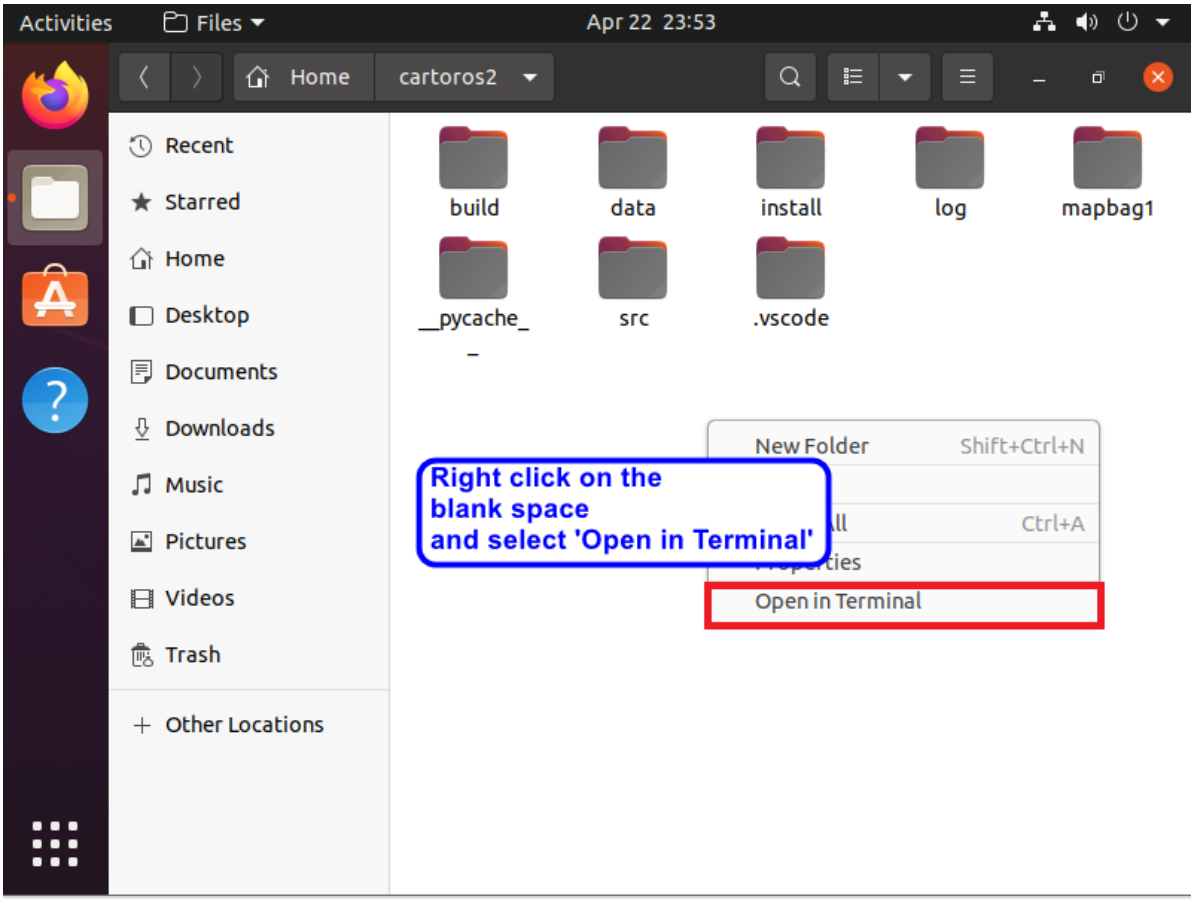


Then enter the following command

```
source install/setup.bash
```

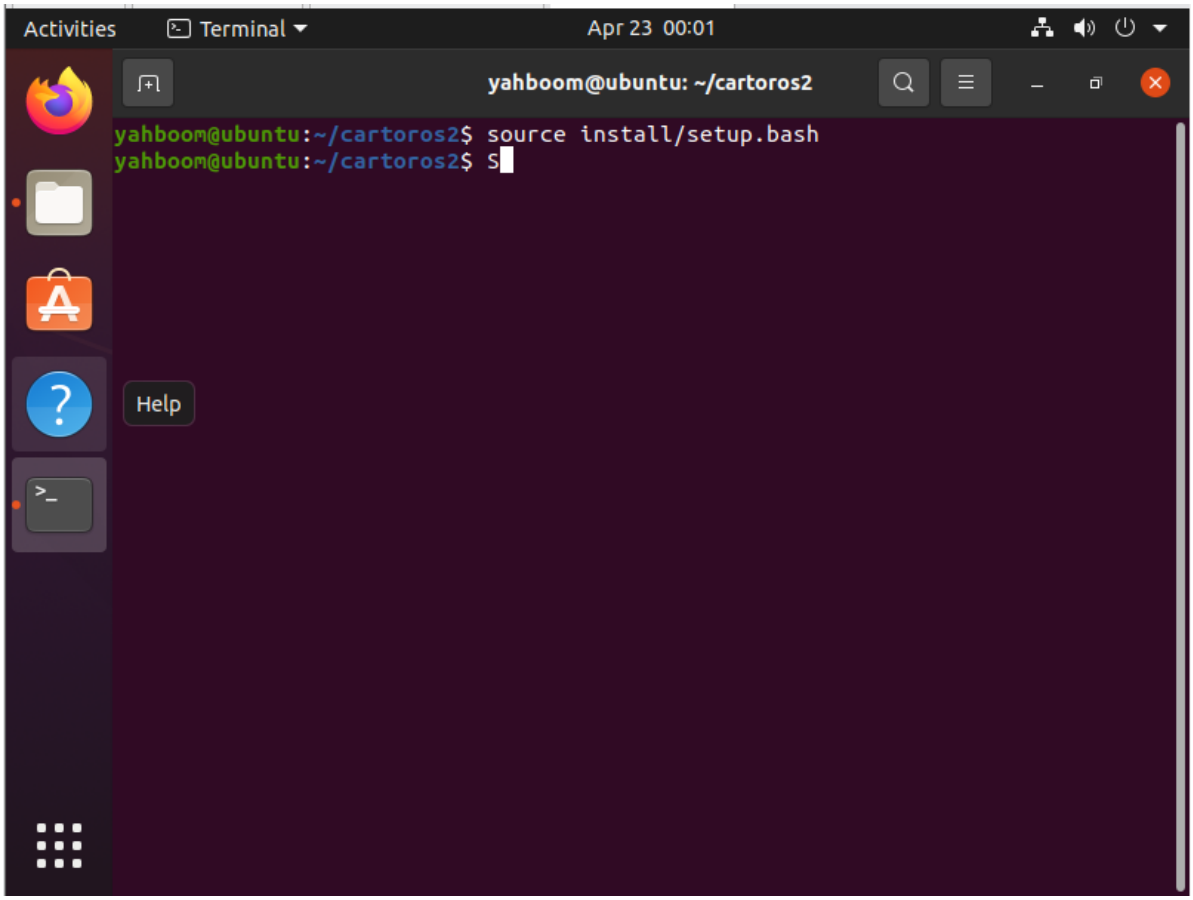


Then start rosbridge and enter the following command


```
ros2 launch rosbridge_server rosbridge_websocket_launch.xml
```

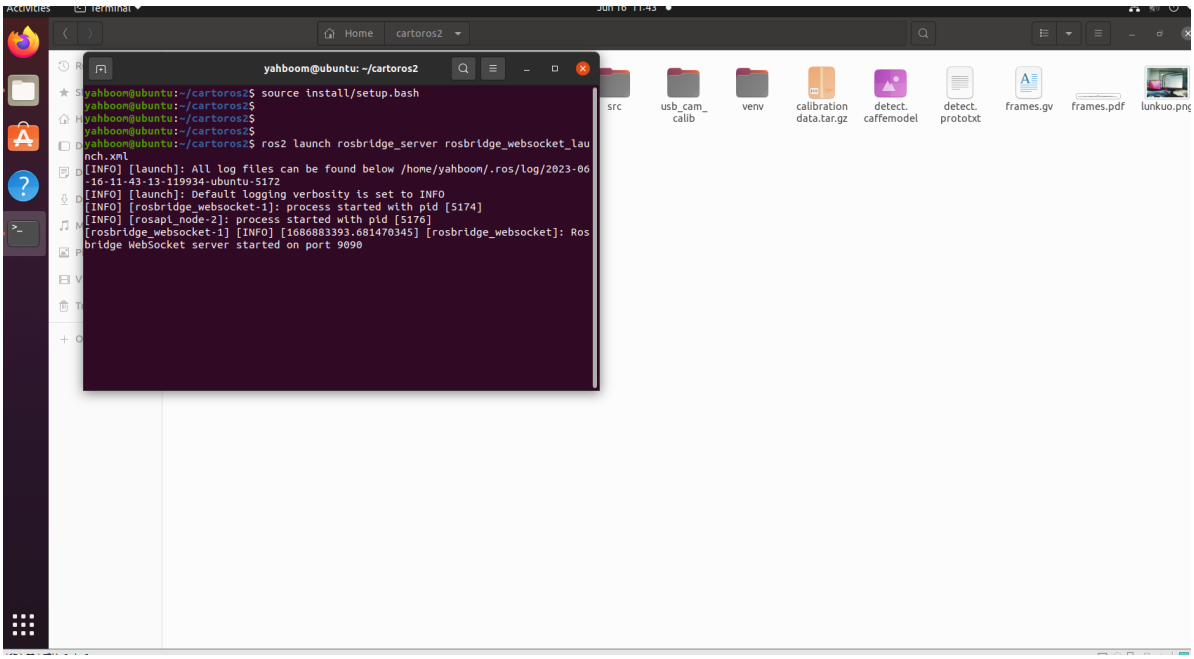


Find the blank.html file in the eb folder in the root directory of this tutorial and open it with Google Chrome.

Note: The IP address of rosbridge needs to be set here. Obtain the IP address of the virtual machine, then open the blank.html file, modify the IP address of line 363 and save it, as shown in the figure below.

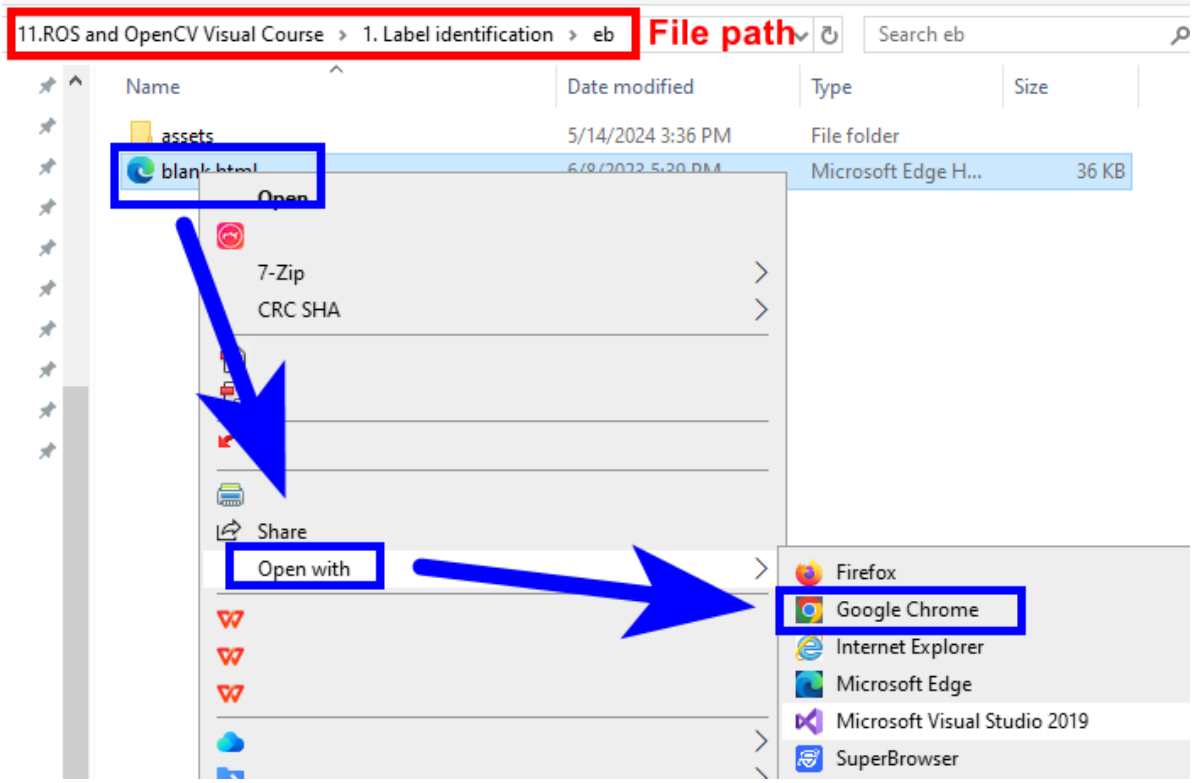

11.ROS and OpenCV Visual Course › 1. Label identification › eb
File path
Search eb
Name
Date modified
Type
Size
assets
5/14/2024 3:36 PM
File folder
blank.html
Microsoft Edge H...
36 KB
Open
7-Zip
CRC SHA
Share
Open with
Firefox
Google Chrome
Internet Explorer
Microsoft Edge
Microsoft Visual Studio 2019
SuperBrowser

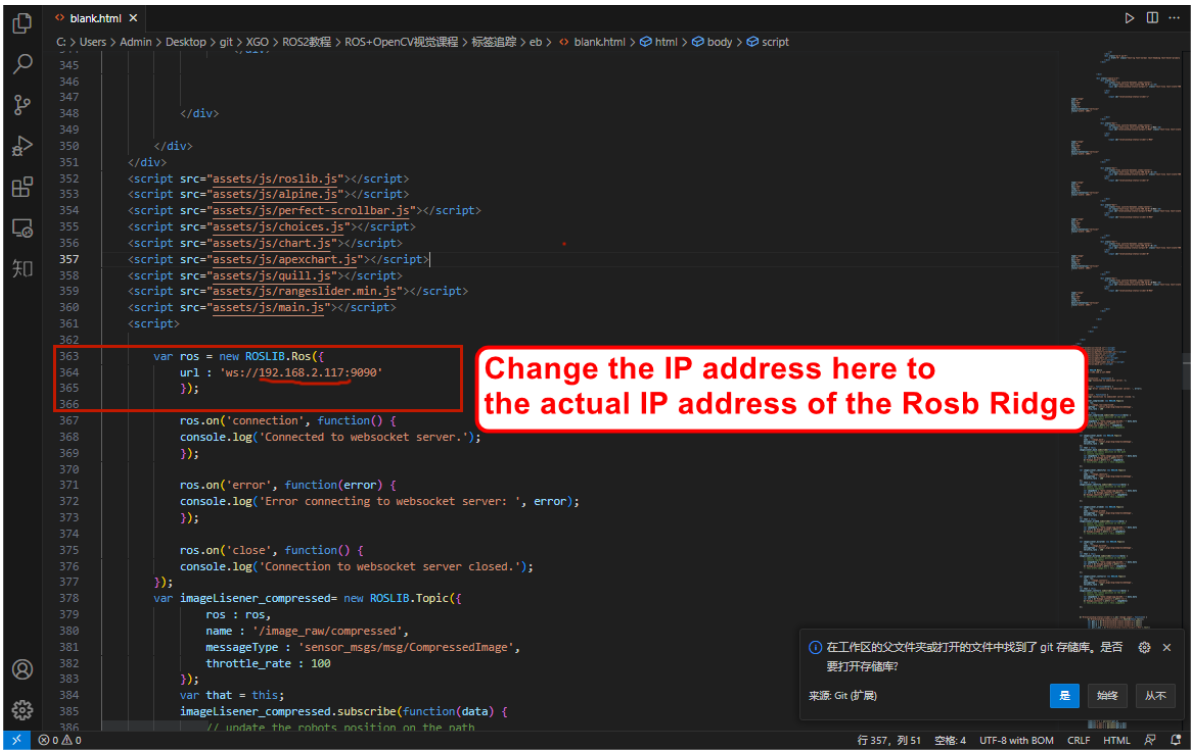
blank.html
C: › Users › Admin › Desktop › git › XGO › ROS2教程 › ROS+OpenCV视觉课程 › 标签追踪 › eb › blank.html › html › body › script


<script src="assets/js/roslib.js"></script>
<script src="assets/js/alpine.js"></script>
<script src="assets/js/perfect-scrollbar.js"></script>
<script src="assets/js/choices.js"></script>
<script src="assets/js/chart.js"></script>
<script src="assets/js/apexchart.js"></script>
<script src="assets/js/quill.js"></script>
<script src="assets/js/rangeslider.min.js"></script>
<script src="assets/js/main.js"></script>
<script>
var ros = new ROSLIB.Ros({
url : 'ws://192.168.2.117:9090'
});
ros.on('connection', function() {
console.log('Connected to websocket server.');
});
ros.on('error', function(error) {
console.log('Error connecting to websocket server: ', error);
});
ros.on('close', function() {
console.log('Connection to websocket server closed.');
});
var imageLisener_compressed= new ROSLIB.Topic({
ros : ros,
name : '/image_raw/compressed',
messageType : 'sensor_msgs/msg/CompressedImage',
throttle_rate : 100
});
var that = this;
imageLisener_compressed.subscribe(function(data) {
Change the IP address here to
the actual IP address of the Rosb Ridge
在工作区的父文件夹或打开的文件中找到了 git 存储库。是否要打开存储库?
来源: Git (扩展)
是
始终
从不
行 357，列 51
空格: 4
UTF-8 with BOM
CRLF
HTML

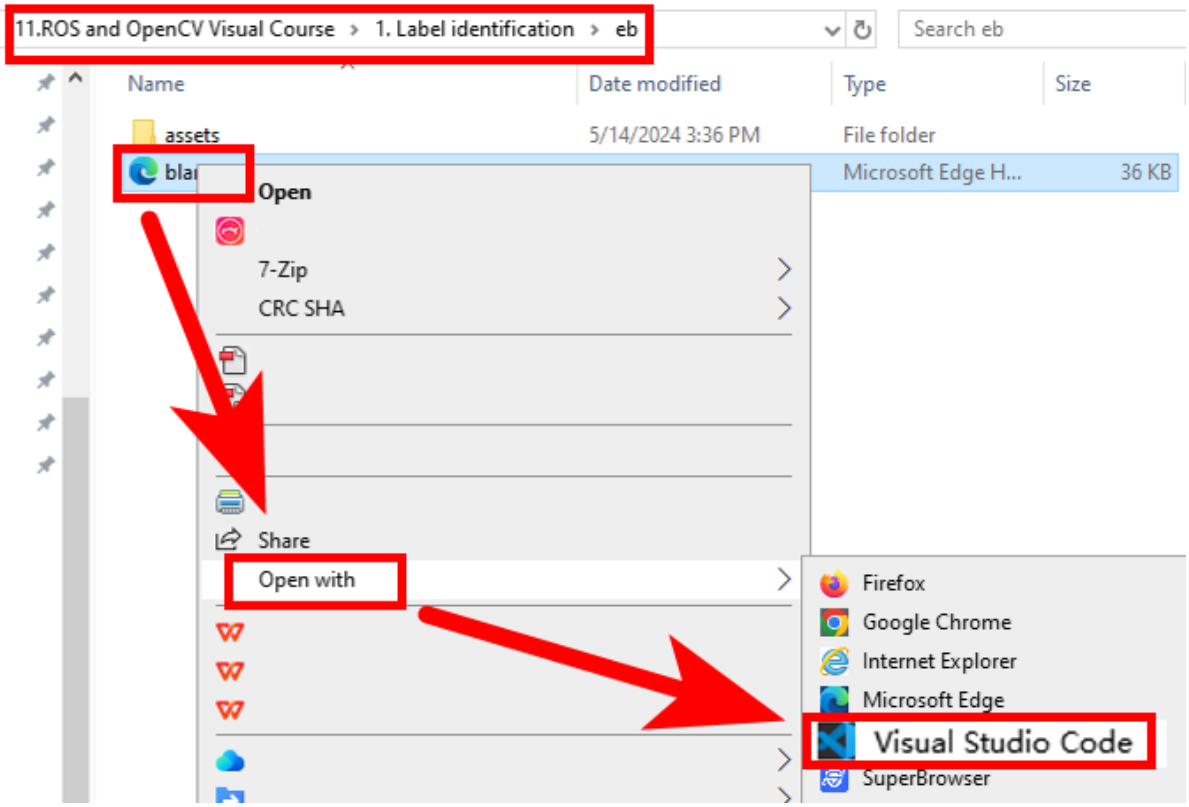

As shown in the picture below, use your mobile phone to display a QR code. Here is the WeChat QR code. You can see the picture transmitted by the camera and the recognized QR code data.

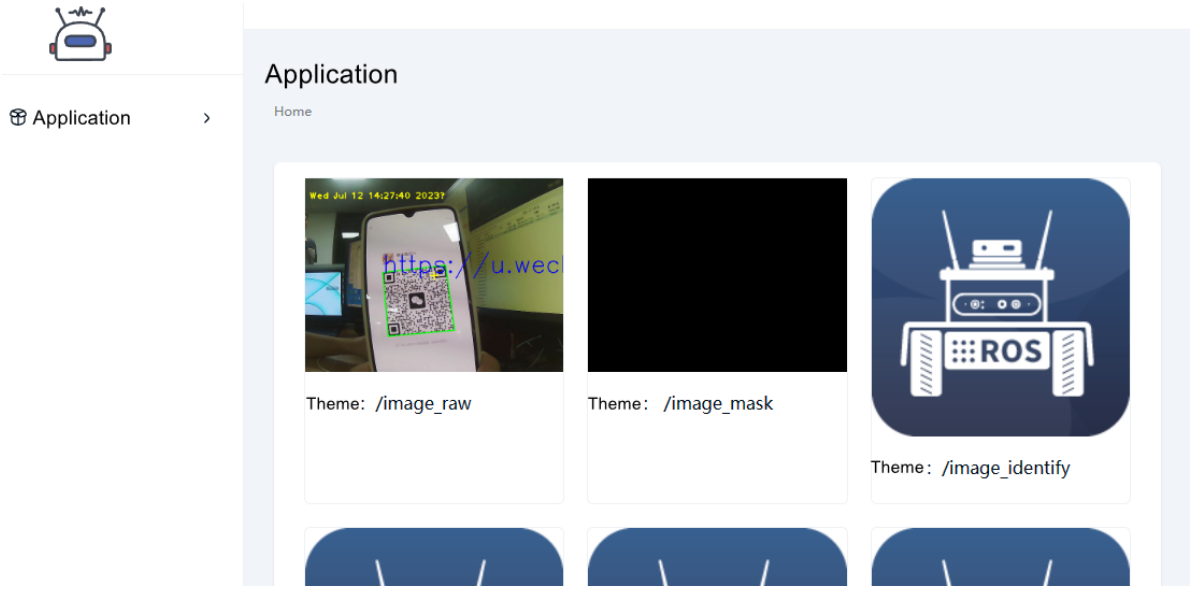

The recognized data will also be printed in the finalshell terminal.

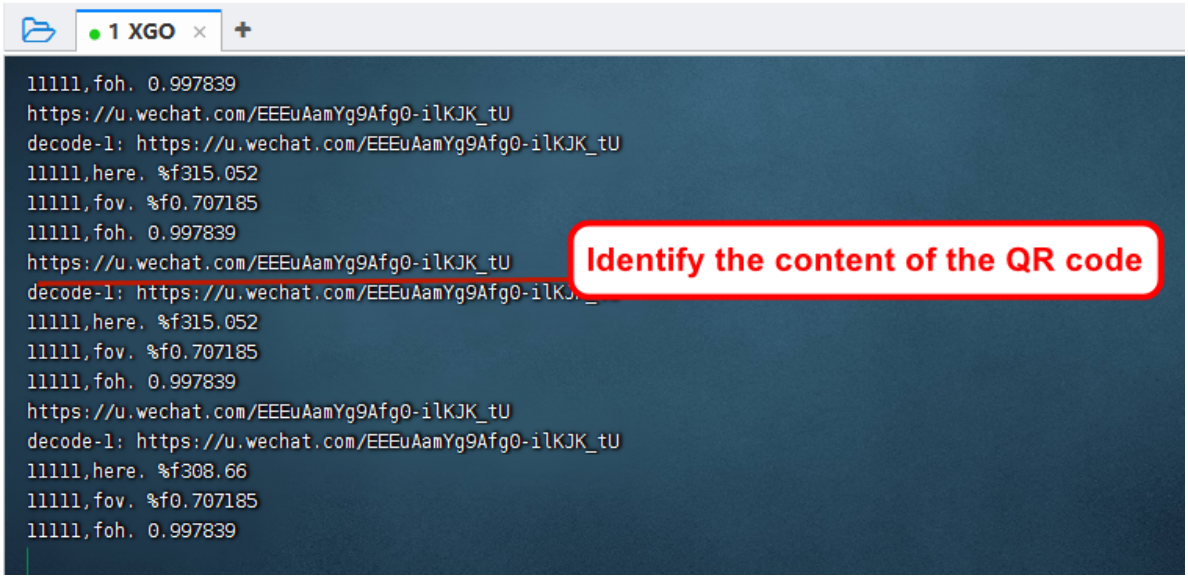
1 XGO
11111,foh. 0.997839
https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
decode-1: https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
11111,here. %f315.052
11111,fov. %f0.707185
11111,foh. 0.997839
https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
decode-1: https://u.wechat.com/EEEuAamYg9Afg0-ilKJ
11111,here. %f315.052
11111,fov. %f0.707185
11111,foh. 0.997839
https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
decode-1: https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
11111,here. %f308.66
11111,fov. %f0.707185
11111,foh. 0.997839
Identify the content of the QR code