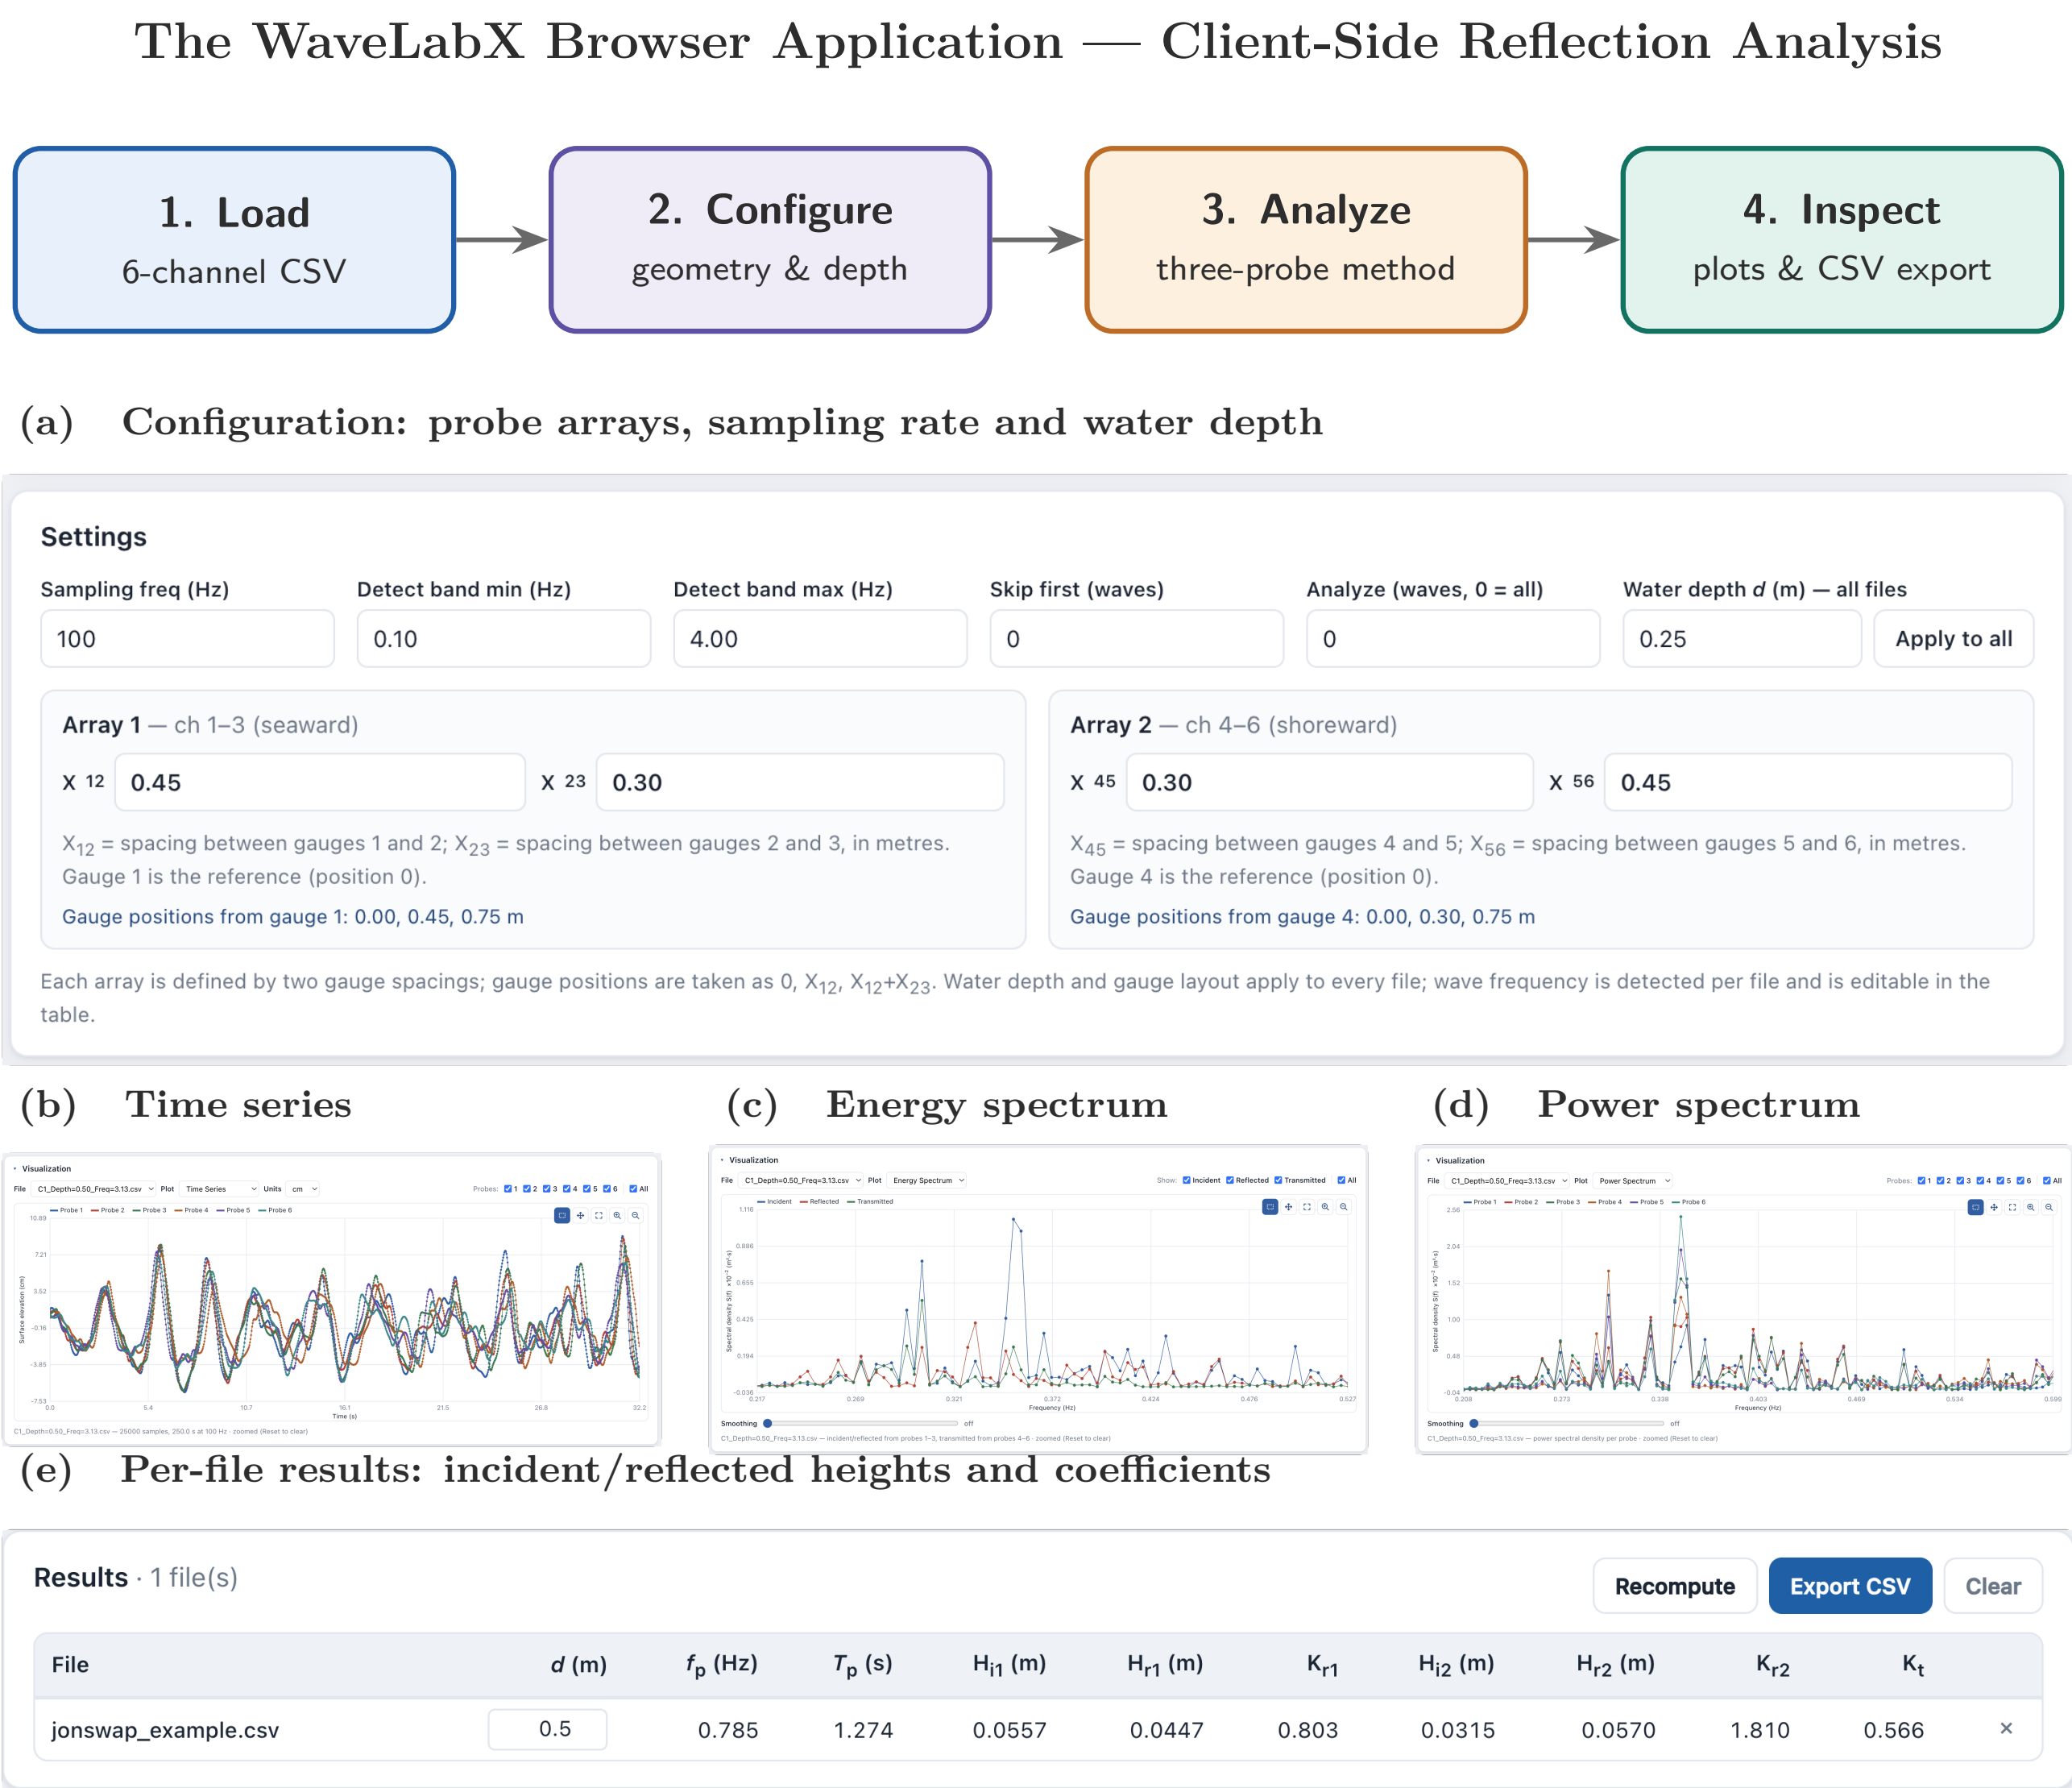

The WaveLabX Browser Application — Client-Side Reflection Analysis
1. Load
6-channel CSV
2. Configure
geometry & depth
3. Analyze
three-probe method
4. Inspect
plots & CSV export
(a) Configuration: probe arrays, sampling rate and water depth
Settings
Sampling freq (Hz)
100
Detect band min (Hz)
0.10
Detect band max (Hz)
4.00
Skip first (waves)
0
Analyze (waves, 0 = all)
0
Water depth d (m) — all files
0.25
Apply to all
Array 1 — ch 1–3 (seaward)
X 12
0.45
X 23
0.30
X12 = spacing between gauges 1 and 2; X23 = spacing between gauges 2 and 3, in metres. Gauge 1 is the reference (position 0).
Gauge positions from gauge 1: 0.00, 0.45, 0.75 m
Array 2 — ch 4–6 (shoreward)
X 45
0.30
X 56
0.45
X45 = spacing between gauges 4 and 5; X56 = spacing between gauges 5 and 6, in metres. Gauge 4 is the reference (position 0).
Gauge positions from gauge 4: 0.00, 0.30, 0.75 m
Each array is defined by two gauge spacings; gauge positions are taken as 0, X12, X12+X23. Water depth and gauge layout apply to every file; wave frequency is detected per file and is editable in the table.
(b) Time series
(c) Energy spectrum
(d) Power spectrum
(e) Per-file results: incident/reflected heights and coefficients
Results · 1 file(s)
Recompute
Export CSV
Clear
File | d (m) | fp (Hz) | Tp (s) | Hi1 (m) | Hr1 (m) | Kr1 | Hi2 (m) | Hr2 (m) | Kr2 | Kt
jonswap_example.csv | 0.5 | 0.785 | 1.274 | 0.0557 | 0.0447 | 0.803 | 0.0315 | 0.0570 | 1.810 | 0.566 | ×