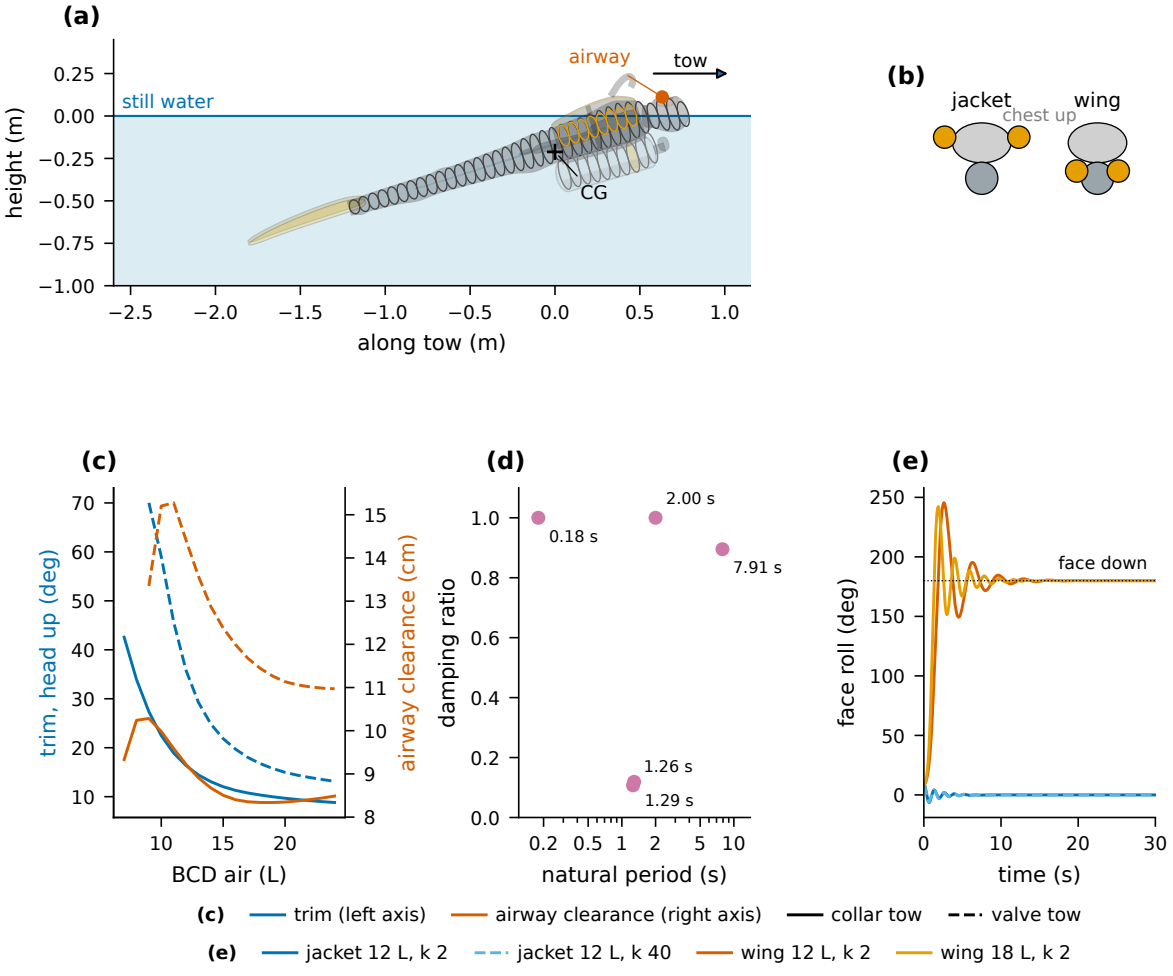

(a)
still water
airway
tow
CG
height (m)
along tow (m)
(b)
jacket
wing
chest up
(c)
trim, head up (deg)
airway clearance (cm)
BCD air (L)
(d)
damping ratio
natural period (s)
2.00 s
0.18 s
7.91 s
1.26 s
1.29 s
(e)
face roll (deg)
face down
time (s)
(c) trim (left axis) airway clearance (right axis) collar tow valve tow
(e) jacket 12 L, k 2 jacket 12 L, k 40 wing 12 L, k 2 wing 18 L, k 2