

Technical data



Technical
data



**Technical data on City Ranger 2260
- basic machine and attachments**



Technical specifications

Basic machine

| | | |
|---------------------------------------------------|---------|-------------|
| Length | mm | 2400 |
| Width | mm | 1070 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |
| Weight with cabin / roll bar (ROPS) ¹⁾ | kg | 940 / 910 |
| Payload | kg | 670 / 700 |
| Gross vehicle weight (GVA) | kg | 1610 |
| Turning circle - kerb to kerb | mm | 3280 |
| Turning circle - inside | mm | 1200 |
| Engine: Kubota petrol engine WG-972-G-E4 | hp / kW | 33 / 24 |
| 4 wheel drive | | std. |

¹⁾ Includes: 75 kg driver and 90% fuel capacity



Versatile and dedicated

- Utility machine for outdoor maintenance

When you are in charge of outdoor maintenance, you need the best tools at your command - and not just in terms of performance. You need utility machines that get the job done beautifully, but will also deliver as many working hours as possible all year round, doing all kinds of jobs perfectly every day. You also need machines that deliver the best return on investment, because, let's face it, equipment for outdoor maintenance is a major budget concern.

Finally, you also need to make sure that the people doing the work out there are taken care of as well as possible, so you need machines that will protect and aid them in keeping the outdoor area clean and attractive.

What you need is the City Ranger 2260 from Egholm.

With its powerful petrol engine and 4-wheel drive, the City Ranger 2260 takes care of all kinds of outdoor cleaning assignments - in all seasons. A complete range of tailor-made quality attachments ensures perfect results all year round. What you get is maximum versatility and efficiency - by the world's fastest shift between attachments, articulated manoeuvrability, easy handling and operation with maximum operator comfort.

Engineered and built in Denmark, the City Ranger 2260 is craftsmanship through and through - dedicated to making your outdoor areas present themselves as beautifully as possible, regardless of the weather or season.

For City Ranger 2260 the following attachments are available:

Sweeping

- Suction sweeper

Ground care

- Weed brush
- Rotary, mulch or collection mower 1200
- Rotary or mulch mower 1600
- Grass collector
- Flail mower / verticutter
- Lawn edger
- Tipping shovel
- Load carrier
- Tipper trailer


Winter

- Snow sweeper
- Snow plough
- Snow V-blade
- Salt and sand spreader



Basic machine

- City Ranger 2260

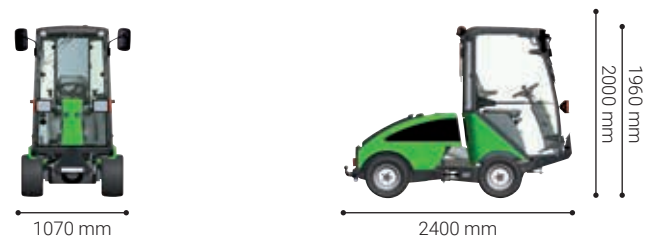

Standard equipment:

- Lights** EU standard driving lights plus two extra lights positioned high on the front (ideal for snow sweeping) and an extra light on the back. Only standard on basic machines with cabin.
- Coupling** Coupling TÜV approved.

Extra equipment (options):

- Air condition (AC)** AC can be installed without having to modify the machine dimensions. The height of the machine stays less than two metres and can still easily be stored in garages or go into underground parking areas. Shared between eight adjustable air ducts, the AC ensures pleasant cabin conditions.
- Seat** This seat option offers several adjustment possibilities and air suspension for extra comfort. There is two different variants - one with nappa and one with fabric.
- Cabin** ROPS approved cabin including lights, mirrors, beacon and heating.
- Roll bar** ROPS approved roll bar for basic machines without cabin. Including lights and mirrors.
- Reversing alarm** An alarm when reversing increases the safety in city centres and pedestrian areas. 108 dB(A).
- Rear view camera** Rear view camera with a colour screen and distance indicators ensures a good visibility in confined spaces, where the operated path can be inspected. It also improves safety in pedestrian zones.
- Radio** Bluetooth or DAB+ radio with bluetooth including headset.
- Working light** Front mounted LED working light provides a wide bright light improving the driver's view of the terrain.
- Numberplate kit** The front mounted numberplate holder including integrated LED flash.
- Top filter** For extra protection against overheating of the engine it is recommended to equip your City Ranger 2260 with a top filter when mowing the grass.
- Anti-corrosion treatment** The anti-corrosion treatment of the basic machine is recommended when operating in the winter season.
- Colour changes** The standard green colour can be changed to the desired RAL colour for your specific needs.

Technical specifications

| Dimensions | | |
|-------------------------------------|----|-------------|
| Length | mm | 2400 |
| Width | mm | 1070 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |

| Weights & other data | | |
|----------------------------------------------|----|-----------|
| Weight with cabin / roll bar ¹⁾ | kg | 940 / 910 |
| Payload with cabin / roll bar | kg | 670 / 700 |
| Gross vehicle weight | kg | 1610 |
| Allowed axle load, front | kg | 900 |
| Allowed axle load, back | kg | 900 |
| Max. permitted trailer weight without brakes | kg | 750 |
| Max. combined weight without brakes | kg | 2050 |
| Max. permitted trailer weight with brakes | kg | 1500 |
| Max. combined weight with brakes | kg | 2500 |

| Performance | | |
|-------------------------------|------|------|
| Turning circle - kerb to kerb | mm | 3280 |
| Turning circle - inside | mm | 1200 |
| Operating speed, max. | km/h | 20 |

| Noise level | | |
|--------------------------------------|-------|----|
| Passing (Outside - 2009/63/EC) | dB(A) | 81 |
| Operators seat (Inside - 2009/76/EC) | dB(A) | 81 |

| Engine | | |
|-------------------------------|--------------------|---------|
| Model | Kubota WG-972-G-E4 | |
| EU norm | | Stage V |
| Engine power | hp/kW | 33 / 24 |
| Fuel tank capacity (petrol) | l | 45 |
| Fuel consumption (EN 15429-2) | l/h | 6,9 |

CE certified according to EU directive

¹⁾ Includes: 75 kg driver and 90% fuel capacity



Suction sweeper

- City Ranger 2260



Standard equipment:

| | |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hopper | As standard the hopper has a rotation filter system and a fresh water tank with 100 l capacity. |
| Front brush unit | The unit consists of a suction mouth and two front brushes with a water nozzle on each. |
| Nose wheel | To adjust height of brushes. |
| Hopper stand | The stand for attaching, detaching and storing the hopper allows you to attach/detach the hopper in just 1 minute supporting the multi-functionality of the machine. |
| Water meter / indicator | There is a water meter on the side of the hopper and a water indicator in the cabin. They ensure an excellent overview over your water consumption and capacity. |
| Wander hose | The wander hose system is handy for areas out of reach of the suction sweeper unit. With easy access, great mobility and excellent suction performance, cleaning tasks around park bins, benches, steps, tress and other obstacles can be done in no time and with good results. Specifications: 5 m x Ø150 mm. |

Extra equipment (options):

| | |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3rd and/or 4th brush | The suction sweeper can be equipped with 2-4 brushes - the two front brushes are standard and the two side-brushes are optional extras. Each brush is equipped with a water sprayer to prevent dust spreading while the unit is working. The front brushes are height-adjustable via a nose wheel. |
| High pressure washer | A long and flexible high pressure hose and lance makes the cleaning of statues, park bins and benches easy. The lance is ergonomic and water amounts can be adjusted to conserve water. Specifications: 6 m hose, 100 bar and 6,5 l/min. |

Technical specifications


| Dimensions | | |
|-------------------------------------------------------------------|-------|-------------|
| Length | mm | 2820 |
| Width | mm | 1200 |
| Height with cabin | mm | 1960 |
| Length with 3 rd and 4 th brush | mm | 3400 |
| Width with 3 rd and 4 th brush | mm | 2100 |
| Storage dimensions | | |
| Length | mm | 900 |
| Width | mm | 1100 |
| Height | mm | 600 |
| Weights | | |
| Weight with cabin ¹⁾ | kg | 1205 |
| Payload with cabin | kg | 405 |
| Weight - hopper | kg | 179 |
| Weight - front brushes, 2 brushes | kg | 86 |
| Weight - 3 rd or 4 th brush | kg | 22 |
| Hopper | | |
| Hopper net volume (EN 15429-1) | l | 450 |
| Hopper gross volume | l | 546 |
| Hopper load, max. | kg | 300 |
| Tipping height | mm | 1300 |
| Fresh water tank capacity | l | 100 |
| Sweeping system & performance | | |
| Working width - 2 brushes | mm | 1200 |
| Working width up to - 3 rd / 4 th brush | mm | 1650 / 2100 |
| Turning circle - 2 brushes and hopper (wall to wall) (EN 15429-1) | mm | 3520 |
| Brush speed | rpm | 0-100 |
| Brush diameter Ø | mm | 570 |
| Suction tube diameter Ø | mm | 150 |
| Clearance below suction mouth | mm | 55 |
| Ground clearance below brushes | mm | 140 |
| Noise level - outside LwA (2000/14/EC) | dB(A) | N/A |
| Dust levels: EU-norm PM10 and PM2.5 | | **** |
| CE certified according to EU directive | | |

¹⁾ Includes: hopper, 2 brushes, 75 kg driver and 90% fuel capacity



Weed brush

- City Ranger 2260

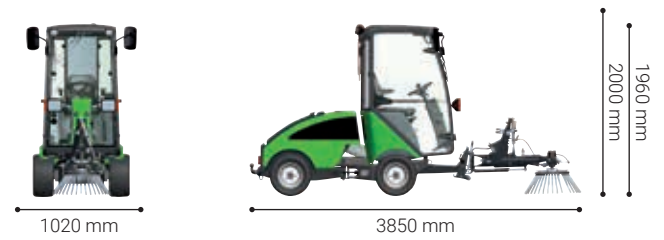

Standard equipment:

- Hydraulic adjustable brushes** The flexible brushes are controlled by the hydraulic system of the machine. Their flexibility allows you to brush $\frac{3}{4}$ of the way around a lamppost.
- Support strut** Attaching and detaching is easy with the automatic support strut.
- Brush regulator** The brush regulator allows you to adjust the brush speed and direction for the best result.

Extra equipment (options):

- Soft weed brush** The flat steel bristles stresses and removes weeds while being gentle on surfaces. Ideal for flagstones that are susceptible to marking and need regular weeding.
- Hard weed brush** The hard weed brushes are a mix of flat steel bristles and steel wires. These are for heavy work on bigger, stronger weeds. Ideal for flagstones and asphalt paths that need regular weeding.
- Guard** The guard prevents weeds from spreading over a wide area and for collecting the weeds under the vacuum nozzle.
- Vacuum nozzle & hopper** A dedicated vacuum nozzle makes it possible to combine the weed brush with the suction sweeper hopper allowing you to vacuum the uprooted weeds into the hopper immediately. Please see data sheet on suction sweeper for details.
- Counterweight** If the weed brush is being used without the suction sweeper hopper, we recommend the use of a counterweight for balancing.

Technical specifications

| Dimensions | | |
|----------------------------------------|------|-------|
| Length | mm | 3850 |
| Width | mm | 1020 |
| Height with cabin | mm | 1960 |
| Storage dimensions | | |
| Length | mm | 1500 |
| Width | mm | 1000 |
| Height | mm | 850 |
| Weight | | |
| Weight (weed brush) | kg | 115 |
| Performance | | |
| Working width | mm | 2100 |
| Brush speed | rpm | 0-114 |
| Brush diameter Ø | mm | 675 |
| Clearance below suction mouth | mm | 90 |
| Ground clearance below brush | mm | 330 |
| Operating speed | km/h | 2-4 |
| CE certified according to EU directive | | |



Mower 1200

- City Ranger 2260



Standard equipment:

- Tilting for cleaning** The mower can tilt up and rest on two support wheels making cleaning easy.
- Floating function** After lifting the mower it quickly returns to the floating position.

Extra equipment (options):

- Top filter** For extra protection against overheating of the engine it is recommended to equip your City Ranger 2260 with a top filter when mowing the grass.
- Mulch kit** The rotary mower can be changed into a mulch mower with a cover placed inside the same mowing deck. Mulching creates fine trimmings, which supply the soil with natural nutrients and reduces the need of fertilisers.
- Collection mower (kit)** Rebuild the rotary mower to a collection mower. Collecting the grass trimmings ensures the most professional looking result and healthiest lawn. It is recommended to use the dedicated grass collector for this purpose. Please see data sheet on suction sweeper for details.


Technical specifications

| Dimensions | | |
|----------------------------------------------|-------------------|-------------|
| Length | mm | 2830 |
| Width | mm | 1285 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |
| Storage dimensions | | |
| Length | mm | 1080 |
| Width | mm | 1285 |
| Height | mm | 580 |
| Weight | | |
| Weight (rotary mower) | kg | 100 |
| Performance | | |
| Ground clearance below mower | mm | 100 |
| Number of mower blades | pcs. | 2 |
| Cutting speed (tip speed) | m/sec. | 77 |
| Cutting width | mm | 1210 |
| Adjustable cutting height | mm | 30-70 |
| Theoretical mowing area - rotary | m ² /h | 15600 |
| Theoretical mowing area - collection / mulch | m ² /h | 12000 |
| Max. recommended operating speed | | |
| Rotary mower* | km/h | 1-13 |
| Collection mower* | km/h | 1-10 |
| Mulch mower (shorter grass)* | km/h | 1-10 |
| * Depends on grass and height | | |
| Noise level | | |
| Noise level - outside LwA (2000/14/EC) | dB(A) | N/A |
| CE certified according to EU directive | | |



Mower 1600

- City Ranger 2260

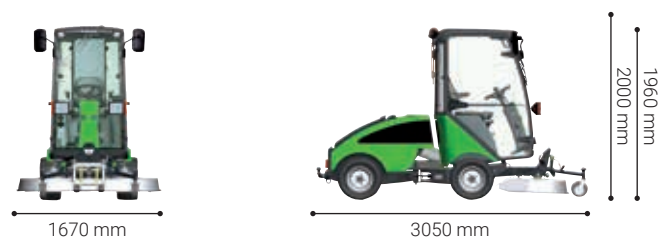

Standard equipment:

- Tilting frame** The mower can tilt up and rest on two support wheels making cleaning and mowing easy.
- Floating function** After lifting the mower it quickly returns to the floating position.

Extra equipment (options):

- Top filter** For extra protection against overheating of the engine it is recommended to equip your City Ranger 2260 with a top filter when mowing the grass.
- Mulch kit** The rotary mower can be changed into a mulch mower with a cover placed inside the same mowing deck. Mulching creates fine trimmings, which supply the soil with natural nutrients and reduces the need of fertilisers.

Technical specifications

| Dimensions | | |
|----------------------------------------|-------------------|-------------|
| Length | mm | 3050 |
| Width | mm | 1670 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |
| Storage dimensions | | |
| Length | mm | 1240 |
| Width | mm | 1670 |
| Height | mm | 570 |
| Weight | | |
| Weight (rotary mower) | kg | 170 |
| Performance | | |
| Ground clearance below mower | mm | 90 |
| Number of mower blades | pcs. | 3 |
| Cutting speed (tip speed) | m/sec. | 80 |
| Cutting width | mm | 1610 |
| Adjustable cutting height | mm | 30-90 |
| Theoretical mowing area - rotary | m ² /h | 20800 |
| Theoretical mowing area - mulch | m ² /h | 16000 |
| Max. recommended operation speed | | |
| Rotary mower* | km/h | 1-13 |
| Mulch mower (shorter grass)* | km/h | 1-10 |
| * Depends on grass and height | | |
| Noise level | | |
| Noise level - outside LwA (2000/14/EC) | dB(A) | N/A |
| CE certified according to EU directive | | |



Grass collector

- City Ranger 2260



Standard equipment:

Stand / frame The supplied frame allows for simple and quick attaching and removal of the hopper. The stand is also used for storing the hopper.

Hydraulic emptying function The hopper can be emptied without leaving the seat. The hydraulic tip function is controlled from the joystick and the cover on the hopper opens automatically when tilted.

The tipping height can be adjusted from 575 to 1860 mm allowing for tipping directly into containers within this height range.

Extra equipment (options):

Leaf collection hose It is also possible to remove leaves with the grass collector. When a leaf collection hose is fitted on the hopper, you can remove leaves in places where the mower cannot work - up to 6 m. The lightweight leaf collection hose is discretely fitted on the top of the hopper, when not in use.

Grass panel (10 mm) The hopper is supplied with a 5 mm grass filter as standard, to minimise airborne deposits when working with dry grass. A 10 mm grass filter increases airflow and suction power, and is an advantage when working with damp and heavy grass.

Plastic panel Used for very damp and sticky grass. The plastic panel is inserted into the hopper to prevent the grass filter from becoming blocked.

Mulch mover & rotary mower kits You can quickly convert the grass collector to a non-collecting mulch mower or standard rotary mower with the help of special kits available.

Technical specifications


| Dimensions | | |
|---------------------------------------------------|-------|-------------|
| Length (with mower 1200) | mm | 3230 |
| Width (with mower 1200) | mm | 1285 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |
| Height with leaf collection hose | mm | 2150 |
| Storage dimensions | | |
| Length | mm | 1700 |
| Width | mm | 940 |
| Height with / without collection hose | mm | 2150 / 1950 |
| Weights | | |
| Weight with cabin / roll bar (ROPS) ¹⁾ | kg | 1242 / 1212 |
| Payload with cabin / roll bar (ROPS) | kg | 368 / 398 |
| Weight (grass collector) | kg | 202 |
| Weight frame | kg | 31 |
| Hopper (grass collector) | | |
| Hopper volume | l | 750 |
| Hopper load, max. | kg | 300 |
| Tipping level from ground | mm | 575 |
| Tipping level from ground adjustable up to | mm | 1860 |
| Performance | | |
| Airflow | m³/h | 2400 |
| Airspeed | km/h | 120 |
| Operating speed | km/h | 1-10 |
| Noise level | | |
| Noise level - outside LwA (2000/14/EC) | dB(A) | N/A |
| CE certified according to EU directive | | |

¹⁾ Includes: grass collector, mower 1200, 75 kg driver and 90% fuel capacity



Flail mower

- City Ranger 2260

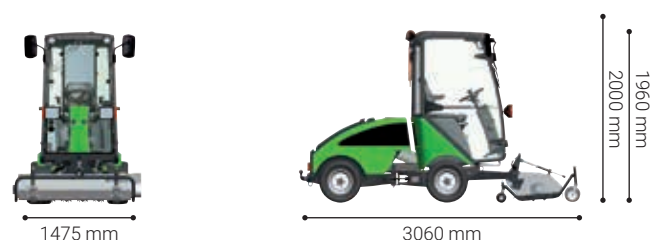

Standard equipment:

Clearing height adjustment

The clearing height is adjusted using the two forward wheels (rough and fine adjustment). Rough adjustment using seven adjusting rings in interval 0-110 mm. Fine adjusting carried out by a variable-adjustable lever.

Extra equipment (options):

Verticutter knives

Changing the flails with vertical blades converts the flail mower into a verticutter, which deals with moss and weeds without the need for pesticides. The verticutter removes moss while simultaneously cutting a thin score in the turf, so the grassroots are aired. This strengthens the grass so the turf is much more resilient to weeds.

Top filter

It is recommend to use a top filter for lawn mowing as this stops the radiator from becoming choked with grass and protects the motor.

Counterweight

It is recommend to use a counterweight on the back of the City Ranger 2260 when using the flail mower.

Technical specifications

Dimensions

| | | |
|-------------------------------------|----|-------------|
| Length | mm | 3060 |
| Width | mm | 1475 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |

Storage dimensions

| | | |
|--------|----|------|
| Length | mm | 955 |
| Width | mm | 1475 |
| Height | mm | 530 |

Weight

| | | |
|------------------------------------|----|-----------|
| Weight (flail mower / verticutter) | kg | 154 / 151 |
|------------------------------------|----|-----------|

Performance


| | | |
|-------------------------------|------|-------|
| No. of flails | pcs. | 76 |
| No. of vertical blades (max.) | pcs. | 38 |
| Flail - clearing width | mm | 1225 |
| Flail - clearing height | mm | 0-110 |
| Rotation of blades | rpm | 2800 |
| Verticutter - clearing width | mm | 1170 |
| Verticutter - clearing depth | mm | 0-15 |

CE certified according to EU directive



Lawn edger

- City Ranger 2260

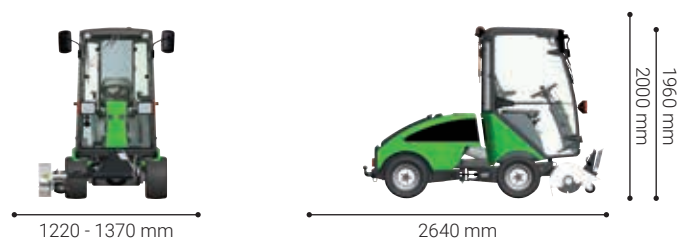

Standard equipment:

- Rotary cutter with two blades** The lawn edger has two blades for optimal performance. While cutting the edge the machine also cultivates the ground for a perfect result.
- Adjustable working depth** The working depth is regulated according to ground conditions, by adjusting the support wheel.
- Reversible blade** Makes it possible to cutting outwards or inwards.
- Adjustable offset** Makes it possible to adjust the distance between machine and work area.

Technical specifications

| Dimensions | | |
|----------------------------------------|------|-------------|
| Length | mm | 2640 |
| Width | mm | 1220-1370 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |
| Storage dimensions | | |
| Length | mm | 540 |
| Width | mm | 930-1080 |
| Height | mm | 520 |
| Weight | | |
| Weight (lawn edger) | kg | 50 |
| Performance | | |
| Clearance height under cutter | mm | 140 |
| Cutting depth (max.) | mm | 95 |
| Offset | mm | 150 |
| Operating speed | km/h | 1-2 |
| CE certified according to EU directive | | |



Tipping shovel

- City Ranger 2260




Technical specifications

| Dimensions | | |
|----------------------------------------|----|-------------|
| Length | mm | 3045 |
| Width | mm | 1045 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |
| Storage dimensions | | |
| Length | mm | 705 |
| Width | mm | 1045 |
| Height | mm | 405 |
| Weight | | |
| Weight (tipping shovel) | kg | 40 |
| Performance | | |
| Volume | l | 66 |
| Lifting capacity | kg | 125 |
| Ground clearance under shovel | mm | 430 |
| CE certified according to EU directive | | |



Load carrier

- City Ranger 2260

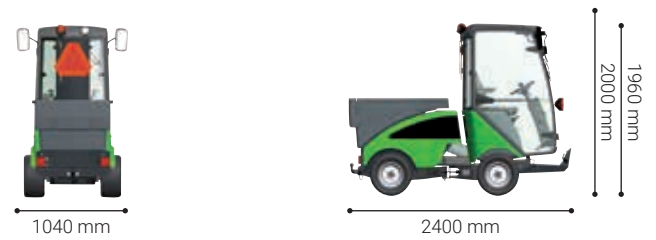

Standard equipment:

- Lashing hooks** The load carrier has 4 lashing hooks to strap down tools etc.
- Light weight** Produced in PE plastic the load carrier is lightweight and easy to handle.
- Low loading height** Facilitates ergonomic loading reducing the strain on the back.

Technical specifications


| Dimensions | | |
|---------------------------------------------------|----|-------------|
| Length | mm | 2400 |
| Width | mm | 1040 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |
| Storage dimensions | | |
| Length | mm | 1185 |
| Width | mm | 880 |
| Height | mm | 585 |
| Weight | | |
| Weight with cabin / roll bar (ROPS) ¹⁾ | kg | 966 / 936 |
| Payload with cabin / roll bar (ROPS) | kg | 644 / 674 |
| Weight (load carrier) | kg | 26 |
| Performance | | |
| Platform, length | mm | 820 |
| Platform, width | mm | 760 |
| Platform, height | mm | 68-200 |
| Volume | l | 95 |
| Load carrying capacity, max. | kg | 100 |
| Loading height | mm | 900 |
| CE certified according to EU directive | | |

¹⁾ Includes: load carrier, 75 kg driver and 90% fuel capacity



Tipper trailer

- City Ranger 2260

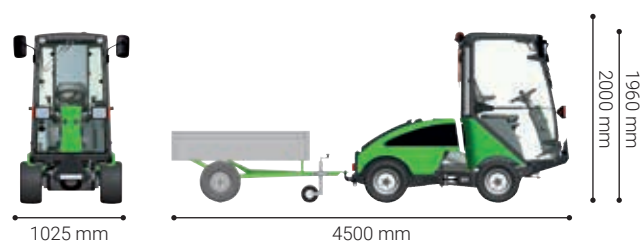

Standard equipment:

- Steel chassis** The tipper trailer features a strongly built steel chassis with fixed headboard and sides.
- Hydraulic tip function** The unloading of the 0,44 m³ trailer is easily done via the joystick from the comfort of the driver seat.
- Support wheel** The support wheel allows for easy attaching, detaching and storage.

Extra equipment (options):

- Side extensions** The optional side extensions increase the volume of the trailer. The side extensions are 40 cm in the height.
- Lighting** The galvanized beam with rear lights makes the trailer visible in traffic.


Technical specifications

| Dimensions | | |
|------------------------------------------------|----------------|-------------|
| Length | mm | 4500 |
| Width | mm | 1025 |
| Height with cabin / roll bar (ROPS) | mm | 1960 / 2000 |
| Storage dimensions | | |
| Length | mm | 2100 |
| Width | mm | 1025 |
| Height | mm | 850 |
| Weight | | |
| Weight (tipper trailer) | kg | 160 |
| Performance | | |
| Platform, length | mm | 1500 |
| Platform, width | mm | 950 |
| Platform, height | mm | 310 |
| Platform, height with optional side extensions | mm | 350 |
| Volume | m ³ | 0,44 |
| Volume with side extensions | m ³ | 1,02 |
| Load carrying capacity, max. | kg | 440 |
| Loading height | mm | 850 |
| CE certified according to EU directive | | |



Snow sweeper

- City Ranger 2260

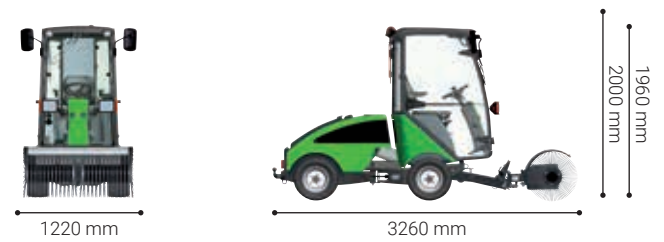

Standard equipment:

- Trapeze mounting** The trapeze-mounting ensures the snow sweeper remains clear of the wheels of the utility machine at all times, whatever the angle. The snow sweeper automatically turns with the utility machine - always sweeping in front of the wheels of the utility machine.
- Reverse rotation function** Reversing the brush rotation ensures that the operator can sweep material when reversing out of an alley or parking spot, which ensures an excellent result.
- Adjustable speed** The rotation speed can easily be adjusted from the cabin to match the need for sweeping.
- Support stand** A support stand with a wheel is build in to the snow sweeper for easy storage.

Extra equipment (options):

- Extended brush guard** Attaching a brush guard extends the snow sweeper cover, which minimises the snow whirling up on the front wind-screen. Furthermore, the guard makes it easier to control the direction of swept sand and gravel during summer operation. This can be retrofitted on existing snow sweepers as well.

Technical specifications

| Dimensions | | |
|----------------------------------------|------|-------|
| Length | mm | 3260 |
| Width | mm | 1220 |
| Height with cabin | mm | 1960 |
| Storage dimensions | | |
| Length | mm | 820 |
| Width | mm | 1220 |
| Height | mm | 650 |
| Weight | | |
| Weight (snow sweeper) | kg | 104 |
| Performance | | |
| Clearing width - straight | mm | 1220 |
| Clearing width - angled 25° | mm | 1140 |
| Ground clearance below brush | mm | 420 |
| Brush diameter Ø | mm | 550 |
| Operating speed | km/h | 1-15 |
| Theoretical sweeping capacity | m²/h | 18300 |
| Handling snow depth up to | mm | 250 |
| Brush speed | rpm | 0-240 |
| Swivel angle (approx.) | | 25° |
| CE certified according to EU directive | | |



Snow plough

- City Ranger 2260



Standard equipment:

- Hydraulic angle adjustment** The snow plough angle can be adjusted from the controls inside the cabin, making it easy for the operator to adjust the blade when needed.
- Safety tilt system** When operating in deep snow there is a risk of hitting obstacles. The safety tilt function reduces the risk of damages both to the plough and surroundings.
- Rubber scraper edge** 100 mm high, 26 mm thick and 1300 mm wide rubber scraper. The scraper edge can be used on two sides giving double usage and extended lifetime.
- Floating skids** The 2 skids are hight adjustable and ensures that the blade follows ground variations.


Technical specifications

| Dimensions | | |
|----------------------------------------|-------------------|-------|
| Length | mm | 2850 |
| Width | mm | 1300 |
| Height with cabin | mm | 1960 |
| Storage dimensions | | |
| Length | mm | 515 |
| Width | mm | 1300 |
| Height | mm | 545 |
| Weight | | |
| Weight (snow plough) | kg | 66 |
| Performance | | |
| Clearing width - inclined | mm | 1130 |
| Clearing width - straight | mm | 1300 |
| Ground clearance below scraper | mm | 420 |
| Operating speed | km/h | 1-20 |
| Handling snow depth up to | mm | 350 |
| Inclination possibility (angling) | | 30° |
| Theoretical performance | m ² /h | 26000 |
| CE certified according to EU directive | | |



Snow V-blade

- City Ranger 2260

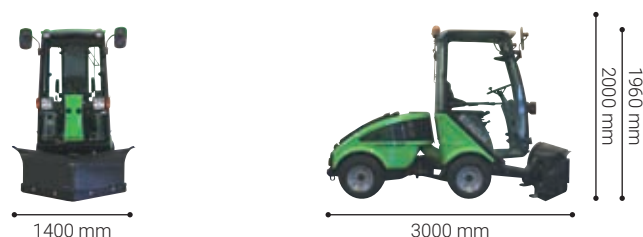

Standard equipment:

| | |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hydraulic angle adjustment | Each side/blade can be adjusted from the controls inside the cabin, making it easy for the operator to adjust the blades when needed. |
| Vibration damping | A-frame featuring integrated vibration damping, which increases comfort and reduces noise. |
| Hardox steel scraper edge | A Hardox steel scraper edge is standard on the professional light weight V-blade. It is 125 mm high, 25 mm thick and 700 mm wide (each side of V-blade). |
| Safety tilt function | When operating in deep snow there is a risk of hitting obstacles. The safety tilt function of lower part of the V-blade reduces the risk of damages both to the plough and surroundings. |
| Adjustable weight distribution | The automatic weight distribution makes it suitable for clearing gravel paths as well. |
| Floating skids | The 2 skids are height adjustable and ensure that the blade follows ground variations. |

Extra equipment (options):

| | |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rubber scraper edge | In addition to the steel scraper a rubber edge can be mounted on the V-blade. The rubber scraping edge is good for surfaces that require extra care. |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|

Technical specifications

| Dimensions | | |
|----------------------------------------|-------------------|-----------|
| Length | mm | 3000 |
| Width (straight) | mm | 1400 |
| Height with cabin | mm | 1960 |
| Storage dimensions | | |
| Length | mm | 500 |
| Width | mm | 1400 |
| Height | mm | 600 |
| Weight | | |
| Weight (snow V-blade) | kg | 118 |
| Performance | | |
| Clearing width - inclined | mm | 1200-1400 |
| Clearing width - 30°, Y- & V-form | mm | 1200 |
| Clearing width - straight | mm | 1400 |
| Ground clearance below scraper | mm | 240 |
| Ground clearance under support strut | mm | 215 |
| Operating speed | km/h | 1-20 |
| Handling snow depth up to | mm | 500 |
| Inclination possibility (angling) | | 30° |
| Theoretical performance | m ² /h | 28000 |
| CE certified according to EU directive | | |



Salt and sand spreader

- City Ranger 2260



Standard equipment:

| | |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Durable material | All parts that get in contact with salt and sand are rust free, made of synthetic material or stainless steel. |
| Stirrer | The stirrer prevents blocking, crushes lumps and ensures precise and uniform spreading - and thereby even thawing of the ground. Made of hardened Hardox steel the stirrer fingers are extremely robust. |
| Material storage | There is space for extra bags of salt and sand on top of the hopper grate, enabling the operator to fill the salt and sand spreader on site. Please note the maximum loading capacity. |
| Stand | A stand for attaching/detaching is delivered with the spreader as standard. The stand has wheels, making it easy to move the spreader into storage without heavy lifting. |
| Start/stop function | The start/stop function ensures that the spreading follows the motion of the vehicle. All spreading stops when the vehicle stops moving. |

Extra equipment (options):

| | |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Powder coated frame | The standard spreader is made of steel and has a C3 protective treatment for good durability. It has one motor for all functions. 70 kg. |
| Stainless steel frame (SG3 model) | Produced in stainless steel this spreader has a high durability. It has two motor for individual adjustments of the spreading disc and the stirrer for optimized spreading. It has been optimized with rubber sealings for a tighter fit. 91 kg. |
| Tarpaulin cover | A cover keeps the material dry and thereby indirectly improve the spreading accuracy. |

Technical specifications

| Dimensions | | |
|------------------------------------------------------|------|-------------|
| Length | mm | 2690 |
| Width | mm | 1070 |
| Height with cabin | mm | 1960 |
| Storage dimensions | | |
| Length with stand | mm | 1250 |
| Width | mm | 880 |
| Height with stand | mm | 1290 |
| Weights | | |
| Weight with cabin (powder / stainless) ¹⁾ | kg | 1031 / 1052 |
| Payload with cabin (powder / stainless) | kg | 579 / 558 |
| Weight (powder / stainless) | kg | 70 / 91 |
| Weight - stand | kg | 31 |
| Spreader | | |
| Volume | l | 240 |
| Spreader load, max. | kg | 330 |
| Loading height | mm | 1290 |
| Performance | | |
| Spreading width | mm | 1000-5000 |
| Operating speed | km/h | 1-20 |
| Distance per filling up to (salt 1200 g/l) | km | 57,6 |
| Material amount per m ² | | |
| Salt ²⁾ | g | 5-125 |
| Sand ²⁾ | g | 5-50 |
| CE certified according to EU directive | | |

¹⁾ Includes: salt and sand spreader, 75 kg driver and 90% fuel capacity

²⁾ Depending on spreading material, width & conditions



Notes

- City Ranger 2260

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Honest Work.

Egholm A/S develops, produces and markets utility machines that keep roads, parks and outdoor areas clean and inviting all year round. We supply functional quality machines and attachments to people who do an honest day's work keeping our cities clean and attractive. With special attachments developed for the machines, Egholm machines deliver perfect results no matter the task at hand. Built by craftsmen in Denmark, Egholm machines are in operation in cities and parks all over the world.

Honest Machines.

Egholm utility machines are developed by people who are passionate about technology and innovation. We listen to the people driving, using and servicing Egholm machines, because they are the true experts. It is our mission to design, build and market utility machines that deliver perfect results in real life. Egholm machines are honest machines - not just because they deliver comfort, safety and strong end results: They are also a sound investment for years to come and give you outstanding return on your investment.

Honest People.

We want you to think of us as your partner in every single way. And we always insist on reliability, trust and honesty in our partnership with you and with our network of dealers and service partners. We are straightforward and direct in our communication and in our dealings with everyone. Our belief in hard work and unwillingness to compromise helps us deliver the quality for which we are known. And we believe it is reflected by the machines we build for you, as well.

Egholm A/S

Transportvej 27
7620 Lemvig, Denmark
T.: +45 97 81 12 05
www.egholm.eu - info@egholm.dk

Egholm GmbH

Am Hafen 24
38112 Braunschweig, Germany
T.: +49 (0) 531 129 77-0
www.egholm.de - info@egholm.de