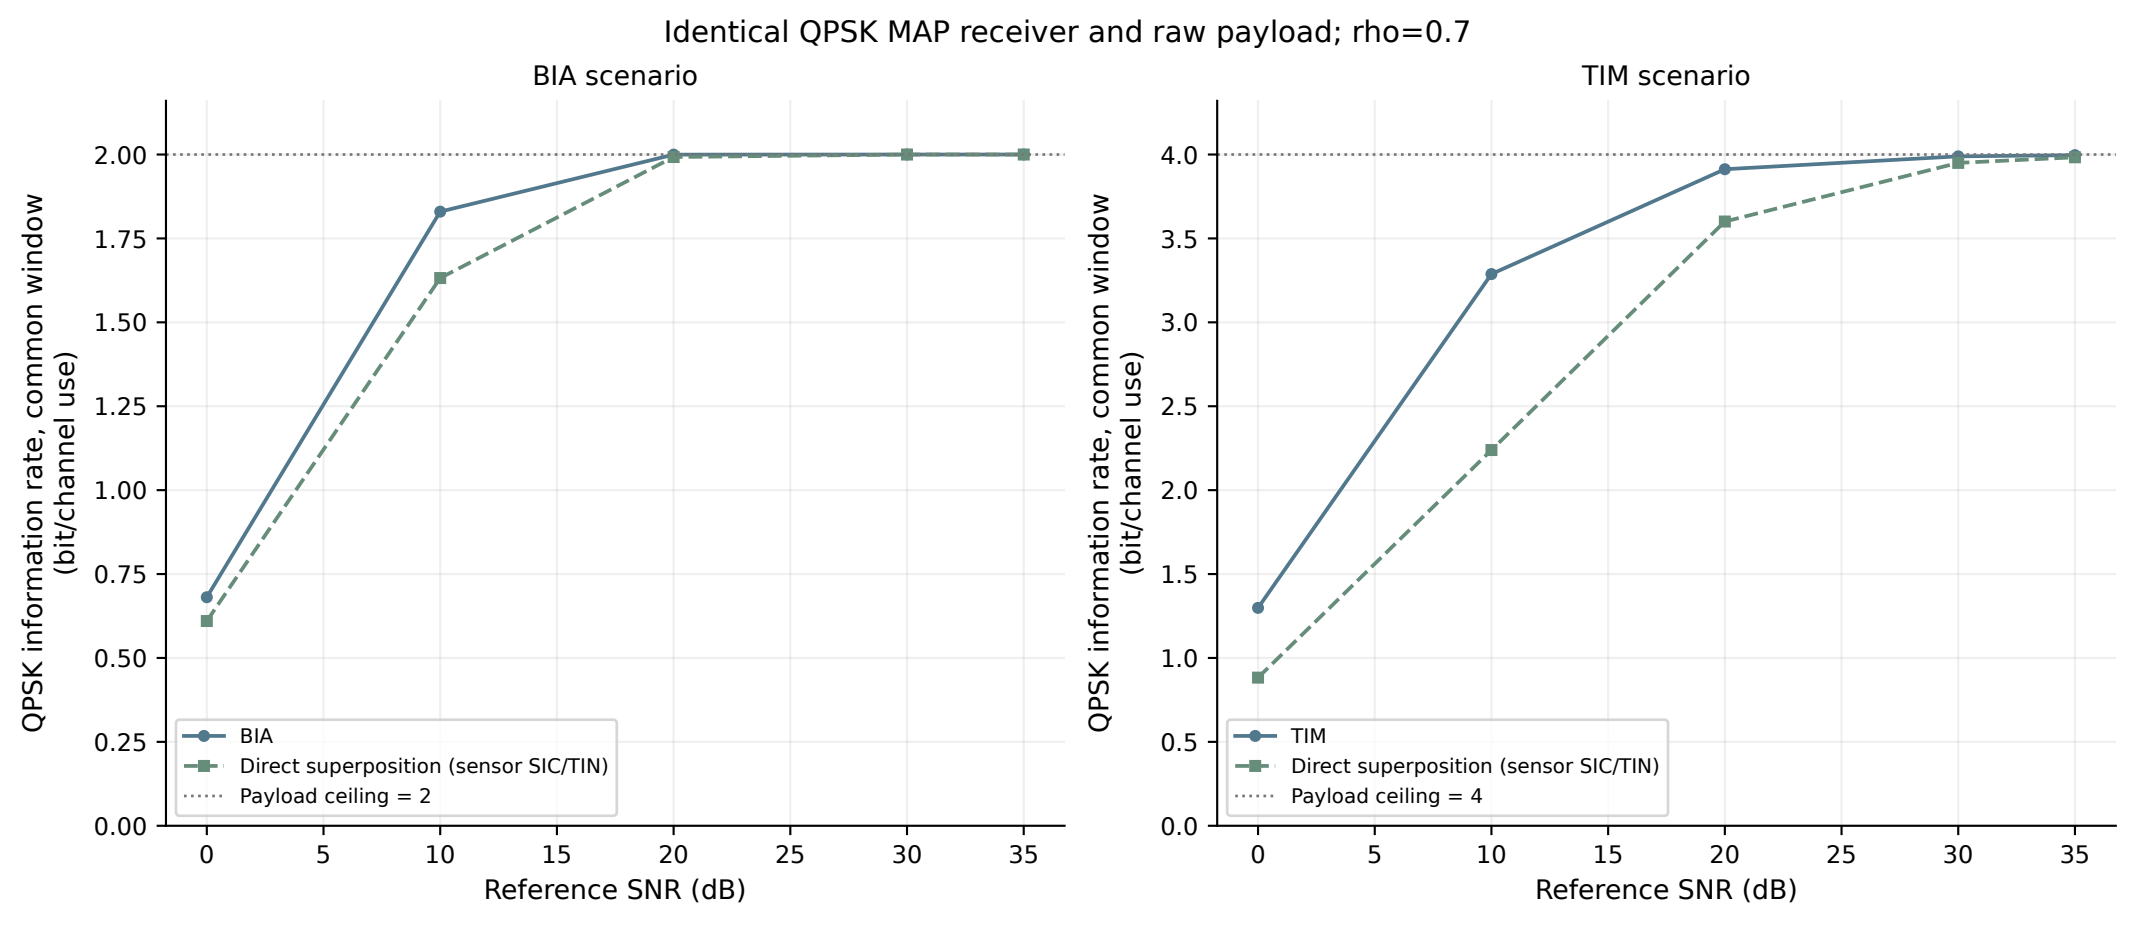
Identical QPSK MAP receiver and raw payload; rho=0.7
BIA scenario
TIM scenario
QPSK information rate, common window (bit/channel use)
Reference SNR (dB)
BIA
Direct superposition (sensor SIC/TIN)
Payload ceiling = 2
TIM
Payload ceiling = 4
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
0
5
10
15
20
25
30
35